STOCK CONTROL, REPORTS AND SETUP

Masters

What it is: the base lists every other screen picks from: papers, mandrels, tube sizes, parchments, adhesives, packaging, inward QC bands, tools, customers, vendors, contacts, employees, shifts, holidays and reason lists.
Who uses it: Owner and Admin (all masters). The Plant Manager can also work on Reason codes. Sales, Plant Manager and Planner can read Order close reasons.
Where: Sidebar > Foundation > Masters (/masters/papers, with sub-links for each master). A tab strip at the top groups them as **Materials**, **Parties**, **Shop floor** and **Quality**.

At a glance

- **Masters feed the dropdowns.** Specs pick papers, mandrels, tube sizes, adhesives, parchments, packaging and tools. Orders pick customers. POs and GRNs pick vendors. Floor screens pick shifts, employees and reasons.
- **Nothing is ever erased. Disable**, **Deactivate** and even **Delete** only hide a record from new dropdowns. Old orders, specs, job cards and ledgers keep pointing to it, and you can reactivate it later.
- **Saved specs keep the values they were saved with.** A spec recipe stores each paper's GSM, BF and bulk at save time, so editing a paper master changes new work only, never an approved recipe version.
- **Every material master becomes a stock item automatically** (same code). Inward QC bands are set per material type, group, colour or line, and are versioned.
- **Customer and vendor details print on documents.** The delivery challan reads the customer's GSTIN and dispatch (ship-to) address; the PO prints the vendor's details. Keep them up to date.

The flow

How a master change reaches daily work

1. **Edit master** — Owner/Admin
2. **New dropdown value**
3. **New spec or order picks it** — Design/Sales
4. **Released job card keeps its copy**

If it goes wrong after **Edit master**

1. **Old specs and orders unchanged**

Inward QC band change

1. **Choose scope** — Owner/Admin — type, group, colour or line
2. **Set bands and reason**
3. **Save bands** — new version
4. **New GRN lots checked against it** — Inward QC

If it goes wrong after **Save bands**

1. **Lots already received keep their old band**

Masters are the start of every chain. A change applies from the next use onward; anything already saved keeps its own copy, so history stays true.

Screen tour

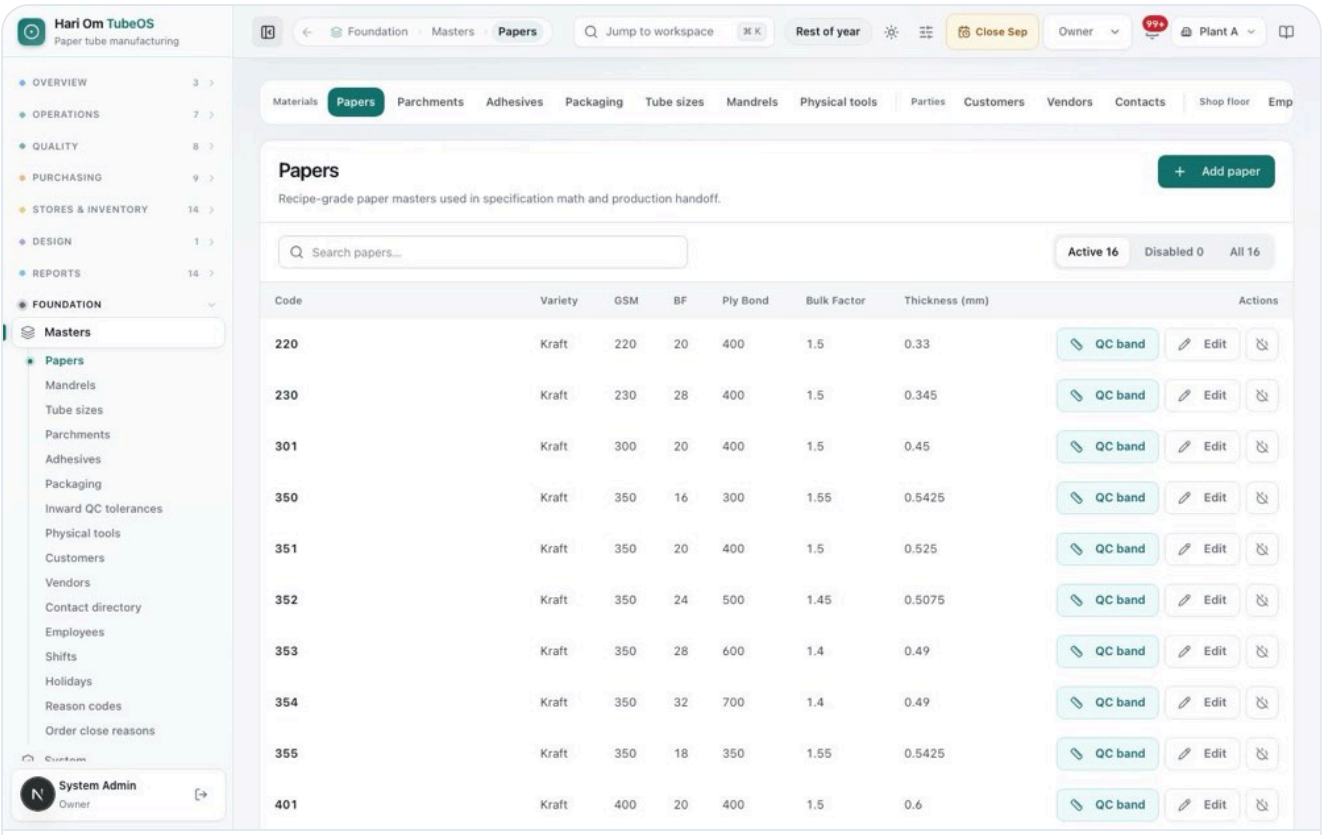


Figure: The Papers master. The tab strip at the top shows Materials (Papers, Parchments, Adhesives, Packaging, Tube sizes, Mandrels, Physical tools), Parties (Customers, Vendors, Contacts) and Shop floor. The table lists papers such as 220 (Kraft, GSM 220, BF 20, Ply Bond 400, Bulk Factor 1.5, Thickness 0.33 mm), each with **QC band**, **Edit** and a disable button. Top right is **Add paper**, with a search box and Active 16 / Disabled 0 / All 16 filters.

What you see (the same layout is used by Papers, Mandrels, Tube sizes, Parchments, Adhesives and Packaging):

1. **Add** button, **Search** box and **Active / Disabled / All** filter with counts.
2. **Table** with the master's columns. Disabled rows are greyed and marked **Disabled**.
3. **Row actions**: **QC band** (opens the inward QC band for that line; papers, adhesives and parchments), **Edit**, the disable icon, and **Reactivate** on a disabled row.

The masters and their key fields:

Master	Key fields	Used by
Papers	Paper Code, Variety, GSM, BF, Bulk Factor, Ply Bond; Derived Thickness = GSM × bulk ÷ 1000	Spec recipe math, reel labels, inward QC nominals
Mandrels	OD (mm), Length (mm)	Spec ID band and winder setup

Master	Key fields	Used by
Tube sizes	Inner Dia, Outer Dia, Length (mm), Description (for example 76.4 x 81 x 150)	Spec and customer ask
Parchments	Company, then Sub Parchment / Color (for example SUNRISE POLYFILMS · BLUE / BLACK STRIP)	Spec allows by company; orders, release and stock use the colour
Adhesives	Variety, Internal Code, Solid %, Viscosity, pH	Spec glue, material issue, inward QC
Packaging	Three kinds: Boxes, Plastic Sheets, Fadda (code, SKU, size, dimensions, colour, weight kg)	Spec packing, packing handoff, dispatch

Parchments has two panels. **Companies** (parchment families allowed on spec sheets, with **Add company**, a QC band per company, and rename) and **Parchments** (the colour rows, with **Add parchment**). A note under the table reads: "Records are never deleted. Disabling hides a record from new dropdowns; old orders, specs, job cards and ledgers keep their references."

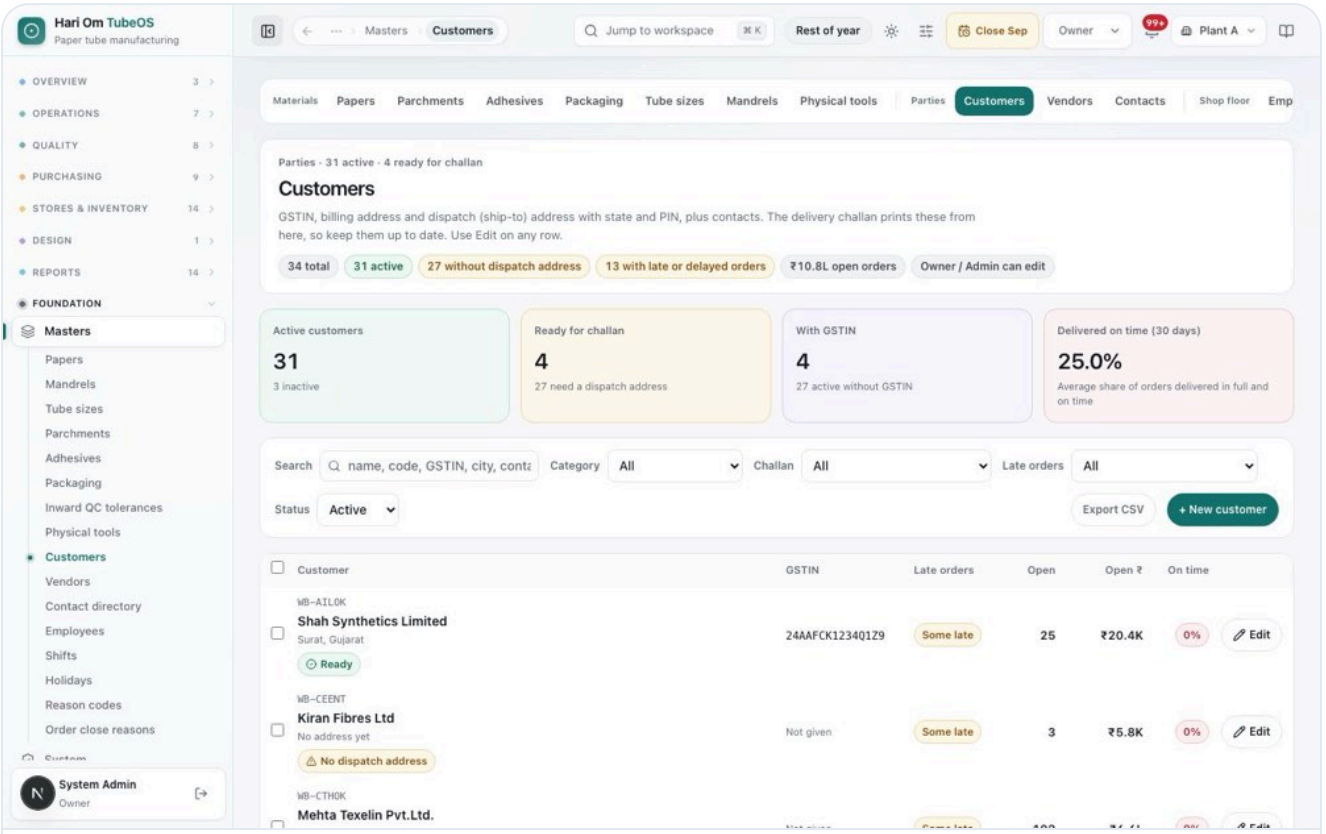


Figure: The Customers master: "31 active · 4 ready for challan". Tiles: Active customers 31, Ready for challan 4 (27 need a dispatch address), With GSTIN 4, Delivered on time (30 days) 25.0%. Filters for Search, Category, Challan, Late orders and Status, with **Export CSV** and **+ New customer**. Rows show code, name, city, a **Ready** or **No dispatch address** chip, GSTIN, Late orders, Open, Open ₹, On time and **Edit**.

What you see:

1. **Summary chips and tiles**: total, active, without dispatch address, with late or delayed orders, open order ₹, and "Owner / Admin can edit".
2. **Filters**: Search (name, code, GSTIN, city, contact), Category, **Challan** (Ready for challan, No dispatch address, GSTIN given, No GSTIN), **Late orders**, Status. **Export CSV**.
3. **Rows**: a **Ready** chip means the customer has what the challan needs. Clicking a row opens the detail panel (Overview, Contacts, Performance) with Billing address, Dispatch (ship-to) address, Tax, Payment and Main contact.
4. **Customer form** (New or Edit): Customer name, Code, Category, GSTIN, PAN, the billing address (Address, City, State, PIN code), the dispatch address (or tick **Same as the billing address**) with a Dispatch contact (stores / gate) and phone, Payment terms, Credit limit (₹), and the main contact (Contact person, Phone, Email). The form shows "Challan prints: ..." so you can see what will print.

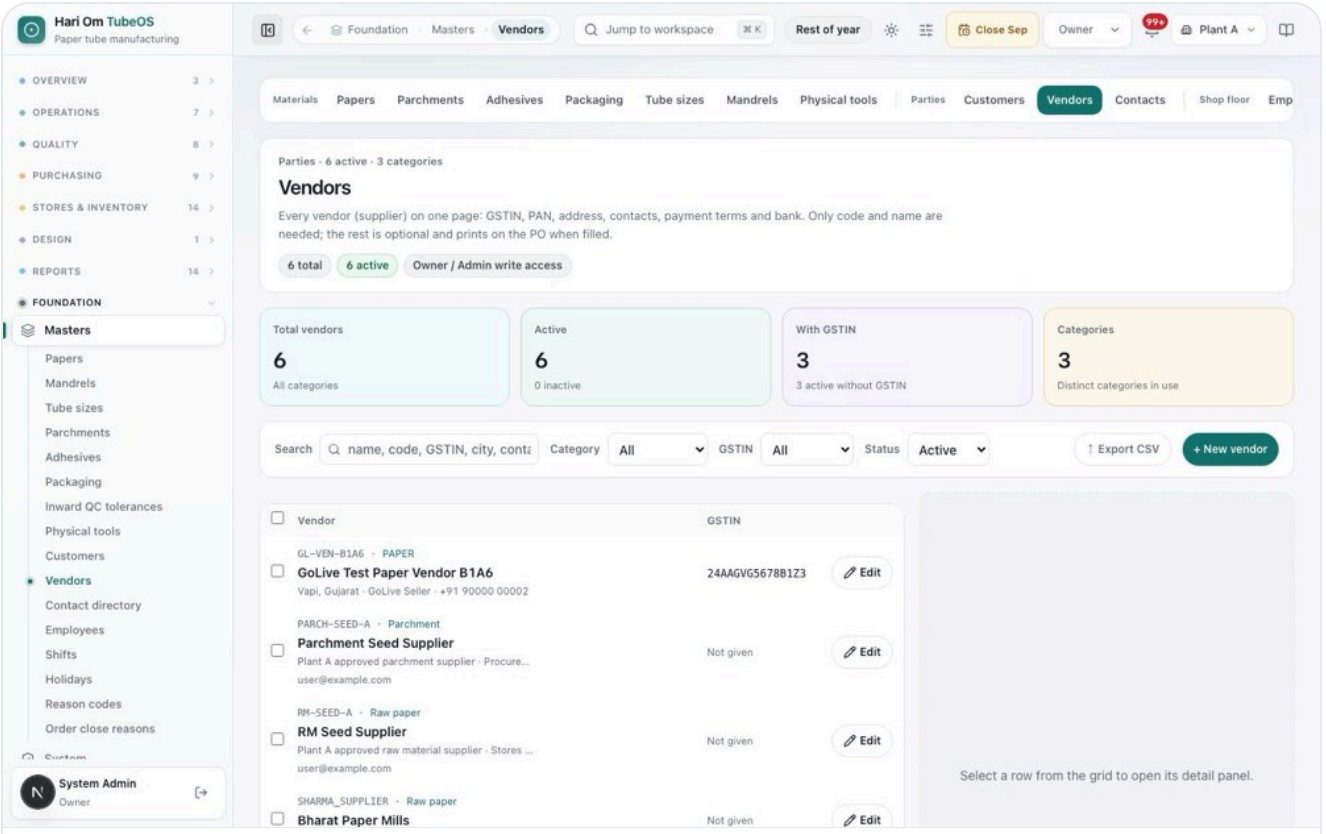


Figure: The Vendors master: Total vendors 6, Active 6, With GSTIN 3, Categories 3. Filters for Search, Category, GSTIN and Status, with **Export CSV** and **+ New vendor**. Rows show code, category (Paper, Parchment, Raw paper), name, city, GSTIN and **Edit**. A side panel says "Select a row from the grid to open its detail panel."

The vendor form has: Code, Vendor name, Legal name, Trade name (as on the GST certificate), Categories, GSTIN, PAN, MSME / Udyam number, the address (Address line 1 and 2, City, State, PIN code, Country), Payment terms (days), Credit days, Credit limit (₹), the bank (Bank name, Account number, IFSC), the main contact (Contact person, Phone, Alternate phone, Email) and Notes. Only code and name are required; whatever else you fill prints on the PO.

Contact directory (/masters/contact-directory) is a read-only list of every customer and vendor contact with Type, Master, Contact Name, Number and Email, plus a search box and Customers / Vendors counts. Edit contacts on the customer or vendor record.

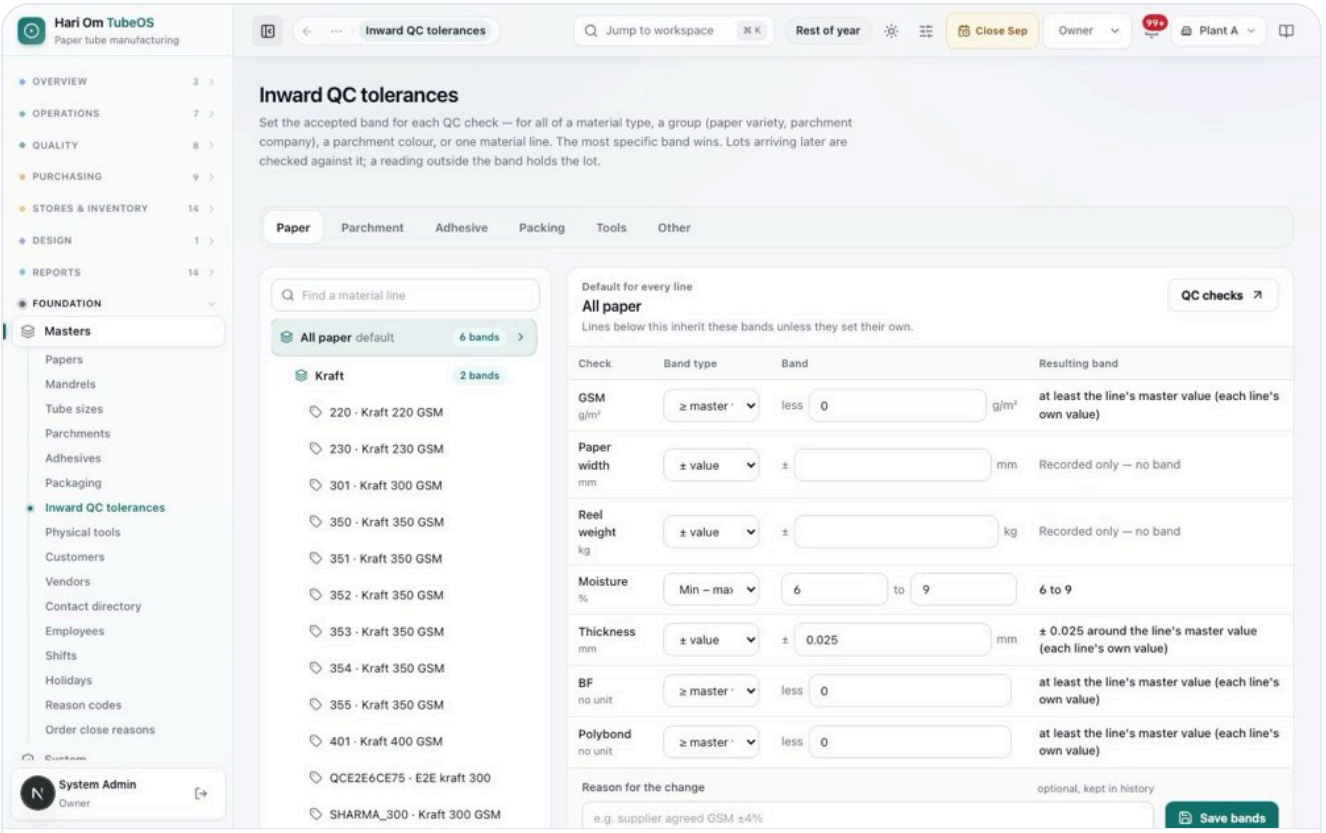


Figure: The Inward QC tolerances page on the Paper tab. On the left is a tree: All paper (default, 6 bands), the Kraft group (2 bands) and each paper line (220 · Kraft 220 GSM and so on). On the right is the band editor for "All paper": each check (GSM, Paper width, Reel weight, Moisture, Thickness, BF, Polybond) with a Band type, a Band and the Resulting band. Examples: Moisture "Min – max 6 to 9", Thickness "± 0.025 around the line's master value", GSM "at least the line's master value". At the bottom are **Reason for the change** and **Save bands**.

What you see:

1. **Material tabs**: Paper, Parchment, Adhesive, Packing, Tools, Other.
2. **Tree**: the default for the whole type, then groups (paper variety or parchment company), colours, and single lines, each with the number of bands set. **Find a material line** searches.
3. **Band editor**: for each check choose a **Band type**: **± value**, **± %**, **≥ master value**, **≤ master value**, **Min – max** or **No band here**. The **Resulting band** column shows what the lot will be checked against. A check with no band says "Recorded only — no band". On a single line you can type its **Nominal** and use **Copy nominals from master**.
4. **QC checks** opens Material standards (where the checks themselves are set).

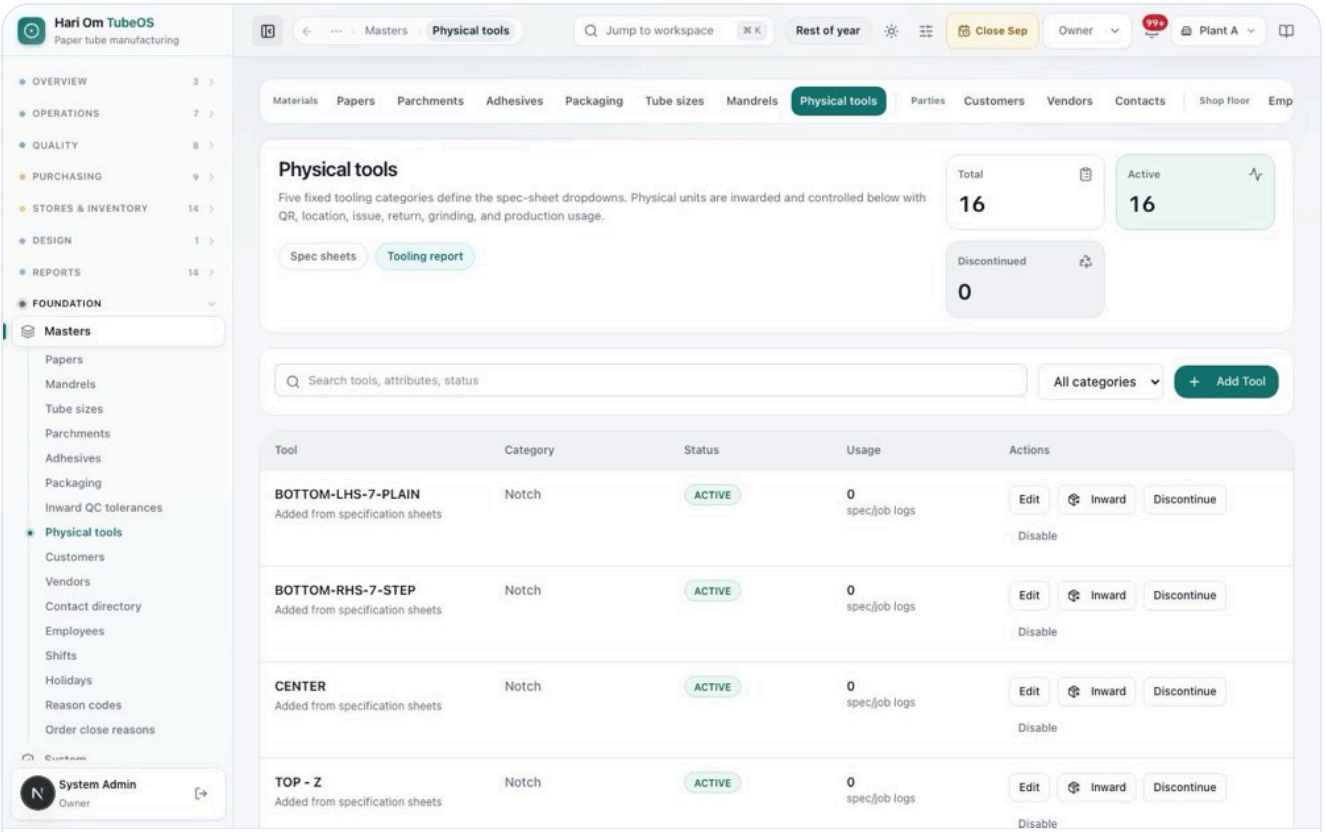


Figure: The Physical tools master: Total 16, Active 16, Discontinued 0, with **Spec sheets** and **Tooling report** links. A search box, an **All categories** filter and **Add Tool**. Rows such as BOTTOM-LHS-7-PLAIN (Notch, ACTIVE, 0 spec/job logs) have **Edit**, **Inward**, **Discontinue** and **Disable**.

Tools come in five fixed categories: **Notch**, **Blade**, **Holder**, **V + Flat** and **Punch**. Each category has its own required fields (for example a Notch needs type, thickness, design and degree; a Blade needs type, thickness and length). The dropdown values (Notch types, designs, degrees and directions; Blade types; Punch single or double) are editable under the **Editable dropdown registry**. **Inward** registers a physical unit with a receipt date, Receipt / GRN no, quantity and a **Location Master position**, and gives it a permanent QR label (**Print QR label**). Each unit then has a **QR asset ledger** of Issue, Return, Grinding out, Grinding return, Maintain, Move and scrap events.

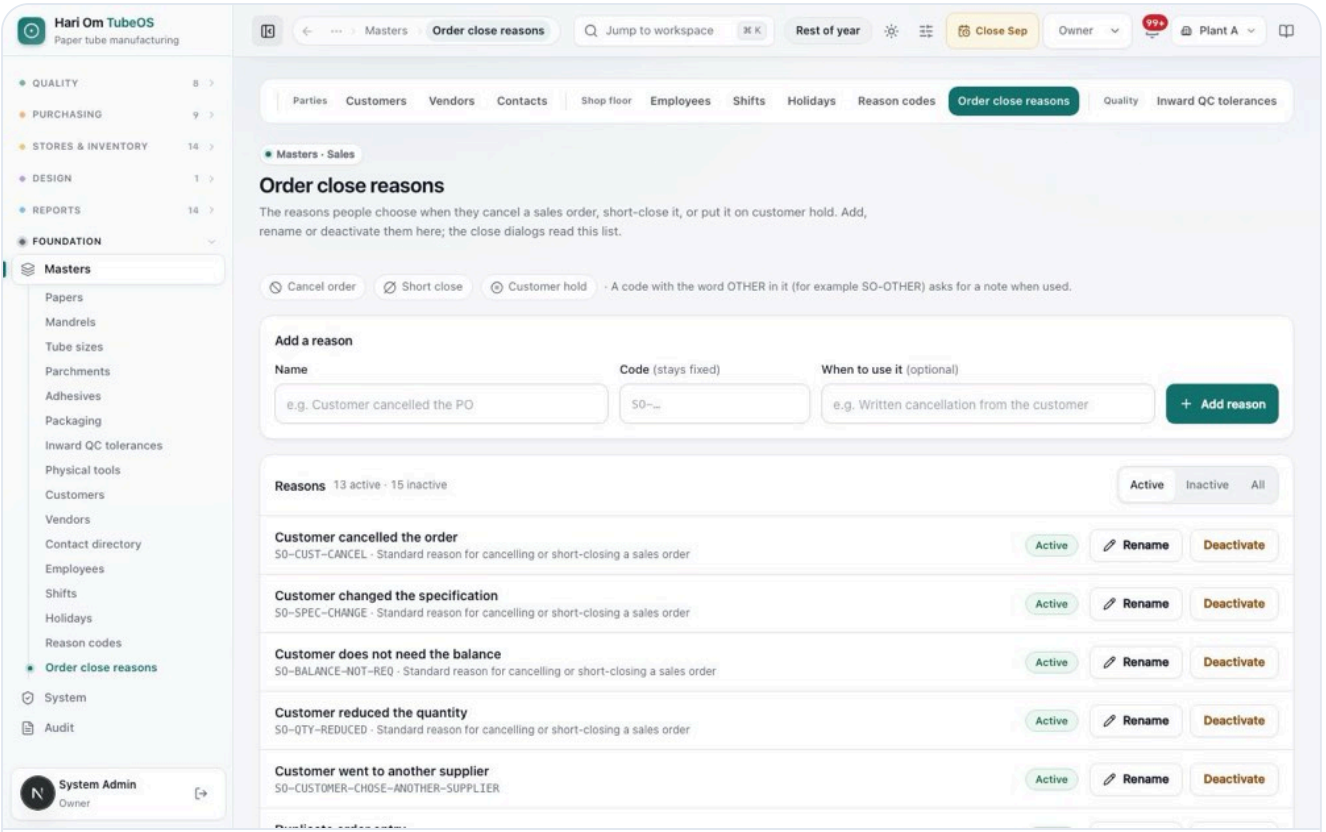


Figure: Order close reasons. Chips show where they are used: Cancel order, Short close, Customer hold, and the note "A code with the word OTHER in it (for example SO-OTHER) asks for a note when used." The **Add a reason** form has Name, Code (stays fixed) and When to use it. The list shows "13 active · 15 inactive", with reasons like "Customer cancelled the order (SO-CUST-CANCEL)", each with **Rename** and **Deactivate**.

Reason codes (/masters/reason-codes) holds the floor reason lists in categories: Downtime, Scrap, QC reject, Short-close, RM issue, Return, Customer complaints and Other. Each has a Code (for example DT-POWER), Label, Description, **Severity** (OK, WATCH, CRITICAL) and Status. Tiles show Total reasons, Downtime, Scrap and Short-close. Order close reasons are listed under their own page.

Employees: Code (EMP-001), Name, Role (Operator, Supervisor, Packer, QC Inspector, Storeman, Dispatcher, Manager), Dept (WINDER, OVEN, PROCESS, PACKING, QC, DISPATCH, STORE, GENERAL), Default shift, Skills (for example WINDER, OVEN), Phone and Email. These people feed the per-operator productivity reports. They are not login users; logins are made under System > Users.

Shifts: Code, Name, Start time, End time, Break (min), Hours / day and Night premium (%). Shifts are marked DAY or NIGHT. They feed machine availability, planner day boundaries and night-premium reports.

Holidays (Plant calendar): Date, Type (PUBLIC HOLIDAY, PLANT HOLIDAY, MAINTENANCE DAY, STRIKE, POWER CUT, OTHER), Description (for example Diwali) and Impact shifts (blank = the

whole day). They are used by OTIF and adherence (a due date on a holiday moves to the next working day).

Step by step

How to add a paper (or mandrel, tube size, adhesive, parchment colour, packaging item)

Owner or Admin.

1. Open **Masters** and the right tab. Click **Add paper** (or the matching button).
2. Fill the fields. For a paper: **Paper Code** (for example KRAFT-230-18BF), **Variety**, **GSM** and **BF** (required), then **Bulk Factor** and **Ply Bond**. **Derived Thickness (mm)** fills itself.
3. Click **Save**. The paper appears in spec dropdowns, and a stock item with the same code is made for purchase, inward and issue.
4. Click **QC band** on the row to set its inward QC band, if it differs from the group default.

How to edit or disable a master record

1. Click **Edit**, change the fields and **Save**. New specs and orders use the new values; saved recipe versions keep the values they were saved with.
2. To stop using a record, click the disable icon (or **Deactivate**). It disappears from new dropdowns only.
3. To bring it back, switch the filter to **Disabled** and click **Reactivate**.

How to add a parchment company and its colours

1. Under **Companies**, click **Add company** and type the **Company Name** (for example SUNRISE POLYFILMS). Save.
2. Click **Add parchment**, pick the **Company** and type the **Sub Parchment / Color** (BLUE, RED, Printed and so on). Save.
3. Specs allow parchment by company. Sales orders and the release step pick the colour, and a parchment colour is compulsory at release.

How to add or edit a customer

Owner or Admin.

1. Open **Customers** and click **+ New customer** (or **Edit** on a row).
2. Fill **Customer name** and **Code** (the only required fields). Add **GSTIN**; the PAN and billing state fill in from it.

3. Fill the billing address. For the dispatch address, tick **Same as the billing address** or type the ship-to address with its own state, PIN and dispatch contact.
4. Fill payment terms, credit limit and the main contact. Save. The row shows **Ready** when the challan has what it needs.

How to add or edit a vendor

Owner or Admin.

1. Open **Vendors**, click **+ New vendor** (or **Edit**).
2. Fill **Code** and **Vendor name**, then GSTIN, PAN, MSME / Udyam, address, payment terms, bank and contact as needed. Save.
3. The vendor now appears in PO, inward and parchment-company dropdowns.

How to set inward QC bands

Owner or Admin.

1. Open **Inward QC tolerances** and pick the material tab.
2. Click the level in the tree: the type default, a group, a colour or one line.
3. For each check, choose the **Band type** and enter the band. Read the **Resulting band** column.
4. Optionally write the **Reason for the change** (kept in history). Click **Save bands**. The message says how many lines now inspect against the new band; lots already received keep the band they arrived with.

How to add and manage a physical tool

Owner or Admin (the Plant Manager can also change tool masters).

1. Open **Physical tools**, click **Add Tool**, choose the category and fill its required fields. Save. It appears in spec sheet dropdowns.
2. To register a real unit, click **Inward**, fill the receipt date, Receipt / GRN no, quantity and location, and click **Post inward**. Print its QR label.
3. Use **Discontinue** to stop new selections, or **Disable** to hide it.

How to add, rename or deactivate an order close reason

Owner or Admin. Sales, Plant Manager and Planner see the list read-only.

1. Open **Order close reasons**. In **Add a reason**, type the **Name**. The **Code** fills in as SO- (you can change it now; it stays fixed afterwards). Add **When to use it** if helpful.
2. Click **Add reason**.
3. To change the wording, click **Rename**. To stop offering it, click **Deactivate** and confirm.

How to add a reason code, employee, shift or holiday

1. Open the master and click **+ New reason code**, **+ New employee**, **+ New shift** or **+ New holiday**.
2. Fill the fields shown above and save. Use **Deactivate** / **Reactivate** for reasons, employees and shifts. Holidays can be edited or deleted.

Rules the system enforces

- **Who can change masters**: Owner and Admin (all). Reason codes also allow the Plant Manager. Order close reasons are Owner or Admin only ("Only the Owner or an Admin can change order close reasons."). Others are shown "This page is not open to your role" (BLOCKS).
- **No hard delete**: disabling, deactivating and deleting all just set the record inactive (automatic). History keeps its references.
- **Codes are unique per plant** (BLOCKS): for example "Paper code already exists in this plant", "Customer code or name already exists in this plant", "Supplier code or name already exists in this plant", "Employee code already exists in this plant", "Shift code already exists in this plant", "Reason code already exists in this plant". Holidays are unique per date and type.
- **Required fields**: paper code, variety, GSM and BF; customer code and name; vendor code and name; employee code and name; shift code and name; reason code and label (BLOCKS).
- **Derived paper thickness** = GSM × bulk factor ÷ 1000 (automatic).
- **GSTIN** must be 15 characters: a 2-digit state code, a 10-character PAN and 3 characters, for example 24ABCDE1234F1Z5 (BLOCKS). **PAN** must be 5 letters, 4 digits and 1 letter. **IFSC** must be 4 letters, a zero and 6 letters or digits.
- **GSTIN fills the PAN and billing state** when they are empty (automatic). A PAN that does not match the GSTIN is refused, and so is a billing state outside the GSTIN's state ("The billing address must be in the GSTIN's state"). When the GSTIN changes, a PAN and state that came from the old GSTIN follow the new one.
- **Vendor payment terms and credit days** must be 0 to 365 days, and the credit limit cannot be negative (BLOCKS).
- **Spec recipes snapshot paper values** (GSM, BF, bulk) when saved (automatic). Master edits never rewrite them.
- **Every material master record gets a stock item** with the same code. A code already used by another material type is reported, not overwritten (automatic).
- **Inward QC bands**: the most specific band wins (line, then colour, then group, then type default). Each save is a new version. New GRN lots are checked against the band in force;

earlier lots keep theirs. A reading outside the band holds an incoming lot.

- **Tools**: the category is fixed after creation ("Tool category is fixed after creation"). Each category has required fields (BLOCKS). Tool names are unique within a category, and dropdown values are unique.
- **Order close reasons**: the code never changes once made ("An order close reason keeps its code, because closed orders still point to it."). A code containing OTHER makes the close dialog ask for a note (automatic). They are stored as reason codes of category SO_CLOSE.
- **Reason codes**: the category must be one of Downtime, Scrap, QC reject, Short-close, RM issue, Return, Customer complaint, SO close or Other; the severity must be OK, WATCH or CRITICAL (BLOCKS).

Sample

New customer for the challan. The Admin adds Sharma Tubes Pvt Ltd: Code WB-SHARMA, GSTIN 24AAKCS4821M1Z3. The system fills PAN AAKCS4821M and the billing state Gujarat (24). Billing address: Plot 14, GIDC Phase II, Vapi 396195. The Dispatch (ship-to) address is their Daman warehouse with stores contact Mr Patel, 98250 12345. The row now shows **Ready**. When Dispatch makes a challan for SO/26/10/412, it prints the GSTIN and the Daman ship-to address.

Paper edit. The Admin changes paper 350 (Kraft) bulk factor from 1.55 to 1.50, so the derived thickness goes from 0.5425 to 0.525 mm. Recipe version 3 of spec 76.4 x 81 x 150 for Sharma Tubes, approved last week, keeps 1.55 in its layers. The next recipe version saved will use 1.50.

Order close reason. The Owner adds "Customer moved the plant" and the code becomes SO-CUSTOMER-MOVED-THE-PLANT. Later the Owner renames it "Customer shifted the plant"; the code stays the same, so orders already closed with it still show it.

Common questions

? I deleted a customer by mistake. Is it gone?

No. Delete only deactivates it. Set Status to Inactive, find it and click **Activate**.

? Why can't I change an order close reason's code?

Closed orders keep that code. Rename it instead, or deactivate it and add a new one.

I changed a paper's GSM. Why does an old spec still show the old value?

Saved recipe versions keep the values they were saved with. Save a new recipe version to use the new value.

The customer row says "No dispatch address". Does it matter?

Yes for dispatch. The challan prints the ship-to address from here. Edit the customer and fill it, or tick **Same as the billing address**.

I typed a GSTIN and the PAN changed by itself.

A GSTIN contains the PAN (characters 3 to 12) and the state code (first 2 digits), so the system fills them to match.

A new paper does not appear in Material items.

It is created automatically when the master is saved. Refresh Material items. If its code is already used by another type of material, the system reports a conflict instead; use a different code.

Where do I change who can log in?

Not here. Employees are shop-floor people for reports. Logins are under System > Users.

Why can't the Plant Manager edit papers?

Masters are Owner and Admin only, except Reason codes, which the Plant Manager may also change.

Related chapters

- Specifications (recipes, tools, parchment allowed)
- Sales orders (close reasons, customer PO, parchment at release)
- Purchase orders and goods inward (vendors)
- Incoming QC and Material standards
- Dispatch and delivery challan
- Inventory and alerts (Material items)

- System and audit (Users, Plants, Machines)