
Village Mapping under Vistrit Module - User Manual

1. Scheme Village Master - Overview


The Scheme Village Master facilitates the mapping of all villages covered under the respective water supply scheme. In this module, users can add villages and capture all relevant details to ensure comprehensive scheme coverage.

Village Mapping is a mandatory activity for all schemes, irrespective of their current stage - whether in the Execution Phase, or in the Operation & Maintenance (O&M) Phase.

Provision for mapping of village provided to GM PIU at Jal Rekha Web portal using their credentials. GM PIU only can map villages under **Vistrit Module.**

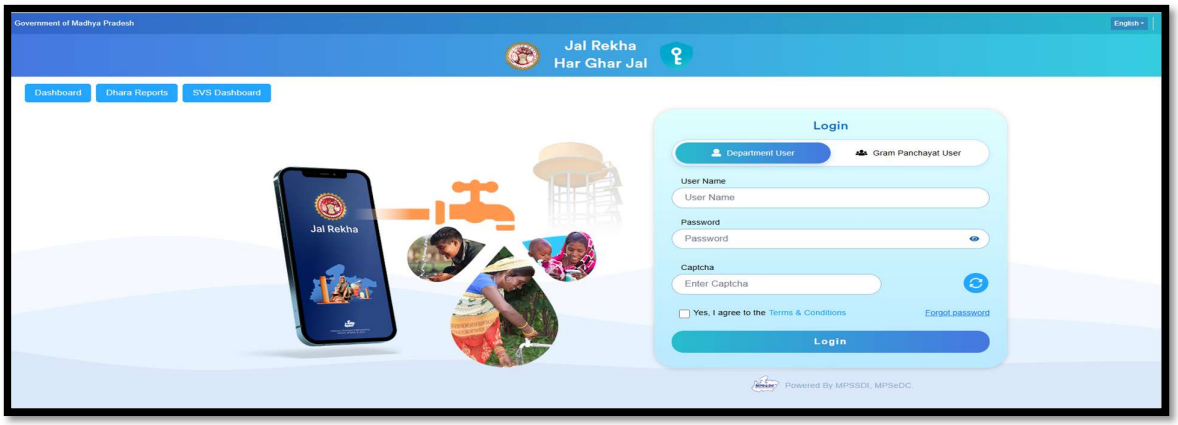

Jal Rekha Web Portal Login Page

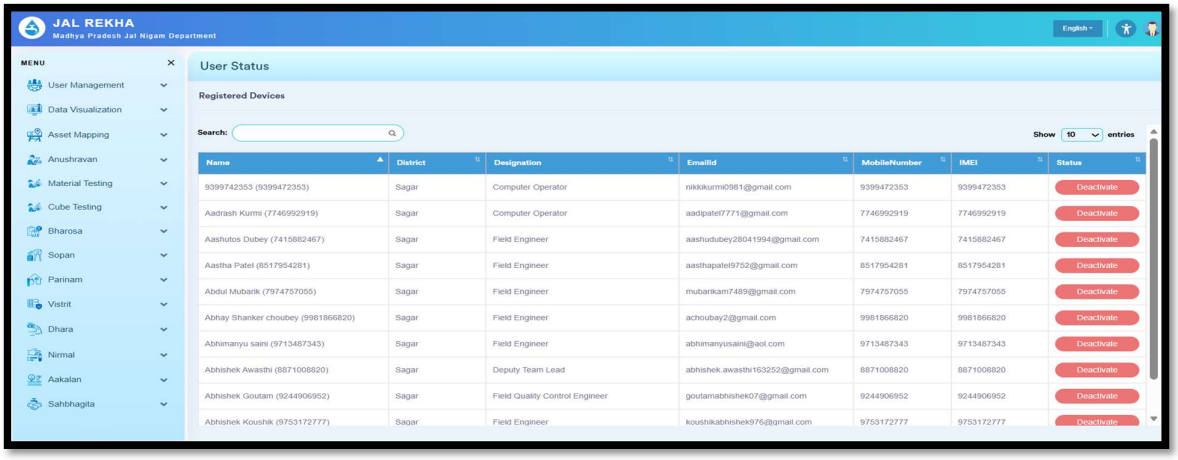

Home Page – GM Login

This mapping is a prerequisite for raising Requests for Inspection (RFI) for modules such as Anushravan, Cube Module, and Material Testing, and for recording daily water supply readings in the Dhara Module & water quality monitoring in Nirmal Module.

Before mapping component to field engineers, need to ensure all villages are mapped properly under that scheme.

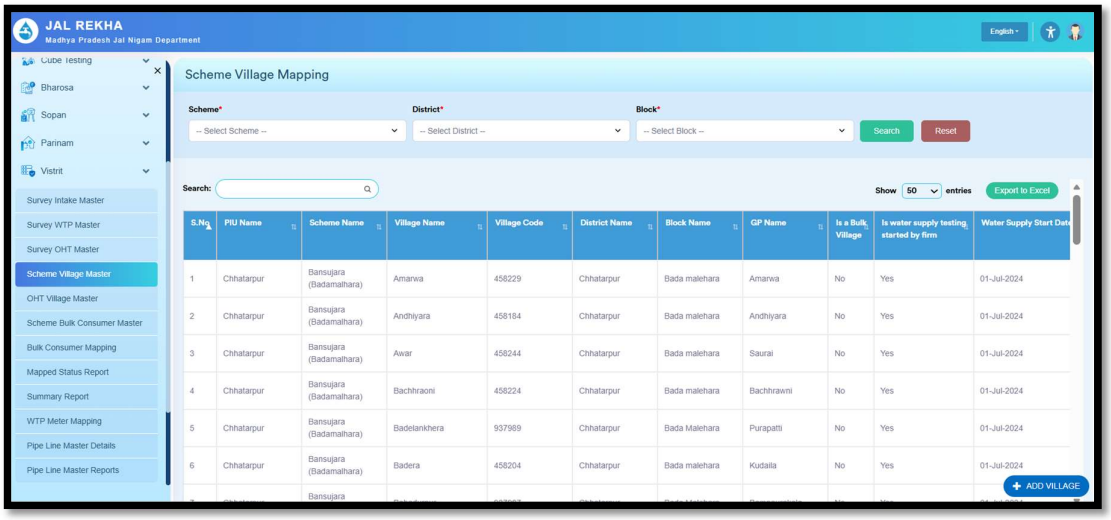


Fig 1: Scheme Village Master - Village List View

Procedure to Add a Village

To map a village to the selected scheme, follow the steps below:

- Click on Add Village: This option enables you to map a village to the selected scheme. Fill in all mandatory details from the dropdown menus.
- Population Details: Upon selecting a village, the Census Population for 2011 and the projected population for 2025 will be auto-populated. If the population is displayed as 0 or less than 10, cross-verify with official records and update accordingly.
- HSC - Provide the accurate Household Service Connection (HSC) count as approved.

Configuration Options

1. Is it a Bulk Village? Select 'Yes' if the village is categorized as a Bulk Village (PHE Village). By default, 'No' is selected for Multi-Village Scheme (MVS) villages.

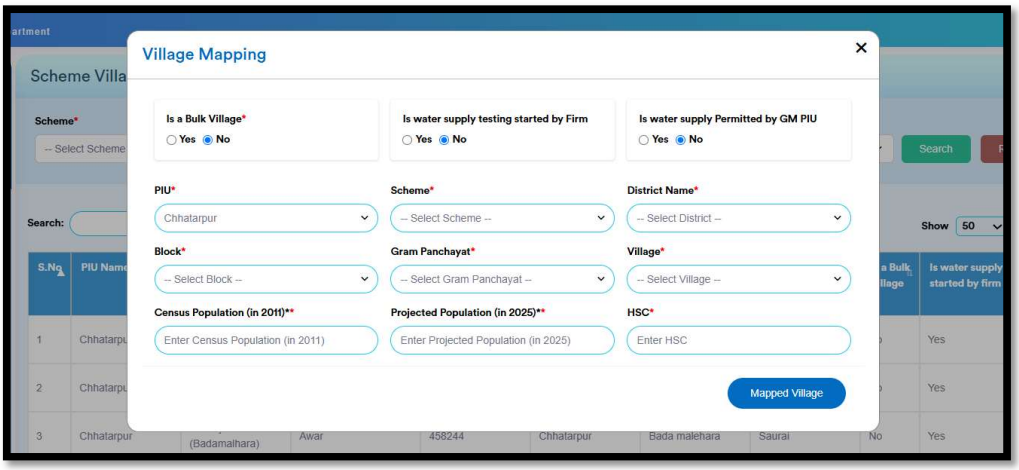


Fig 2: Village Mapping Form - Village Selection

2. Is Water Supply Testing Started by Firm? By default, 'No' is selected. Select 'Yes' if water supply testing has been initiated by the firm. On selecting 'Yes', the system will prompt you to enter the commencement date. This date is mandatory and cannot be edited once saved.

3. Is Water Supply Permitted by GM, PIU? Select 'Yes' if testing is successfully completed and regular water supply has been formally permitted by the General Manager, PIU. You will be required to enter the date on which O&M was declared or water supply was permitted. This date is mandatory and non-editable after submission. After entering all details, click on 'Map Village' to complete.

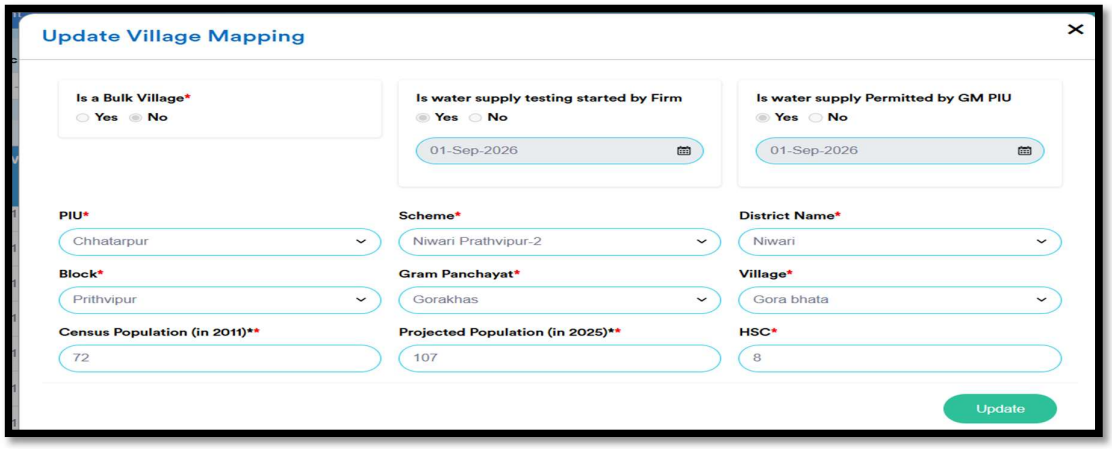


Fig 3: Entering Testing and Permission Dates

Editing Mapped Village Information

To edit information for a mapped village, navigate to the Scheme Village Master tab under the Vistrit Module. Locate the desired village and go to the last column labelled Action. Two options are available: Edit and Delete. Click on Edit.

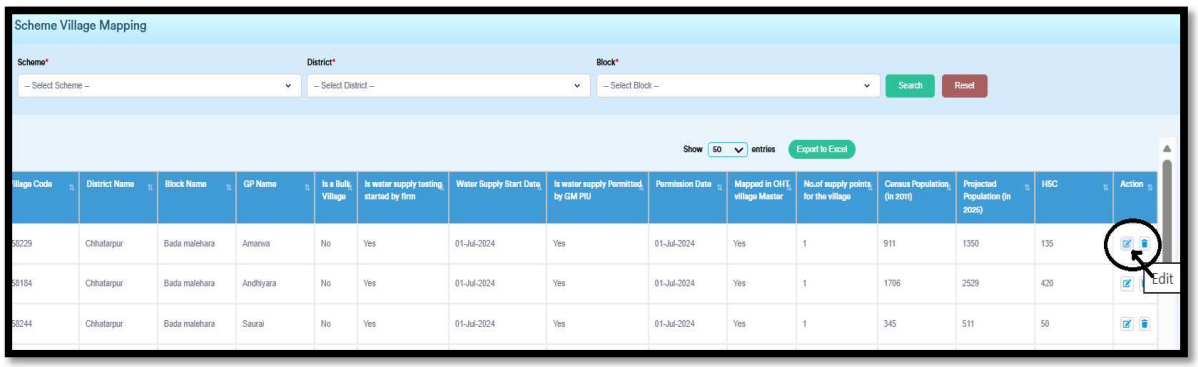


Fig 4: Action Column - Edit and Delete Options

Click on Edit.

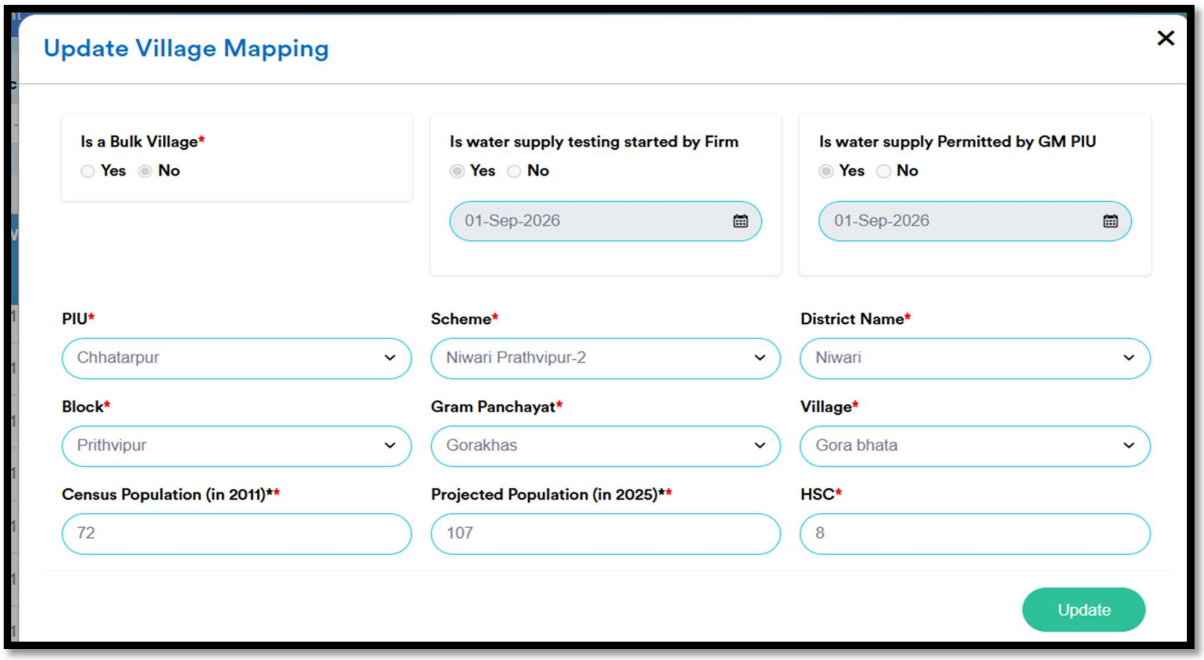


Fig 5: Edit Village Details Window

Upon clicking Edit, a pop-up window will display the details of the selected village. You may edit the population, HSC count, and bulk status. Please note that the Testing Start Date and Water Supply Permitted Date, once entered, are non-editable.

2. WTP Meter Mapping

This section requires mapping of the Electromagnetic Flow (EMF) meter installed at the Water Treatment Plant (WTP). You need to define the meter name and select the Overhead Tanks (OHTs) that are filled from the WTP.

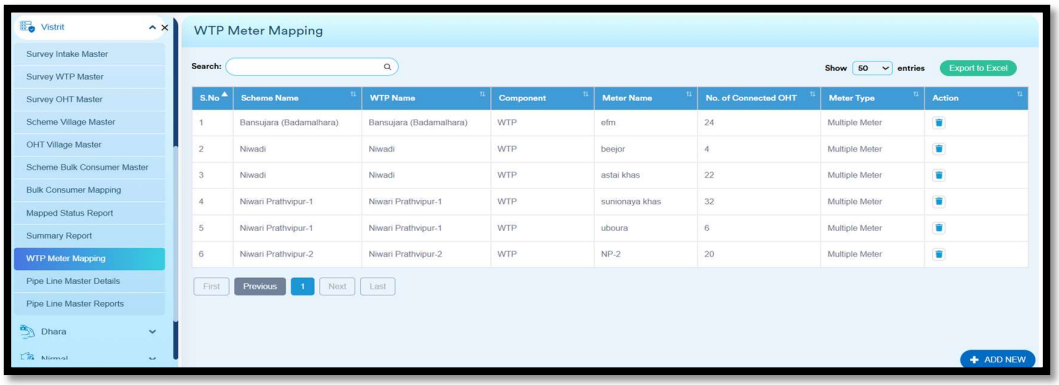


Fig 6: WTP Meter Mapping

Click on ADD NEW to initiate.

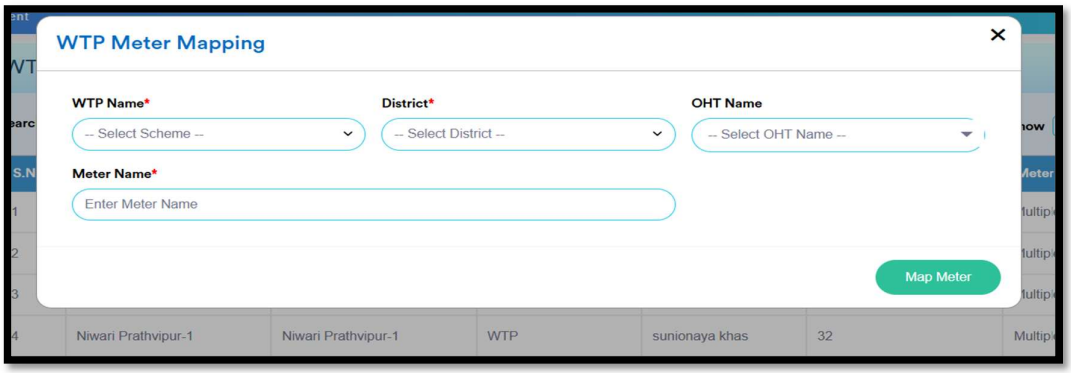


Fig 7: WTP Meter Mapping Form

Select the scheme, district, and OHT name from the dropdown menu and enter the meter name as identified at the site. Click on Map Meter



Fig 8: WTP Meter Mapping - OHT Selection

In case where WTP has multiple meters, GM shall able to add meters. GM can Map each meter individually and select the corresponding OHTs as per the actual supply arrangement from the respective EMF meter.

The WTP meter name defined here will be reflected consistently across all other modules.

3. OHT Village Master

After mapping villages under the scheme in the Scheme Village Master, the OHT Village Master requires mapping each village with its respective OHT from which it receives water supply, as per the approved design and drawings.

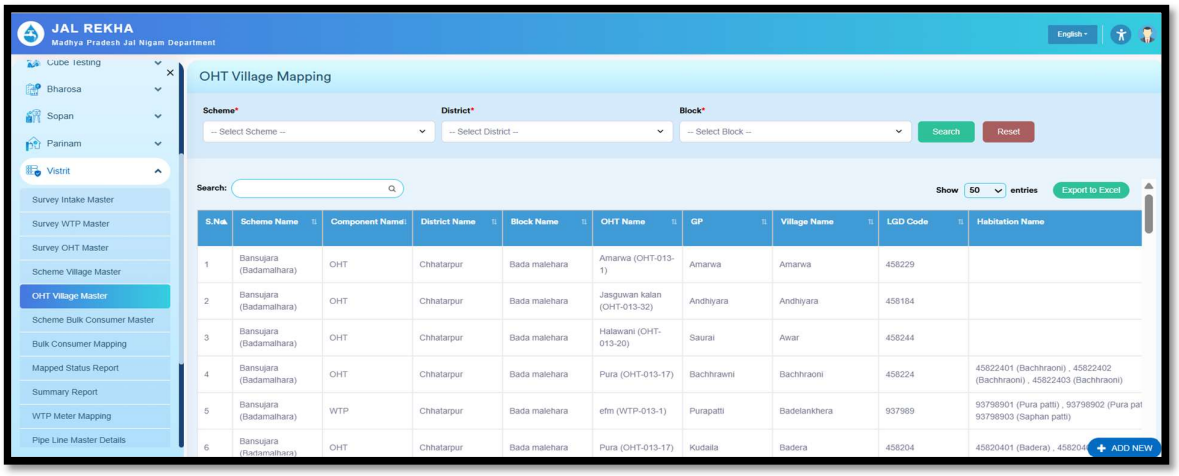


Fig 9: OHT Village Mapping - Master List

Click on Add New to map villages with an OHT or WTP (in case of direct supply from WTP to the village). Please refer to individual cluster drawings and OHT survey data for accurate mapping.

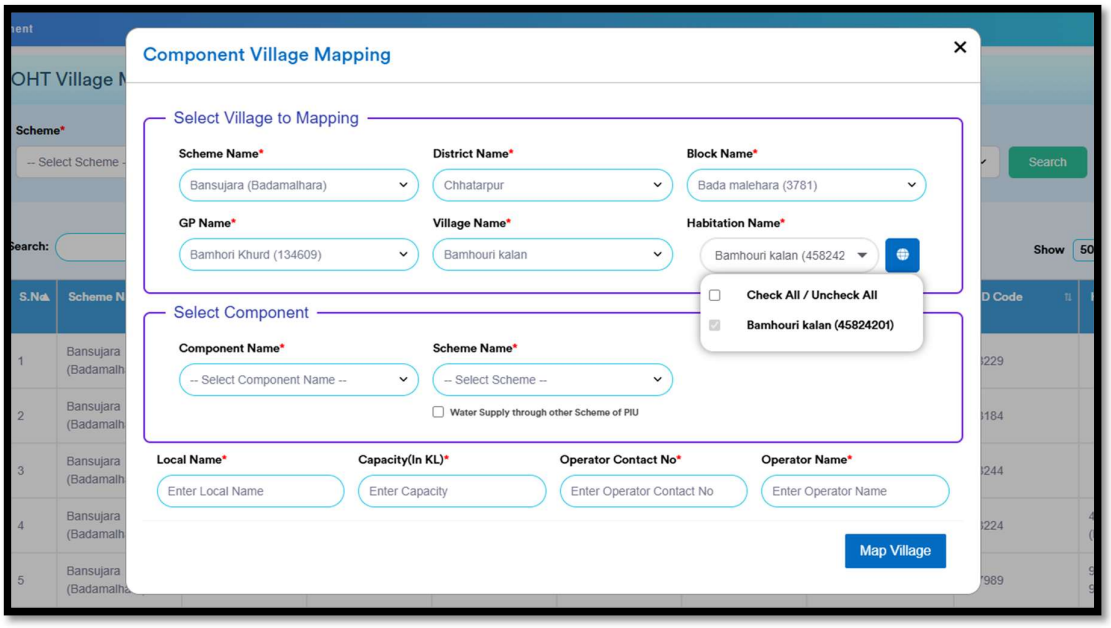


Fig 10: Add New - OHT Village Mapping Form

Steps:

- Click on Add New - First, select the village, then select the component type - OHT/WTP. If OHT is selected, choose the OHT number.
- Enter other details such as local name, OHT capacity, operator name, and mobile number.
- Click on Select from Map - You can view the habitation on the map. Ensure accurate selection of the village with its respective OHT.

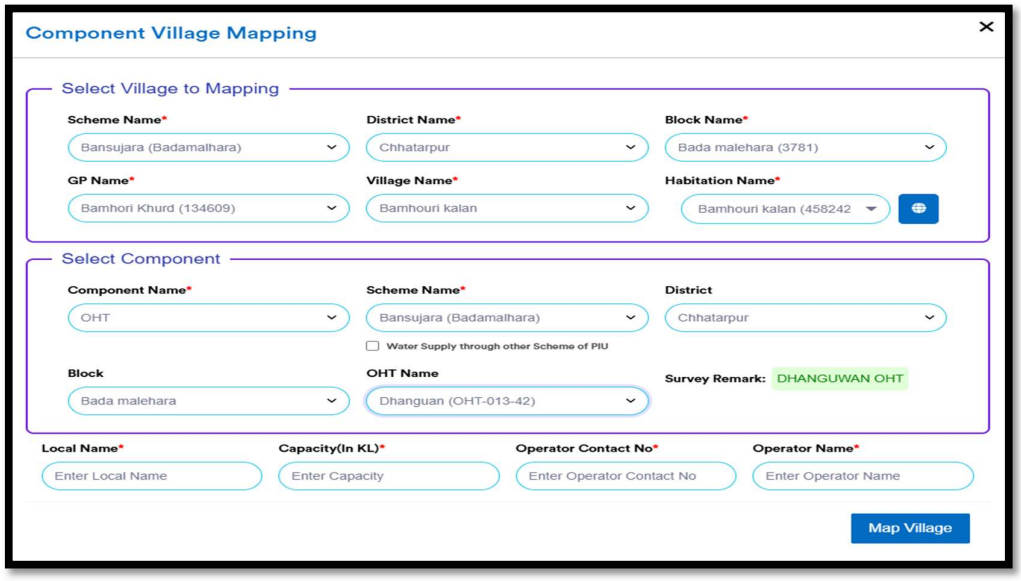


Fig 11: Add New - OHT Village Mapping Form

Click on Select from Map - you can see habitation on map.



Fig 12: Select Habitations on Map View

Ensure accurate selection of village with respective OHT. Once mapping is complete, click on Map Village.

Direct Supply from WTP

In cases where water supply to an MVS village or a Bulk Village is provided directly from the WTP through CWPM/CWGM, select the component as WTP and choose the WTP meter name created in the WTP Meter Mapping tab under Vistrit.

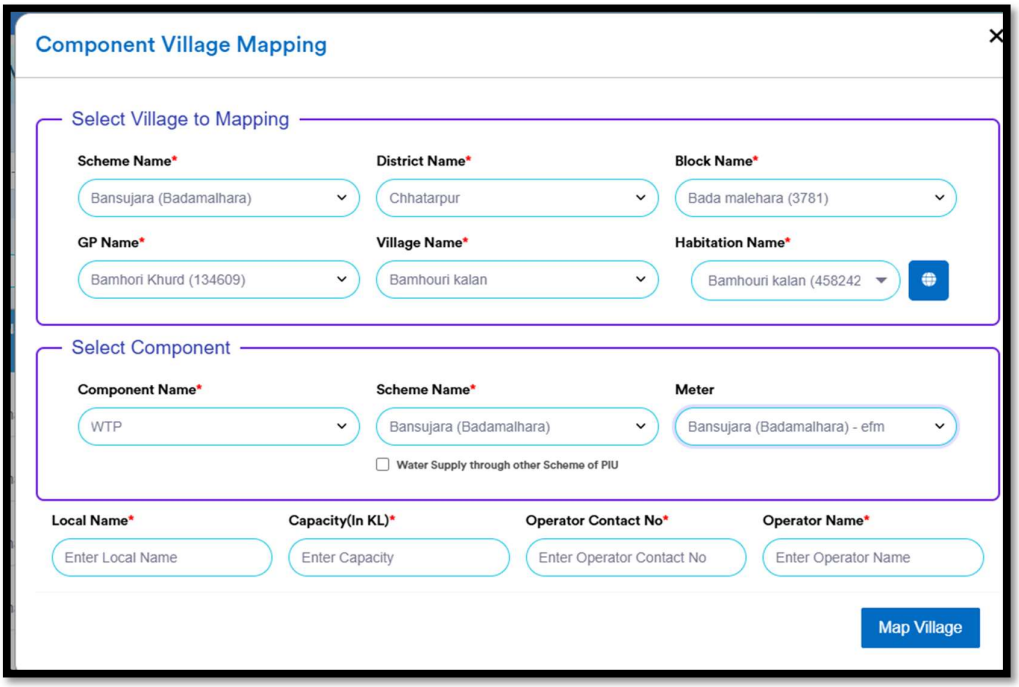


Fig 13: Mapping Direct Supply from WTP

Multiple Sources for a Single Village

In some cases, water supply to a village may be provided from more than one source.

Example: In village Pipariya Kalan, water is supplied from two sources - OHT and WTP. Therefore, two meters will be installed for monitoring the water supply on 2 different locations. In such cases, the village must be mapped with both sources separately.

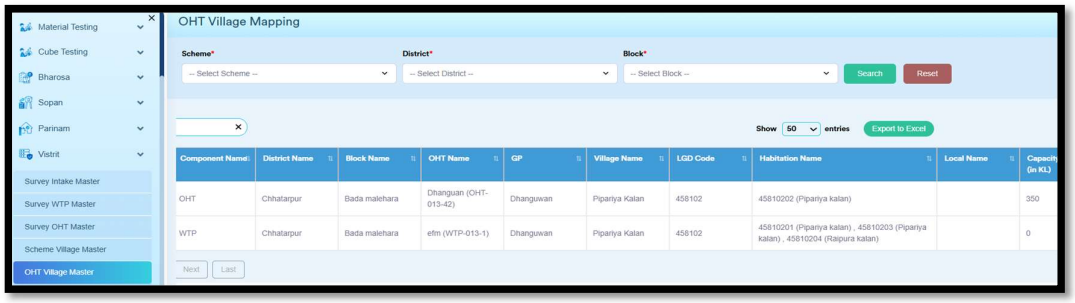


Fig 14: Example - Pipariya Kalan Mapped with Both OHT and WTP Sources

Click on ADD New - Select the village and the habitation receiving water from the OHT. Use the dropdown for Habitation Name, check the habitation name, or select it from the map. If more than one source needs to be mapped for a single village, more than one habitation must exist for mapping. If only one habitation exists, add a new habitation before proceeding.

First, map the village with the OHT - select the habitation, then the OHT name, enter the location where the EMF is installed, OHT capacity, operator name, and mobile number.

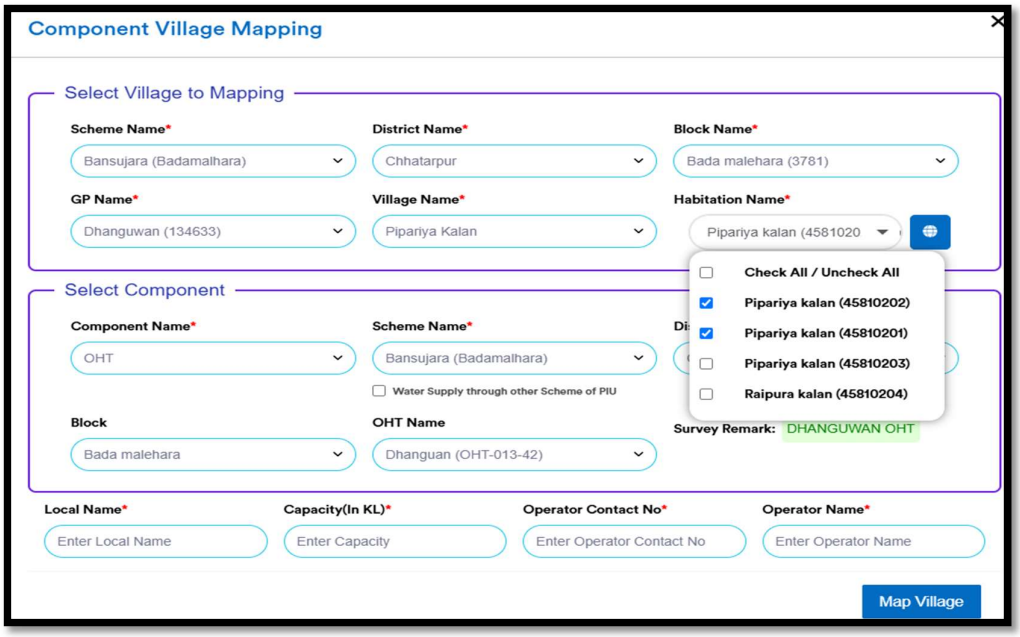


Fig 15: Pipariya Kalan Mapped with OHT

Then, map the remaining habitation(s) of the village with the WTP or another OHT as per the actual site condition. Select the village, the related habitation, and provide the source details. Click on Map Village to finalize.


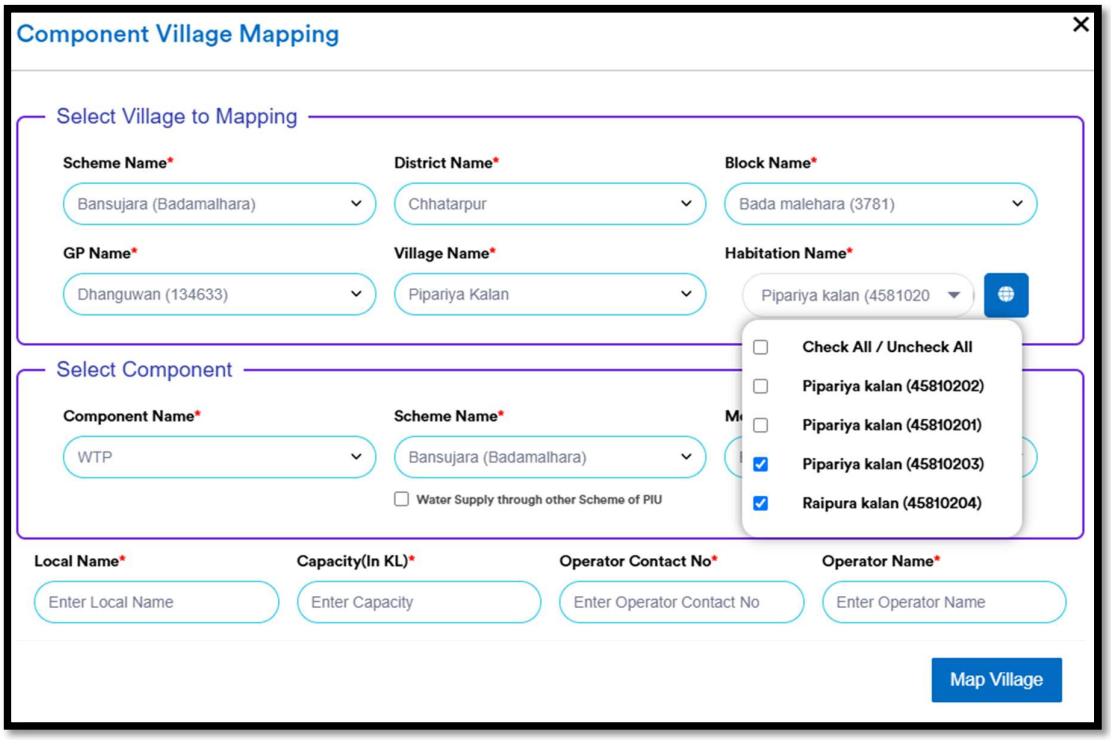


Fig 16: Pipariya Kalan Mapped with WTP

4. Scheme Bulk Consumer Master

Bulk Consumer – In MVS, Bulk consumer refers to an entity like Nagar Nigam, Nagar Palikas, School, Colleges, Hospitals, where we need to provide water to a Tapping point or their water storage tank. There will be two kind of bulk

To monitor water supply quantity, GM PIU need to map these bulk consumers with respective schemes from there water supply provided.

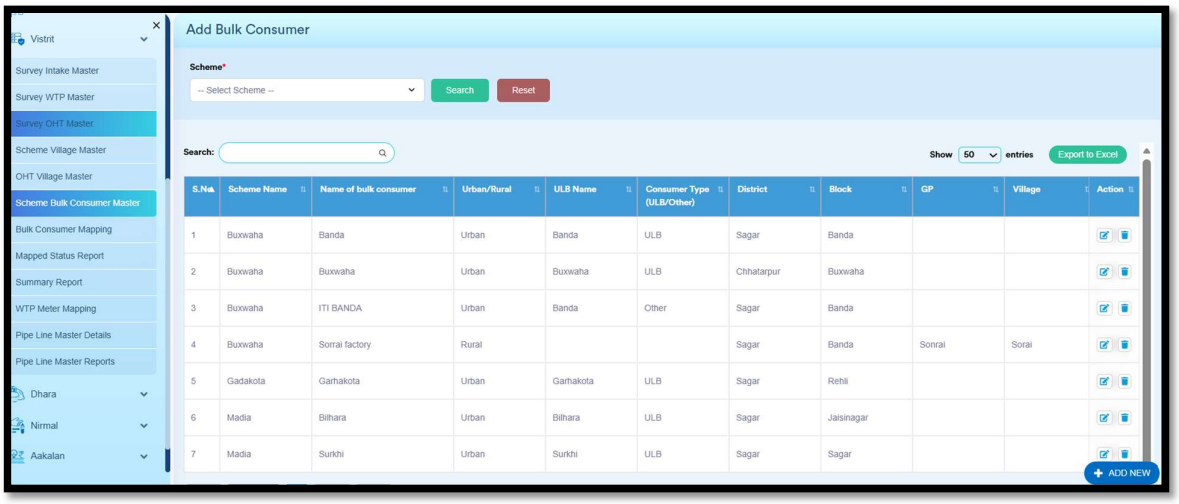

Click on ADD NEW- Once click on add new, a window will pop-up.

Select the scheme name in which bulk consumer need to map.

User can select that consumer falls under the scheme boundary or outside.

❖ If user select “Yes”, means consumer fall outside the scheme boundary. In this case, all block opens for the selection

❖ If user select “NO” means consumer fall inside the scheme boundary. In this case, only scheme block will display in dropdown


Select **user type** Urban or Rural. If bulk consumers are belonging to Urban area, then select Urban.

Select **Consumer Type ULB or Other**. If bulk consumer is any ULB then select ULB Name.

Mention Daily Contract Demand (in KL) & Upload Supporting document like agreement.

If consumer type other than ULB and falls in Urban area, then select **Other.**


Mention **name of Bulk Consumer**, fill **Daily contract demand** and upload supporting documents and **Save** the details

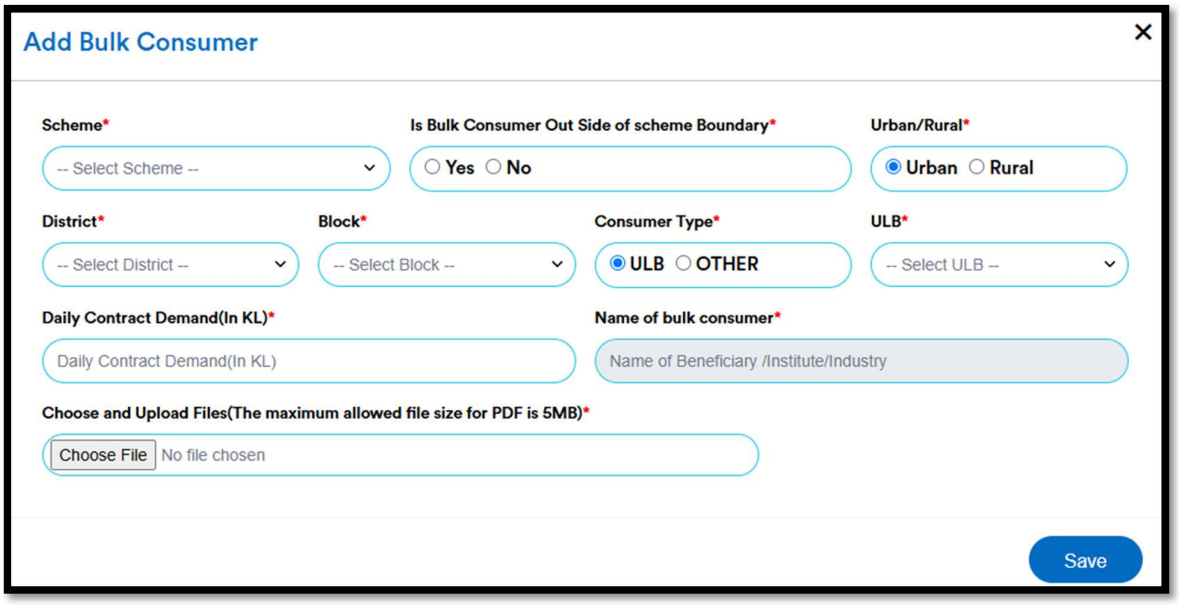

In case user type is Rural then select District, Block, GP & Village.


Mention Name of Bulk Consumer, Daily Contract Demand (in KL).

Upload supporting documents and **Save** the details

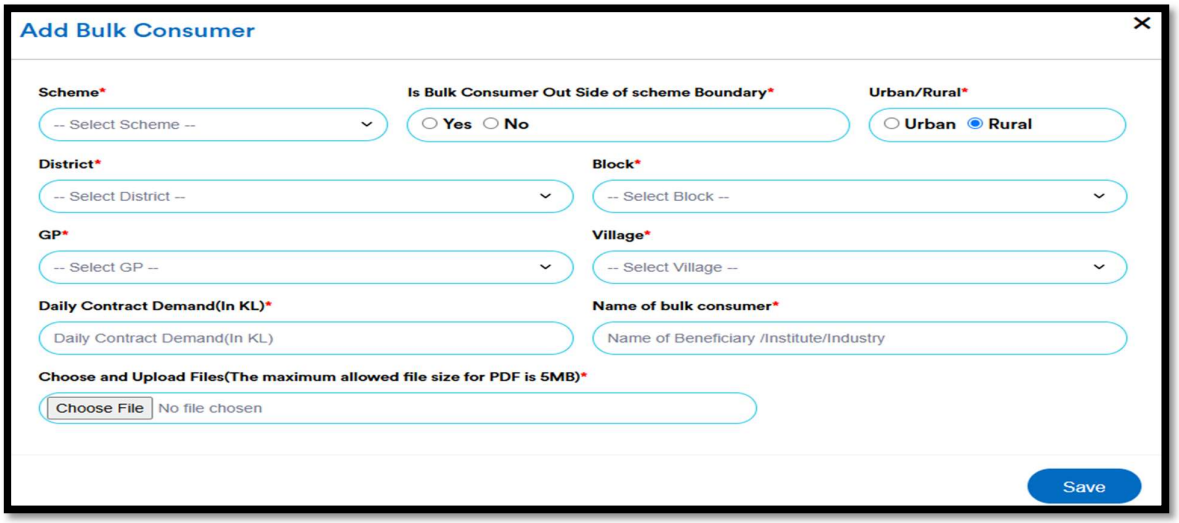


5. Bulk Consumer Mapping

Once Bulk Consumer mapped under the schemes, then GM PIU need to map these Bulk Consumers with OHT or WTP from there they will receive water supply.

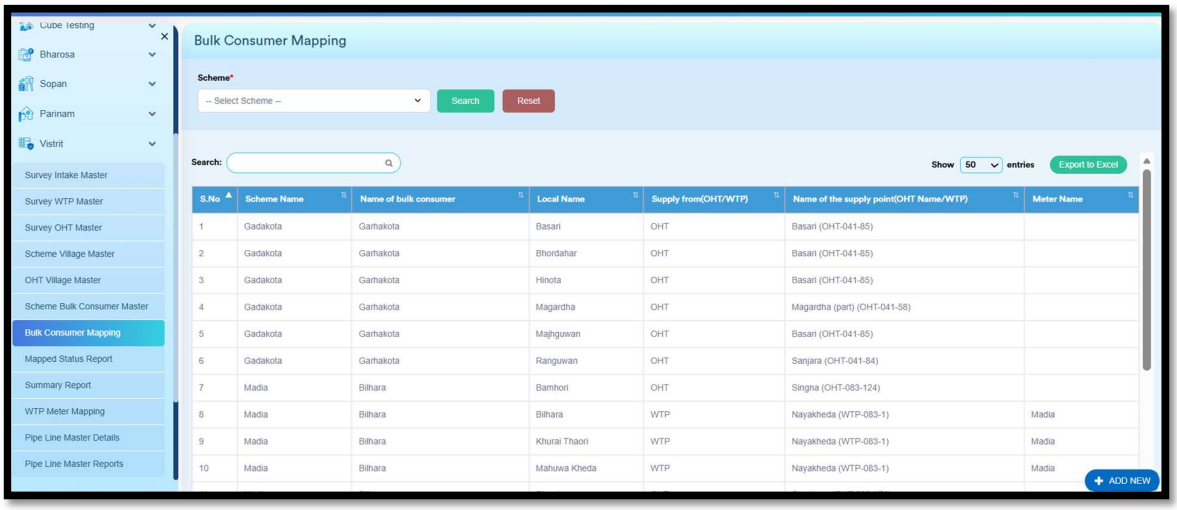

Click on **ADD NEW.** New window will pop-up.

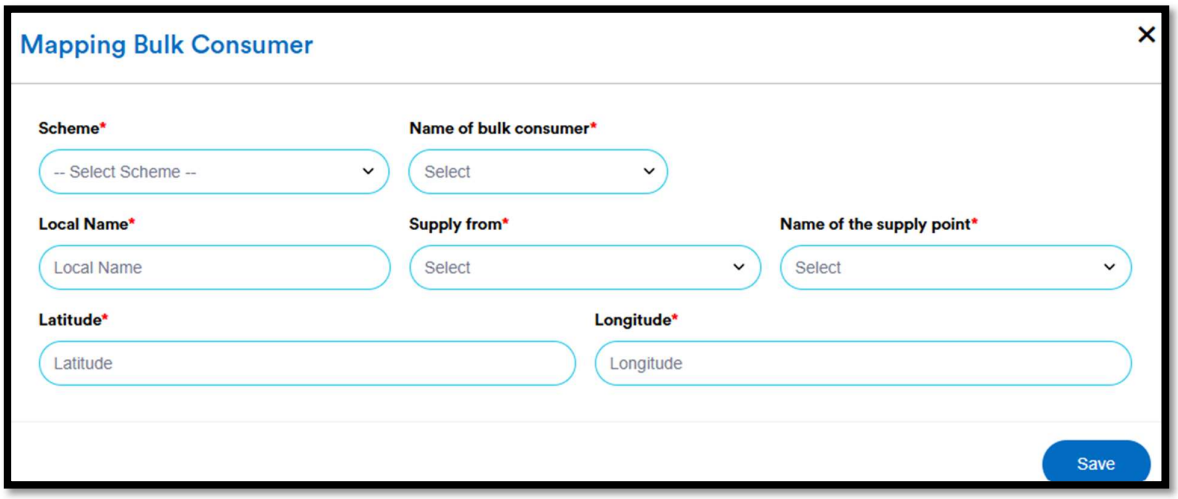


Select Scheme, once scheme selected then mapped Bulk consumer list will be available in drop down under **Name of Bulk Consumer.**

You can mention local name if any. Then select Supply. There will 2 options **OHT or WTP.**

If you select OHT then under **Name of Supply Points – list of OHTs of selected scheme will appear then you need to select OHTs.**

Mention Latitude and Longitude of the Bulk Consumer & **Save.**

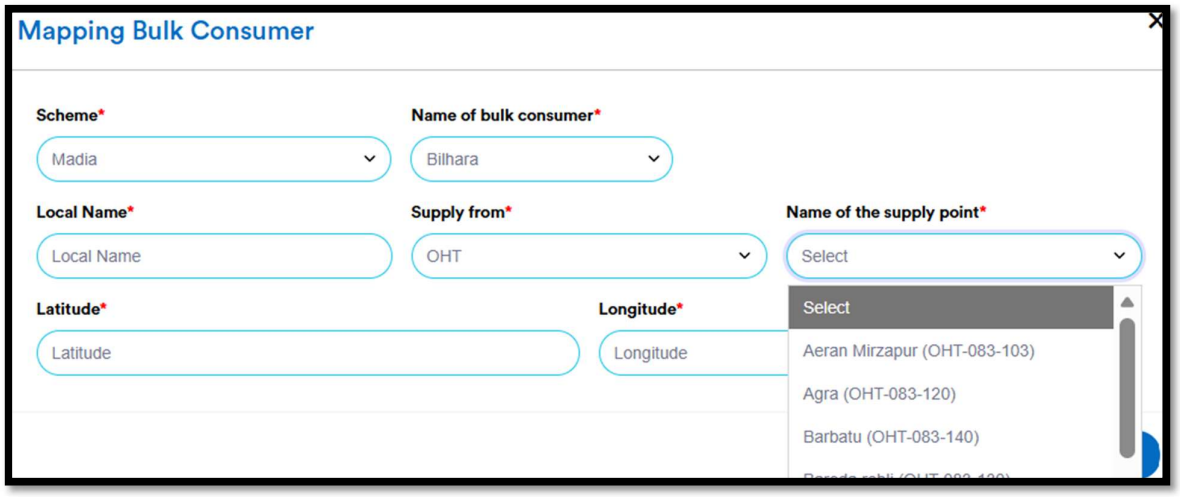

In case of water supply through directly from WTP then select **WTP** under **Supply From**.

Select Name of Supply points and Meter from Drop Down.

Mention Latitude and Longitude of the Bulk Consumer & **Save.**

