




1. Unzip files and get token

Route

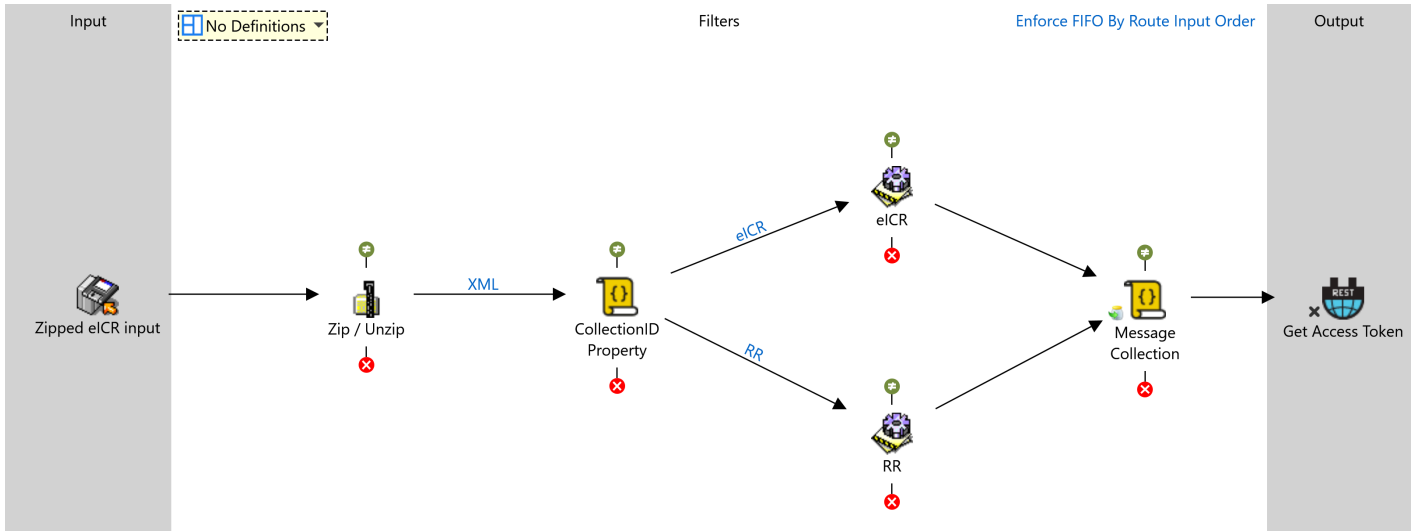

Notes

Purpose: Send an eICR/RR pair from a zip file to DIBBs

Description: This route will unzip a zip file containing an eICR and RR pair then get a bearer token to be used for eCR ingestion.

Date: 06.03.2025

Inputs

Page

Zip / Unzip..... Directory

Outputs

Page

Get Access Token..... JavaScript REST Client (v.1) 5

Filters

Name

Page

CollectionID Property..... JavaScript (v.2) 2

eICR..... No-operation 3

Message Collection..... JavaScript (v.2) 2

RR..... No-operation 3

Zip / Unzip..... Zip / Unzip 2

Details

General

Priority	Normal
Startup State	Manual Restart Required
FIFO Mode	Enforce FIFO By Route Input Order
Stop route on error message	False



CollectionID Property

JavaScript (v.2)

On 1. Unzip files and get token route

[Filter](#)

Javascript

```

/* Single input message case */
// Create the output message
var next = output.append(input[0]);

//Setting the property to be used at the message collector
next.setProperty('collectionID', next.getProperty('BaseFilename'));

```

Destinations

Name	Page
Output Condition: eICR ZipBaseFilename ends with 'eICR' ignoring case	
eICR..... No-operation	3
Output Condition: RR ZipBaseFilename ends with 'RR' ignoring case	
RR..... No-operation	3



Zip / Unzip

Zip / Unzip

On 1. Unzip files and get token route

[Filter](#)

Configuration Properties

Mode	Unzip
On Non-zip File Receipt	Send to error connector
On Empty Zip File Receipt	Send to error connector
Filename Encoding	Default platform encoding

Destinations

Name	Page
Output Condition: XML ZipSuffix ends with 'xml' ignoring case	
CollectionID Property..... JavaScript (v.2)	2



Message Collection

JavaScript (v.2)

[Filter](#)

On 1. Unzip files and get token route

Javascript

```
/* Single input message case */
// Create the output message
var next = output.append(input[0]);
next.setProperty("eICR", input[0].text);
next.setProperty("RR", input[1].text);
```

Message Collector: Input Collation

Collection Order	[1. Unzip files and get token/f4fc7b28-238f-4465-939e-8f6beee533c4,1. Unzip files and get token/75c539f8-739c-43f6-850e-c766ef2b8e28]
Match Property	collectionID
Message Set Timeout	10
Timeout Units	Minutes
Timeout Destination	Process as Usual

Destinations

Name	Page
 Get Access Token..... JavaScript REST Client (v.1)	5



RR

No-operation

On 1. Unzip files and get token route

Filter

Destinations

Name	Page
 Message Collection..... JavaScript (v.2)	2



eICR

No-operation

On 1. Unzip files and get token route

Filter


Destinations

Name	Page
 Message Collection..... JavaScript (v.2)	2



2. Use token to save eCR

Route

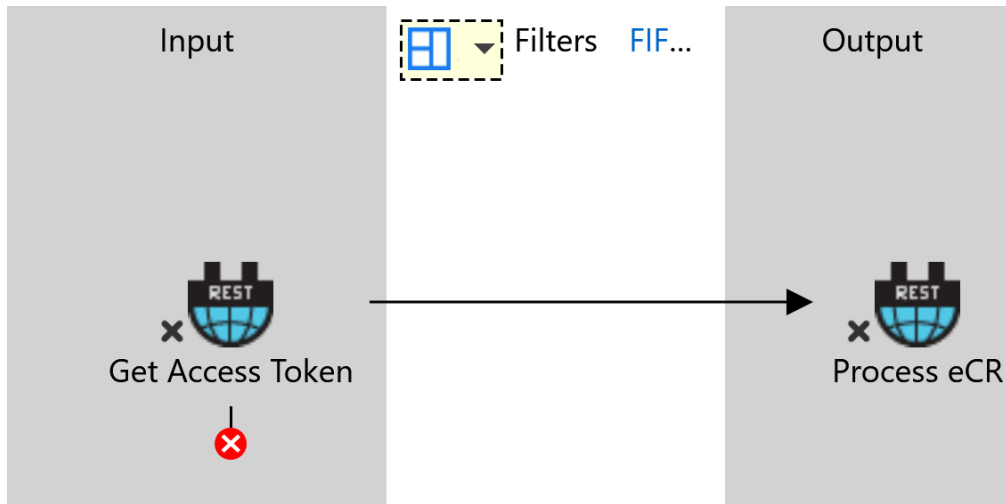

Notes

Purpose: Send an eICR/RR pair from a zip file to DIBBs
 Description: Uses access token to send eCR to DIBBs for ingestion
 Date: 06.03.2025

Inputs

Get Access Token..... JavaScript REST Client (v.1) [5](#)

Outputs

Process eCR..... JavaScript REST Client (v.1) [7](#)

Details

General

Priority	Normal
Startup State	Manual Restart Required
FIFO Mode	Enforce FIFO By Route Input Order
Stop route on error message	False



Get Access Token

JavaScript REST Client (v.1) (Out->In Mode)

Communication Point

Configuration Properties	
REST Client	IDP
<pre>/** Gets an access token from the IDP. */ var config = { 'content-type': 'application/x-www-form-urlencoded' }; var data = 'client_id=' + getVariable('authClientID') + '&scope=' + getVariable('authClientID') + '%2F.default&client_secret=' + getVariable('authClientSecret') + '&grant_type=client_credentials'; var response = client.post(config, data); output.setProperty('accessToken', JSON.parse(response.response).access_token);</pre>	
Read Timeout (ms)	10000
Used on Routes	
	Page
1. Unzip files and get token.....Route	1
2. Use token to save eCR.....Route	4
token to process 7.....Route	

Details

Retries	
Retry Type	Linear
Number of Retries	5
Retries before Notification	5
Retry Delay (ms)	5000
Properties	
Idle Timeout (ms)	0
Number of Connections	1
Startup State	Manual Restart Required
Input Message Encoding	Unknown / Not Set
Response Timeout (ms)	60000
Retry Count	Infinite
Fail Action	Treat as error

REST Clients

IDP	
Hostname	login.microsoftonline.com
Port	443
Relative URL	/<your tenant ID>/oauth2/v2.0/token

IDP	
Description	Generate bearer token for POST to DIBBs
Default Content Type	
Proxy Enabled	False
Proxy Hostname	
Proxy Port	
Proxy Username	
Proxy Password	<i>encrypted value</i>
Protocol	HTTPS
SSL Protocol	TLSv1_2
SSL Cipher Suites	VERY_STRONG
Authentication	NONE



Process eCR

JavaScript REST Client (v.1) (Output Mode)

Communication Point

Configuration Properties							
REST Client	eCR Viewer						
<pre>/** Perform a POST request to process-ecr. */ var config = { 'relative-url': '/process-ecr', 'content-type': 'application/json' }; config.headers = [{ 'header': 'Authorization', 'value': 'Bearer ' + input.getProperty('access Token') }]; var body = { 'ecr': input.getProperty('eICR'), 'rr': input.getProperty('RR') }; var data = JSON.stringify(body); var response = client.post(config, data); logger.info(response.status); logger.info(response.response);</pre>							
Read Timeout (ms)	10000						
Used on Routes							
<table border="1"> <thead> <tr> <th></th><th>Page</th></tr> </thead> <tbody> <tr> <td>2. Use token to save eCR.....</td><td>Route 4</td></tr> <tr> <td>Unzip files and process eCR.....</td><td>Route</td></tr> </tbody> </table>			Page	2. Use token to save eCR.....	Route 4	Unzip files and process eCR.....	Route
	Page						
2. Use token to save eCR.....	Route 4						
Unzip files and process eCR.....	Route						

Details

Retries	
Retry Type	None
Properties	
Idle Timeout (ms)	0
Number of Connections	1
Startup State	Manual Restart Required
Continue Routing Enabled	False

REST Clients

eCR Viewer	
Hostname	<your eCR Viewer hostname>
Port	443
Relative URL	/ecr-viewer/api
Description	
Default Content Type	

eCR Viewer	
Proxy Enabled	False
Proxy Hostname	
Proxy Port	
Proxy Username	
Proxy Password	<i>encrypted value</i>
Protocol	HTTPS
SSL Protocol	TLSv1_2
SSL Cipher Suites	FIPS
Authentication	NONE