



Process eCR with JWT

JavaScript REST Client (v.2) (Output Mode)

Communication Point

Configuration Properties	
REST Client	eCR Viewer
OAuth2 REST Client	
<pre>/** Perform a POST request to process-ecr. */ const jwt = jwtBuilder .withKey('DIBBsPrivateKey') .alg('RS256') .build(); const config = { 'relative-url': '/process-ecr', 'content-type': 'application/json', 'headers': [{ 'header': 'Authorization', 'value': 'Bearer ' + jwt.serialize() }] }; const body = { 'ecr': input.getProperty('eICR'), 'rr': input.getProperty('RR') }; const data = JSON.stringify(body); const response = client.post(config, data); logger.info(response.status); logger.info(response.response);</pre>	
Read Timeout (ms)	10000
Used on Routes	
Unzip files and process eCR - JSv2 with JWT..... Route 3	

Details

Retries	
Retry Type	Linear
Number of Retries	5
Retries before Notification	5
Retry Delay (ms)	5000
Properties	
Idle Timeout (ms)	0
Number of Connections	1
Startup State	Manual Restart Required
Continue Routing Enabled	False


REST Clients

eCR Viewer	
Hostname	<your eCR Viewer hostname>
Port	443
Relative URL	/ecr-viewer/api
Description	
Default Content Type	
Proxy Enabled	False
Proxy Hostname	
Proxy Port	
Proxy Username	
Proxy Password	<i>encrypted value</i>
Protocol	HTTPS
SSL Protocol	TLSv1_2
SSL Cipher Suites	FIPS
Authentication	NONE



Unzip files and process eCR - JSv2 with JWT

Route

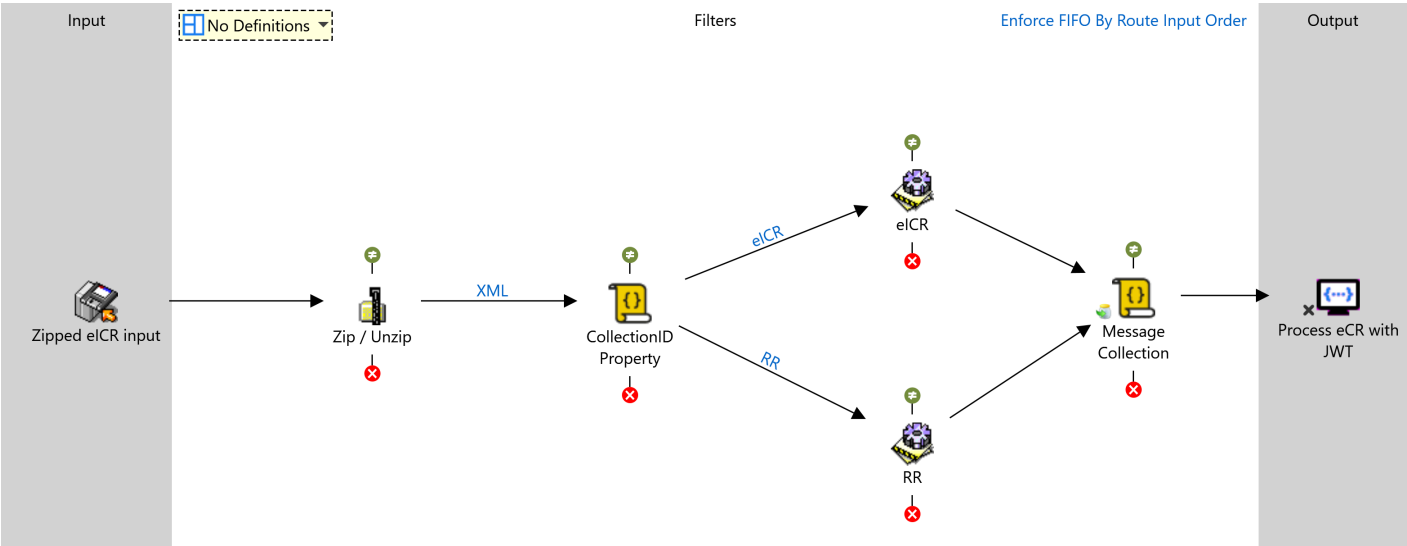

Notes
Purpose: Send an eICR/RR pair from a zip file to DIBBs
Description: This route will unzip a zip file containing an eICR and RR pair a send them to the eCR Viewer for ingestion.
Date: 07.15.2025
Processing notes: n/a

Inputs	Page
Zipped eICR input..... Directory	
Outputs	Page
Process eCR with JWT..... JavaScript REST Client (v.2)	1

Filters

Name	Page
CollectionID Property..... JavaScript (v.2)	4
eICR..... No-operation	5
Message Collection..... JavaScript (v.2)	4
RR..... No-operation	5
Zip / Unzip..... Zip / Unzip	4

Details

General	
Priority	Normal
Startup State	Manual Restart Required
FIFO Mode	Enforce FIFO By Route Input Order
Stop route on error message	False



CollectionID Property

[Filter](#)

JavaScript (v.2)

On Unzip files and process eCR - JSv2 with JWT route

Javascript

```

/* Single input message case */
// Create the output message
const next = output.append(input[0]);

//Setting the property to be used at the message collector
next.setProperty('collectionID', next.getProperty('BaseFilename'));

```

Destinations

Name	Page
Output Condition: eICR	
ZipBaseFilename ends with 'eICR' ignoring case	
eICR..... No-operation	5
Output Condition: RR	
ZipBaseFilename ends with 'RR' ignoring case	
RR..... No-operation	5



Zip / Unzip

[Filter](#)

Zip / Unzip

On Unzip files and process eCR - JSv2 with JWT route

Configuration Properties

Mode	Unzip
On Non-zip File Receipt	Send to error connector
On Empty Zip File Receipt	Send to error connector
Filename Encoding	Default platform encoding

Destinations

Name	Page
Output Condition: XML	
ZipSuffix ends with 'xml' ignoring case	
CollectionID Property..... JavaScript (v.2)	4



Message Collection

[Filter](#)

JavaScript (v.2)

On Unzip files and process eCR - JSv2 with JWT route

Javascript	
<pre>/* Single input message case */ // Create the output message const next = output.append(input[0]); next.setProperty("eICR", input[0].text); next.setProperty("RR", input[1].text);</pre>	
Message Collector: Input Collation	
Collection Order	[Unzip files and process eCR - JSv2 with JWT/f4fc7b28-238f-4465-939e-8f6beee533c4,Unzip files and process eCR - JSv2 with JWT/75c539f8-739c-43f6-850e-c766ef2b8e28]
Match Property	collectionID
Message Set Timeout	10
Timeout Units	Minutes
Timeout Destination	Process as Usual

Destinations

Name	Page
 Process eCR with JWT..... JavaScript REST Client (v.2)	1



RR
No-operation

On Unzip files and process eCR - JSv2 with JWT route

Filter

Destinations

Name	Page
 Message Collection..... JavaScript (v.2)	4



eICR
No-operation

On Unzip files and process eCR - JSv2 with JWT route

Filter

Destinations

Name	Page
 Message Collection..... JavaScript (v.2)	4