



Process eCR - Rhapsody 7

JavaScript REST Client (v.2) (Output Mode)

Communication Point

Configuration Properties	
REST Client	eCR Viewer
OAuth2 REST Client	IDP
<pre> /** Perform a POST request to process-ecr. */ const clientId = getVariable('authClientID'); // String keys and values that will be converted to application/x-www-form-urlencoded and sent in the body. const formParams = { "scope": clientId + "/.default", "client_id": clientId, "client_secret": getVariable("authClientSecret"), "grant_type": "client_credentials" }; const oauthConfig = { // Note: only needed if not already set on the oauth REST client's content-type 'content-type' : 'application/x-www-form-urlencoded', }; // Get the access token const tokenResponse = client.requestAccessToken(oauthConfig, formParams); const token = JSON.parse(tokenResponse.response).access_token; // Use the token const config = { 'relative-url': '/process-ecr', 'content-type': 'application/json', 'headers': [{ 'header': 'Authorization', 'value': bearerAuth(token) }] }; const body = { 'ecr': input.getProperty('eICR'), 'rr': input.getProperty('RR') }; const data = JSON.stringify(body); const response = client.post(config, data); logger.info(response.status); logger.info(response.response); </pre>	
Read Timeout (ms)	10000
Used on Routes	
Unzip files and process eCR - Rhapsody 7.....Route	
Page 3	

Details

Retries	
Retry Type	Linear

Retries	
Number of Retries	5
Retries before Notification	5
Retry Delay (ms)	5000
Properties	
Idle Timeout (ms)	0
Number of Connections	1
Startup State	Manual Restart Required
Continue Routing Enabled	False


REST Clients

eCR Viewer	
Hostname	<your eCR Viewer hostname>
Port	443
Relative URL	/ecr-viewer/api
Description	
Default Content Type	
Proxy Enabled	False
Proxy Hostname	
Proxy Port	
Proxy Username	
Proxy Password	<i>encrypted value</i>
Protocol	HTTPS
SSL Protocol	TLSv1_2
SSL Cipher Suites	FIPS
Authentication	NONE
IDP	
Hostname	login.microsoftonline.com
Port	443
Relative URL	/<your tenant ID>/oauth2/v2.0/token
Description	Generate bearer token for POST to DIBBs
Default Content Type	
Proxy Enabled	False
Proxy Hostname	
Proxy Port	
Proxy Username	
Proxy Password	<i>encrypted value</i>
Protocol	HTTPS
SSL Protocol	TLSv1_2
SSL Cipher Suites	VERY_STRONG
Authentication	NONE



Unzip files and process eCR - Rhapsody 7

Route

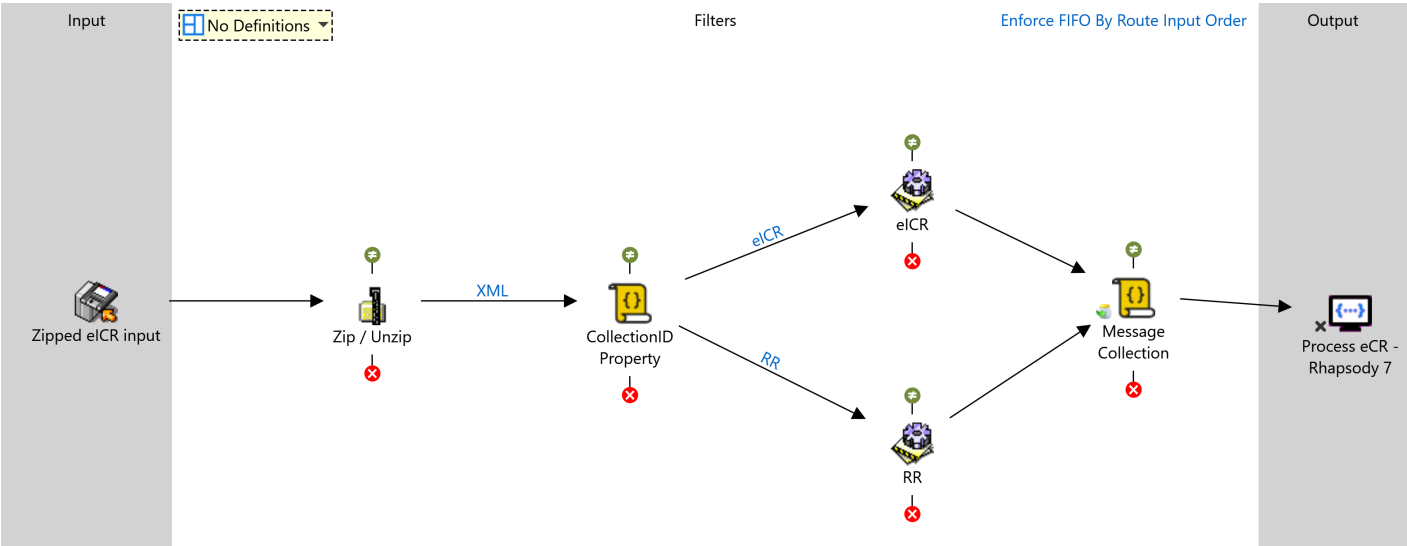

Notes

Purpose: Send an eICR/RR pair from a zip file to DIBBs
Description: This route will unzip a zip file containing an eICR and RR pair a send them to the eCR Viewer for ingestion.
Date: 06.03.2025
Processing notes: n/a

Inputs

Zipped eICR input..... Directory

Page

Outputs

Process eCR - Rhapsody 7..... JavaScript REST Client (v.2)

Page

1

Filters

Name

CollectionID Property.....	JavaScript (v.2)	4
eICR.....	No-operation	5
Message Collection.....	JavaScript (v.2)	4
RR.....	No-operation	5
Zip / Unzip.....	Zip / Unzip	4

Page

Details

General

Priority	Normal
Startup State	Manual Restart Required
FIFO Mode	Enforce FIFO By Route Input Order
Stop route on error message	False



CollectionID Property

JavaScript (v.2)

On Unzip files and process eCR - Rhapsody 7 route

[Filter](#)

Javascript

```

/* Single input message case */
// Create the output message
const next = output.append(input[0]);

//Setting the property to be used at the message collector
next.setProperty('collectionID', next.getProperty('BaseFilename'));

```

Destinations

Name	Page
Output Condition: eICR	
ZipBaseFilename ends with 'eICR' ignoring case	
eICR..... No-operation	5
Output Condition: RR	
ZipBaseFilename ends with 'RR' ignoring case	
RR..... No-operation	5



Zip / Unzip

Zip / Unzip

On Unzip files and process eCR - Rhapsody 7 route

[Filter](#)

Configuration Properties

Mode	Unzip
On Non-zip File Receipt	Send to error connector
On Empty Zip File Receipt	Send to error connector
Filename Encoding	Default platform encoding

Destinations

Name	Page
Output Condition: XML	
ZipSuffix ends with 'xml' ignoring case	
CollectionID Property..... JavaScript (v.2)	4



Message Collection

JavaScript (v.2)

[Filter](#)

On Unzip files and process eCR - Rhapsody 7 route

Javascript	
<pre>/* Single input message case */ // Create the output message const next = output.append(input[0]); next.setProperty("eICR", input[0].text); next.setProperty("RR", input[1].text);</pre>	
Message Collector: Input Collation	
Collection Order	[Unzip files and process eCR - Rhapsody 7/f4fc7b28-238f-4465-939e-8f6beee533c4,Unzip files and process eCR - Rhapsody 7/75c539f8-739c-43f6-850e-c766ef2b8e28]
Match Property	collectionID
Message Set Timeout	10
Timeout Units	Minutes
Timeout Destination	Process as Usual

Destinations

Name	Page
 Process eCR - Rhapsody 7..... JavaScript REST Client (v.2)	1



RR

No-operation

On Unzip files and process eCR - Rhapsody 7 route

Filter

Destinations

Name	Page
 Message Collection..... JavaScript (v.2)	4



eICR

No-operation

On Unzip files and process eCR - Rhapsody 7 route

Filter

Destinations

Name	Page
 Message Collection..... JavaScript (v.2)	4