

The 007786 scans for valid object data:

- Object (sprite) code,
- palette,
- position and
- attributes


It translates it into:

- Individual object character (tiles) color code,
- Palette values
- object character address

This is copied into the frame buffers with the 007786.

1. SCLR (OSCANCLR) starts the obeit scanning process.
2. OSCEN is activated when each of the four words to be scanned are to be read. The 007783 increments the address.

The 007786 uses an OKI 79V000 gate cell array with 3289 unit cells.

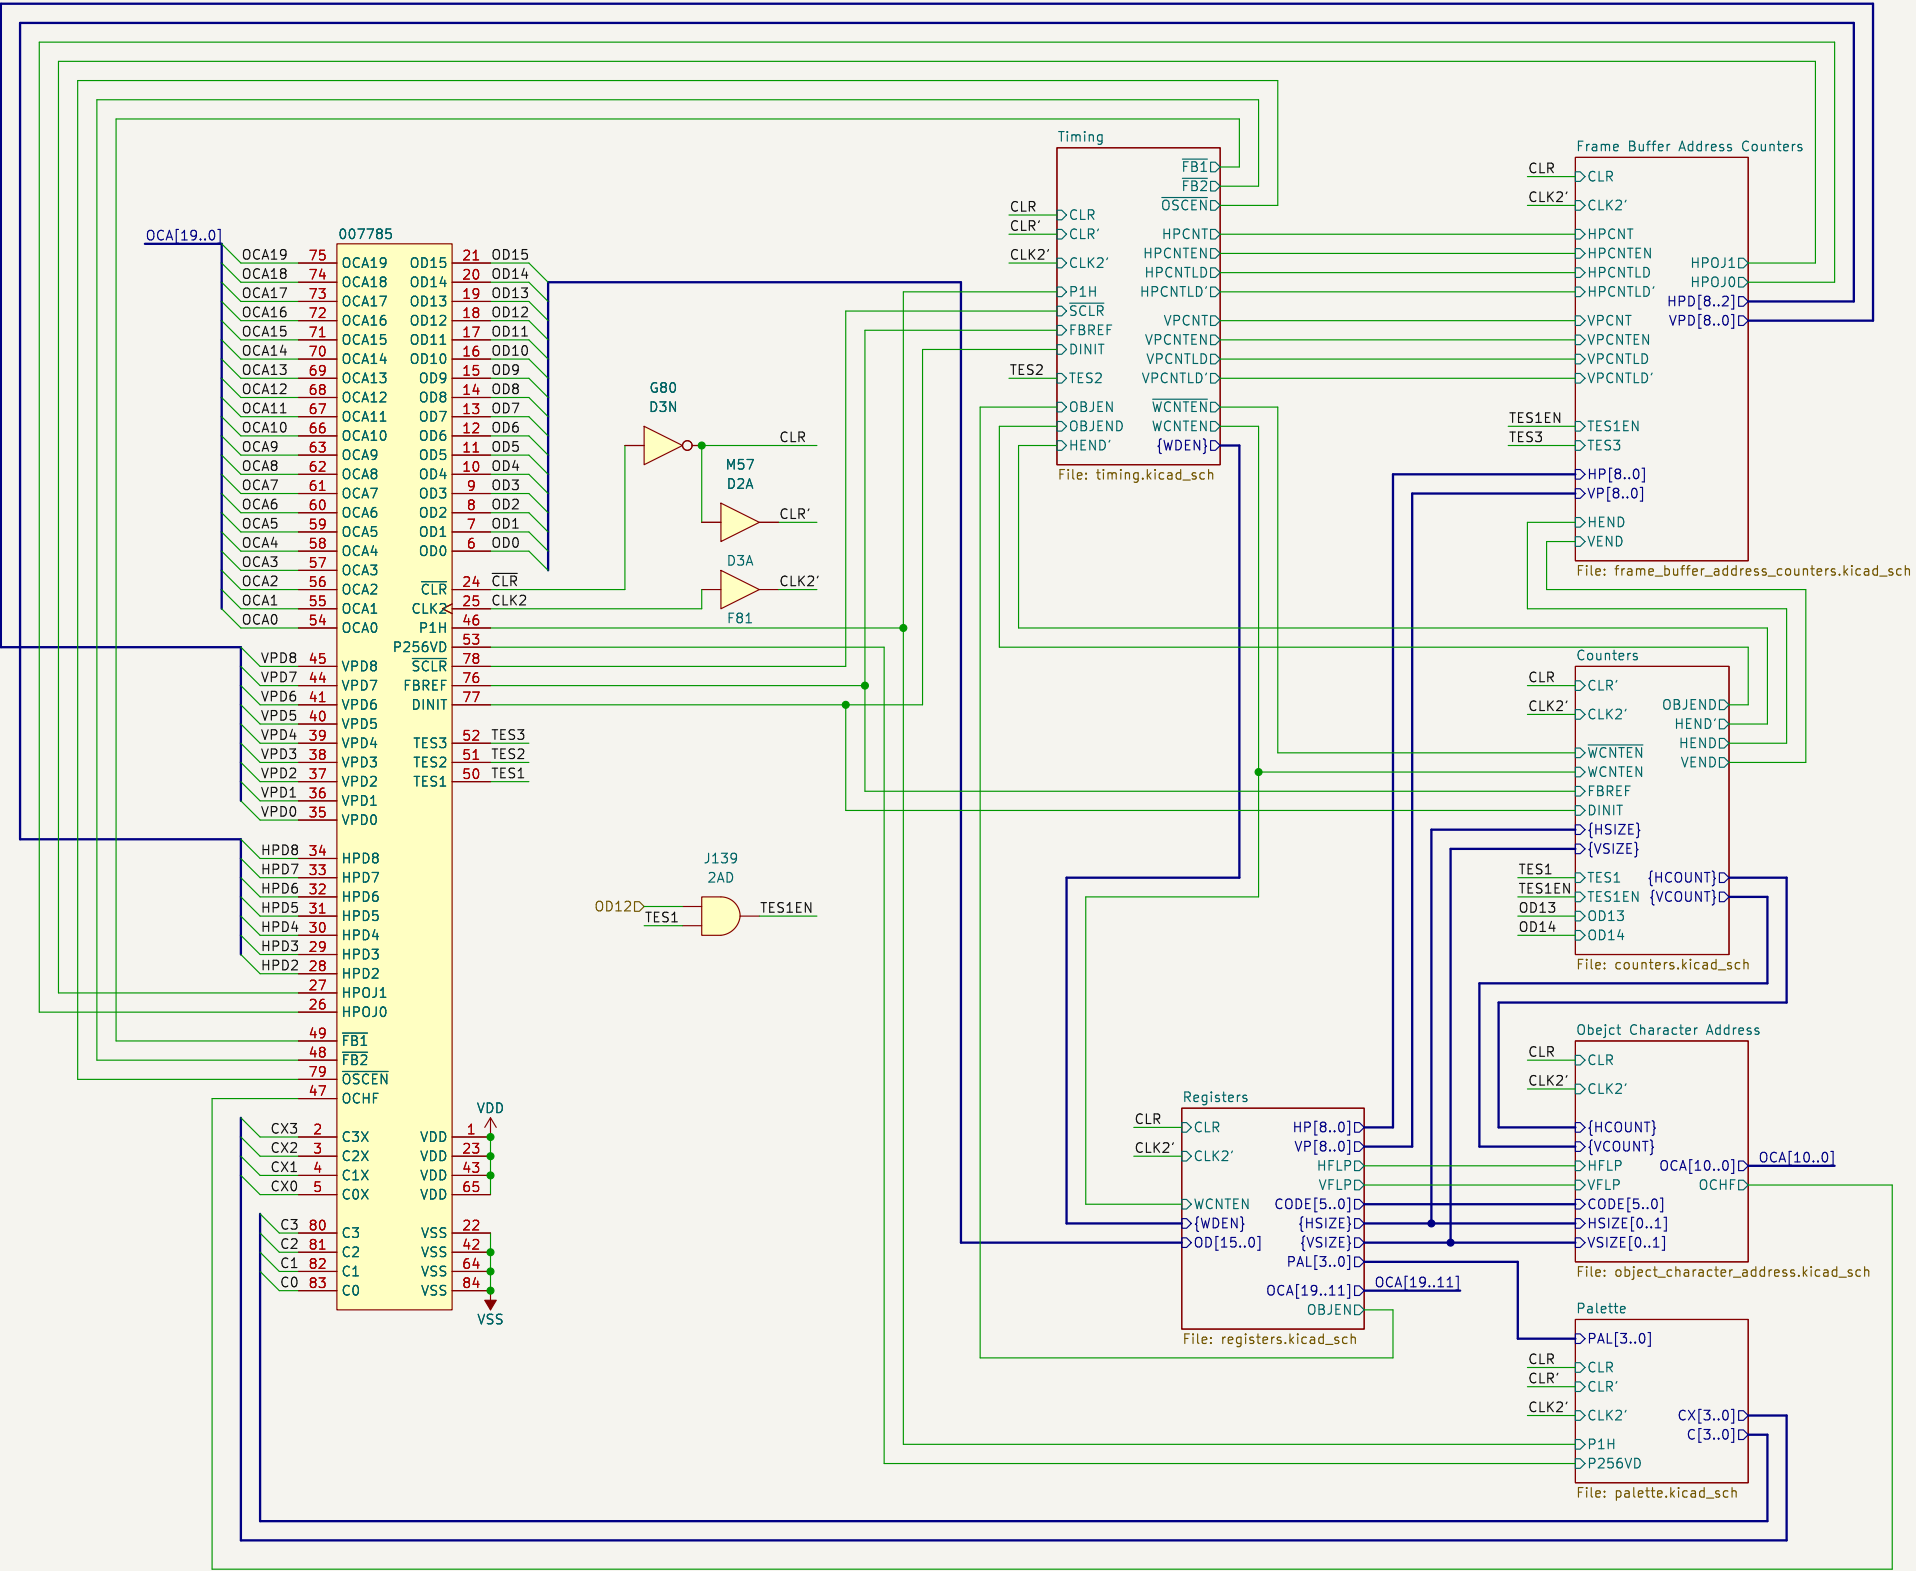

Ulf Skutnabba, twitter: @skutis77

Sheet: /
File: 007785.kicad_sch

Title: Konami 007785



Size: A3 Date: 2023-12-22


KiCad E.D.A. 8.0.9

Rev:

Id: 1/7




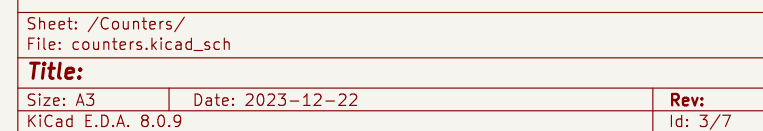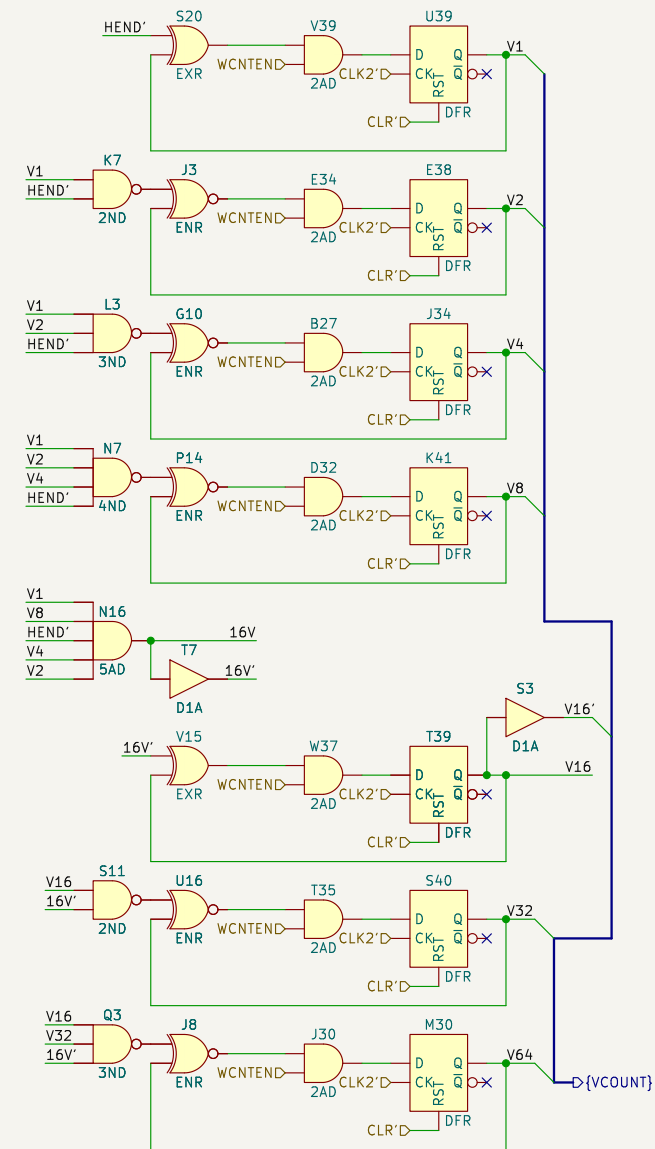



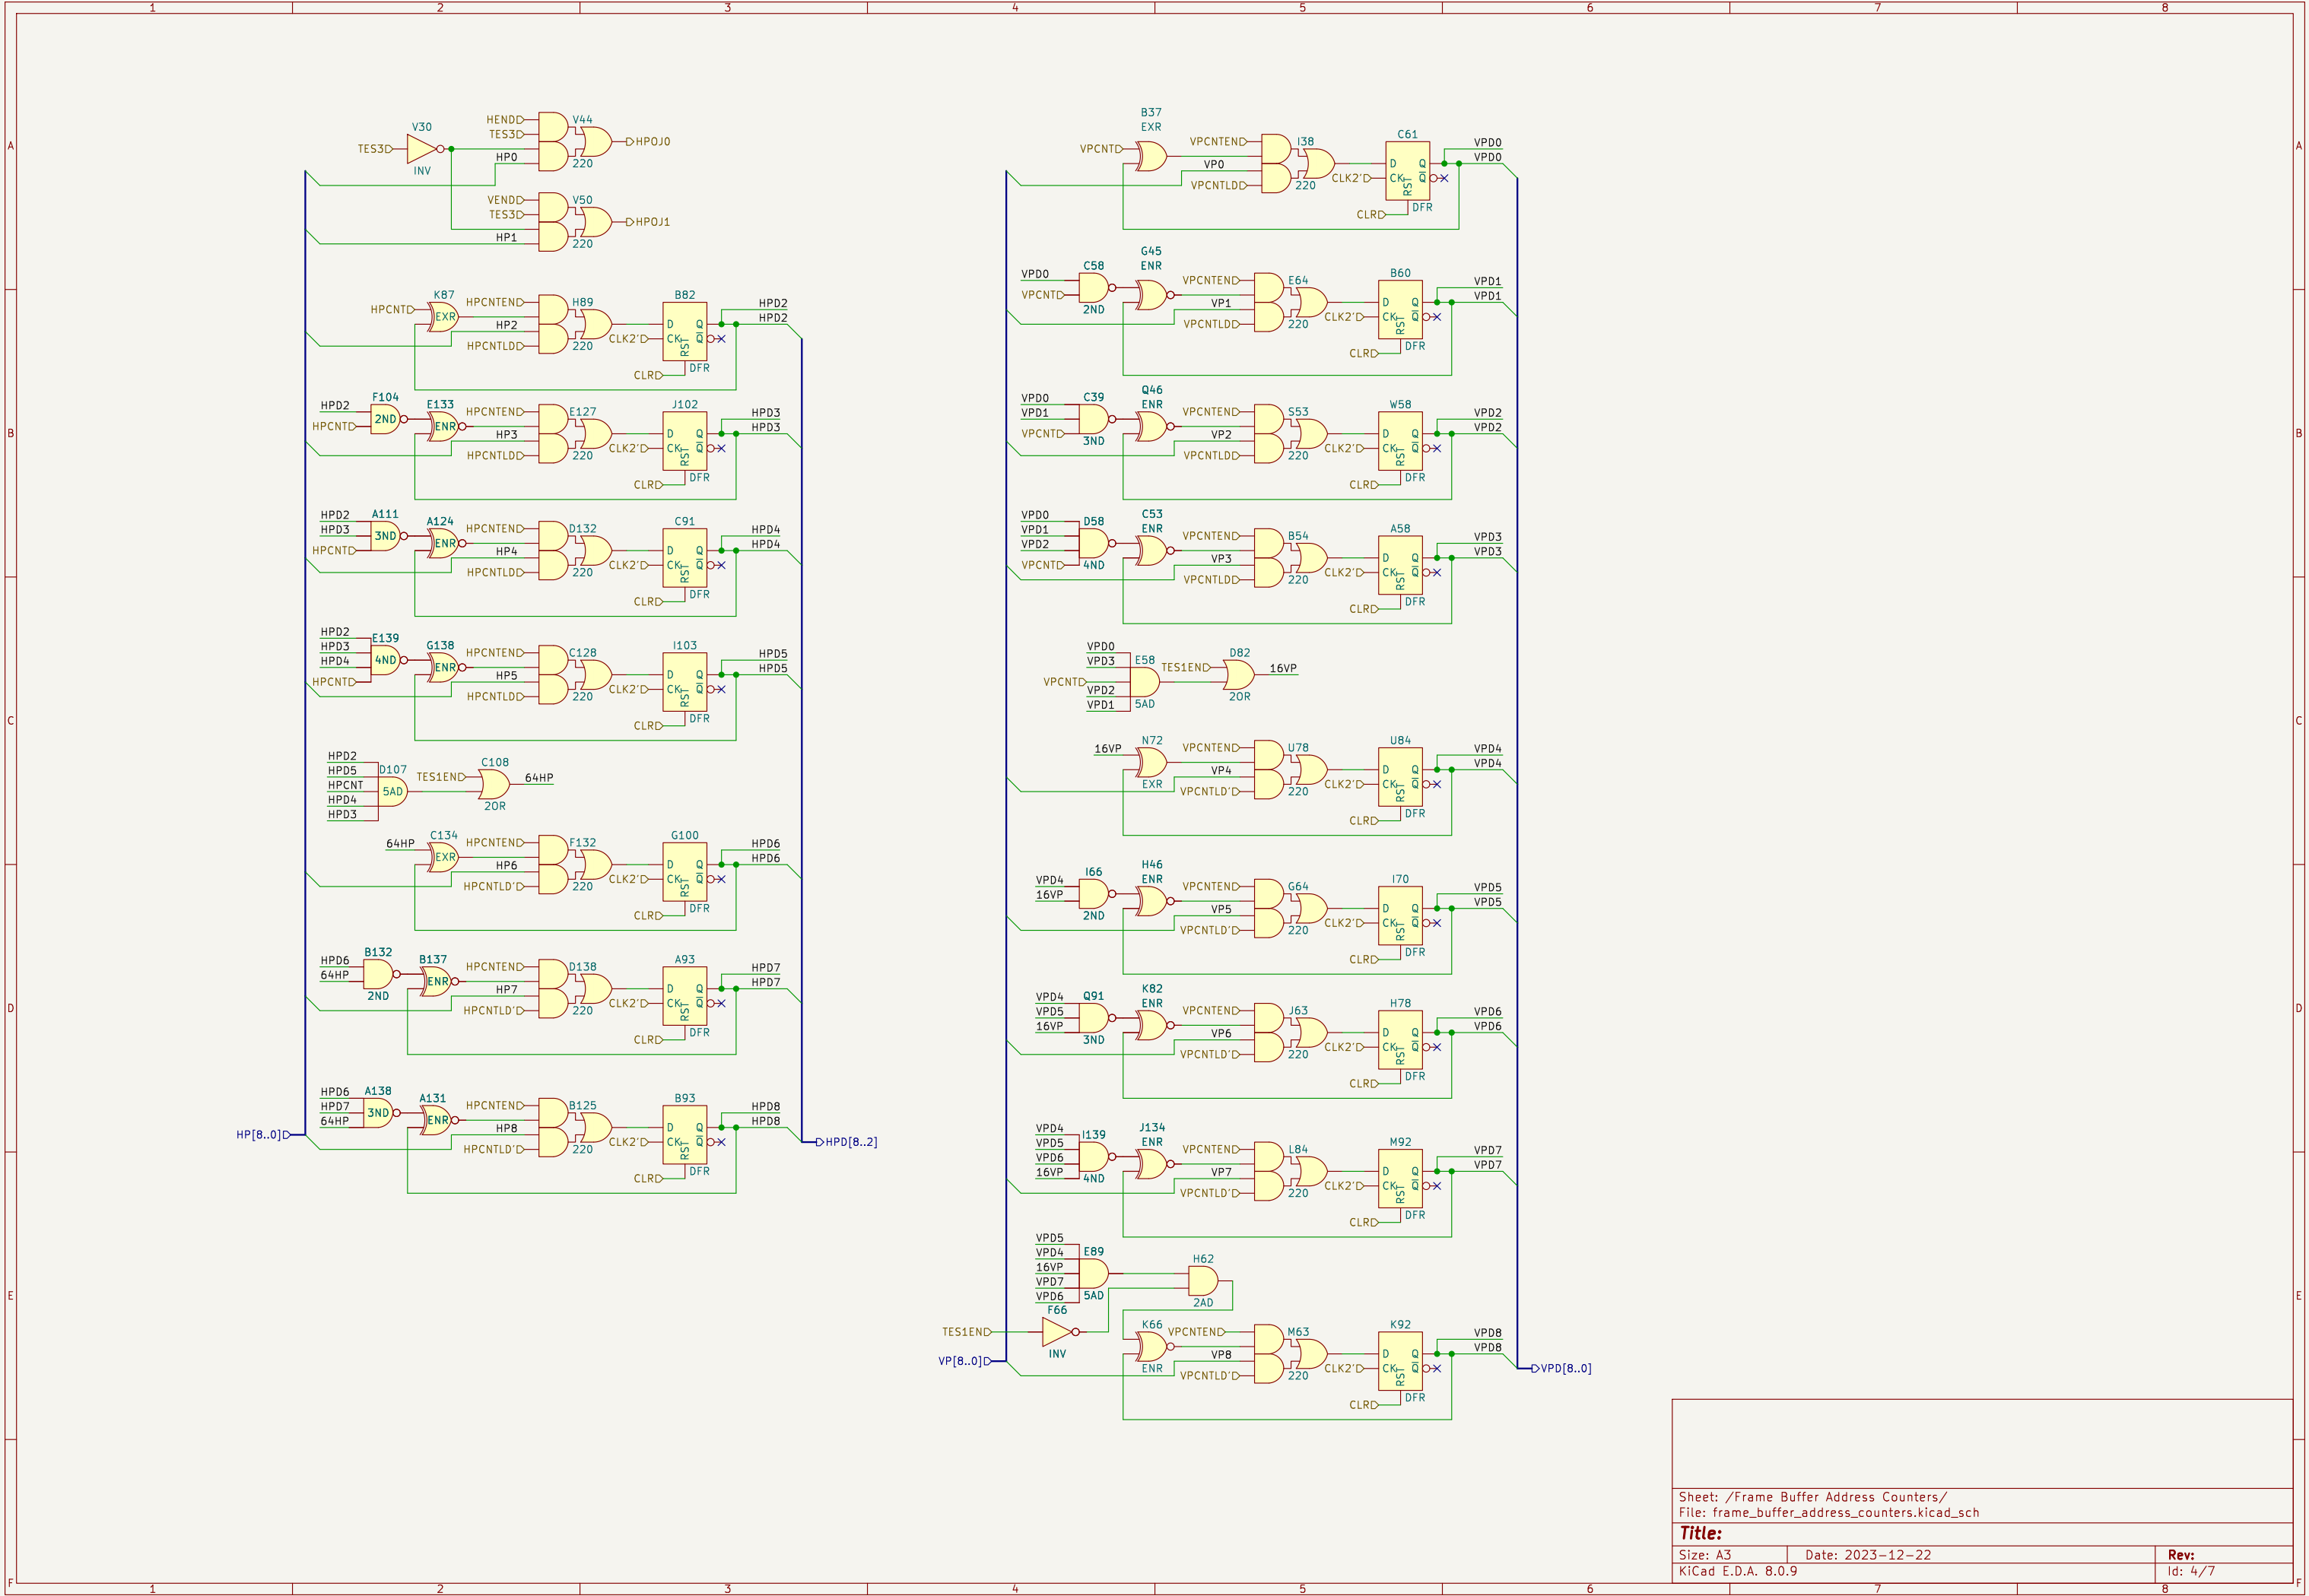


Object Character Select Address

Object (Sprite) tiles are called characters on the twin16 platform.

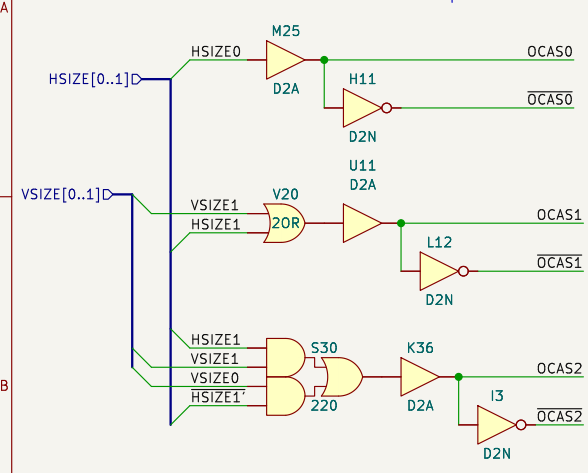

VSIZE1	VSIZE0	VSIZE	HSIZE1	HSIZE0	HSIZE	OCAS2	OCAS1	OCAS0		
0	0	16	0	0	16	0	0	0	0	16H16V
0	0	16	1	0	32	0	0	1	1	32H16V
0	0	16	1	1	64	0	0	1	0	64H16V
0	0	16	1	1	128	0	1	1	0	128H16V
0	1	32	0	0	16	1	0	0	0	16H32V
0	1	32	0	1	32	1	0	1	0	32H32V
0	1	32	1	0	64	0	1	1	0	64H32V
0	1	32	1	1	128	0	1	1	0	128H32V
1	0	64	0	0	16	0	1	0	0	16H64V
1	0	64	0	1	32	0	1	1	0	32H64V
1	0	64	1	0	64	1	1	0	0	64H64V
1	0	64	1	1	128	1	1	1	0	128H64V
1	1	128	0	0	16	1	1	0	0	16H128V
1	1	128	0	1	32	1	1	1	0	32H128V
1	1	128	1	0	64	1	1	0	0	64H128V
1	1	128	1	1	128	1	1	1	0	128H128V

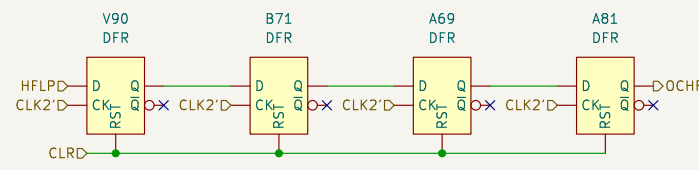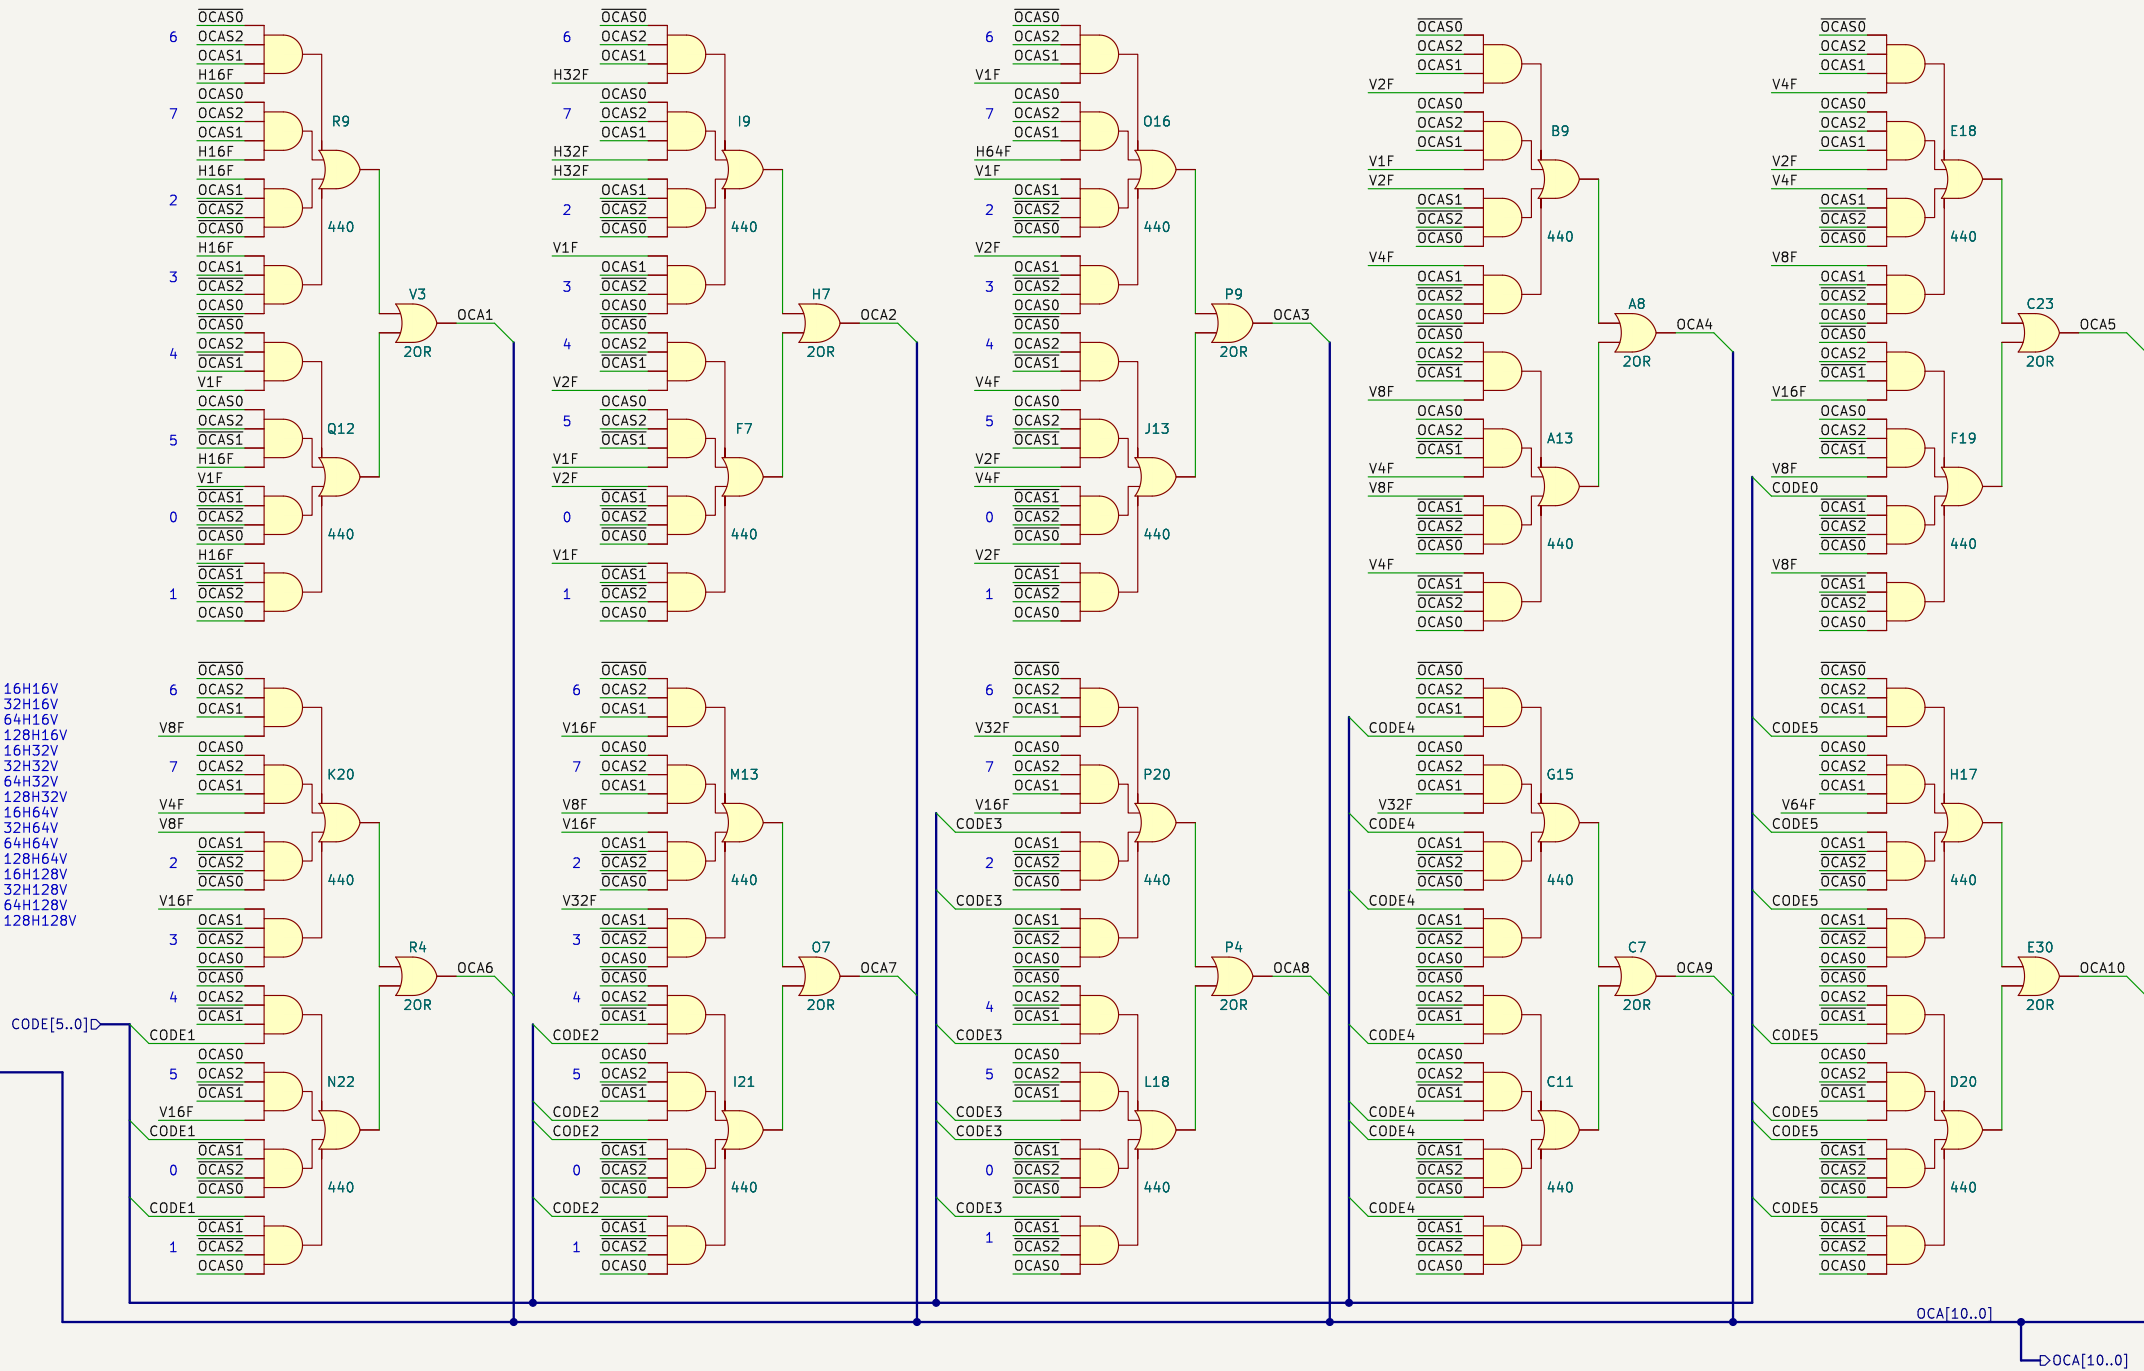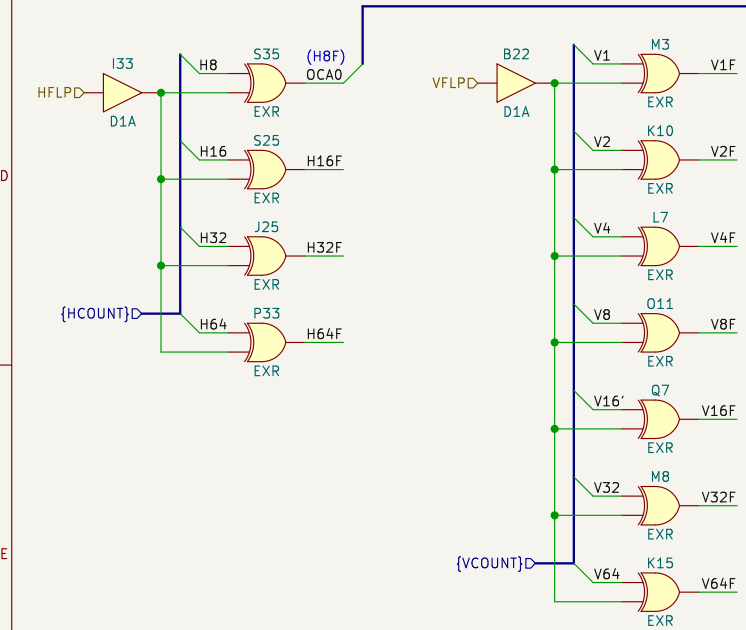

Size	
16H16V	H8F
32H16V	H8F
64H16V	H8F
128H16V	H8F
16H32V	H8F
32H32V	H8F
64H32V	H8F
128H32V	H8F
16H64V	H8F
32H64V	H8F
64H64V	H8F
128H64V	H8F

OCA0	OCA1	OCA2	OCA3	OCA4	OCA5	OCA6	OCA7	OCA8	OCA9	OCA10
H8F	V1F	V2F	V4F	V8F	CODE0	CODE1	CODE2	CODE3	CODE4	CODE5
H8F	H16F	V1F	V2F	V8F	V16F	CODE1	CODE2	CODE3	CODE4	CODE5
H8F	V1F	V2F	V4F	V8F	V16F	CODE1	CODE2	CODE3	CODE4	CODE5
H8F	H16F	H32F	V1F	V2F	V8F	V16F	CODE1	CODE2	CODE3	CODE4
H8F	H16F	V1F	V2F	V8F	V16F	V32F	CODE1	CODE2	CODE3	CODE4
H8F	H16F	H32F	V1F	V2F	V8F	V16F	V32F	CODE1	CODE2	CODE3
H8F	H16F	H32F	H64F	V1F	V2F	V8F	V16F	V32F	CODE1	CODE2



