

PUSH POSSIBLE™

MANHATTAN SCALE™

RF ANDROID INSTALLATION GUIDE

RF ANDROID INSTALLATION GUIDE

Copyright and Disclaimer

Copyright © 2026 Manhattan Associates, Inc. All rights reserved.

This documentation, as well as the software described in it, is furnished under license and may be used or copied only in accordance with the terms of such license. The information in this documentation is furnished for informational use only, is subject to change without notice, and should not be construed as a commitment by Manhattan Associates, Inc. ("Manhattan"). No third-party patent liability is assumed with respect to the use of the information contained herein. While every precaution has been taken in the preparation of this documentation, Manhattan assumes no responsibility for errors or omissions.

EXCEPT WHERE EXPRESSLY PROVIDED OTHERWISE, ALL CONTENT, MATERIALS AND INFORMATION, ARE PROVIDED ON AN "AS IS" AND "AS AVAILABLE" BASIS. MANHATTAN EXPRESSLY DISCLAIMS ALL WARRANTIES OF ANY KIND, WHETHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT.

Except as permitted by license, no part of this documentation may be reproduced, stored in a retrieval system, or transmitted, in any form by any means, electronic, mechanical, recording, or otherwise, without the prior written permission of Manhattan Associates.

Manhattan Associates is a registered trademark of Manhattan Associates, Inc.

All other brands, products, or services are trademarks, registered trademarks, or service marks of their respective companies or organizations.

Contact Address:

Manhattan Associates, Inc.
2300 Windy Ridge Parkway,
Atlanta, Georgia 30339

<http://www.manh.com/>

Region	Telephone	Email
Americas	+1 877.756.7435 (U.S. and Canada only) +1 404.965.4025	callcenter@manh.com
Asia	(00) 800.988.0885 (China only) +86 21 3311 3499	asiacustomersupport@manh.com
Europe, Middle East, and Africa	+44 (0) 1344 318400 (UK) +31 (0)30 214 3400 (NL)	emeacustomersupport@manh.com
Australia	+61 1300787050	aucustomersupport2@manh.com

Unsure whom to contact? Call +1 404.965.4025 and you will be routed to the appropriate support group.

RF ANDROID INSTALLATION GUIDE

Confidentiality

Rights to the Content of This Work

This material is protected by the Copyright Act of 1976, as amended, as an unpublished work and the foregoing notice and legend shall not be deemed to constitute publication or an intent to publish there under. These materials are proprietary and confidential information of Manhattan Associates, Inc., and may not be disclosed and used only as authorized in the License Agreement and Confidentiality Agreement controlling such disclosure and use.

Modification to the Content of This Work

Manhattan Associates, Inc. reserves the right, at any time and without notice, to change these materials or any of the functions, features or specifications of any of the software described herein. Manhattan Associates shall have no warranty obligation with respect to these materials or the software described herein, except as provided in Manhattan Associates' software license agreement with an authorized licensee.

Trademarks and Copyrights

Manhattan Associates and Manhattan Associates SCALE are trademarks of Manhattan Associates, Inc. All other company and product names may be trademarks of their respective owners. The information contained herein is subject to change without notice.

RF ANDROID INSTALLATION GUIDE

Revisions

Date	Description	Applies to build
August 8, 2016	Removed version and added revisions table with specific build level.	14.0.0314.0
November 7, 2016	Added Keystrokes – DataWedge configuration	14.0.0314.0
September 25, 2017	Updated document for external login.json and gboard keyboard support	15.0.0060.0
April 21, 2018	Removed touch top	15.0.0570.0
June 25, 2018	Added CT50 and removed unsupported devices	15.0.0901.0

Table of Contents

Revisions	3
Introduction	1
Supported Platforms.....	1
Installation Files.....	1
Running the Installation	2
Download and Install the APK file from the mobile device	2
Post-Installation Requirements	4
Set Up Certificate Trust	4
Update Manhattan SCALE RF mobile application Settings for SCALE-RF App.....	4
Sample Screenshots.....	14
RF Selection Screens.....	14

Introduction

Manhattan SCALE RF mobile application provides a comprehensive mobile application framework and device aware platform which enables the SCALE RF application to run on modern mobile devices without the use of Remote Desktop Services. This document outlines the installation and configuration of mobile app for use with the SCALE RF application.

Supported Platforms

Currently Manhattan SCALE RF mobile application only supports the Android OS platform.

Installation Files


Mobile Android applications are compiled into an Android Application Package (APK) file that is used by the Android operating system for distribution and installation of mobile apps and middleware. Manhattan will utilize an APK file for installing the Manhattan SCALE RF mobile application that will run SCALE RF.

Running the Installation

Download and Install the APK file from the mobile device


1. SCALE RF APK file (scalerf.apk) are deployed by the installer at “C:\Program Files\Manhattan Associates\ILS\<version>\RF\” and are available through the RF website on SCALE application servers.

To download the APK file to the Android mobile device, the user needs to browse to the following URL in the mobile browser by accessing <https://<Server Name>/RF/scalerf.apk>. Tap Go to start downloading the .apk file into the *Downloads* folder. Tap on the downloaded APK file to install.

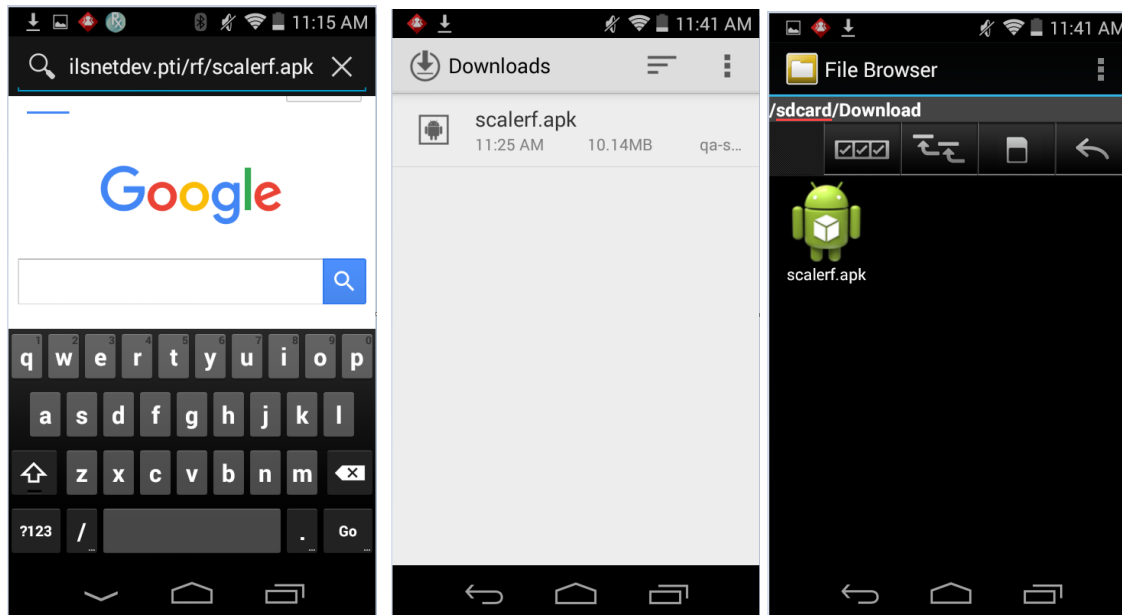

2. Click *Install*.

RF ANDROID INSTALLATION GUIDE

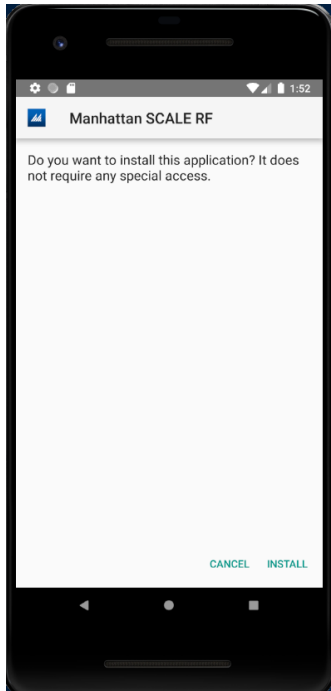

Post-Installation Requirements

After you install the Manhattan SCALE RF mobile application, please review the following requirements and address all items.

Set Up Certificate Trust

The SCALE-RF application communicates securely with the SCALE web server over SSL. This requires the mobile device to trust the certificate used to encrypt communication. Please follow the instructions in the section titled: *How to configure client devices to trust certificate -> Android browser* of the **SCALE Whitepaper - HTTPS Configuration Guide**.

Update Manhattan SCALE RF mobile application Settings for SCALE-RF App


1. Create a login.json file on your Desktop / Laptop with below content for HTTPS

```
{  
  "host": "server",  
  "port": "443",  
  "protocol": "https"  
}
```


- a. Host: The SCALE server hosting RF.
 - a. Specify the server name for the host if no environments are configured. The server name should be specified in the fully qualified domain name format.
 - b. Specify the environment name for the host if environments are configured. The environment name should be specified in the fully qualified domain name format.
 - b. Port: 443 (for HTTPS)
 - c. Protocol: HTTPS
2. Save login.json in a shared path.
 3. Go to the applications menu on your Android device. Open the File Browser application.
 4. Tap on Download Folder

RF ANDROID INSTALLATION GUIDE

5. Copy the login.json to the download folder from your shared path

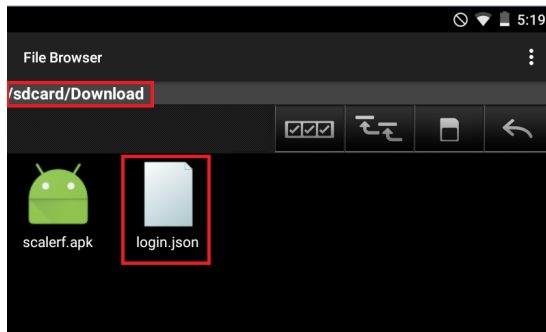


6. Open Manhattan SCALE RF app.

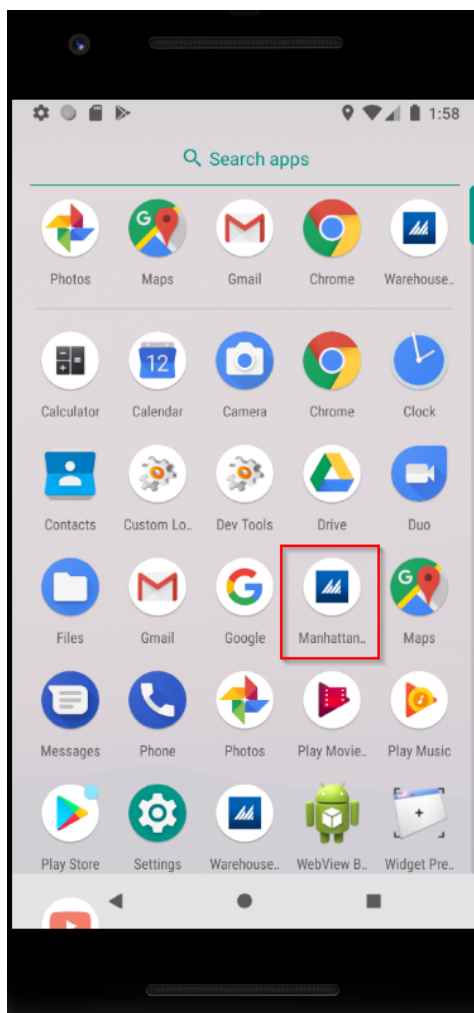

7. Click *Allow* to give storage permissions to the app.

RF ANDROID INSTALLATION GUIDE

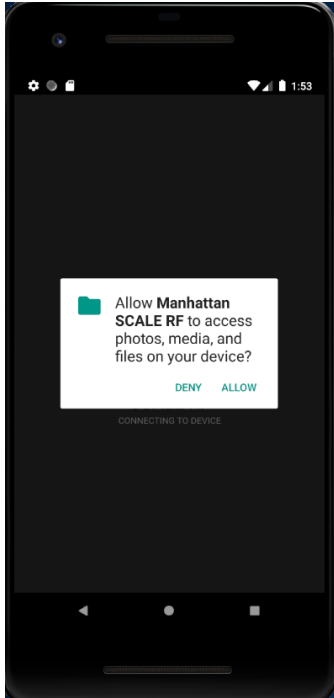


Keystroke – DataWedge configurations

SCALE RF screens support both scans and keyed input. For scans on screens with multiple input-capable fields, it is desirable to have the focus move to the next field after data entry. This can be achieved by having the device suffix a TAB keystroke to every scan. The following sections describe how to configure this on the supported devices.


Honeywell CT50

Configurations on CT50 can be done by the following steps. Browse to **Apps -> Settings -> Scanning -> Internal Scanner -> Default Profile -> Data Processing Settings**. Configure the Wedge as seen below.

RF ANDROID INSTALLATION GUIDE



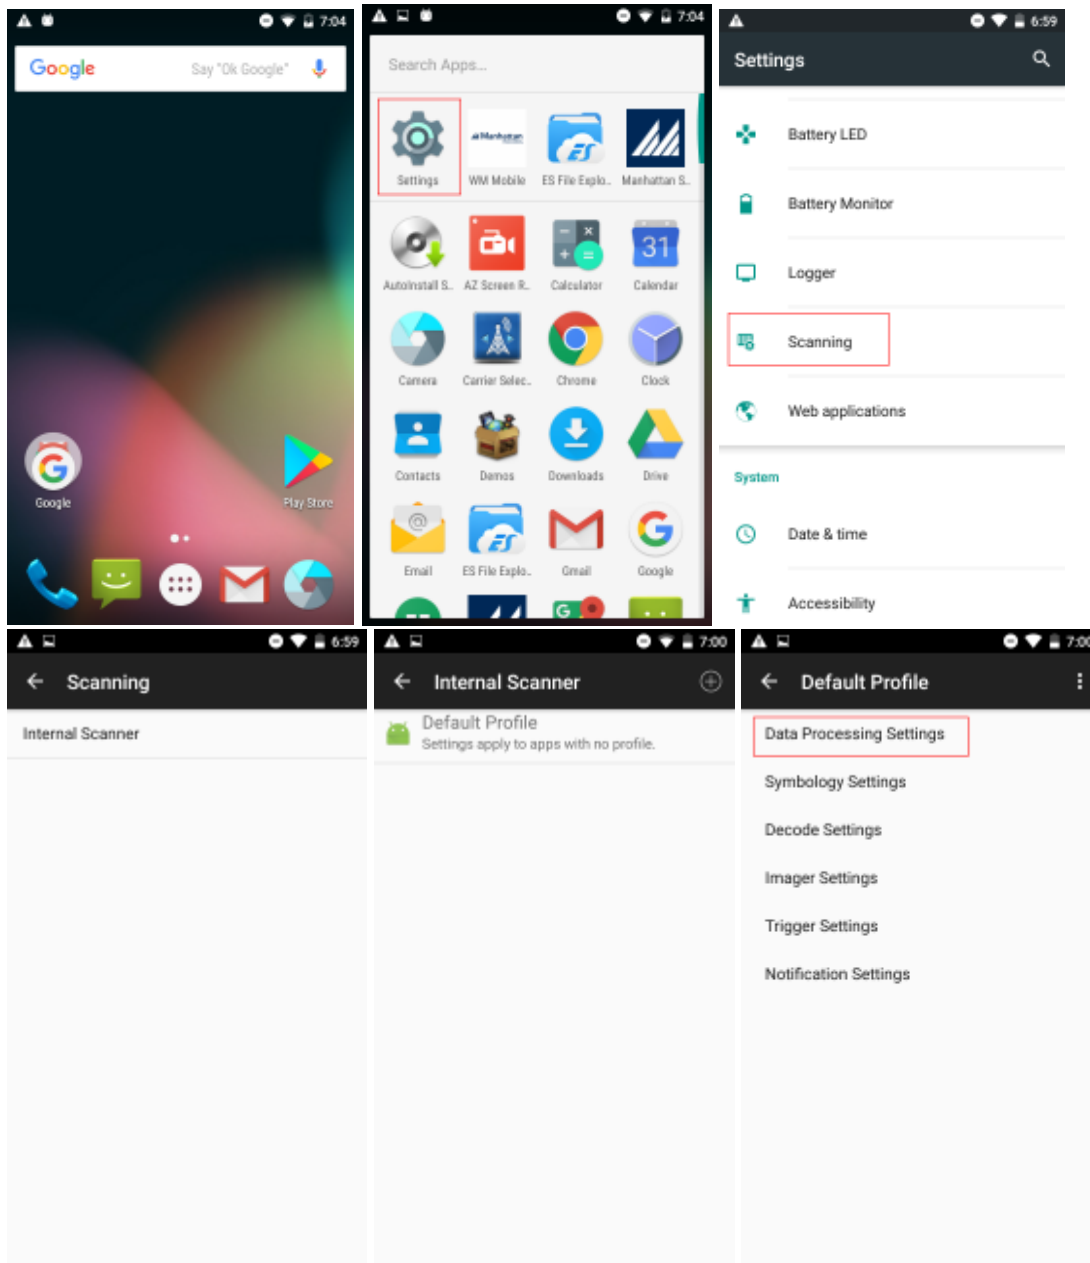


RF ANDROID INSTALLATION GUIDE

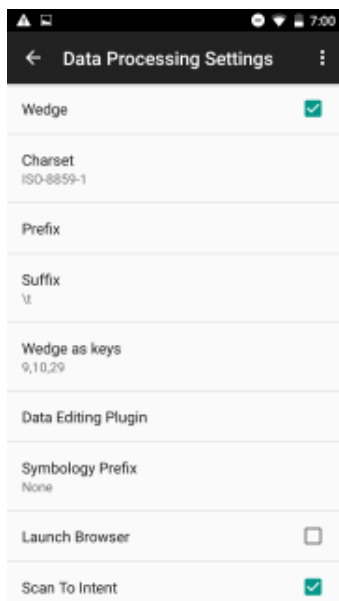


Zebra TC8000

Configurations on TC8000 are similar and available in the DataWedge chapter of the [manual](#). **Steps:** Browse to **Apps -> DataWedge -> Profiles** and open the currently active profile to enable **Keystroke Output**. Then configure **Basic data formatting** to **Send TAB key** as shown below.

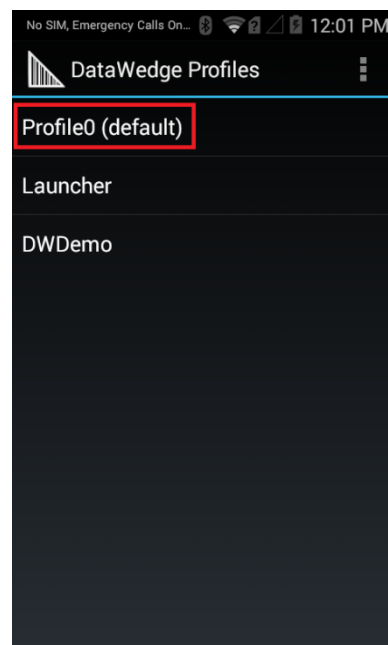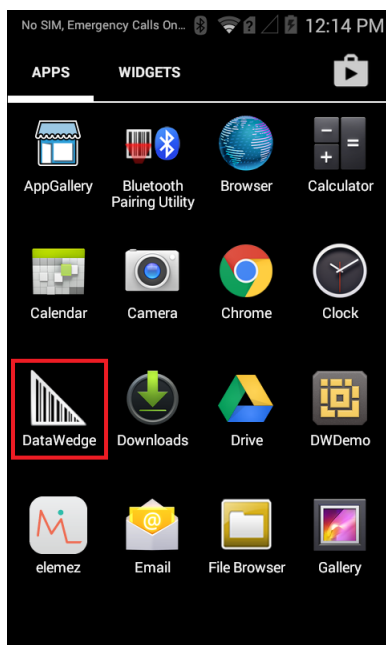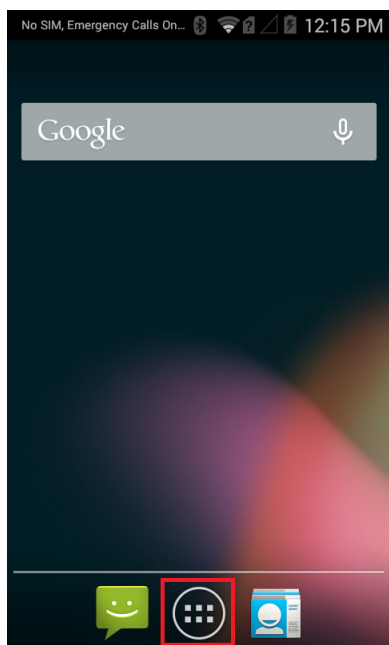

RF ANDROID INSTALLATION GUIDE

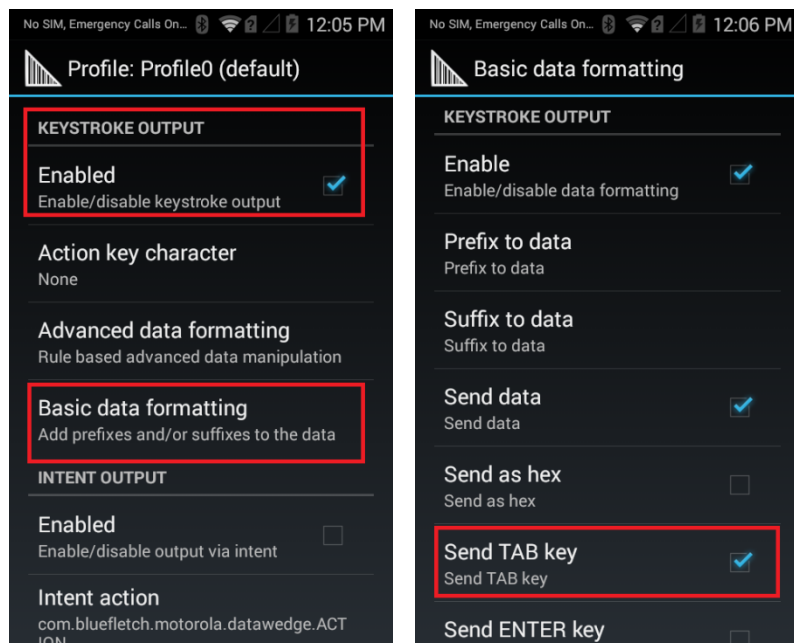


Google Keyboard Configuration on Zebra WT6000

Modifying Keyboard to use the Google Keyboard


The wearable device Zebra WT6000 comes with real estate at a premium. It is advised to change the keyboard to one that uses less real-estate. Please follow the steps below for changing the keyboard to the Google Keyboard on the device.

1. Go to the Application menu on the Android device. Tap on Settings.

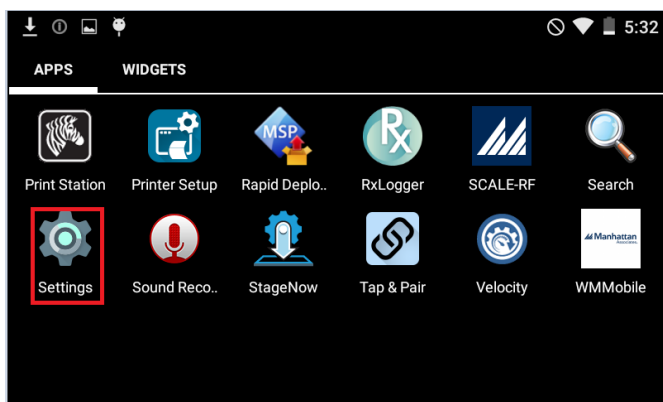


2. In the Personal section tap on Language & input


RF ANDROID INSTALLATION GUIDE

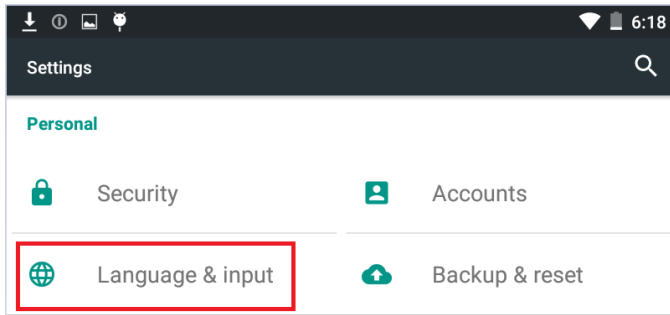

3. In the Keyboard & input methods section tap on Current Keyboard.

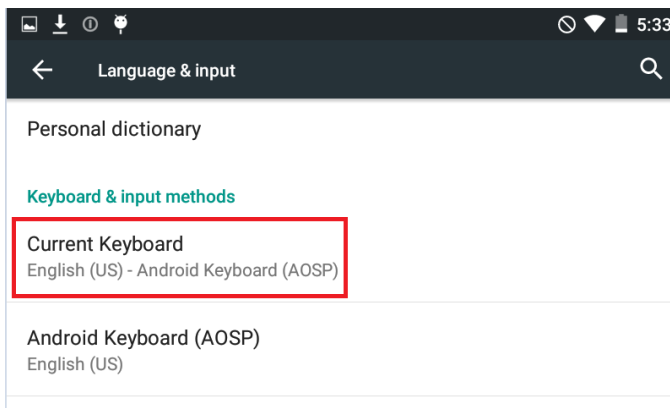


4. Select English (US) Google Keyboard.

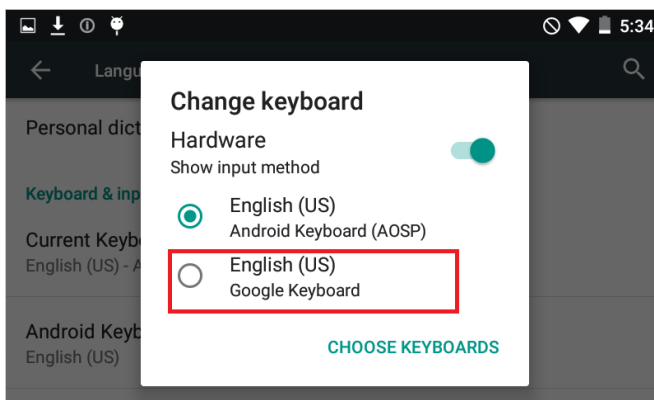


5. The keyboard gets updated.

RF ANDROID INSTALLATION GUIDE

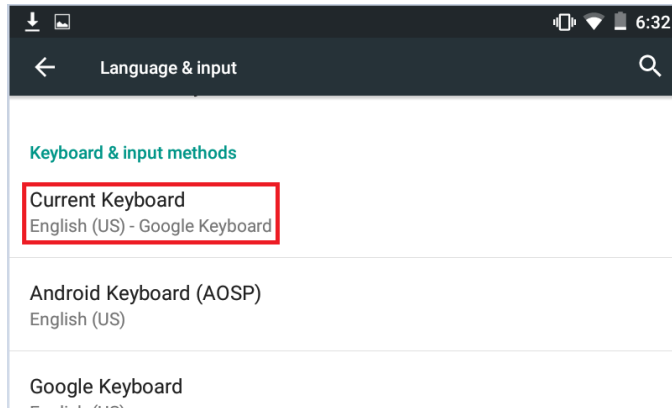

Setting the Keyboard Height

1. Go to the application menu. Open SCALE-RF.

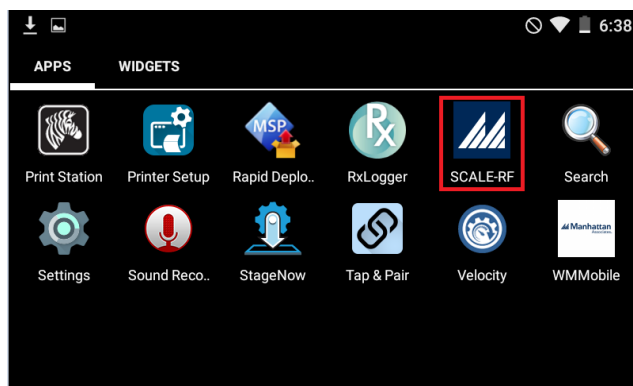


2. SCALE RF opens.




3. Long press letter Comma “,” -on the keyboard.


RF ANDROID INSTALLATION GUIDE

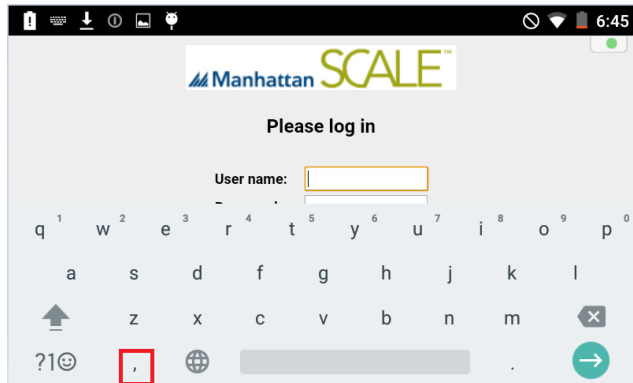

4. Tap on Google Keyboard settings.

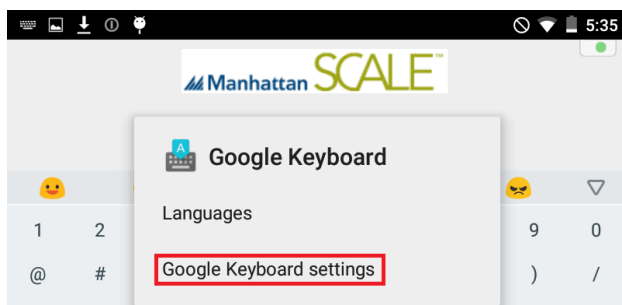


5. Tap on Preferences.

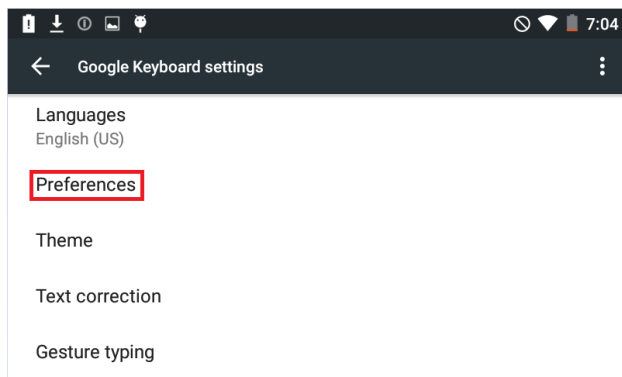


6. Tap on Keyboard height.

RF ANDROID INSTALLATION GUIDE


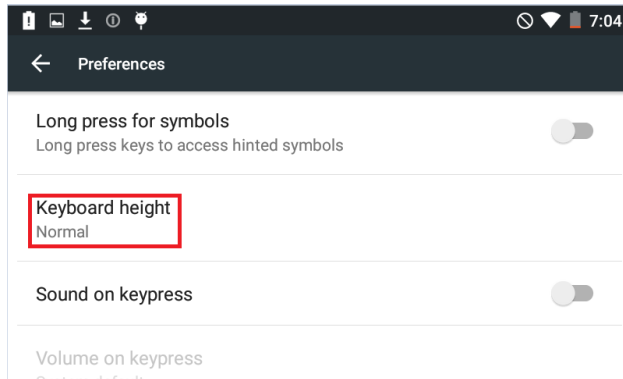


7. Set Keyboard height to Short. Click OK.

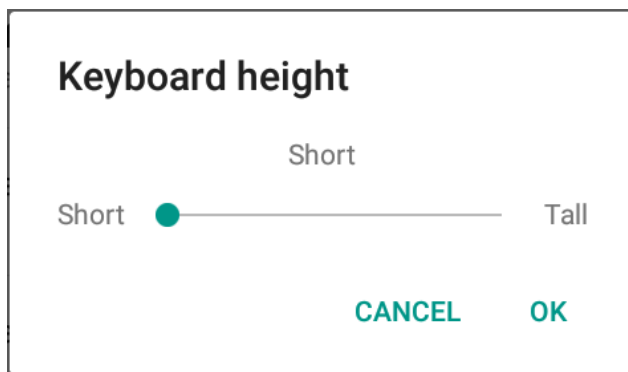


RF ANDROID INSTALLATION GUIDE


Sample Screenshots

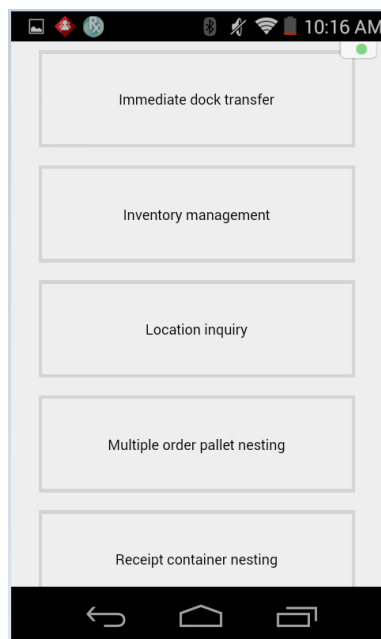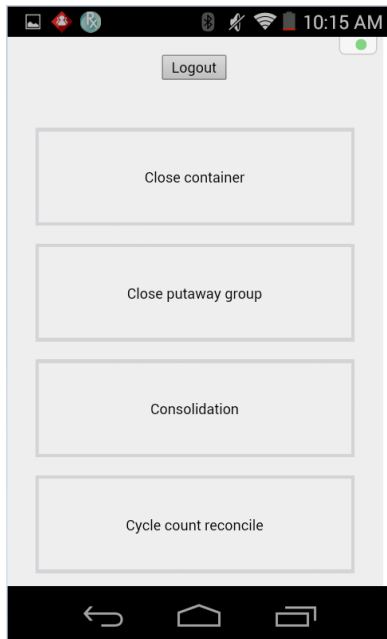


RF Selection Screens

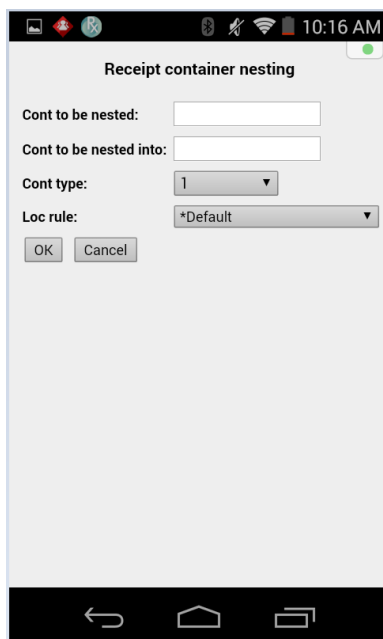

Receipt Container Nesting

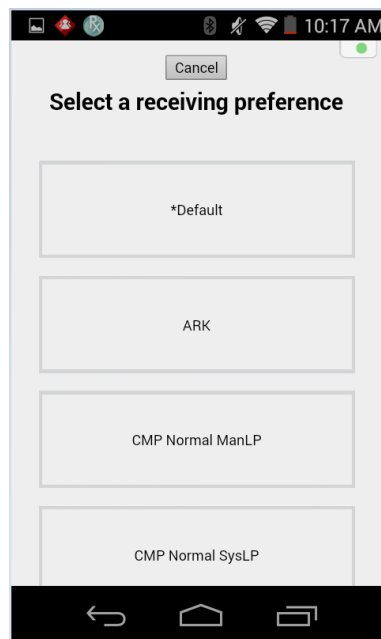

Receiving Preference

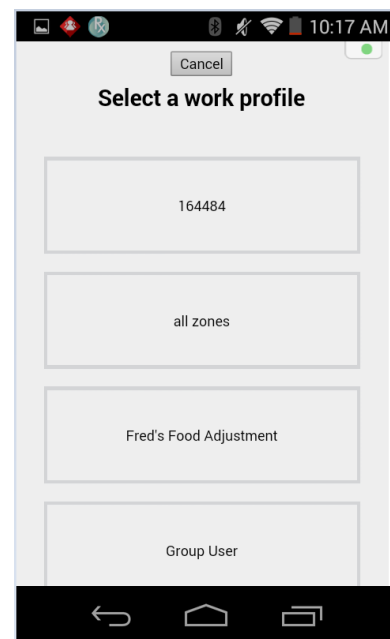

Work Profile