
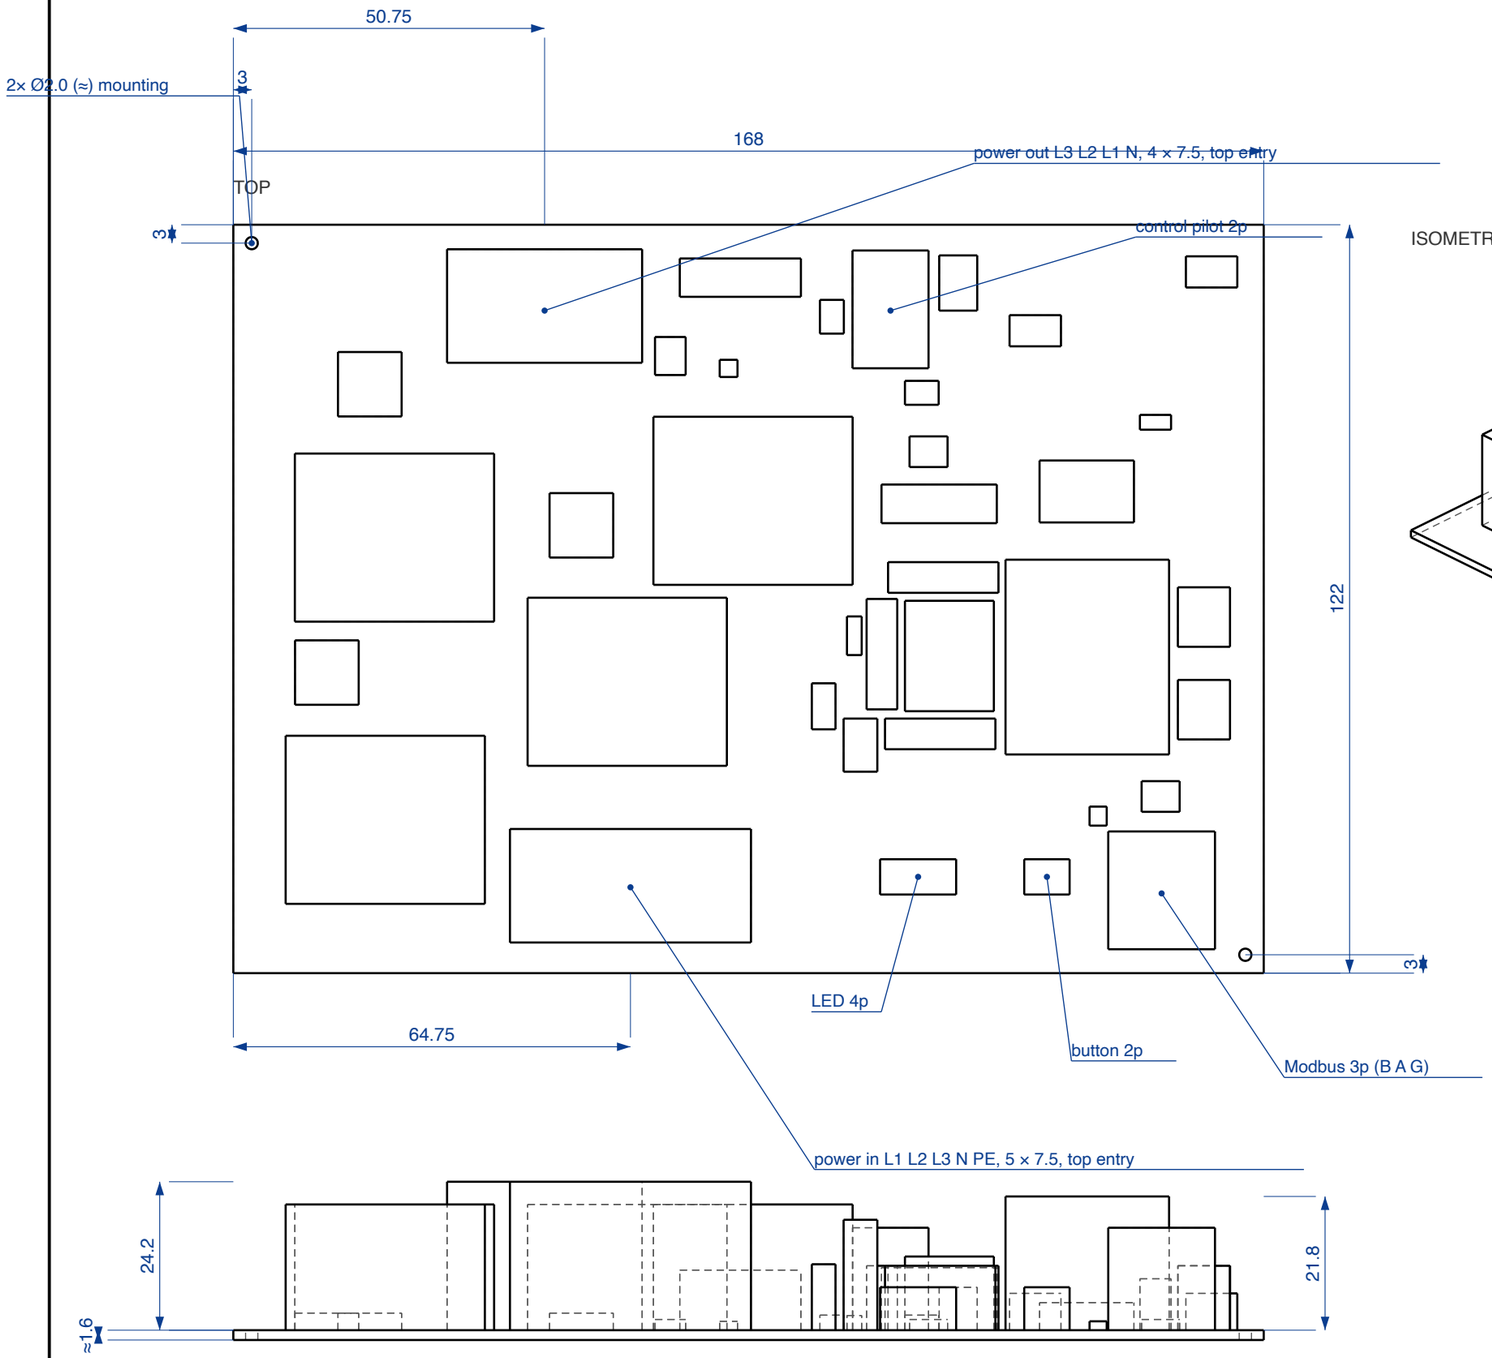


FRONT

ISOMETRIC (not to scale)

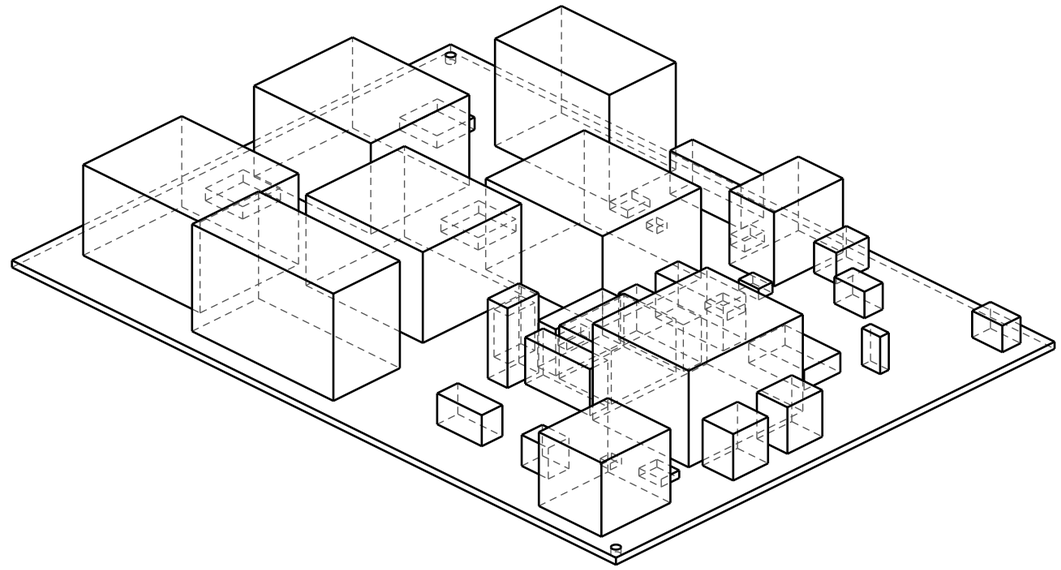

NOTES

1. Mount on the two Ø2.0 holes (M2 or self-tapping 2.2); keep Ø6 free around them on the top side.
2. Highest parts: power terminal blocks 24.2 mm and the power module 21.8 mm above the board.
3. Bottom side: through-hole solder joints, keep ≥3 mm free under the board (STEP keep-out); no bottom components.
4. All terminals top entry; leave ≥40 mm above the power terminals for wiring and the release tool.
5. Component boxes are envelopes from the board's 3D model (±0.5 mm); hole Ø and board thickness ≈.

EdgeTech Charge controller board 3 x 32 A

PART NUMBER	REVISION	DATE
EVSE-C-3x32A	A	2026-10-11
UNITS	SCALE (A3)	PROJECTION
mm	1:1	third angle

For fit and installation only, not for manufacture.

≈ = estimated dimension (see notes). File: evse-c-3x32a.step