

F-100 Series**MANUAL PULL STATIONS****Features**

- Durable Extruded Aluminium Construction
- Attractive, Low Profile Design
- Standard Single Gang Mount
- Glass Rod Optional (one provided)

Description

Attractive and durable, DSW's F-100 Series of pull stations provide manual fire reporting. The SPS-100 Series pull stations are non-coded, single or double action devices which initiate an alarm when pulled. Resetting is accomplished by inserting a 1/8" screwdriver from the front. The handle, once pulled will remain open and cannot be reset without utilizing the screwdriver.

The F-100 Series pull stations are constructed of durable aluminium and finished in red. An abrasion resistant label with large, raised letters provides clear legible instructions.


Operation

Pulling on the station's handle will release the internal switch to trigger the alarm detection circuit.

Specifications


The single action pull station shall be DSW's F-100 Series. Operating instructions shall be in raised English lettering and the unit shall be constructed of extruded aluminium, finished in red enamel paint to provide quick identification. Pulling the handle shall initiate immediate operation of the alarm detection circuit. All manual fire alarm stations shall be installed as per the specific requirements outlined in the UL codes, as well as all other applicable national or local codes.

Dimensions

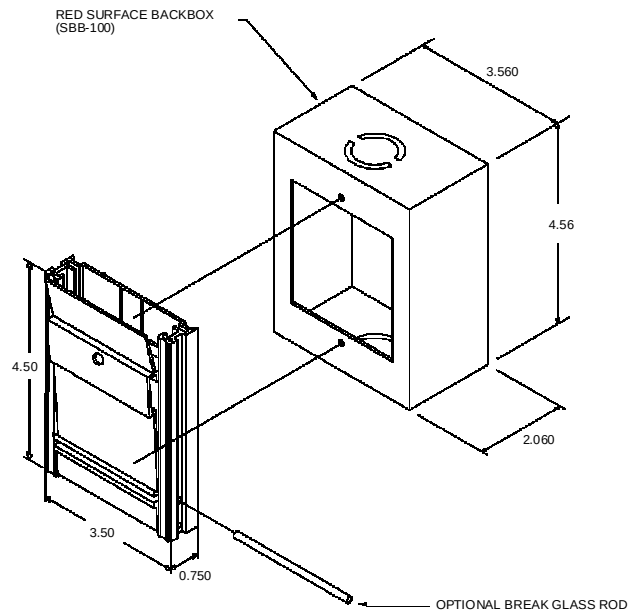

Wiring Diagram

F-101

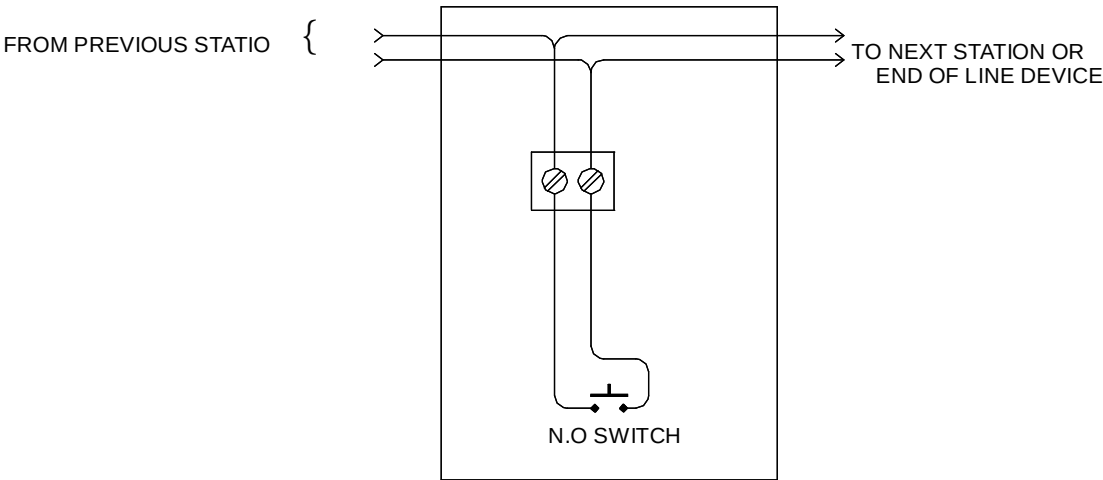

- NOTES:
- 1. WIRE AS SHOWN SO THAT SUPERVISION OF CONNECTIONS IS MAINTAINED.
 - 2. MOUNT STATION TO 2" X 4" X 2 1/4" OUTLET BOX.
 - 3. SWITCH RATING: ALL MODELS 1A @ 30 VDC

Ordering Information

Model Number	Description
F-101	Single Stage Pull Station
F -101S	Single Stage Pull Station (N.O. with station closed) Bilingual English/Spanish
MS-APNY	Pull Station Adapter Plate with White Strip for New York City
SBB-100	Surface Mounting Box, Single Gang Red Finish