







(IRM-30-xxST)























#### Features

- 2.74"x1.54"compact size
- PCB, chassis or screw terminal mounting version
- Universal input 85~305VAC
- No load power consumption<0.1W</li>
- · EMI Class B without additional components
- Wide operating temp. range -30~70°C
- Protections: Short circuit / Overload / Over voltage
- Cooling by free air convection
- Isolation Class  ${\rm I\hspace{-.1em}I}$
- Over voltage category III
- Pass LPS(except for 5V)
- 3 years warranty


# Applications

- Industrial electrical equipment
- Mechanical equipment
- Factory automation equipment
- · Hand-held electronic device

# Description

IRM-30 is a 30W miniature (69.5\*39\*24mm) AC-DC module-type power supply, ready to be soldered onto the PCB boards of various kinds of electronic instruments or industrial automation equipments. This product allows the universal input voltage range of 85~305VAC. The 94V-0 flame retardant plastic case and the fully-potted silicone enhance the heat dissipation. PCB mounting style model(Blank) meet the anti-vibration demand up to 2G and screw terminal style model (ST) meet the anti-vibration demand up to 5G; moreover, it provides the fundamental resistance to dust and moisture.

With the high efficiency up to 90% and the extremely low no-load power consumption below 0.1W, IRM-30 series fulfills the worldwide regulation for the low power consumption requirement for electronics. The entire series is a Class  ${
m II}\,$  design (no FG pin), incorporating the built-in EMI filtering components, enabling the compliance with BS EN/EN55032 Class B; the supreme EMC features keep the end electronic units from electromagnetic interference. In addition to module-type model, IRM-30 series also offers the screw terminal style model (ST).BSEN/

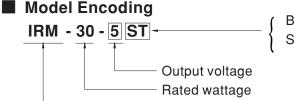

Series name

Blank : PCB mounting style
ST : Screw terminal style




MODEL		IRM-30-5 □	IRM-30-12 □	IRM-30-15 □	IRM-30-24 □	IRM-30-48 □
OUTPUT	DC VOLTAGE	5V	12V	15V	24V	48V
	RATED CURRENT	6A	2.5A	2A	1.3A	0.63A
	CURRENT RANGE	0 ~ 6A	0~2.5A	0 ~ 2A	0 ~ 1.3A	0 ~ 0.63A
	RATED POWER	30W	30W	30W	31.2W	30.2W
	RIPPLE & NOISE (max.) Note.2	120mVp-p	150mVp-p	200mVp-p	240mVp-p	300mVp-p
	VOLTAGE TOLERANCE Note.3		±2.5%	±2.5%	±2.5%	±2.5%
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	LOAD REGULATION	±1.0%	±0.5%	±0.5%	±0.5%	±0.5%
	SETUP, RISE TIME	1000ms, 30ms/230VAC 1500ms, 30ms/115VAC at full load				
	HOLD UP TIME (Typ.)	40ms/230VAC 12ms/115VAC at full load				
INPUT	VOLTAGE RANGE	85 ~ 305VAC				
	FREQUENCY RANGE	47 ~ 440Hz				
	EFFICIENCY (Typ.)	83%	88%	88%	88.5%	90%
	AC CURRENT (Typ.)				00.070	30 /0
	INRUSH CURRENT (Typ.)	0.75A/115VAC 0.5A/230VAC 0.375A/277VAC COLD START 25A/115VAC 45A/230VAC				
	LEAKAGE CURRENT	<0.25mA/277VAC				
	LEARAGE CORRENT					
PROTECTION	OVERLOAD	105% ~ 160% rated output power  Protection type: Hiccup mode, recovers automatically after fault condition is removed				
						FO 4 . 041/
	OVER VOLTAGE	5.25 ~ 6.75V	12.6 ~ 16.2V	15.75 ~ 20.25V	25.2 ~ 32.4V	50.4 ~ 64V
		Protection type: Shut off o/p voltage, clamping by zener diode				
ENVIRONMENT	WORKING TEMP.	-30 ~ +70°C (Refer to "Derating Curve")				
	WORKING HUMIDITY	20 ~ 90% RH non-condensing				
	STORAGE TEMP., HUMIDITY	-40 ~ +85°C, 10 ~ 95% RH				
	TEMP. COEFFICIENT	±0.03%/°C (0~50°C)				
	VIBRATION	Blank:10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes  ST:10 ~ 500Hz, 5G 10min./1cycle, period for 60min. each along X, Y, Z axes				
	VIDRATION					
	LEAD TEMPERATURE	260±5°C,5s (max.)				
	OVER VOLTAGE GATEGORY	/ III; According to EN62368-1;altitude up to 2000 meters				
	OPERATING ALTITUDE Note.4	2000 meters				
	SAFETY STANDARDS	IEC62368-1, UL62368-1, TUV BS EN/EN62368-1, BS EN/EN60335-1, EAC TP TC 004, BSMI CNS14336-1 approved				
	WITHSTAND VOLTAGE	I/P-O/P:4KVAC				
	ISOLATION RESISTANCE	I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH				
SAFETY & EMC (Note.5)	EMC EMISSION	Parameter	Standard		Test Level / Note	
		Conducted	BS EN/EN5	5032(CISPR32), CNS13438	Class B	
		Radiated	BS EN/EN5	5032(CISPR32), CNS13438	Class B	
		Harmonic Current (Note 5) BS EN/EN61000-3-2		1000-3-2	Class A	
		Voltage Flicker BS EN/EN61000-3-3				
	EMC IMMUNITY	BS EN/EN55035, BS EN/EN61000-6-2  Parameter  Standard  Text Level (Note)				
		Parameter	Standard	1000 4 0	Test Level /Note Level 3, 8KV air; Level 2, 4KV contact, criteria A	
		Radiated Susceptibility	BS EN/EN6 BS EN/EN6		Level 3, 8KV air; Level 2, 4KV contact, criteria A	
		EFT/Burest	BS EN/EN6		Level 3, criteria A	
		Surge	BS EN/EN6		Level 4, 2KV/L-N, criteria A	
		Conducted	BS EN/EN6		Level 3, criteria A	
		Magnetic Field	BS EN/EN6	1000-4-8	Level 4, criteria A	
		Voltage Dips and interrup	ptions BS EN/EN61000-4-11 >95% dip 0. 5 periods, 30% dip 25 periods,			
	MTBF				>95% interruptions 25	0 periods
OTHERS	DIMENSION	593.3Khrs min. MIL-HDBK-217F (25°C)  PCB mounting style : 69.5*39*24mm (L*W*H) Screw terminal style : 91*39.5*28.5mm (L*W*H)				
	PACKING	PCB mounting style : 0.094Kg;144pcs/14.5Kg/0.94CUFT				
IOTE		lly mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.				
NOIE	2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1 uf & 47uf parallel capacitor.  3. Tolerance: includes set up tolerance, line regulation and load regulation.  4. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6 5. The power supply is considered as an independent unit, but the final equipment still need to re-confirm that the whole system complies with the EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies."					




# FILTER Block Diagram Fosc: 65KHz RECTIFIERS POWER SWITCHING PWM CONTROL PWM CONTROL DETECTION CIRCUIT

### ■ Derating Curve

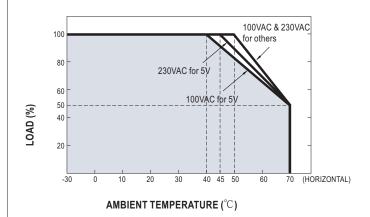

## ■ Output Derating VS Input Voltage

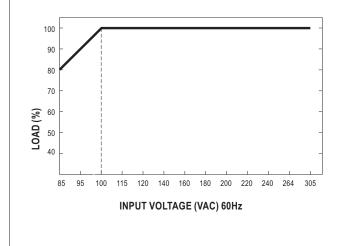



Case No. Unit:mm



#### ■ Mechanical Specification


• PCB mounting style (IRM-30)

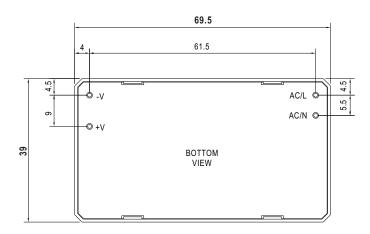




P/N diameter:1.04

 Screw terminal style (IRM-30-xxST)

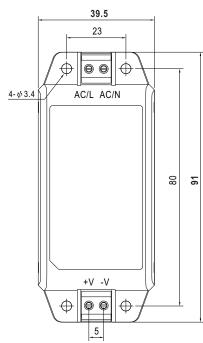



#### **■** Installation Manual

Please refer to : http://www.meanwell.com/manual.html