


Array-based list implementation

Recall: List ADT

- Store ordered collection of values
 - void add(item) //add to end
 - void add(int, item) //add at a given position
 - int size()
 - void remove(item)
 - item remove(int) //remove from given position
 - void clear()
 - item set(int, item)
 - item get(int)
 - ...

Basic setup for OurArrayList

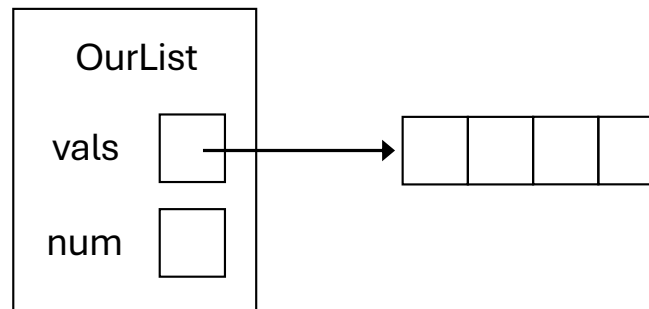

Which of the following lines is incorrect?

(E = not exactly one of the above)

```
public boolean contains(T val) { //A
    for(int i=0; i < vals.length; i++) //B
        if(vals[i] == val) //C
            return true;
    return false; //D
}
```

Which of the following lines is incorrect?

(E = not exactly one of the above)

B and C

```
public boolean contains(T val) { //A
    for(int i=0; i < vals.length; i++) //B
        if(vals[i] == val) //C
            return true;
    return false; //D
}
```