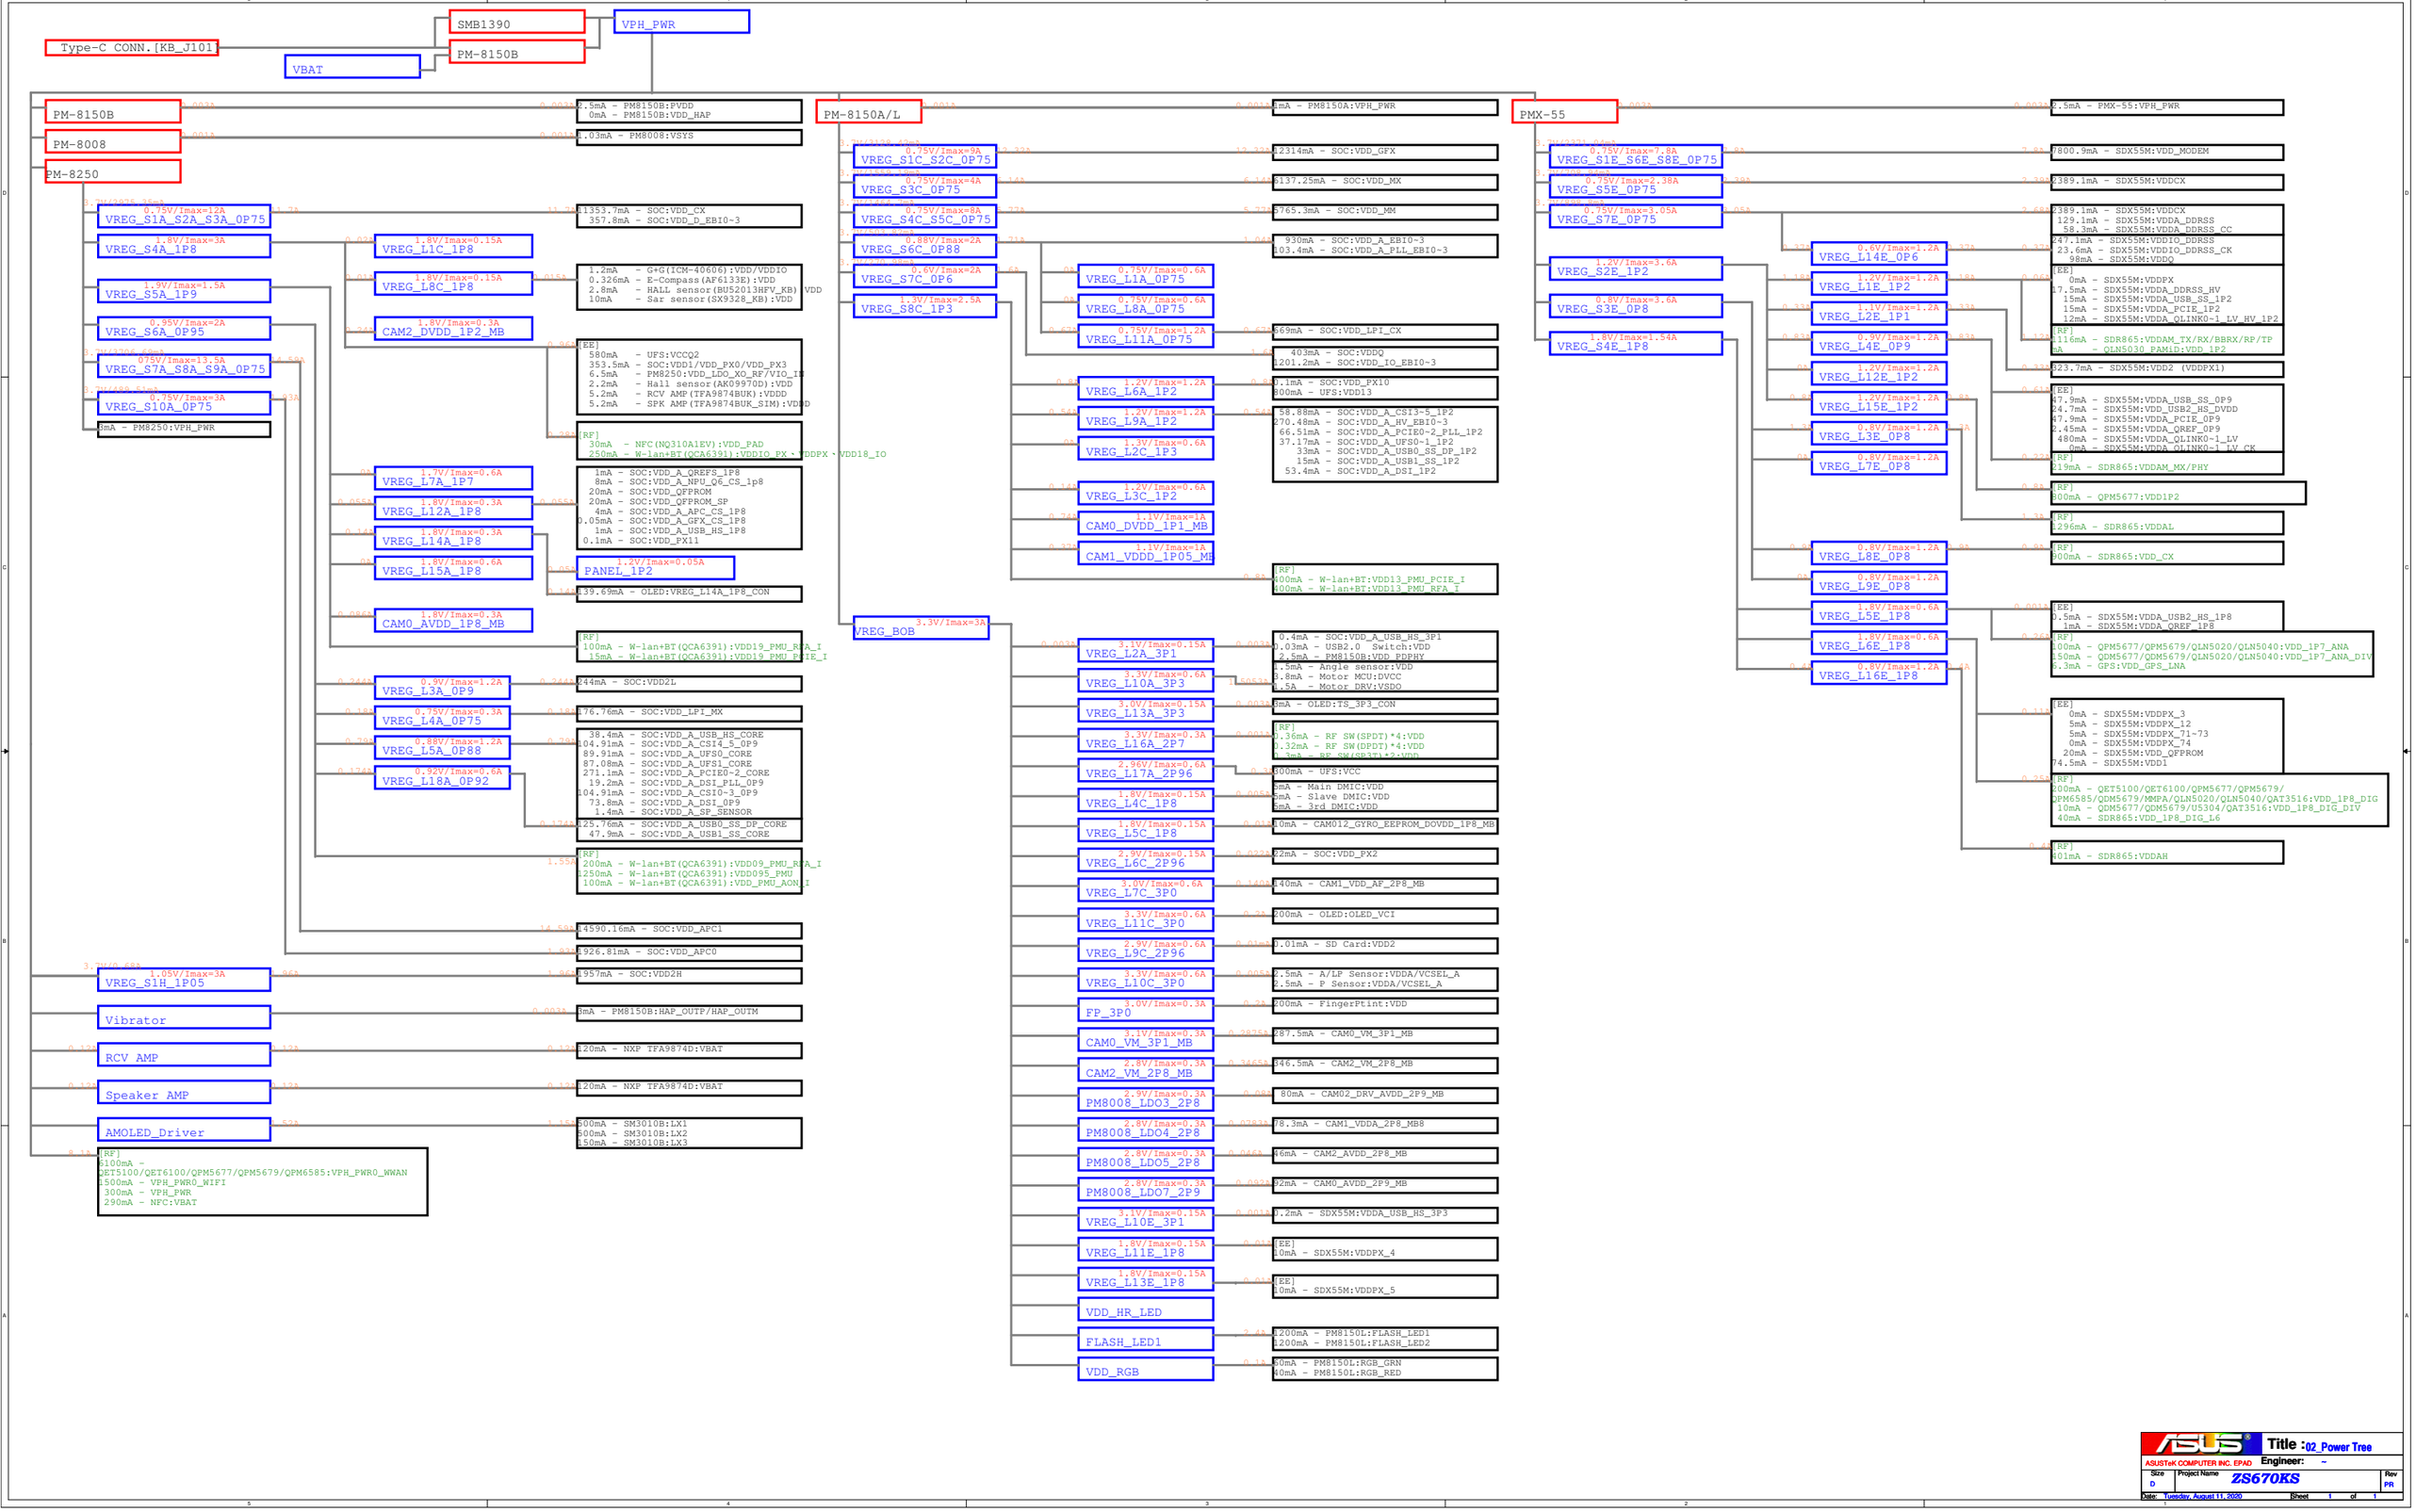
Type-C CONN.[KB_J101]
SMB1390
PM-8150B
VBAT
VPH_PWR
PM-8150B
PM-8008
PM-8250
0.75V/Imax=12A
VREG_S1A_S2A_S3A_0P75
1.8V/Imax=3A
VREG_S4A_1P8
1.9V/Imax=1.5A
VREG_S5A_1P9
0.95V/Imax=2A
VREG_S6A_0P95
075V/Imax=13.5A
VREG_S7A_S8A_S9A_0P75
0.75V/Imax=3A
VREG_S10A_0P75
6mA - PM8250:VPH_PWR
1.8V/Imax=0.15A
VREG_L1C_1P8
1.8V/Imax=0.15A
VREG_L8C_1P8
1.8V/Imax=0.3A
CAM2_DVDD_1P2_MB
1.7V/Imax=0.6A
VREG_L7A_1P7
1.8V/Imax=0.3A
VREG_L12A_1P8
1.8V/Imax=0.3A
VREG_L14A_1P8
1.8V/Imax=0.6A
VREG_L15A_1P8
1.8V/Imax=0.3A
CAM0_AVDD_1P8_MB
0.9V/Imax=1.2A
VREG_L3A_0P9
0.75V/Imax=0.3A
VREG_L4A_0P75
0.88V/Imax=1.2A
VREG_L5A_0P88
0.92V/Imax=0.6A
VREG_L18A_0P92
1.05V/Imax=3A
VREG_S1H_1P05
Vibrator
RCV_AMP
Speaker AMP
AMOLED_Driver
[RF]
5100mA -
QET5100/QET6100/QPM5677/QPM5679/QPM6585:VPH_PWR0_WWAN
1500mA - VPH_PWR0_WIFI
300mA - VPH_PWR
290mA - NFC:VBAT
2.5mA - PM8150B:PVDD
0mA - PM8150B:VDD_HAP
1.03mA - PM8008:VSYS
41353.7mA - SOC:VDD_CX
357.8mA - SOC:VDD_D_EBI0~3
1.2mA - G+G(ICM-40606):VDD/VDDIO
0.326mA - E-Compass(AF6133E):VDD
2.8mA - HALL sensor(BU52013HFV_KB) VDD
10mA - Sar sensor(SX9328_KB):VDD
[EE]
580mA - UFS:VCCQ2
353.5mA - SOC:VDD1/VDD_PX0/VDD_PX3
6.5mA - PM8250:VDD_LDO_XO_RF/VIO_IF
2.2mA - Hall sensor(AK09970D):VDD
5.2mA - RCV AMP(TFA9874BUK):VDDD
5.2mA - SPK AMP(TFA9874BUK_SIM):VDDD
[RF]
30mA - NFC(NQ310A1EV):VDD_PAD
250mA - W-lan+BT(QCA6391):VDDIO_PX、VDDPX、VDD18_IO
1mA - SOC:VDD_A_QREFS_1P8
8mA - SOC:VDD_A_NPU_Q6_CS_1p8
20mA - SOC:VDD_QFPROM
20mA - SOC:VDD_QFPROM_SP
4mA - SOC:VDD_A_APC_CS_1P8
0.05mA - SOC:VDD_A_GFX_CS_1P8
1mA - SOC:VDD_A_USB_HS_1P8
0.1mA - SOC:VDD_PX11
1.2V/Imax=0.05A
PANEL_1P2
139.69mA - OLED:VREG_L14A_1P8_CON
[RF]
100mA - W-lan+BT(QCA6391):VDD19_PMU_RFA_I
15mA - W-lan+BT(QCA6391):VDD19_PMU_PCIE_I
244mA - SOC:VDD2L
176.76mA - SOC:VDD_LPI_MX
38.4mA - SOC:VDD_A_USB_HS_CORE
104.91mA - SOC:VDD_A_CSI4_5_0P9
89.91mA - SOC:VDD_A_UFS0_CORE
87.08mA - SOC:VDD_A_UFS1_CORE
271.1mA - SOC:VDD_A_PCIE0~2_CORE
19.2mA - SOC:VDD_A_DSI_PLL_0P9
104.91mA - SOC:VDD_A_CSI0~3_0P9
73.8mA - SOC:VDD_A_DSI_0P9
1.4mA - SOC:VDD_A_SP_SENSOR
125.76mA - SOC:VDD_A_USB0_SS_DP_CORE
47.9mA - SOC:VDD_A_USB1_SS_CORE
[RF]
200mA - W-lan+BT(QCA6391):VDD09_PMU_RFA_I
1250mA - W-lan+BT(QCA6391):VDD095_PMU
100mA - W-lan+BT(QCA6391):VDD_PMU_AON_I
14590.16mA - SOC:VDD_APC1
1926.81mA - SOC:VDD_APC0
1957mA - SOC:VDD2H
3mA - PM8150B:HAP_OUTP/HAP_OUTM
120mA - NXP TFA9874D:VBAT
120mA - NXP TFA9874D:VBAT
500mA - SM3010B:LX1
500mA - SM3010B:LX2
150mA - SM3010B:LX3
PM-8150A/L
0.75V/Imax=9A
VREG_S1C_S2C_0P75
0.75V/Imax=4A
VREG_S3C_0P75
0.75V/Imax=8A
VREG_S4C_S5C_0P75
0.88V/Imax=2A
VREG_S6C_0P88
0.6V/Imax=2A
VREG_S7C_0P6
1.3V/Imax=2.5A
VREG_S8C_1P3
3.3V/Imax=3A
VREG_BOB
0.75V/Imax=0.6A
VREG_L1A_0P75
0.75V/Imax=0.6A
VREG_L8A_0P75
0.75V/Imax=1.2A
VREG_L11A_0P75
1.2V/Imax=1.2A
VREG_L6A_1P2
1.2V/Imax=1.2A
VREG_L9A_1P2
1.3V/Imax=0.6A
VREG_L2C_1P3
1.2V/Imax=0.6A
VREG_L3C_1P2
1.1V/Imax=1A
CAM0_DVDD_1P1_MB
1.1V/Imax=1A
CAM1_VDDD_1P05_MB
3.1V/Imax=0.15A
VREG_L2A_3P1
3.3V/Imax=0.6A
VREG_L10A_3P3
3.0V/Imax=0.15A
VREG_L13A_3P3
3.3V/Imax=0.3A
VREG_L16A_2P7
2.96V/Imax=0.6A
VREG_L17A_2P96
1.8V/Imax=0.15A
VREG_L4C_1P8
1.8V/Imax=0.15A
VREG_L5C_1P8
2.9V/Imax=0.15A
VREG_L6C_2P96
3.0V/Imax=0.6A
VREG_L7C_3P0
3.3V/Imax=0.6A
VREG_L11C_3P0
2.9V/Imax=0.6A
VREG_L9C_2P96
3.3V/Imax=0.6A
VREG_L10C_3P0
3.0V/Imax=0.3A
FP_3P0
3.1V/Imax=0.3A
CAM0_VM_3P1_MB
2.8V/Imax=0.3A
CAM2_VM_2P8_MB
2.9V/Imax=0.3A
PM8008_LDO3_2P8
2.8V/Imax=0.3A
PM8008_LDO4_2P8
2.8V/Imax=0.3A
PM8008_LDO5_2P8
2.8V/Imax=0.3A
PM8008_LDO7_2P9
3.1V/Imax=0.15A
VREG_L10E_3P1
1.8V/Imax=0.15A
VREG_L11E_1P8
1.8V/Imax=0.15A
VREG_L13E_1P8
VDD_HR_LED
FLASH_LED1
VDD_RGB
4mA - PM8150A:VPH_PWR
12314mA - SOC:VDD_GFX
6137.25mA - SOC:VDD_MX
5765.3mA - SOC:VDD_MM
930mA - SOC:VDD_A_EBI0~3
103.4mA - SOC:VDD_A_PLL_EBI0~3
569mA - SOC:VDD_LPI_CX
403mA - SOC:VDDQ
1201.2mA - SOC:VDD_IO_EBI0~3
0.1mA - SOC:VDD_PX10
900mA - UFS:VDD13
58.88mA - SOC:VDD_A_CSI3~5_1P2
270.48mA - SOC:VDD_A_HV_EBI0~3
66.51mA - SOC:VDD_A_PCIE0~2_PLL_1P2
37.17mA - SOC:VDD_A_UFS0~1_1P2
33mA - SOC:VDD_A_USB0_SS_DP_1P2
15mA - SOC:VDD_A_USB1_SS_1P2
53.4mA - SOC:VDD_A_DSI_1P2
[RF]
400mA - W-lan+BT:VDD13_PMU_PCIE_I
400mA - W-lan+BT:VDD13_PMU_RFA_I
0.4mA - SOC:VDD_A_USB_HS_3P1
0.03mA - USB2.0 Switch:VDD
2.5mA - PM8150B:VDD_PDPHY
0.5mA - Angle sensor:VDD
3.8mA - Motor MCU:DVCC
0.5A - Motor DRV:VSDO
9mA - OLED:TS_3P3_CON
[RF]
0.36mA - RF SW(SPDT)*4:VDD
1.32mA - RF SW(DPDT)*4:VDD
2.3mA - RF SW(6P3T)*2:VDD
600mA - UFS:VCC
5mA - Main DMIC:VDD
5mA - Slave DMIC:VDD
5mA - 3rd DMIC:VDD
10mA - CAM012_GYRO_EEPROM_DOVDD_1P8_MB
22mA - SOC:VDD_PX2
140mA - CAM1_VDD_AF_2P8_MB
200mA - OLED:OLED_VCI
0.01mA - SD Card:VDD2
2.5mA - A/LP Sensor:VDDA/VCSEL_A
2.5mA - P Sensor:VDDA/VCSEL_A
200mA - FingerPtint:VDD
287.5mA - CAM0_VM_3P1_MB
346.5mA - CAM2_VM_2P8_MB
80mA - CAM02_DRV_AVDD_2P9_MB
78.3mA - CAM1_VDDA_2P8_MB8
46mA - CAM2_AVDD_2P8_MB
92mA - CAM0_AVDD_2P9_MB
0.2mA - SDX55M:VDDA_USB_HS_3P3
[EE]
10mA - SDX55M:VDDPX_4
[EE]
10mA - SDX55M:VDDPX_5
1200mA - PM8150L:FLASH_LED1
1200mA - PM8150L:FLASH_LED2
50mA - PM8150L:RGB_GRN
40mA - PM8150L:RGB_RED
PMX-55
0.75V/Imax=7.8A
VREG_S1E_S6E_S8E_0P75
0.75V/Imax=2.38A
VREG_S5E_0P75
0.75V/Imax=3.05A
VREG_S7E_0P75
1.2V/Imax=3.6A
VREG_S2E_1P2
0.8V/Imax=3.6A
VREG_S3E_0P8
1.8V/Imax=1.54A
VREG_S4E_1P8
0.6V/Imax=1.2A
VREG_L14E_0P6
1.2V/Imax=1.2A
VREG_L1E_1P2
1.1V/Imax=1.2A
VREG_L2E_1P1
0.9V/Imax=1.2A
VREG_L4E_0P9
1.2V/Imax=1.2A
VREG_L12E_1P2
1.2V/Imax=1.2A
VREG_L15E_1P2
0.8V/Imax=1.2A
VREG_L3E_0P8
0.8V/Imax=1.2A
VREG_L7E_0P8
0.8V/Imax=1.2A
VREG_L8E_0P8
0.8V/Imax=1.2A
VREG_L9E_0P8
1.8V/Imax=0.6A
VREG_L5E_1P8
1.8V/Imax=0.6A
VREG_L6E_1P8
0.8V/Imax=1.2A
VREG_L16E_1P8
2.5mA - PMX-55:VPH_PWR
7800.9mA - SDX55M:VDD_MODEM
2389.1mA - SDX55M:VDDCX
2389.1mA - SDX55M:VDDCX
129.1mA - SDX55M:VDDA_DDRSS
58.3mA - SDX55M:VDDA_DDRSS_CC
247.1mA - SDX55M:VDDIO_DDRSS
23.6mA - SDX55M:VDDIO_DDRSS_CK
98mA - SDX55M:VDDQ
[EE]
0mA - SDX55M:VDDPX
17.5mA - SDX55M:VDDA_DDRSS_HV
15mA - SDX55M:VDDA_USB_SS_1P2
15mA - SDX55M:VDDA_PCIE_1P2
12mA - SDX55M:VDDA_QLINK0~1_LV_HV_1P2
[RF]
1116mA - SDR865:VDDAM_TX/RX/BBRX/RP/TP
0A - QLN5030_PAMiD:VDD_1P2
923.7mA - SDX55M:VDD2 (VDDPX1)
[EE]
47.9mA - SDX55M:VDDA_USB_SS_0P9
24.7mA - SDX55M:VDD_USB2_HS_DVDD
47.9mA - SDX55M:VDDA_PCIE_0P9
2.45mA - SDX55M:VDDA_QREF_0P9
480mA - SDX55M:VDDA_QLINK0~1_LV
0mA - SDX55M:VDDA_QLINK0~1_LV_CK
[RF]
819mA - SDR865:VDDAM_MX/PHY
[RF]
300mA - QPM5677:VDD1P2
[RF]
1296mA - SDR865:VDDAL
[RF]
900mA - SDR865:VDD_CX
[EE]
0.5mA - SDX55M:VDDA_USB2_HS_1P8
1mA - SDX55M:VDDA_QREF_1P8
[RF]
100mA - QPM5677/QPM5679/QLN5020/QLN5040:VDD_1P7_ANA
150mA - QDM5677/QDM5679/QLN5020/QLN5040:VDD_1P7_ANA_DIV
6.3mA - GPS:VDD_GPS_LNA
[EE]
0mA - SDX55M:VDDPX_3
5mA - SDX55M:VDDPX_12
5mA - SDX55M:VDDPX_71~73
0mA - SDX55M:VDDPX_74
20mA - SDX55M:VDD_QFPROM
74.5mA - SDX55M:VDD1
[RF]
200mA - QET5100/QET6100/QPM5677/QPM5679/
QPM6585/QDM5679/MMPA/QLN5020/QLN5040/QAT3516:VDD_1P8_DIG
10mA - QDM5677/QDM5679/U5304/QAT3516:VDD_1P8_DIG_DIV
40mA - SDR865:VDD_1P8_DIG_L6
401mA - SDR865:VDDAH
Title :02_Power Tree
ASUSTeK COMPUTER INC. EPAD
Engineer: ~
Size D
Project Name ZS670KS
Rev PR
Date: Tuesday, August 11, 2020
Sheet 1 of 1