





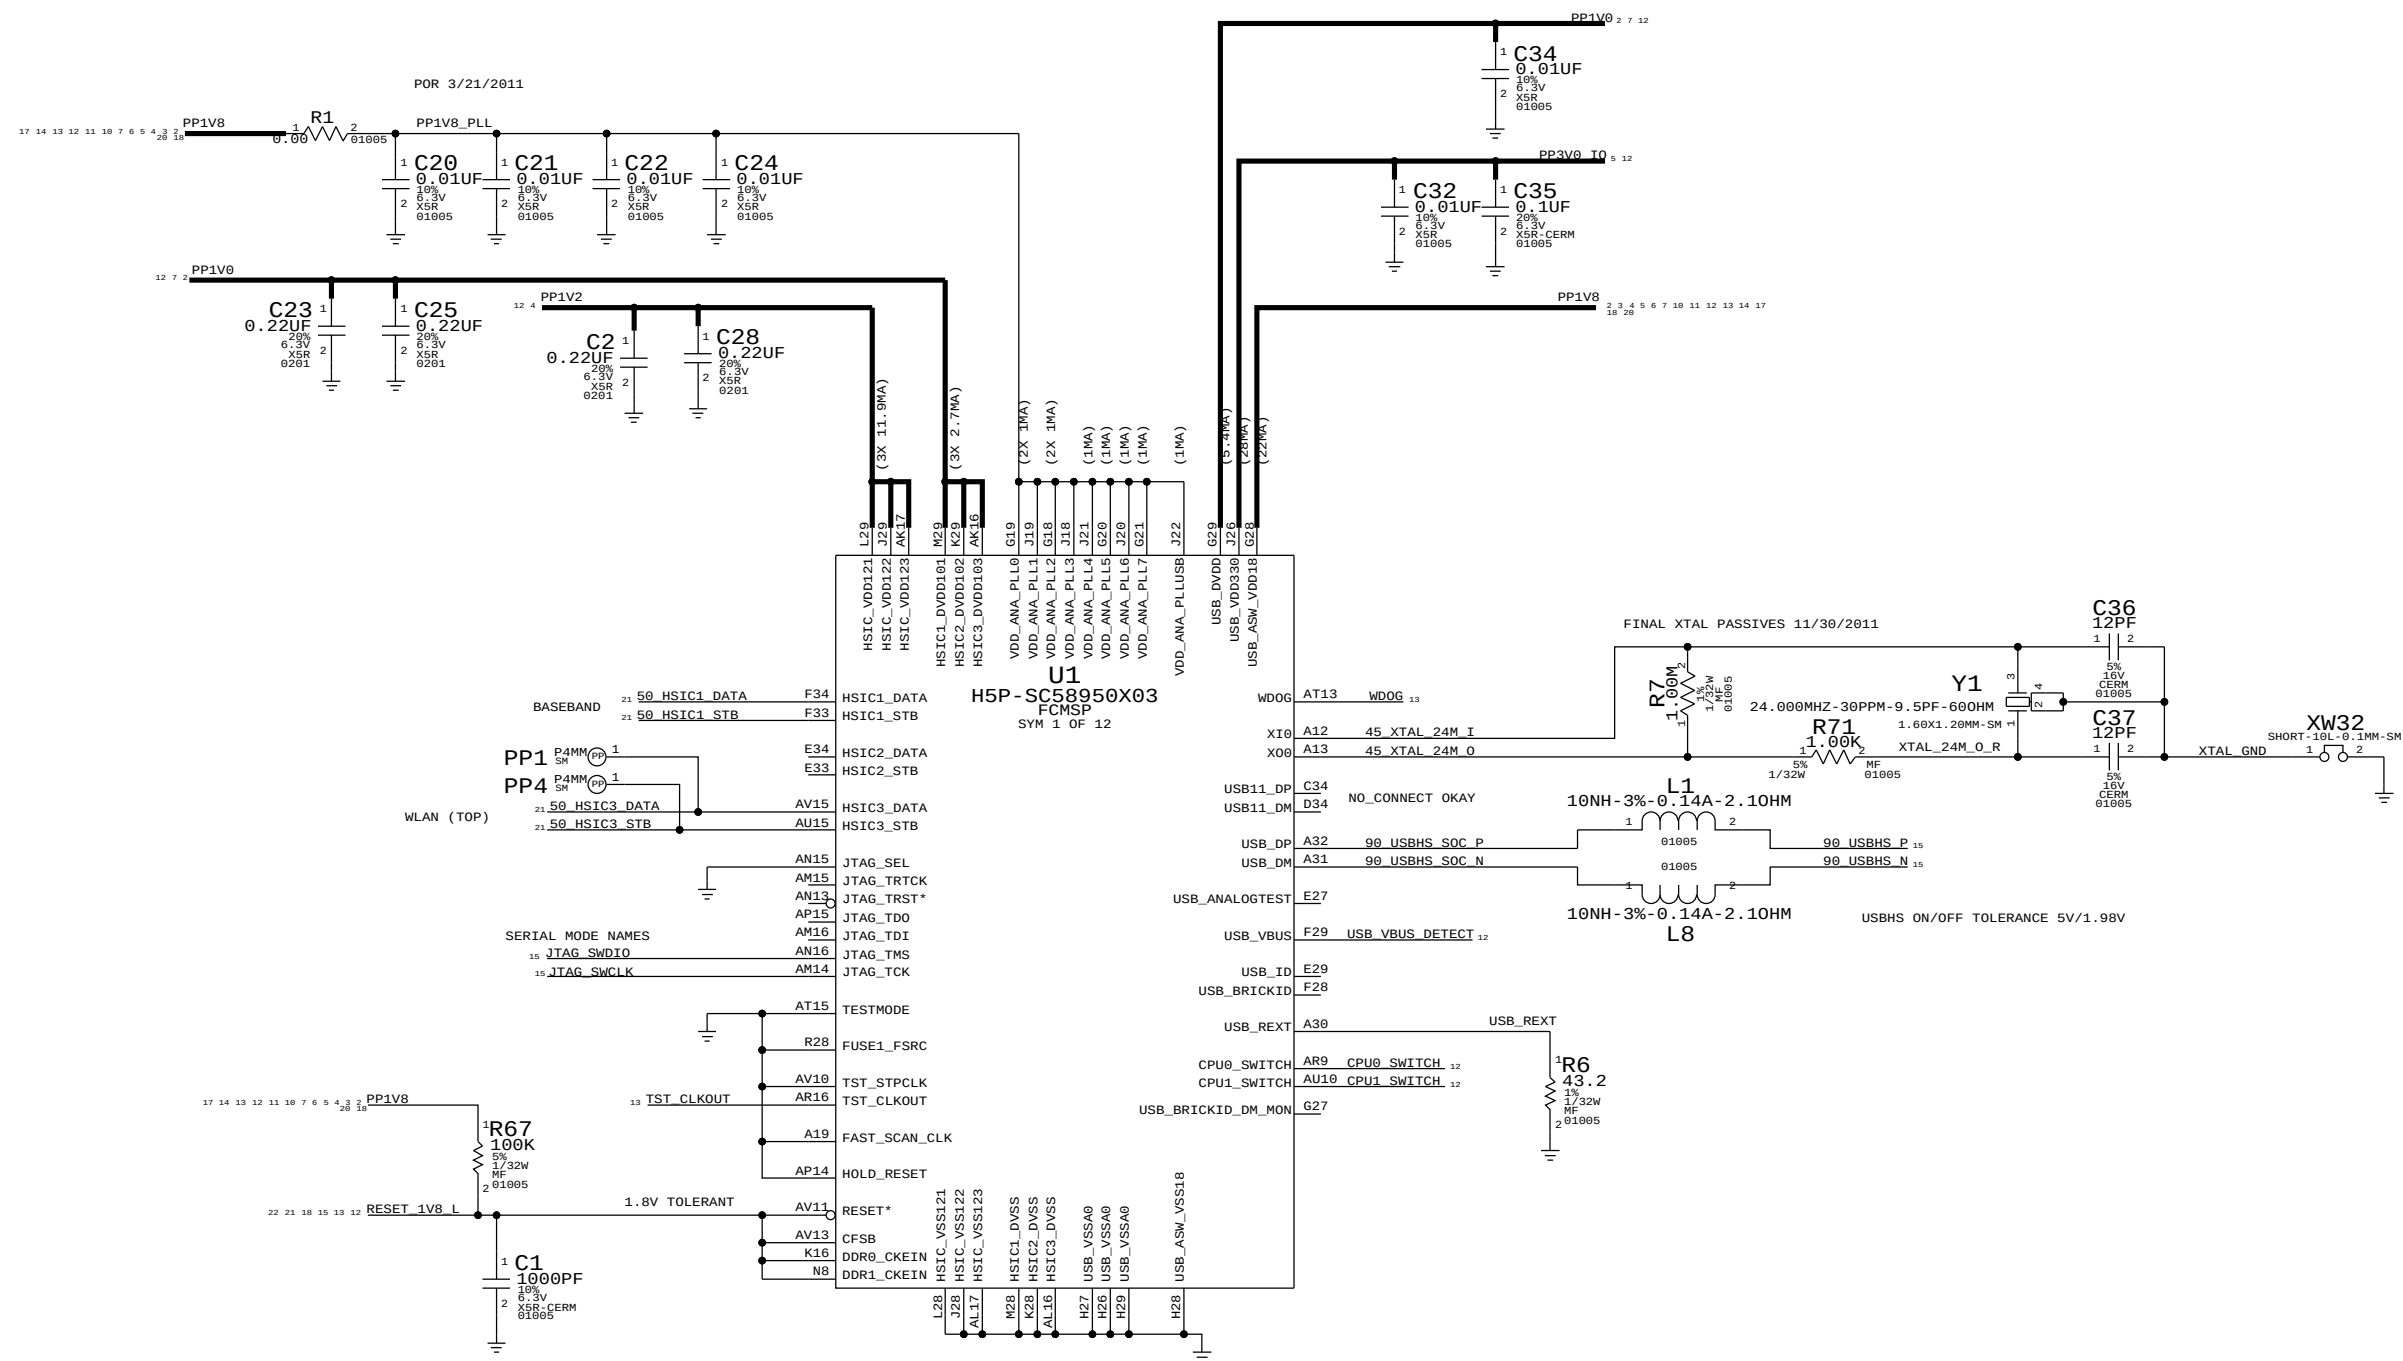


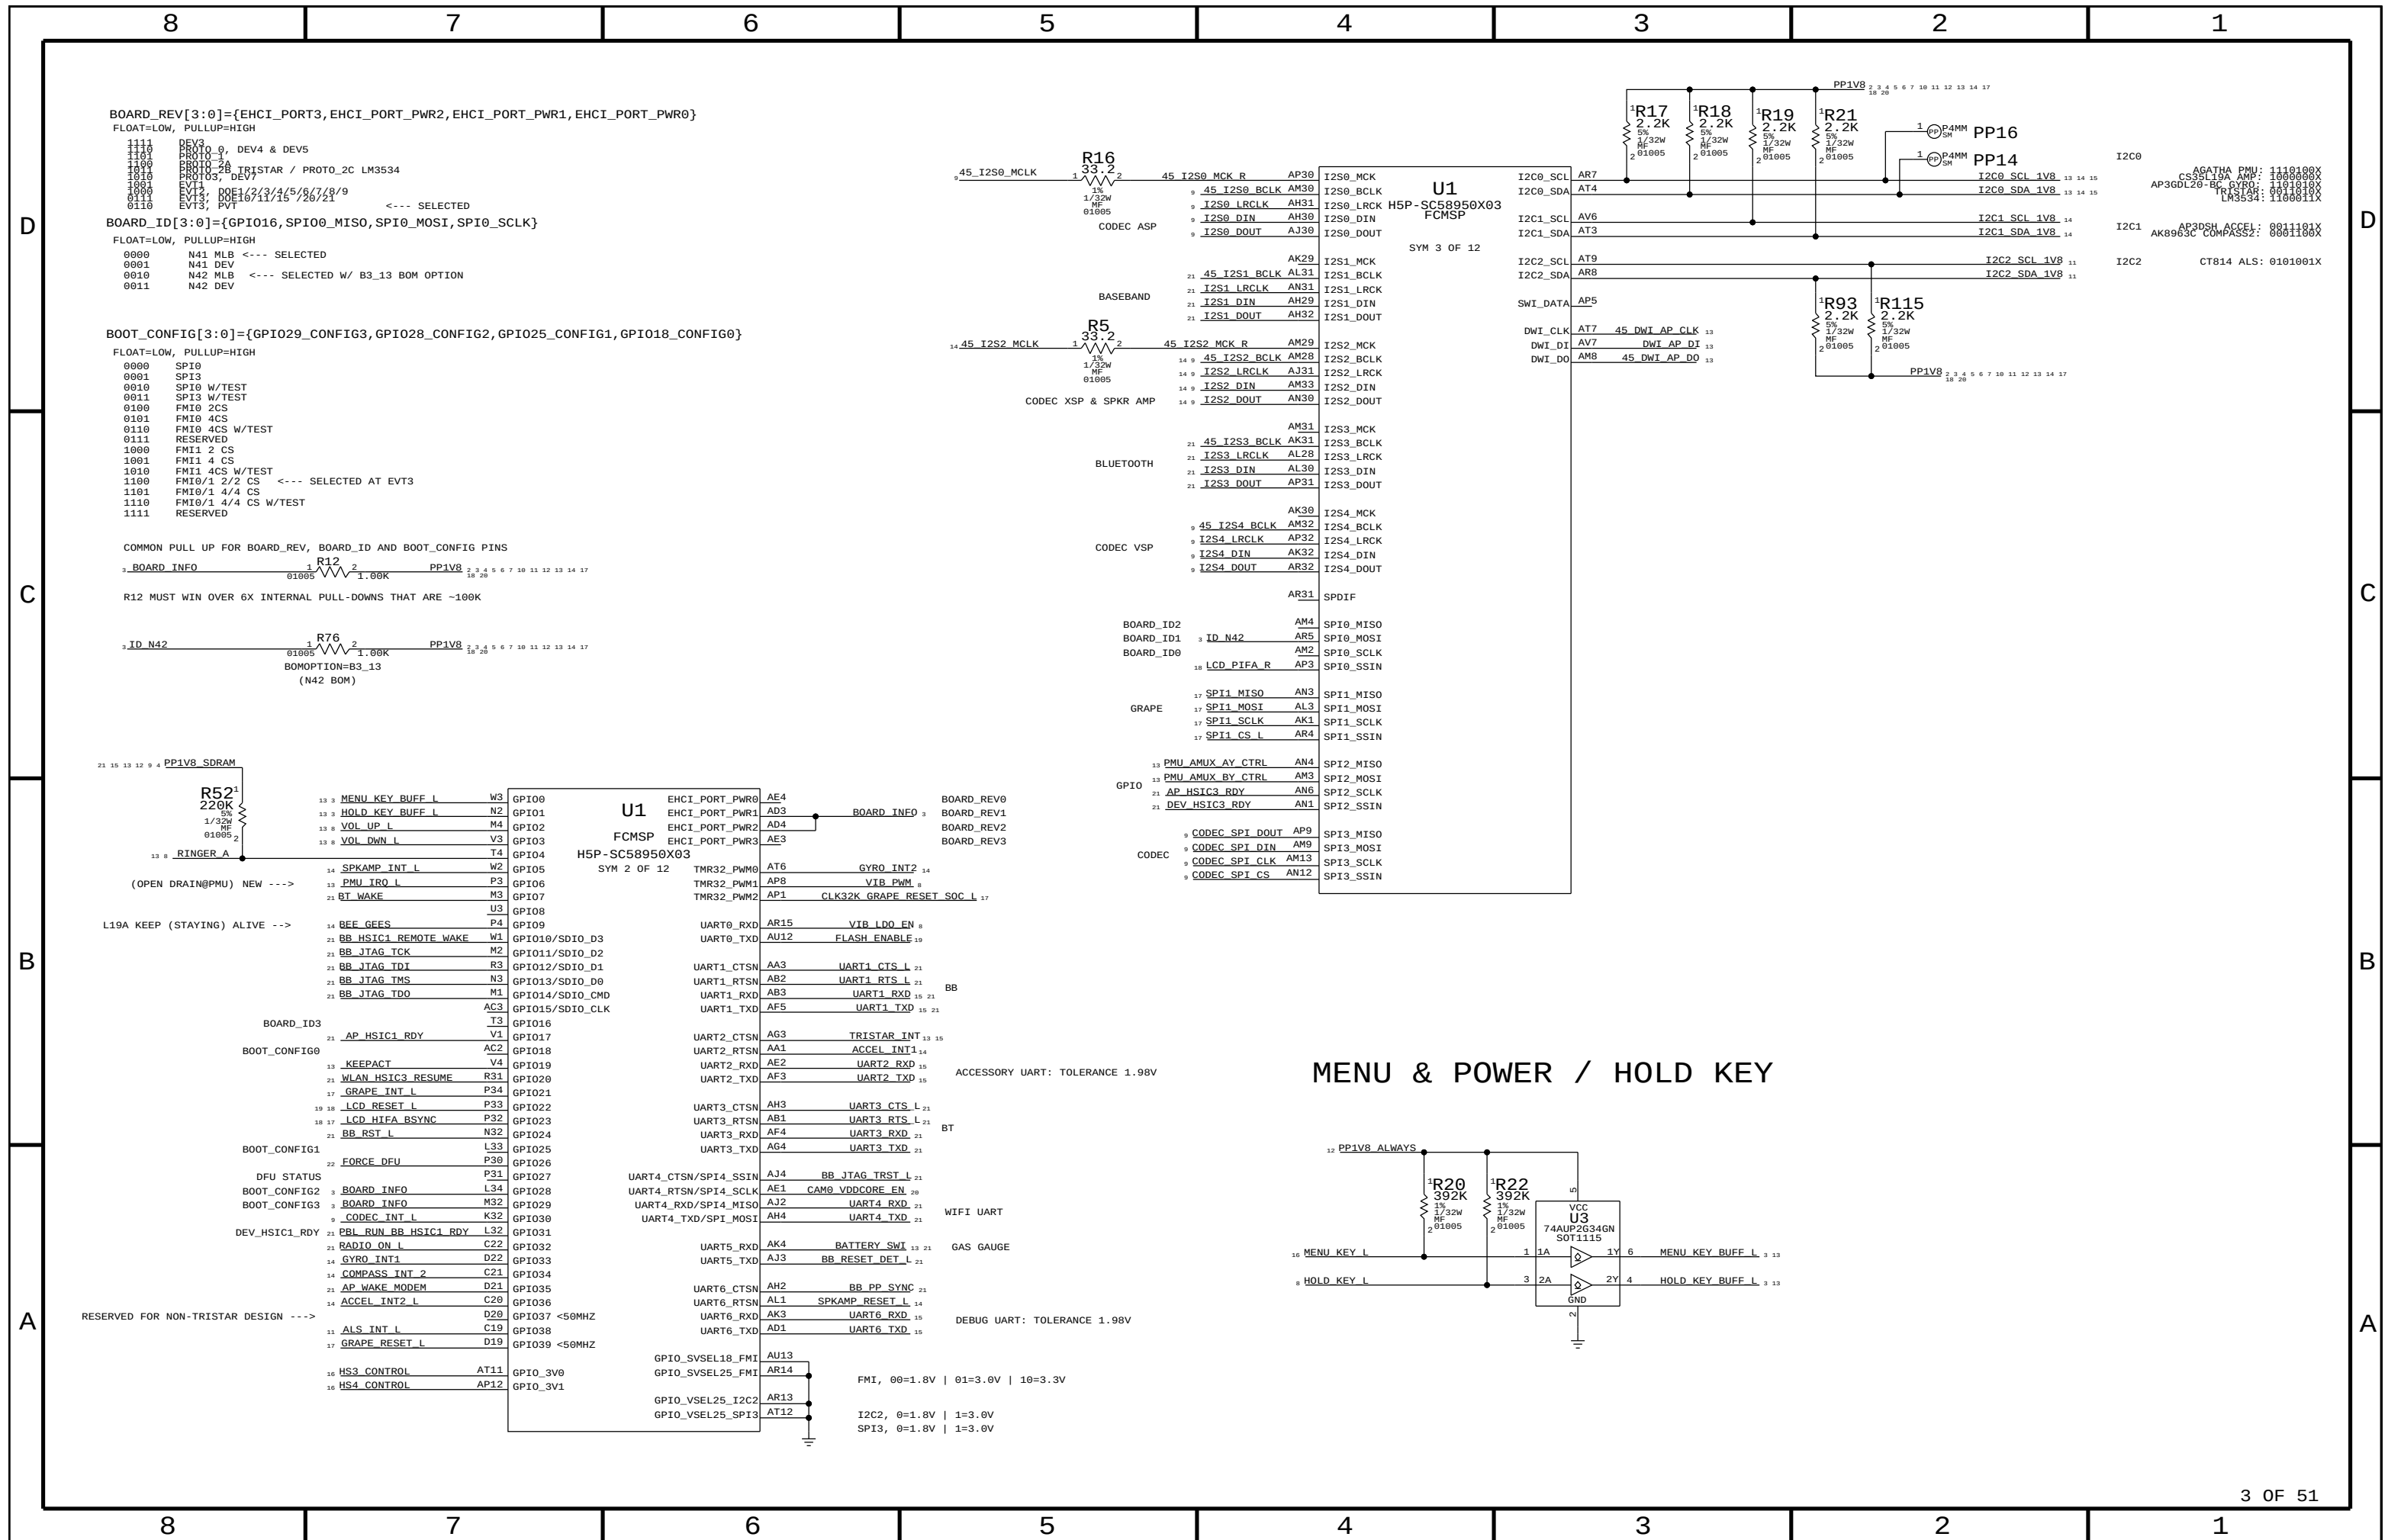


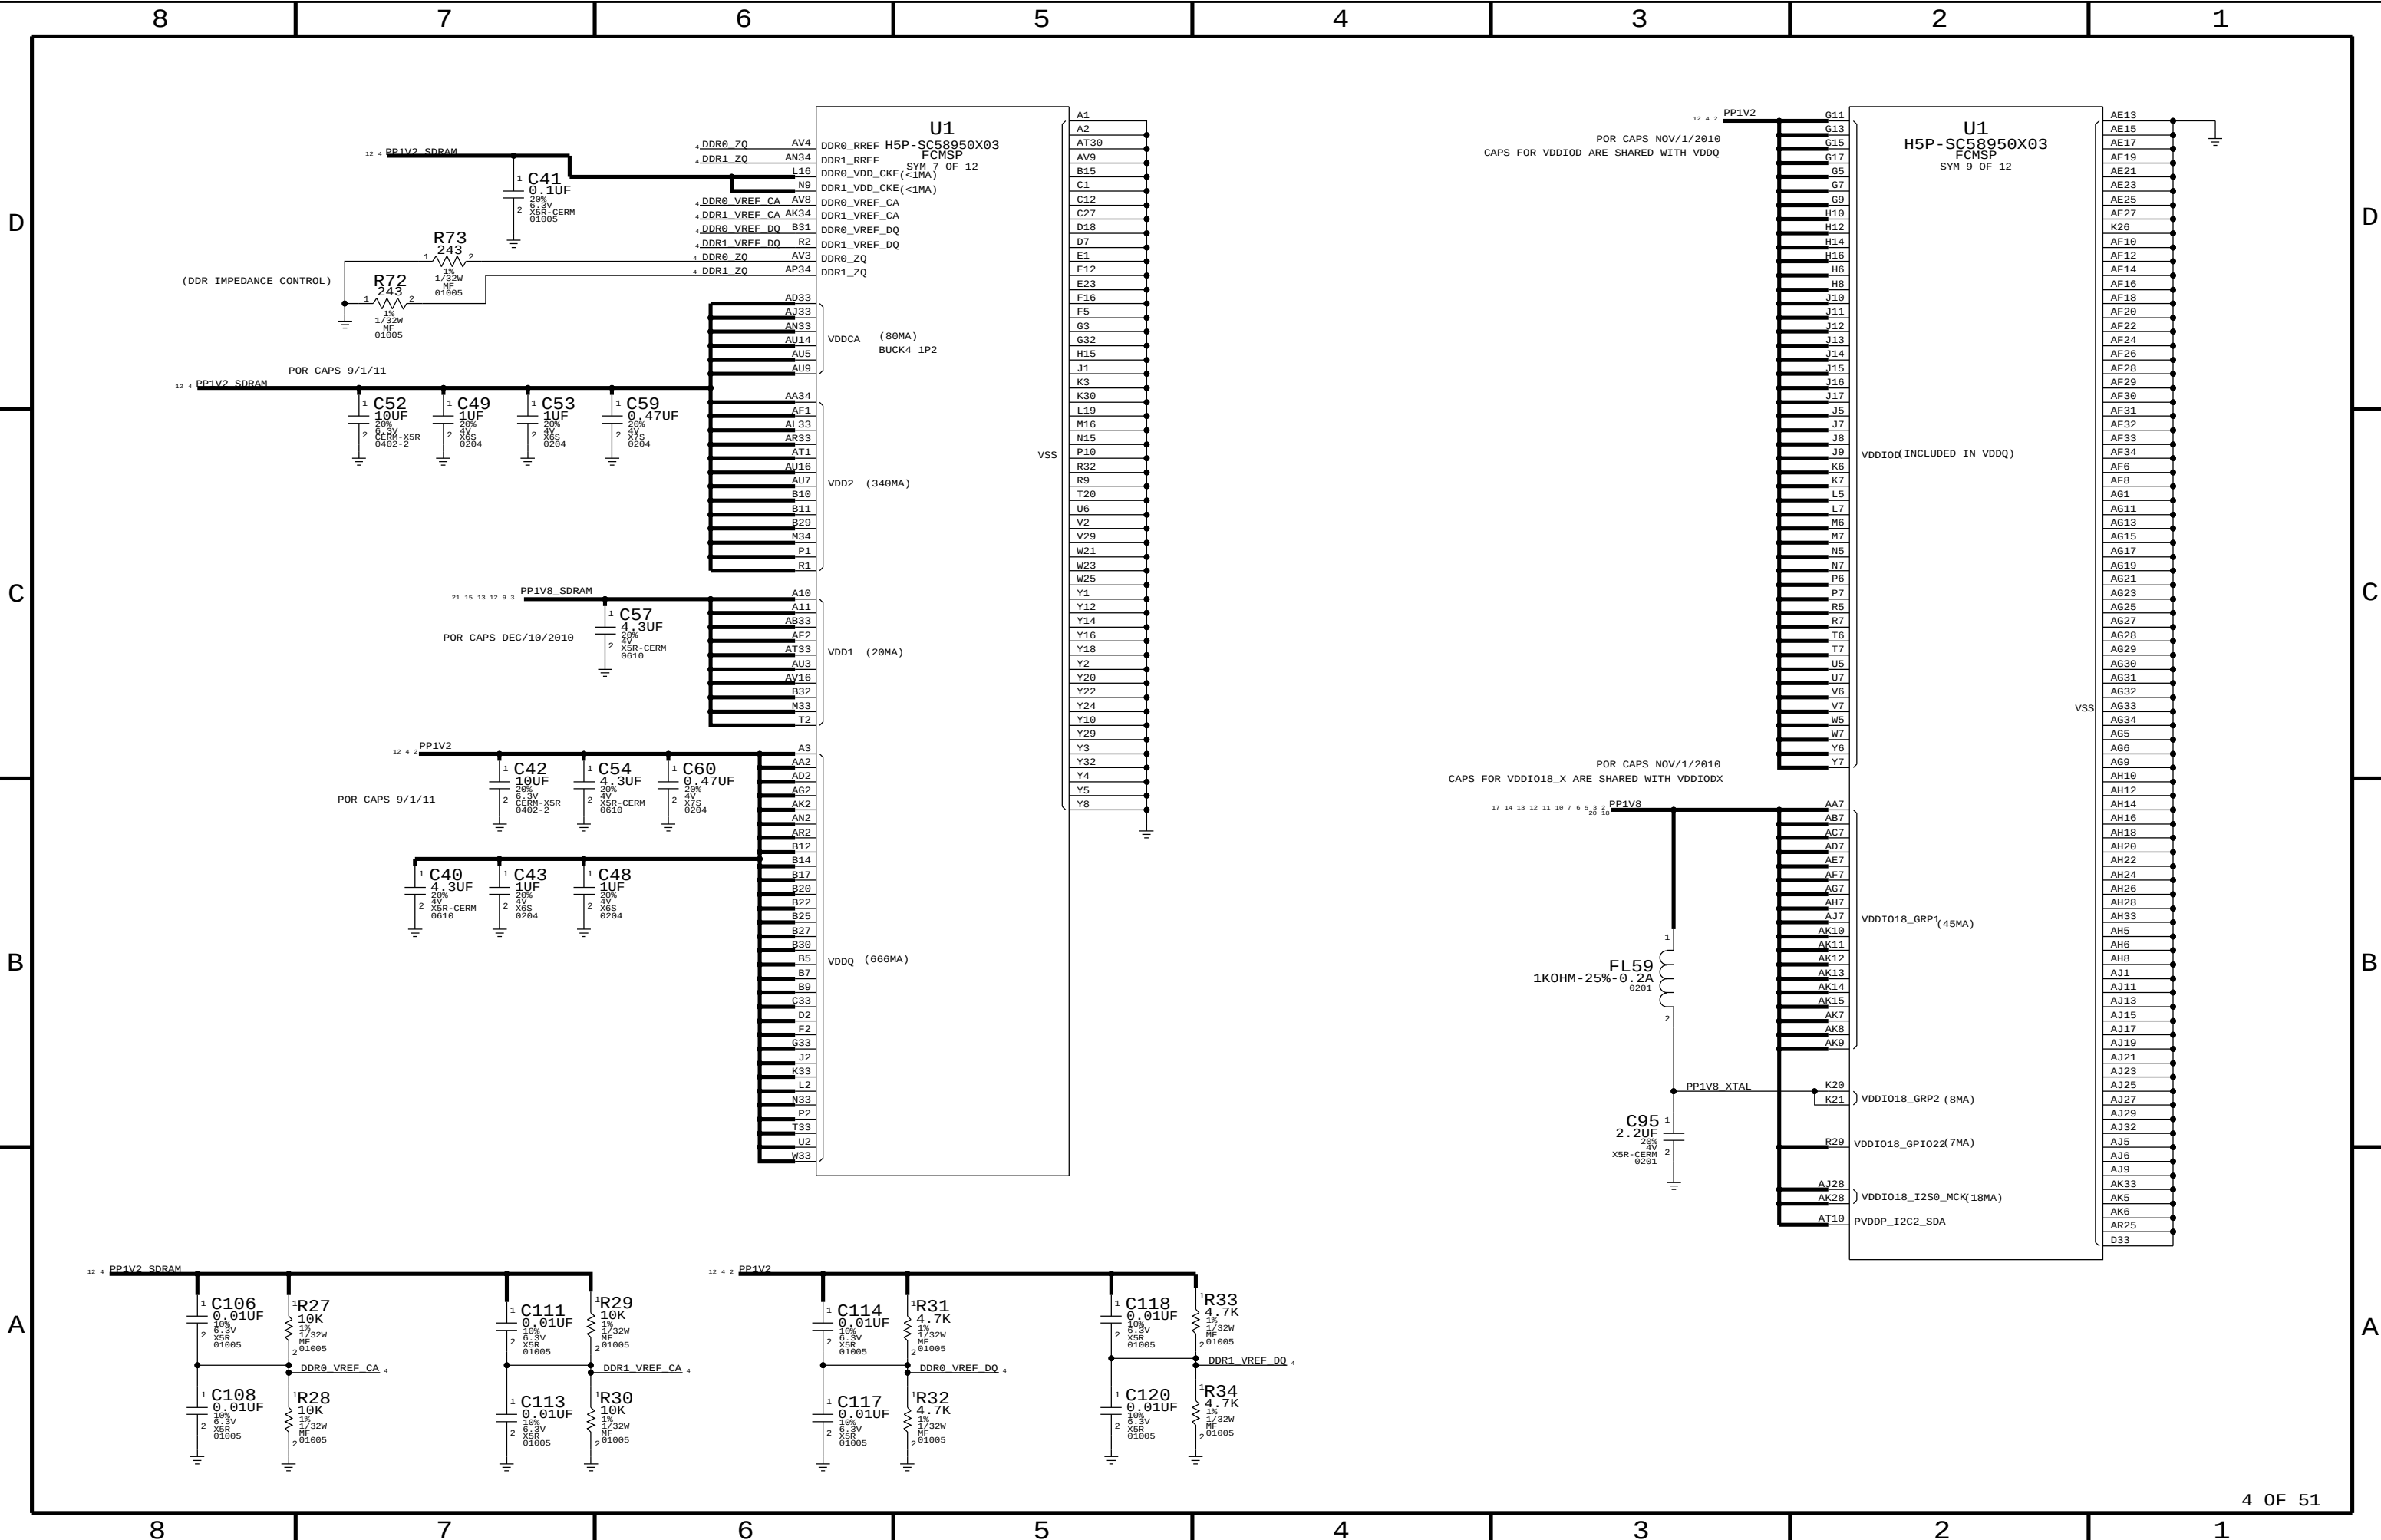

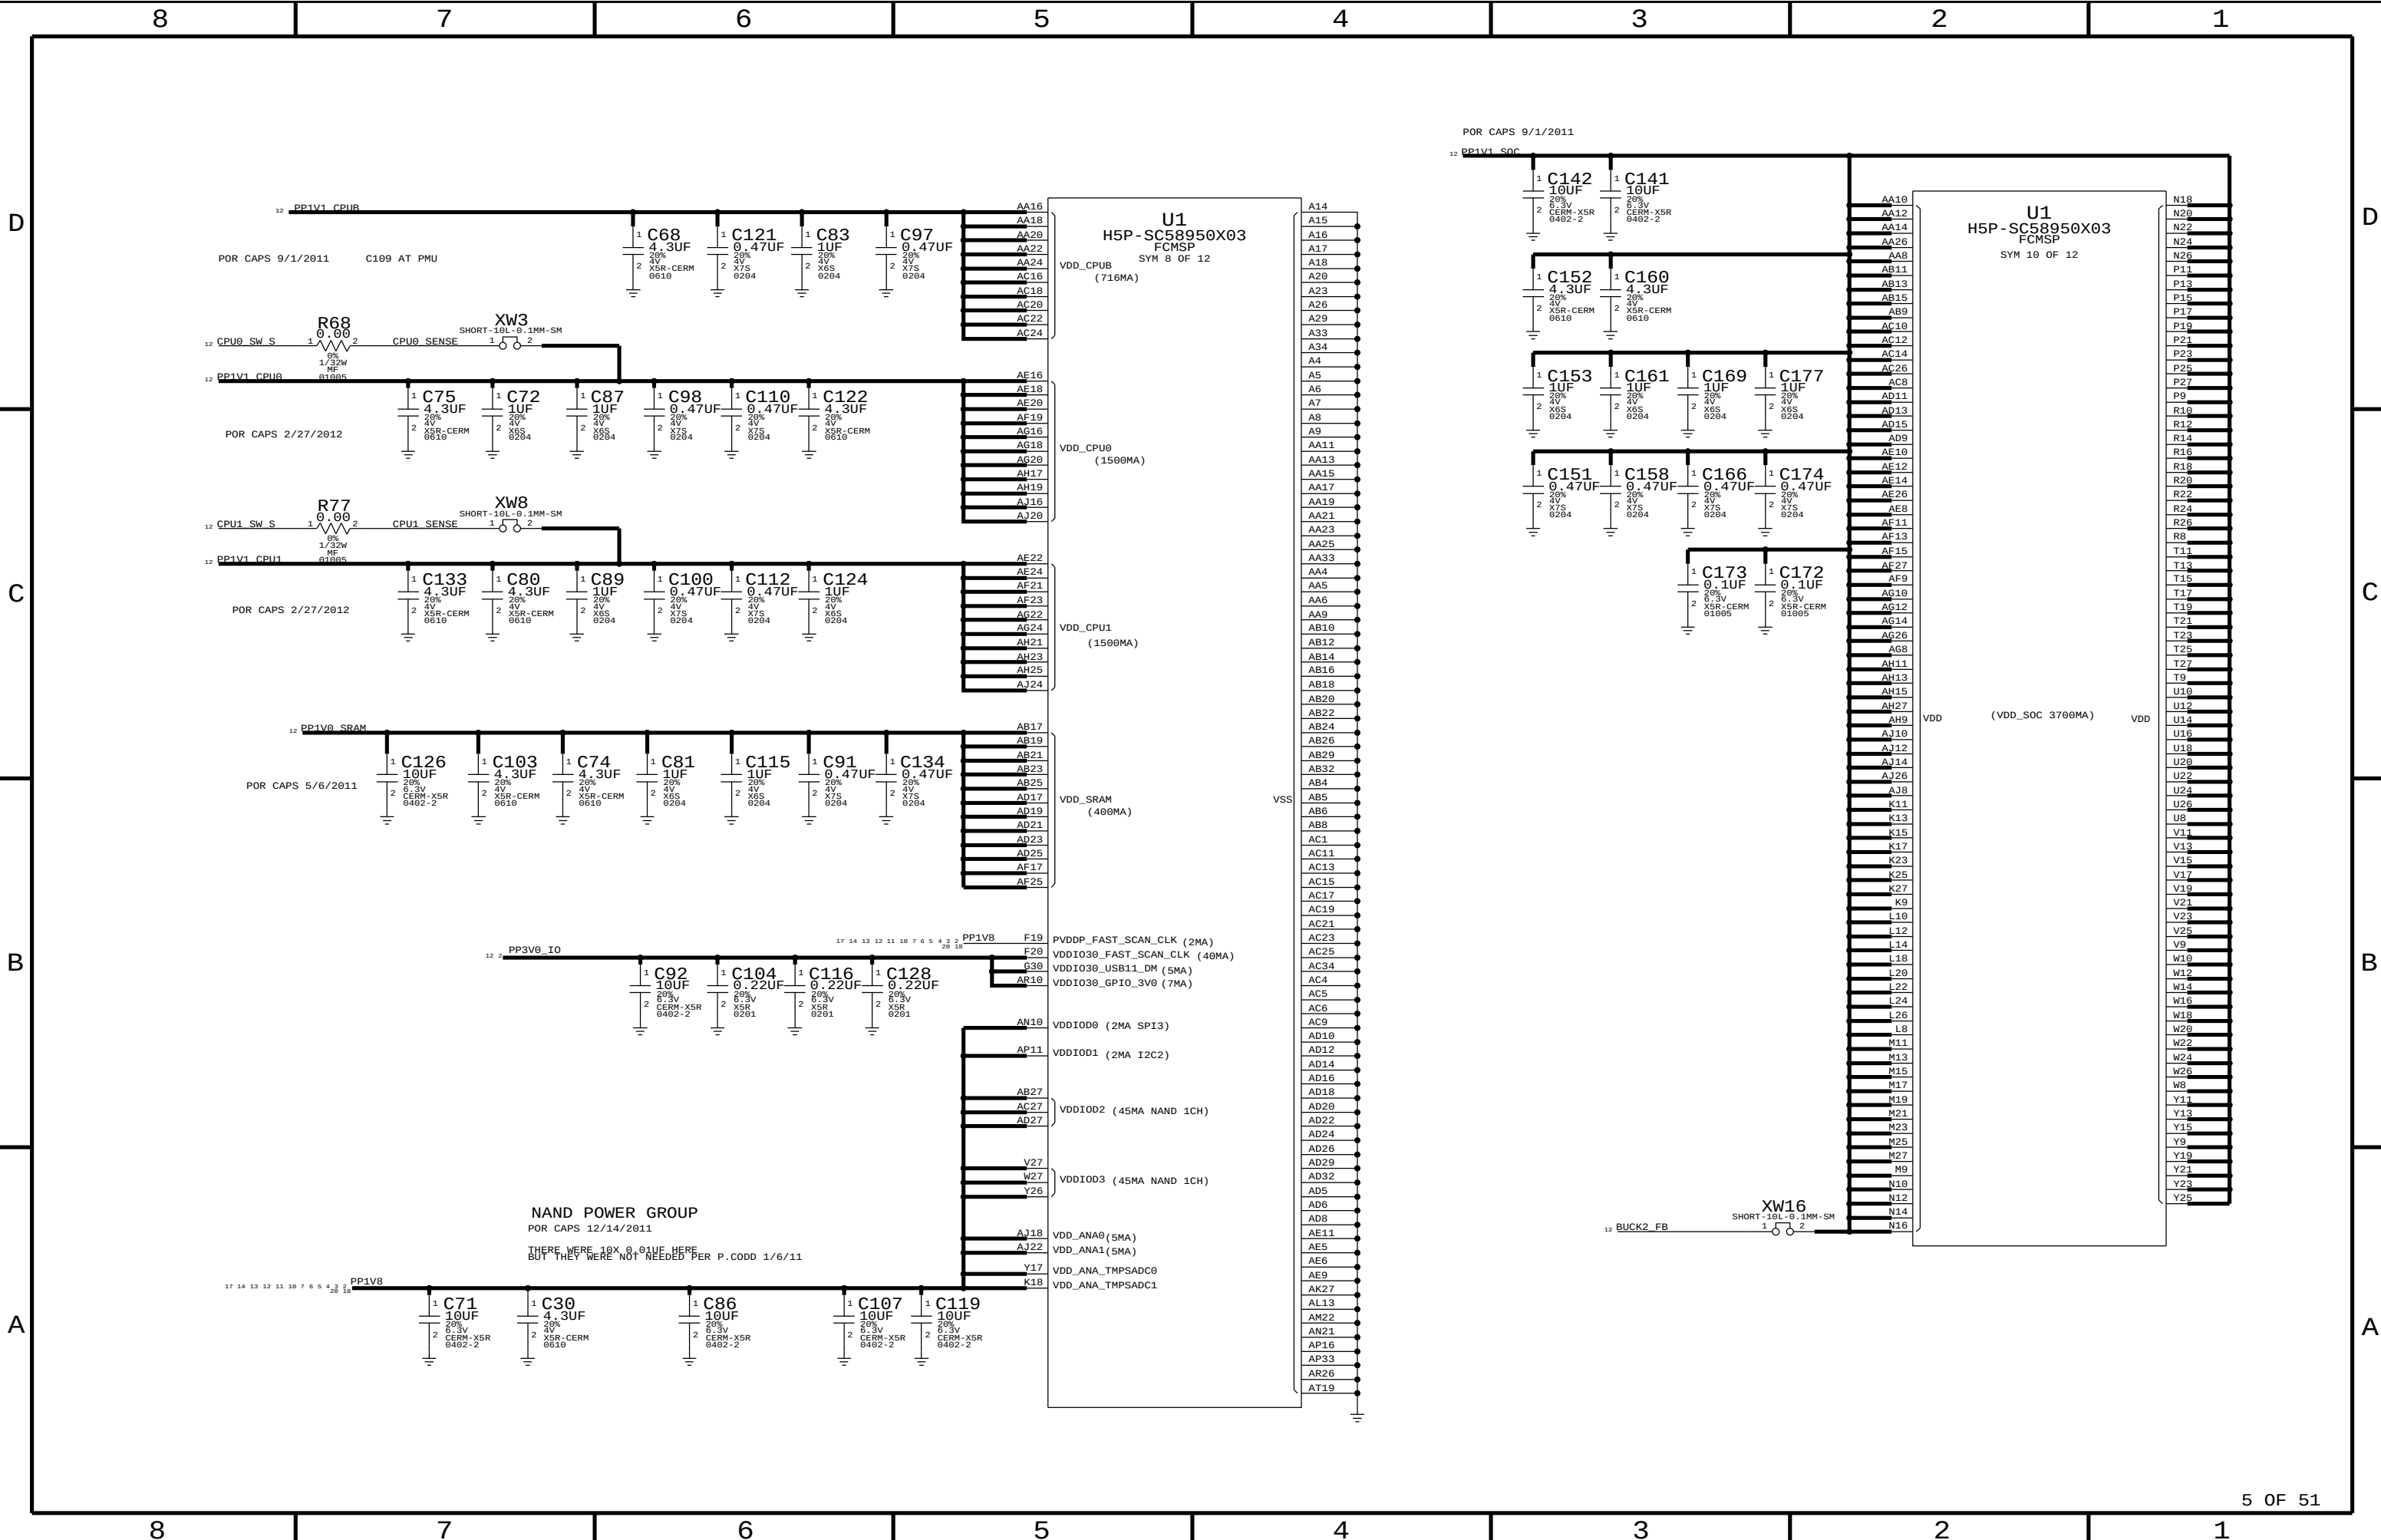


SUPPORT FOR PPN1.5 AND PPN1.0 W/ 1.8V IO ONLY




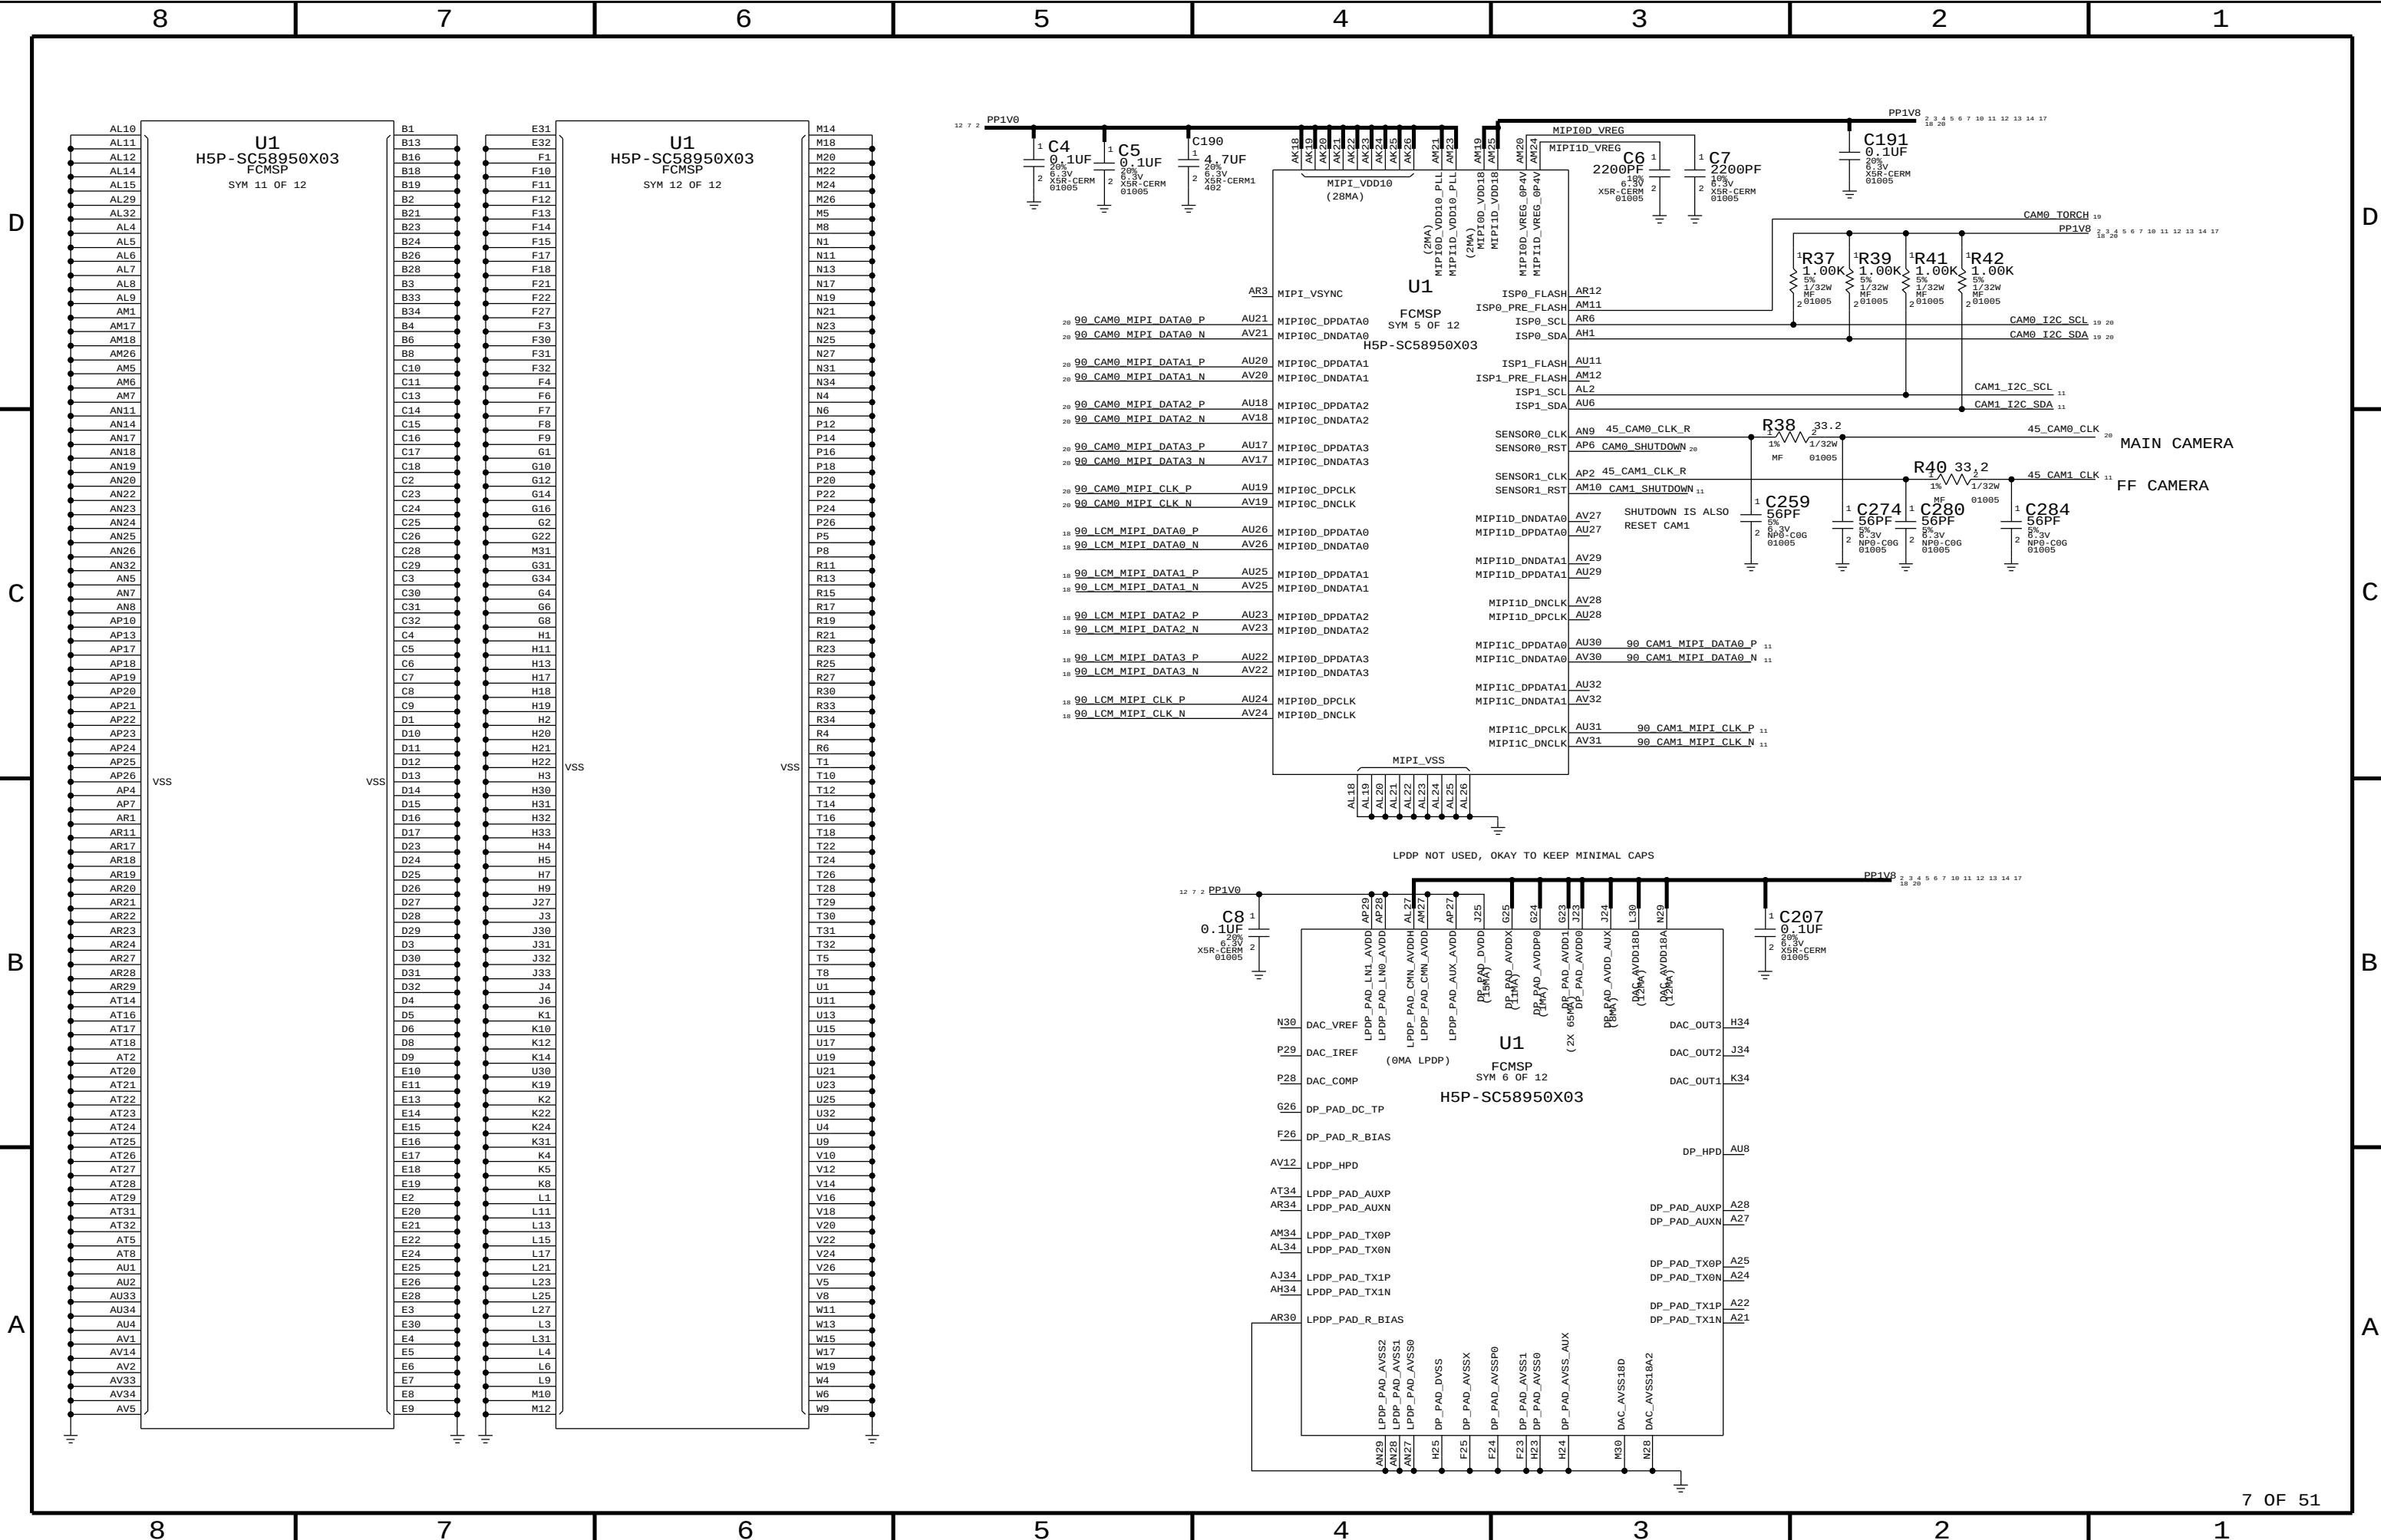



CS42L65 AUDIO CODEC

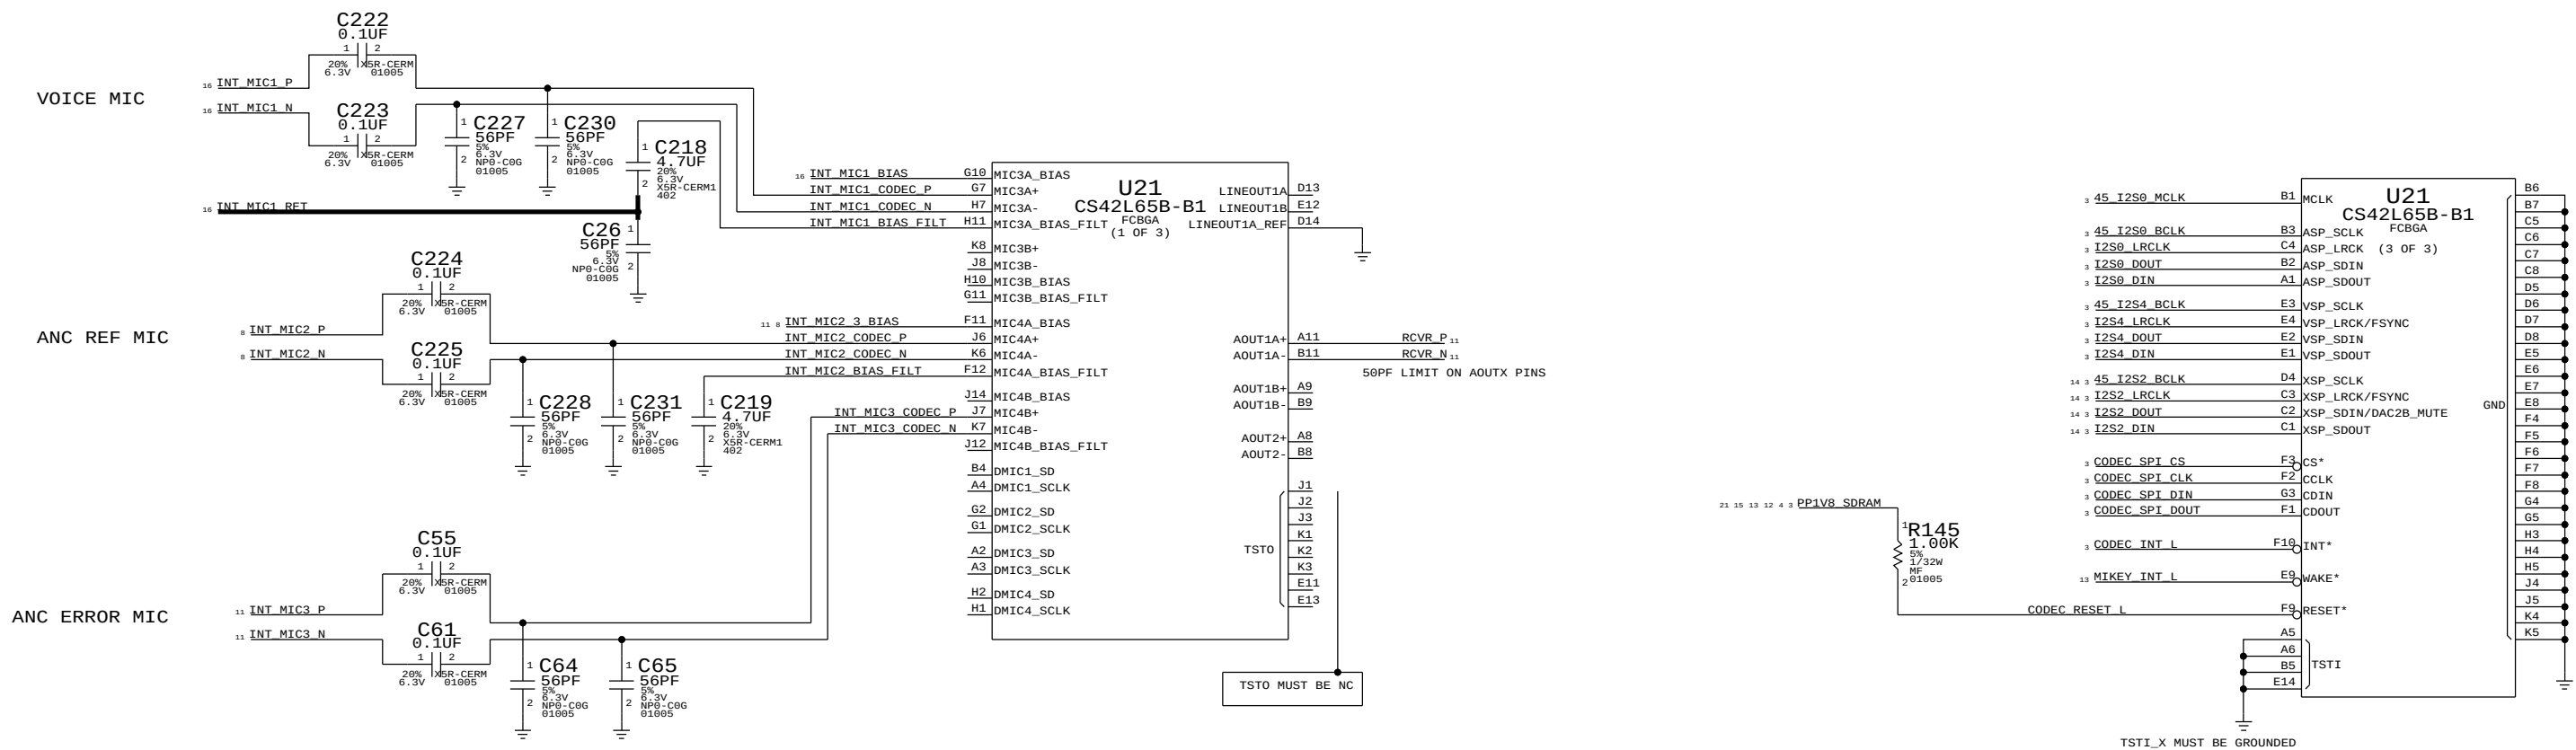

CS42L65 AUDIO CODEC

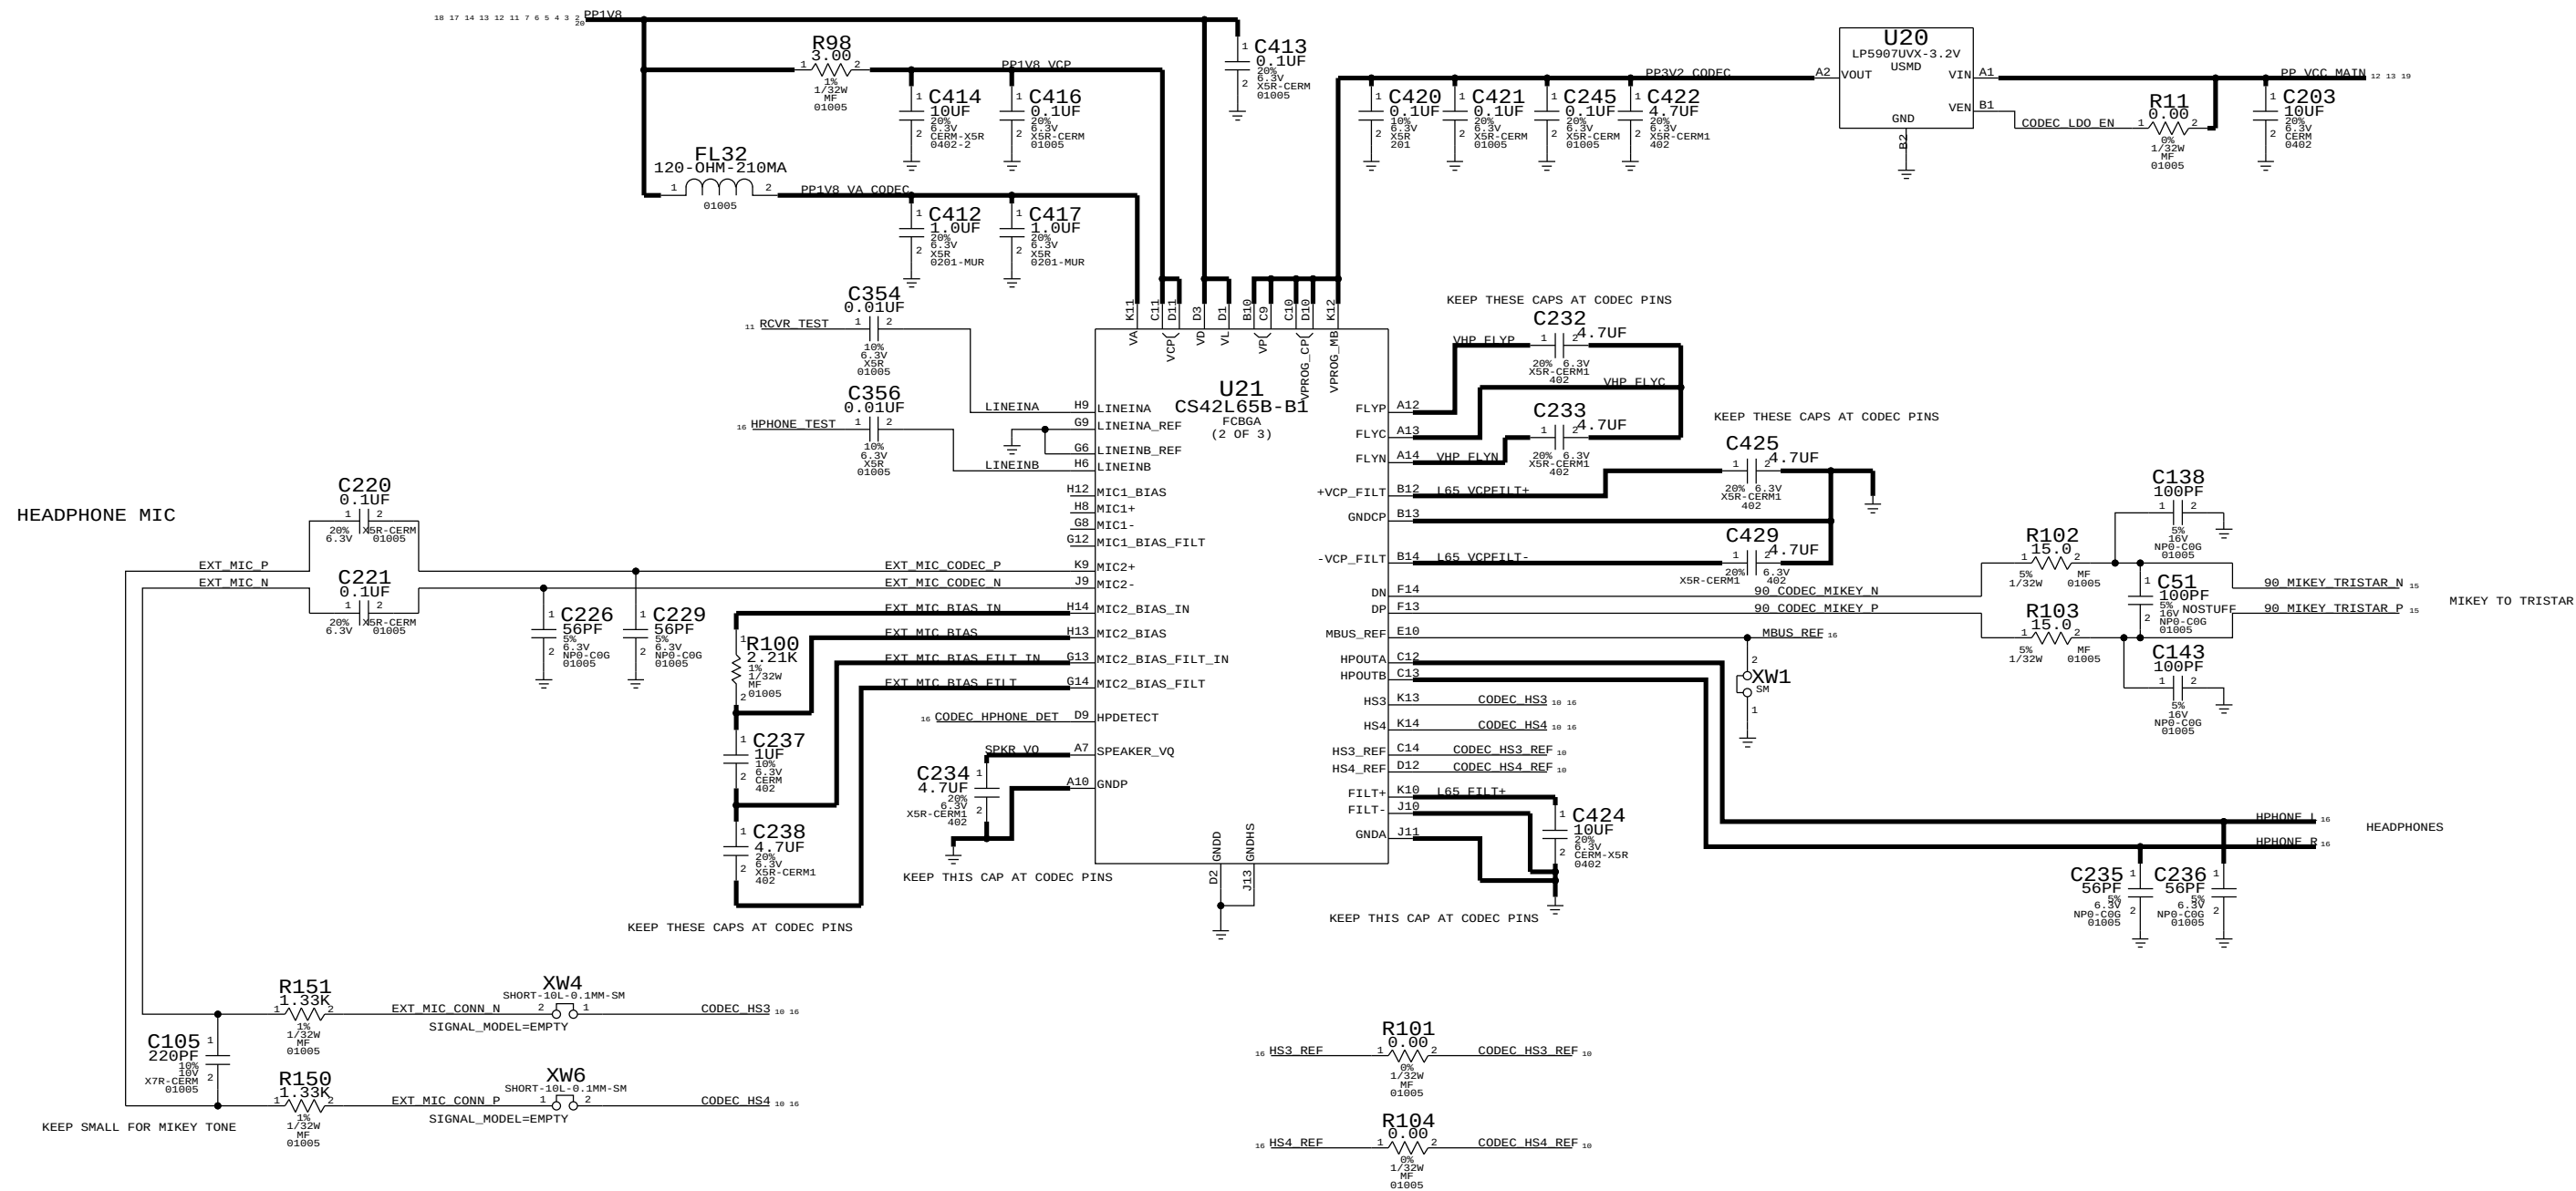


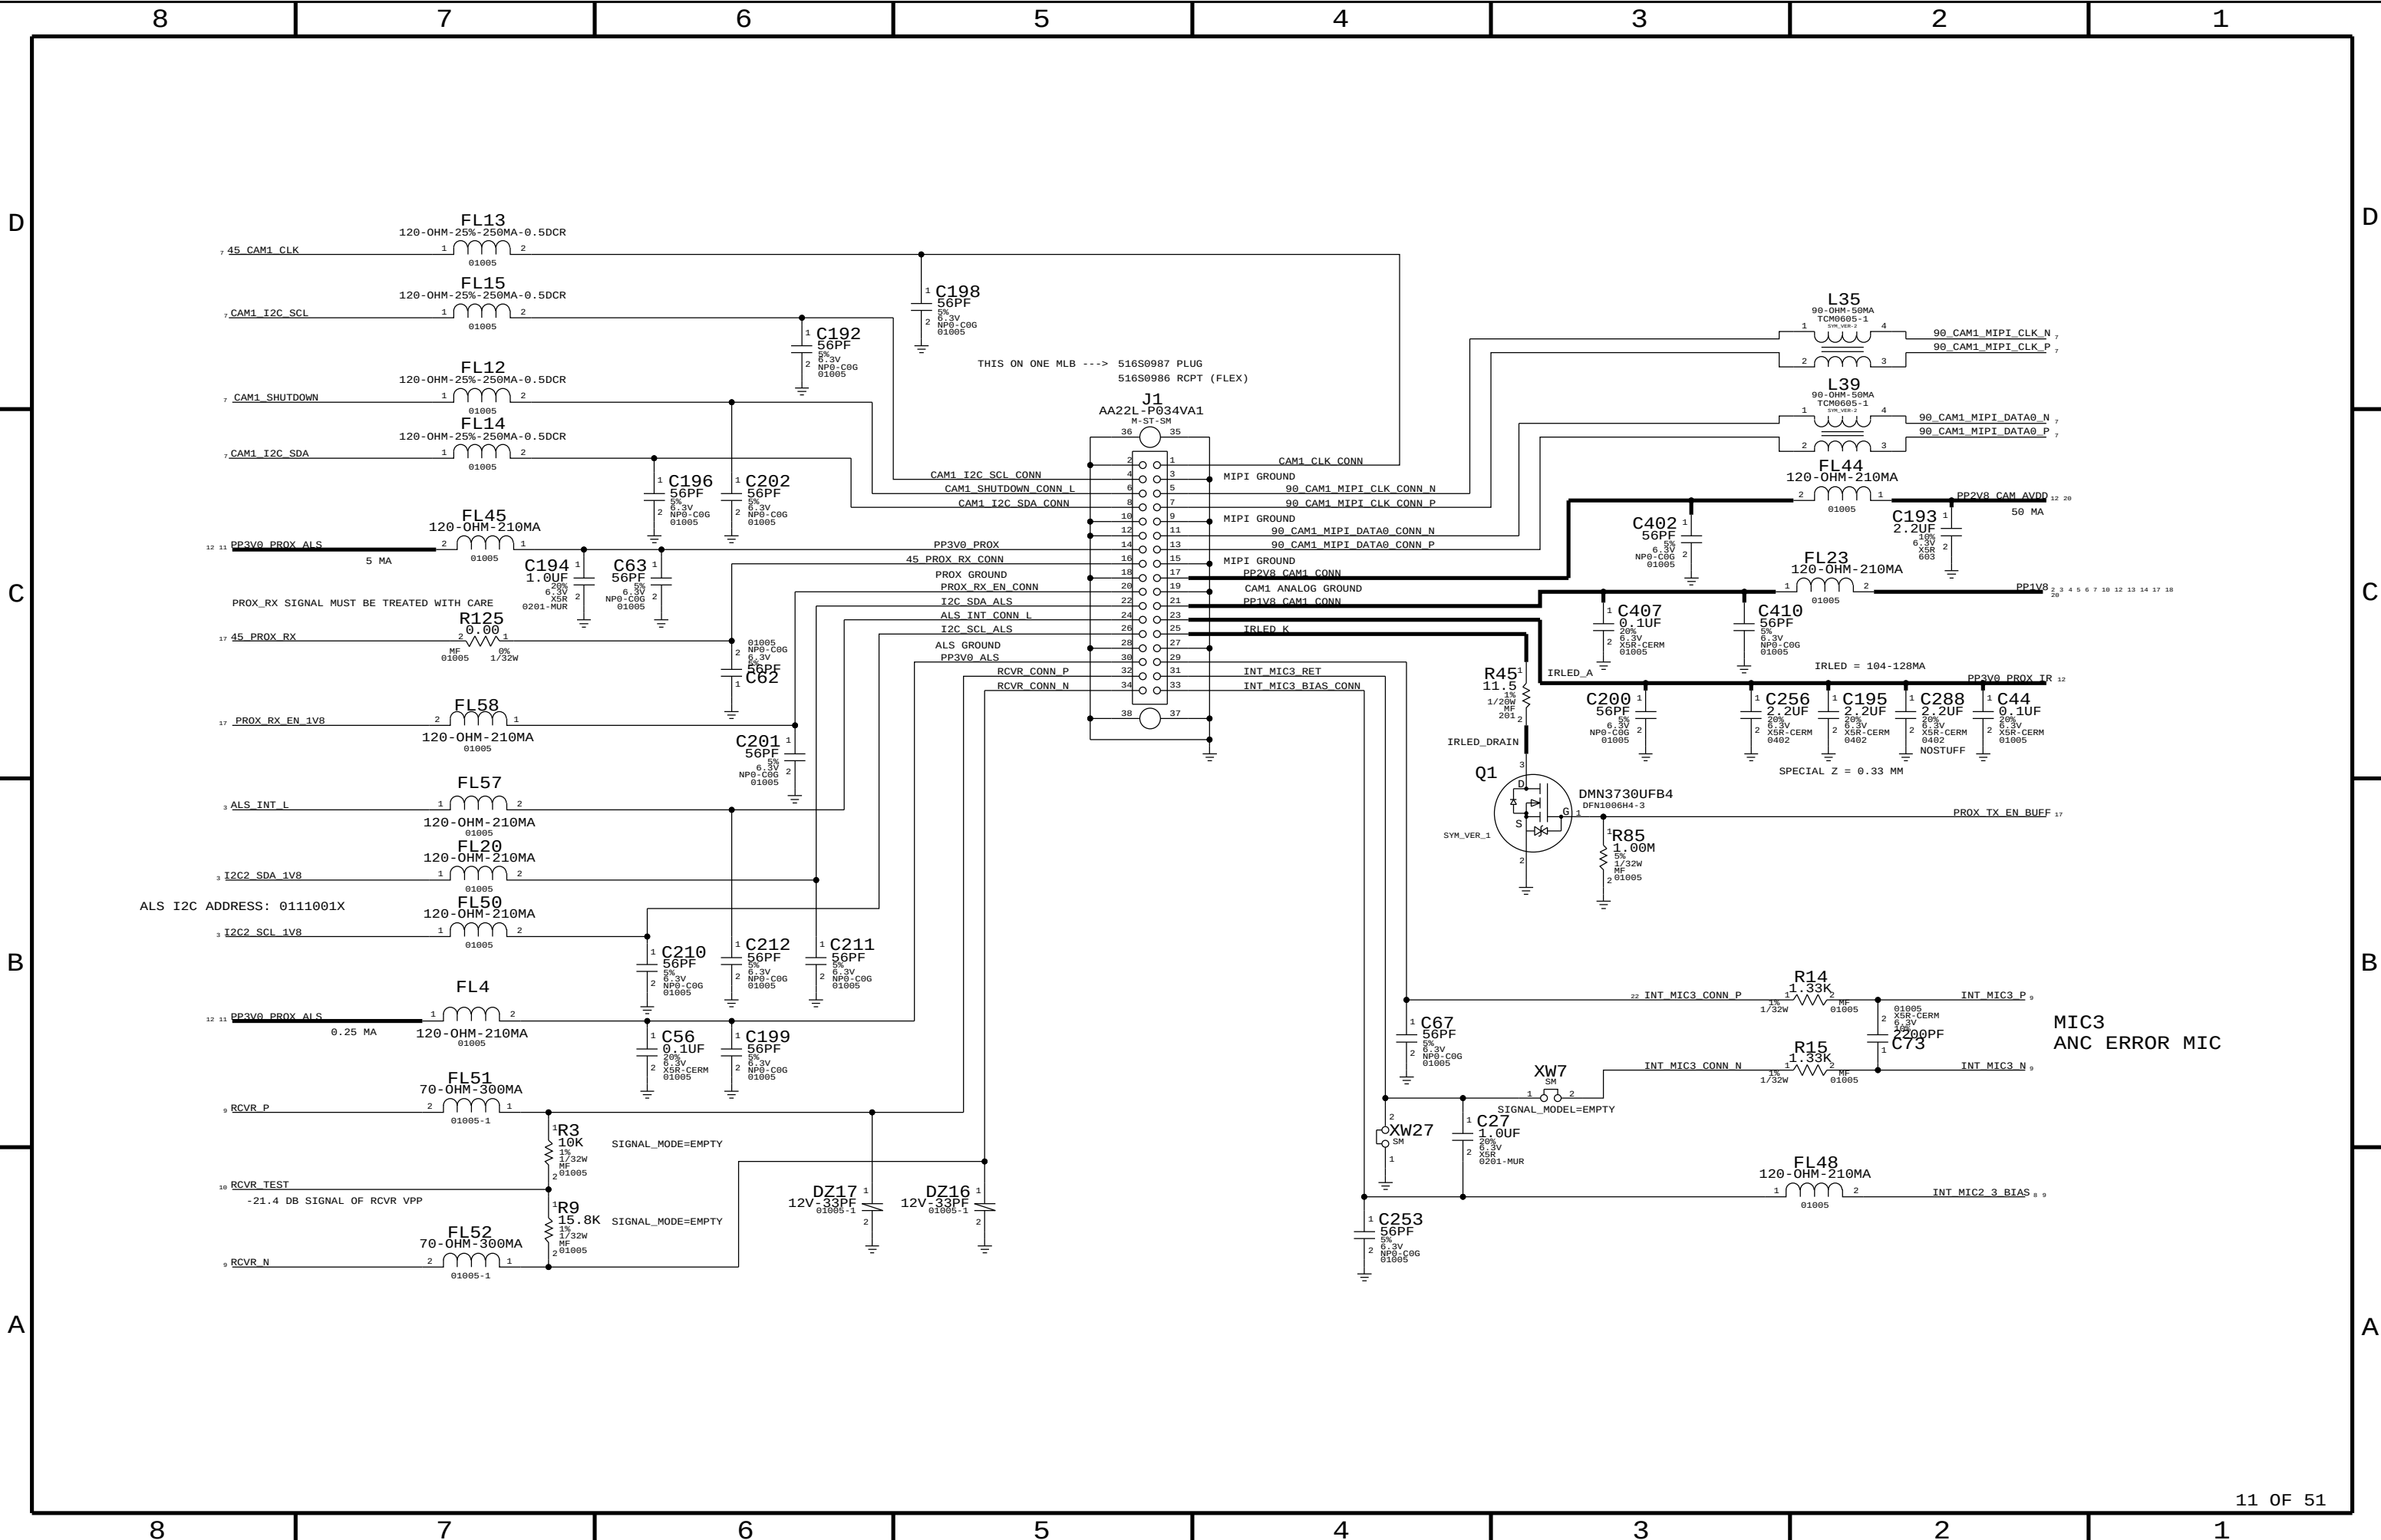

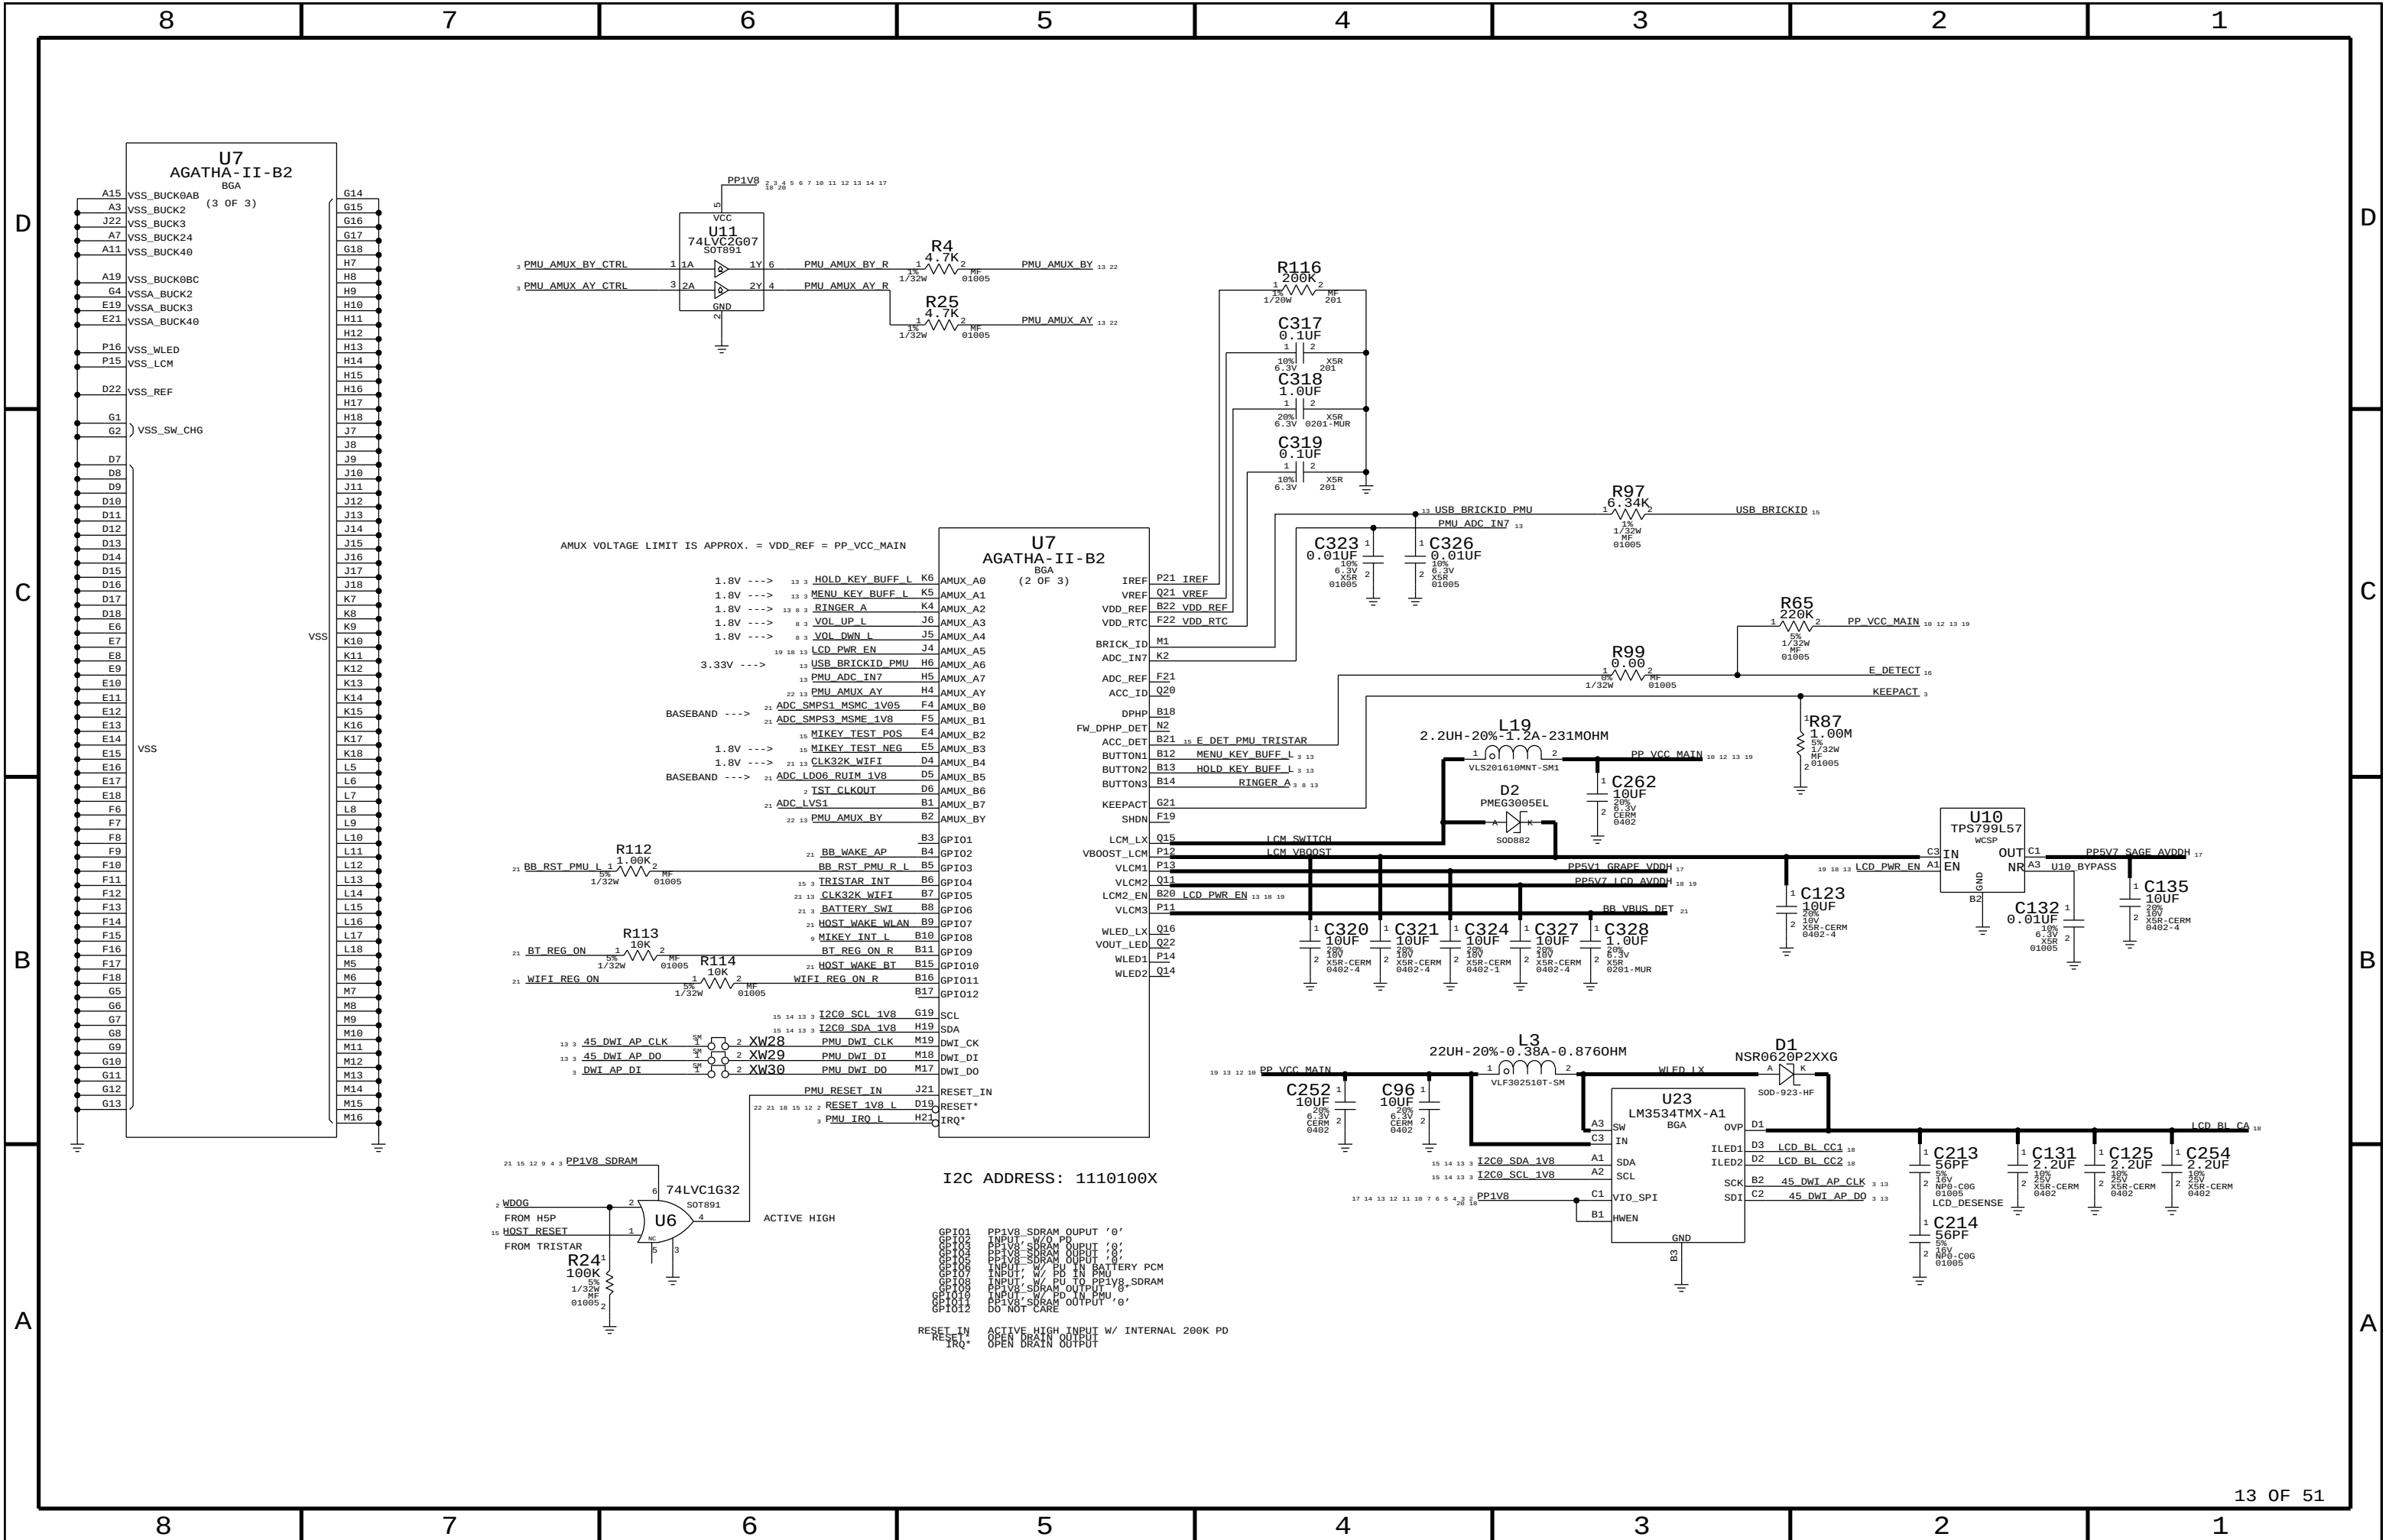

SPEAKER AMP


I2C ADDRESS: 1000000X

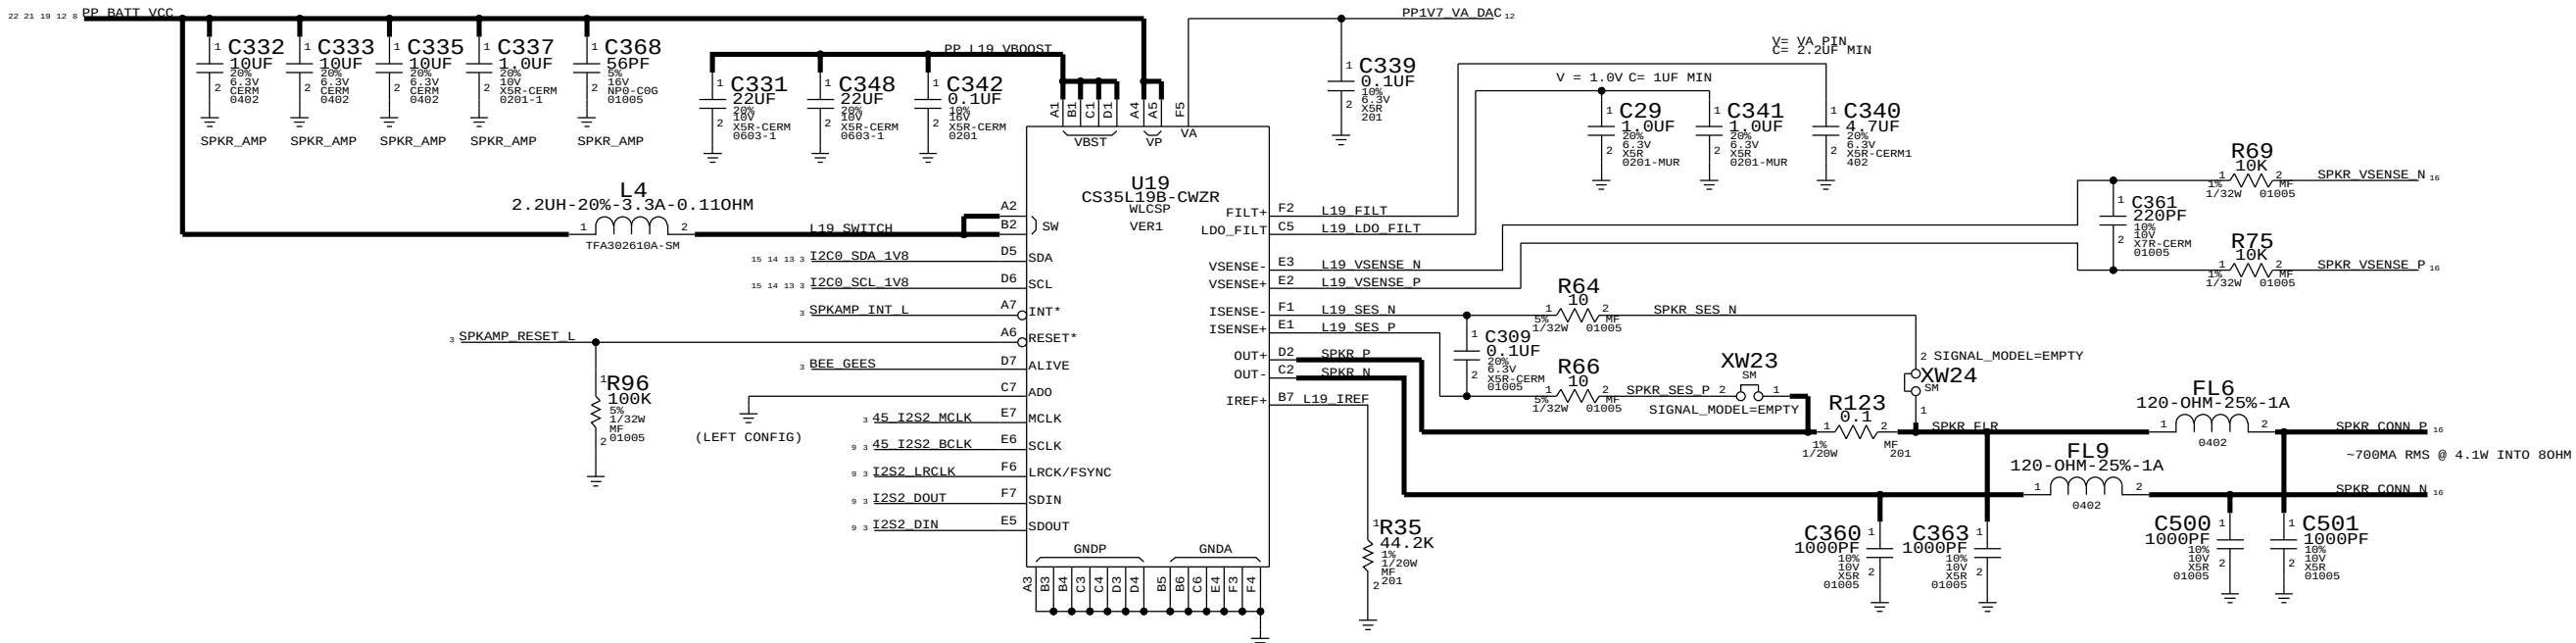

THESE PARTS OUTSIDE OF SHIELD

ACCELEROMETER


I2C ADDRESS: 0011101X

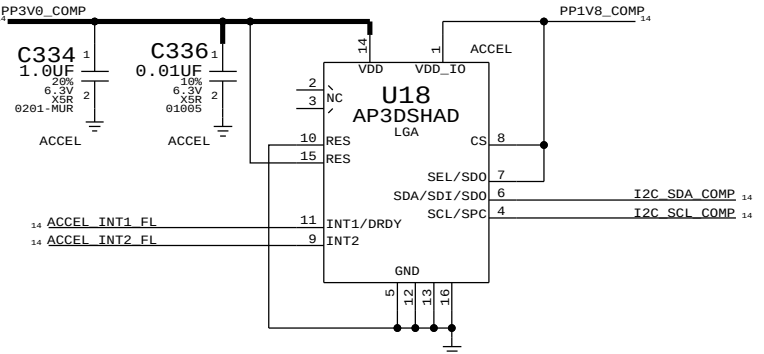


COMPASS2

I2C ADDR: 0001100X

COMPASS POP FOOTPRINT: 998-5120
COMPASS DEVICE: 338S1014

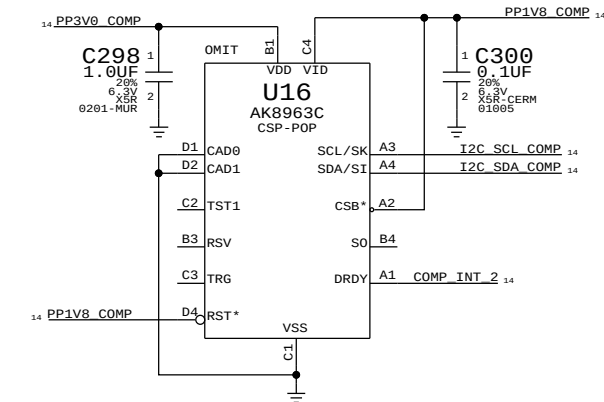


COMPASS SCREW IS RF GROUND






PART#	QTY	DESCRIPTION	REFERENCE DESIGNATOR(S)	BOM OPTION
639-4824	1	PCB, COMPASS POP, N41	U16	?


GYRO 20KHZ


I2C ADDRESS: 1101010X

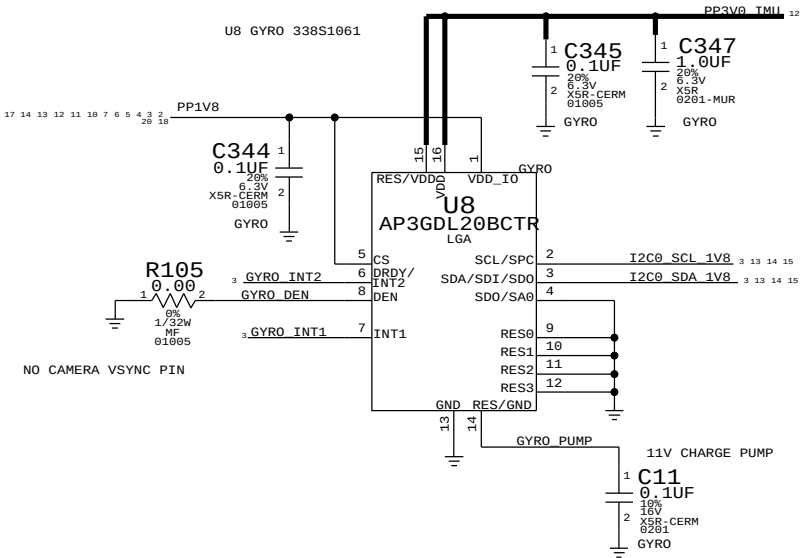

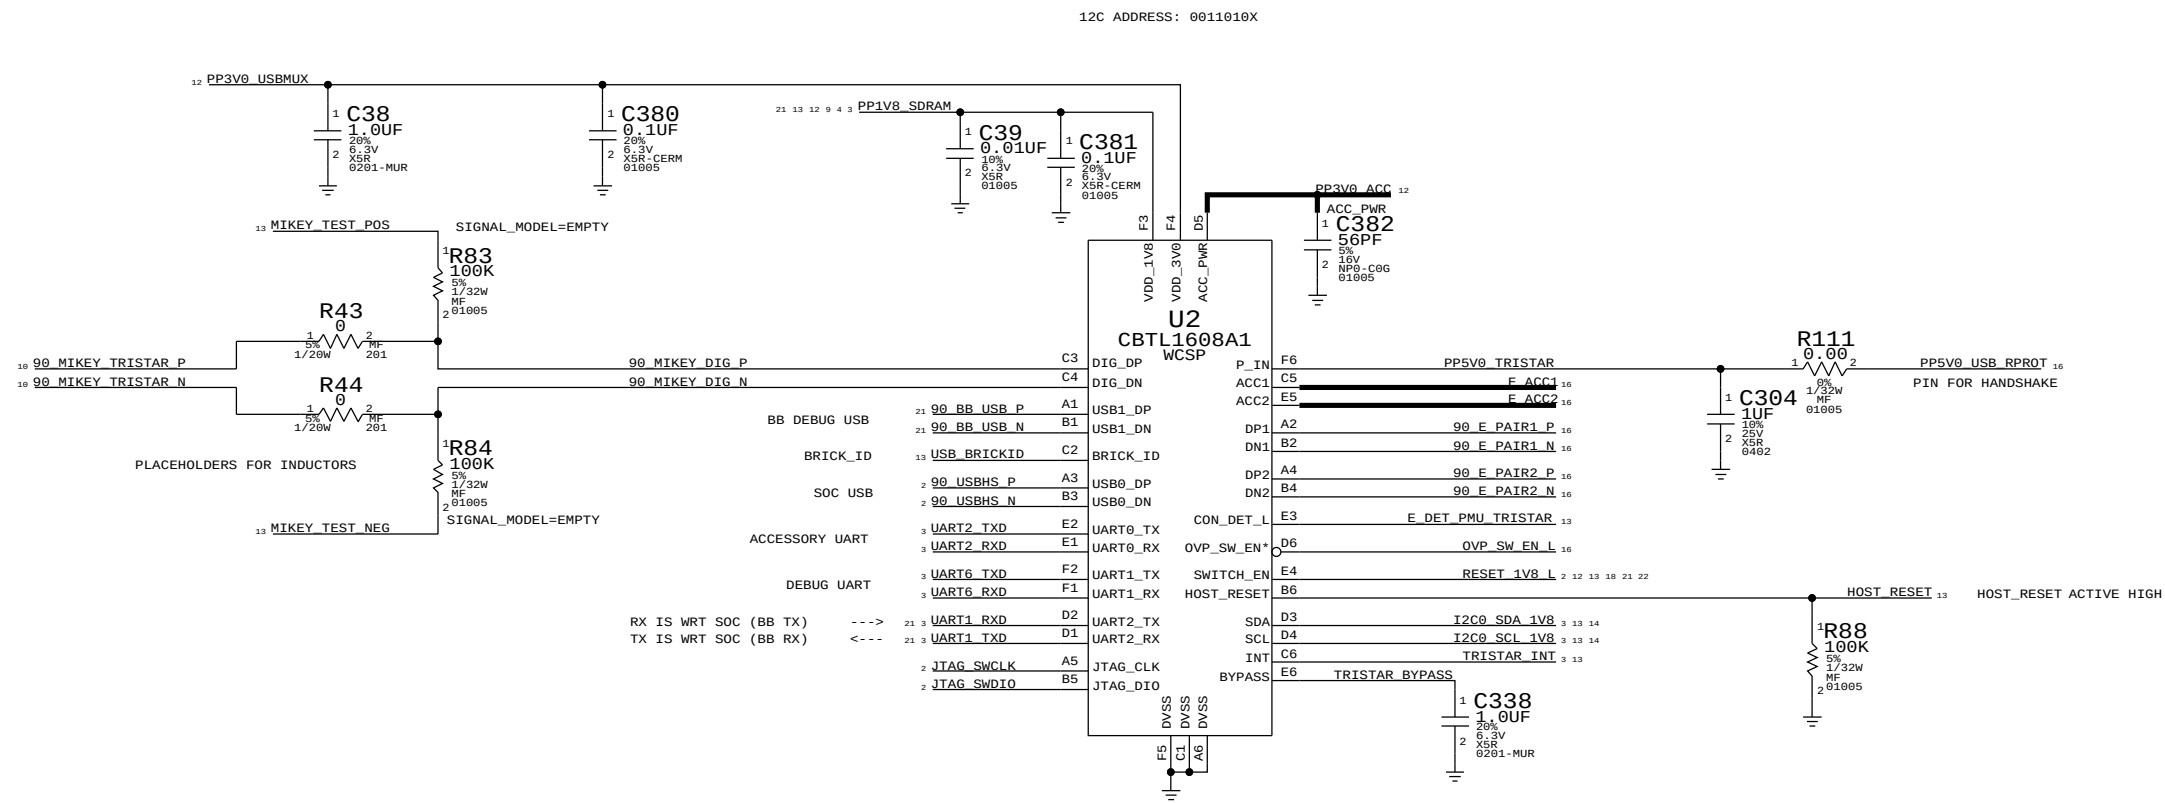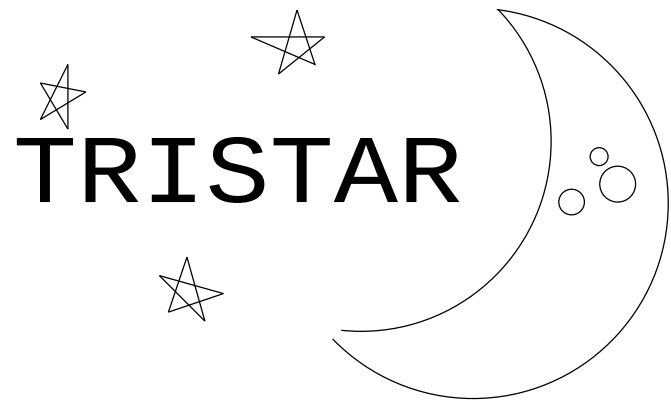

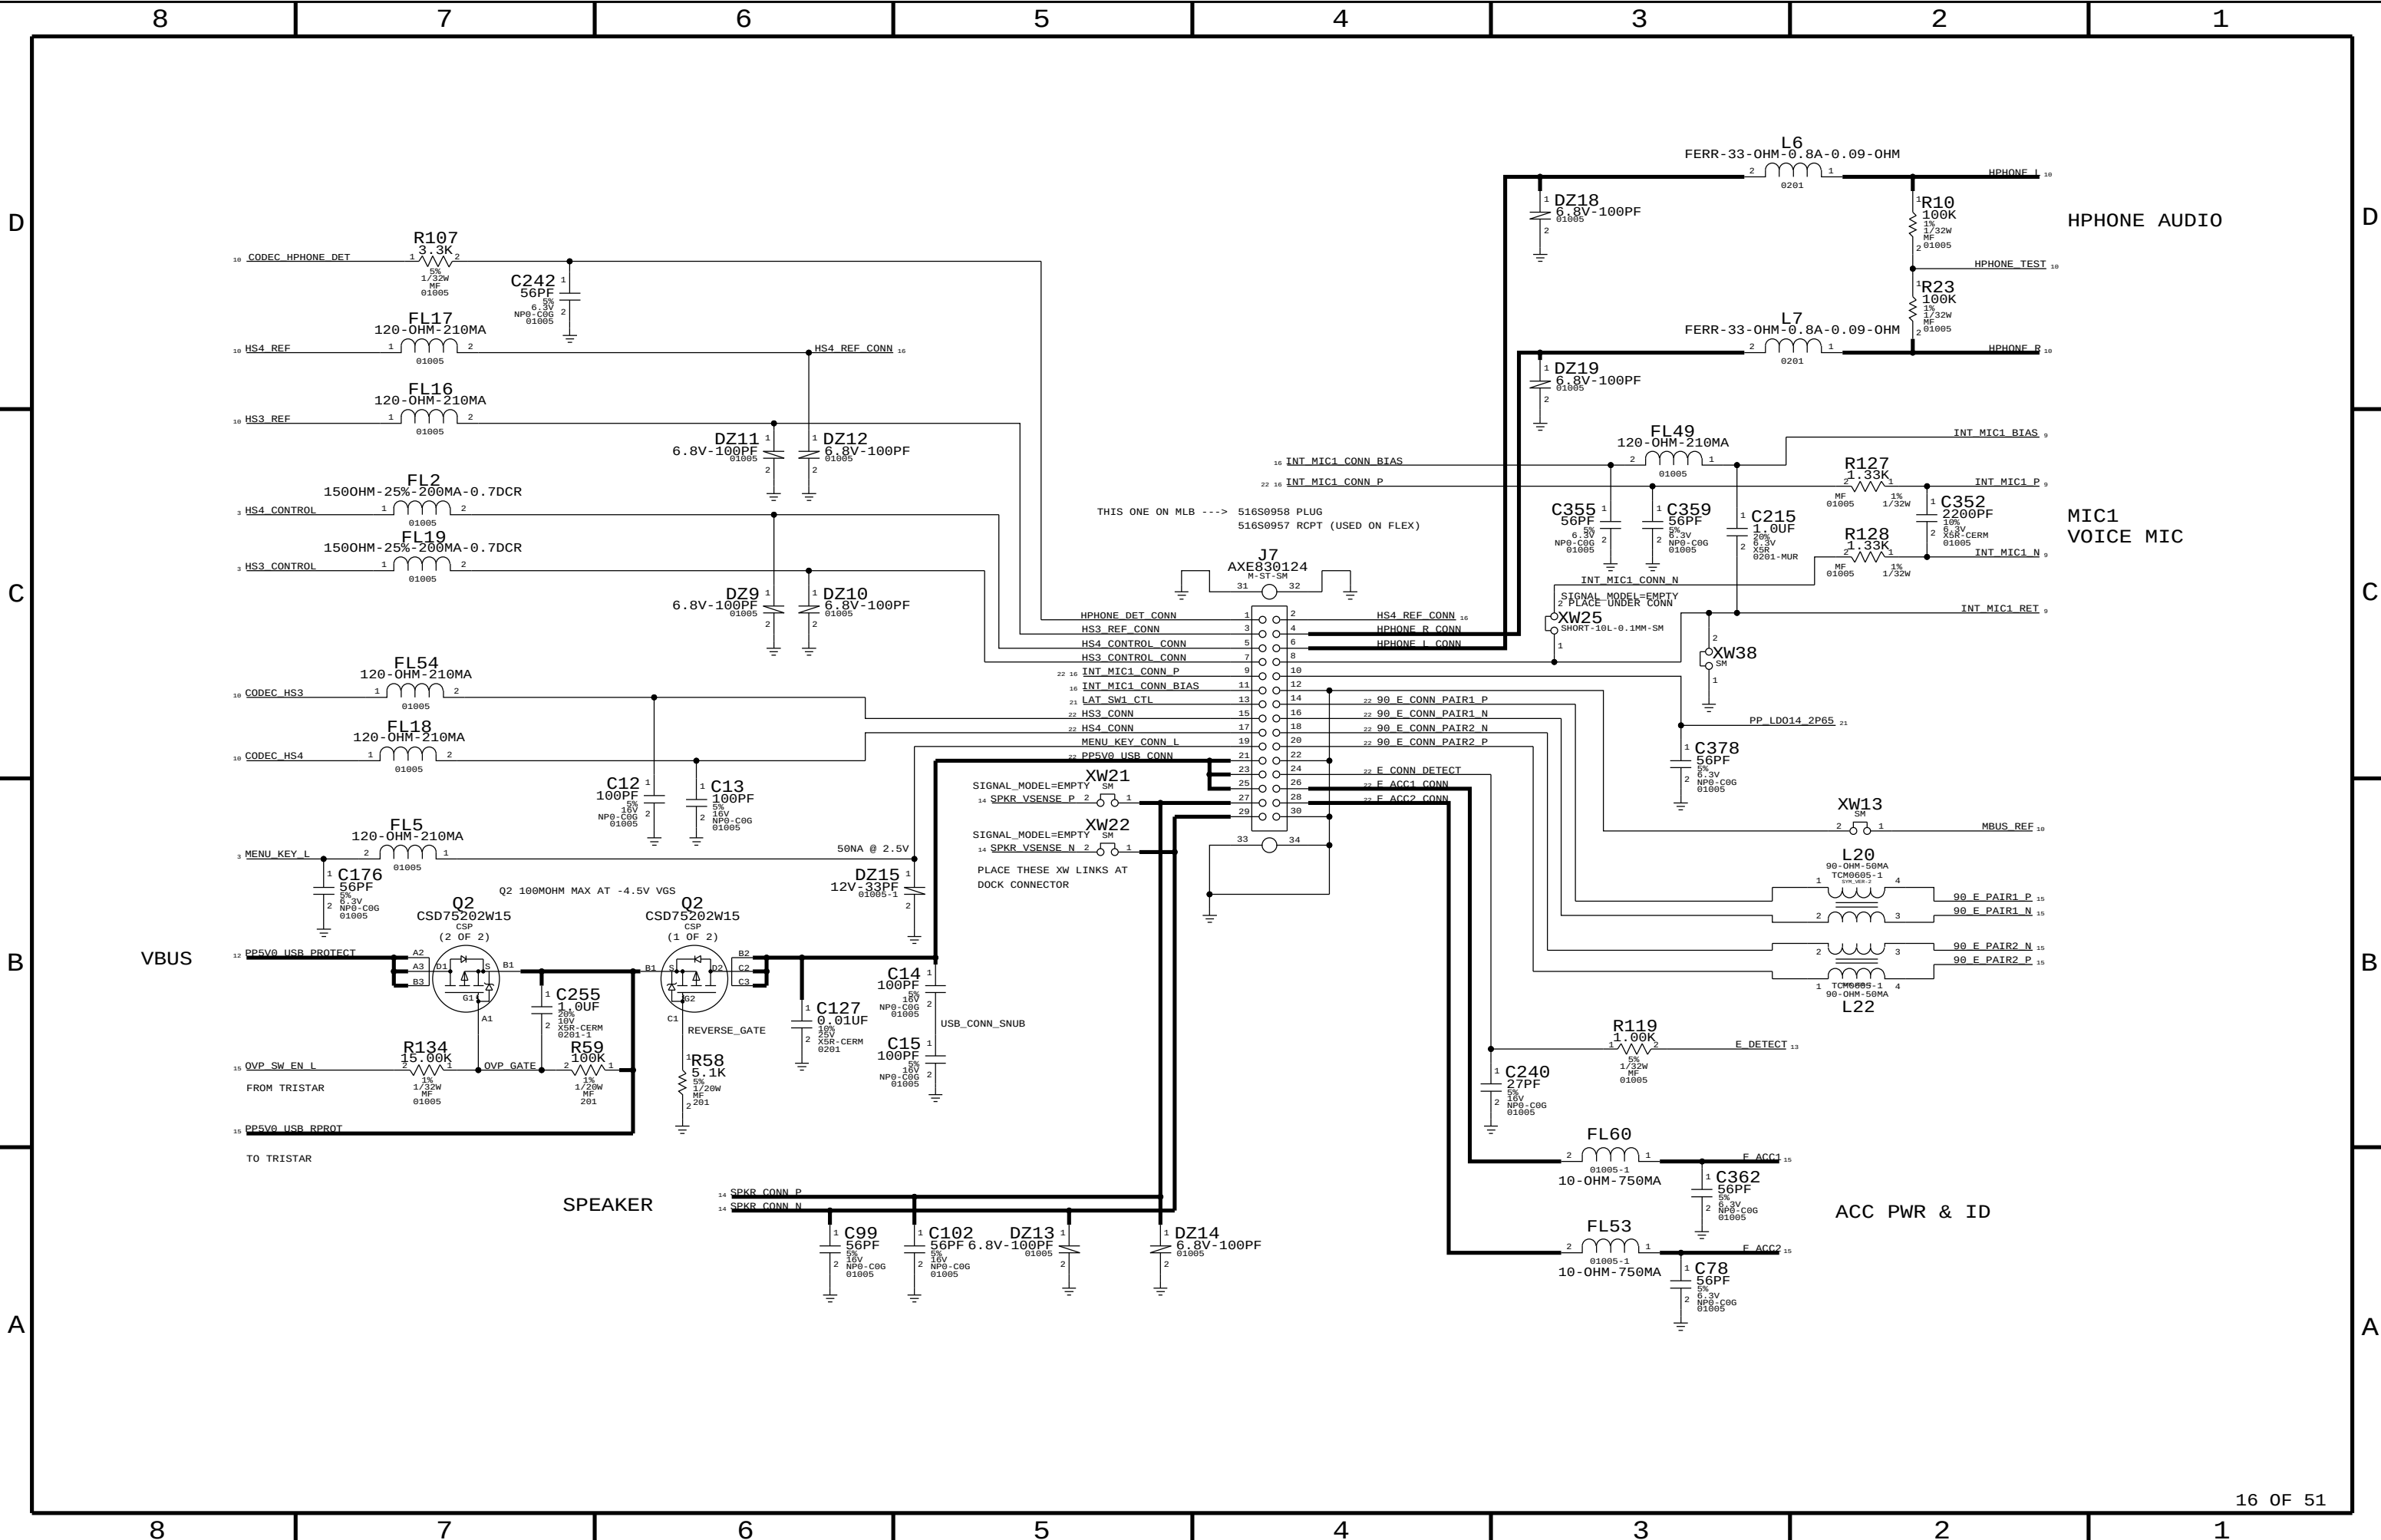

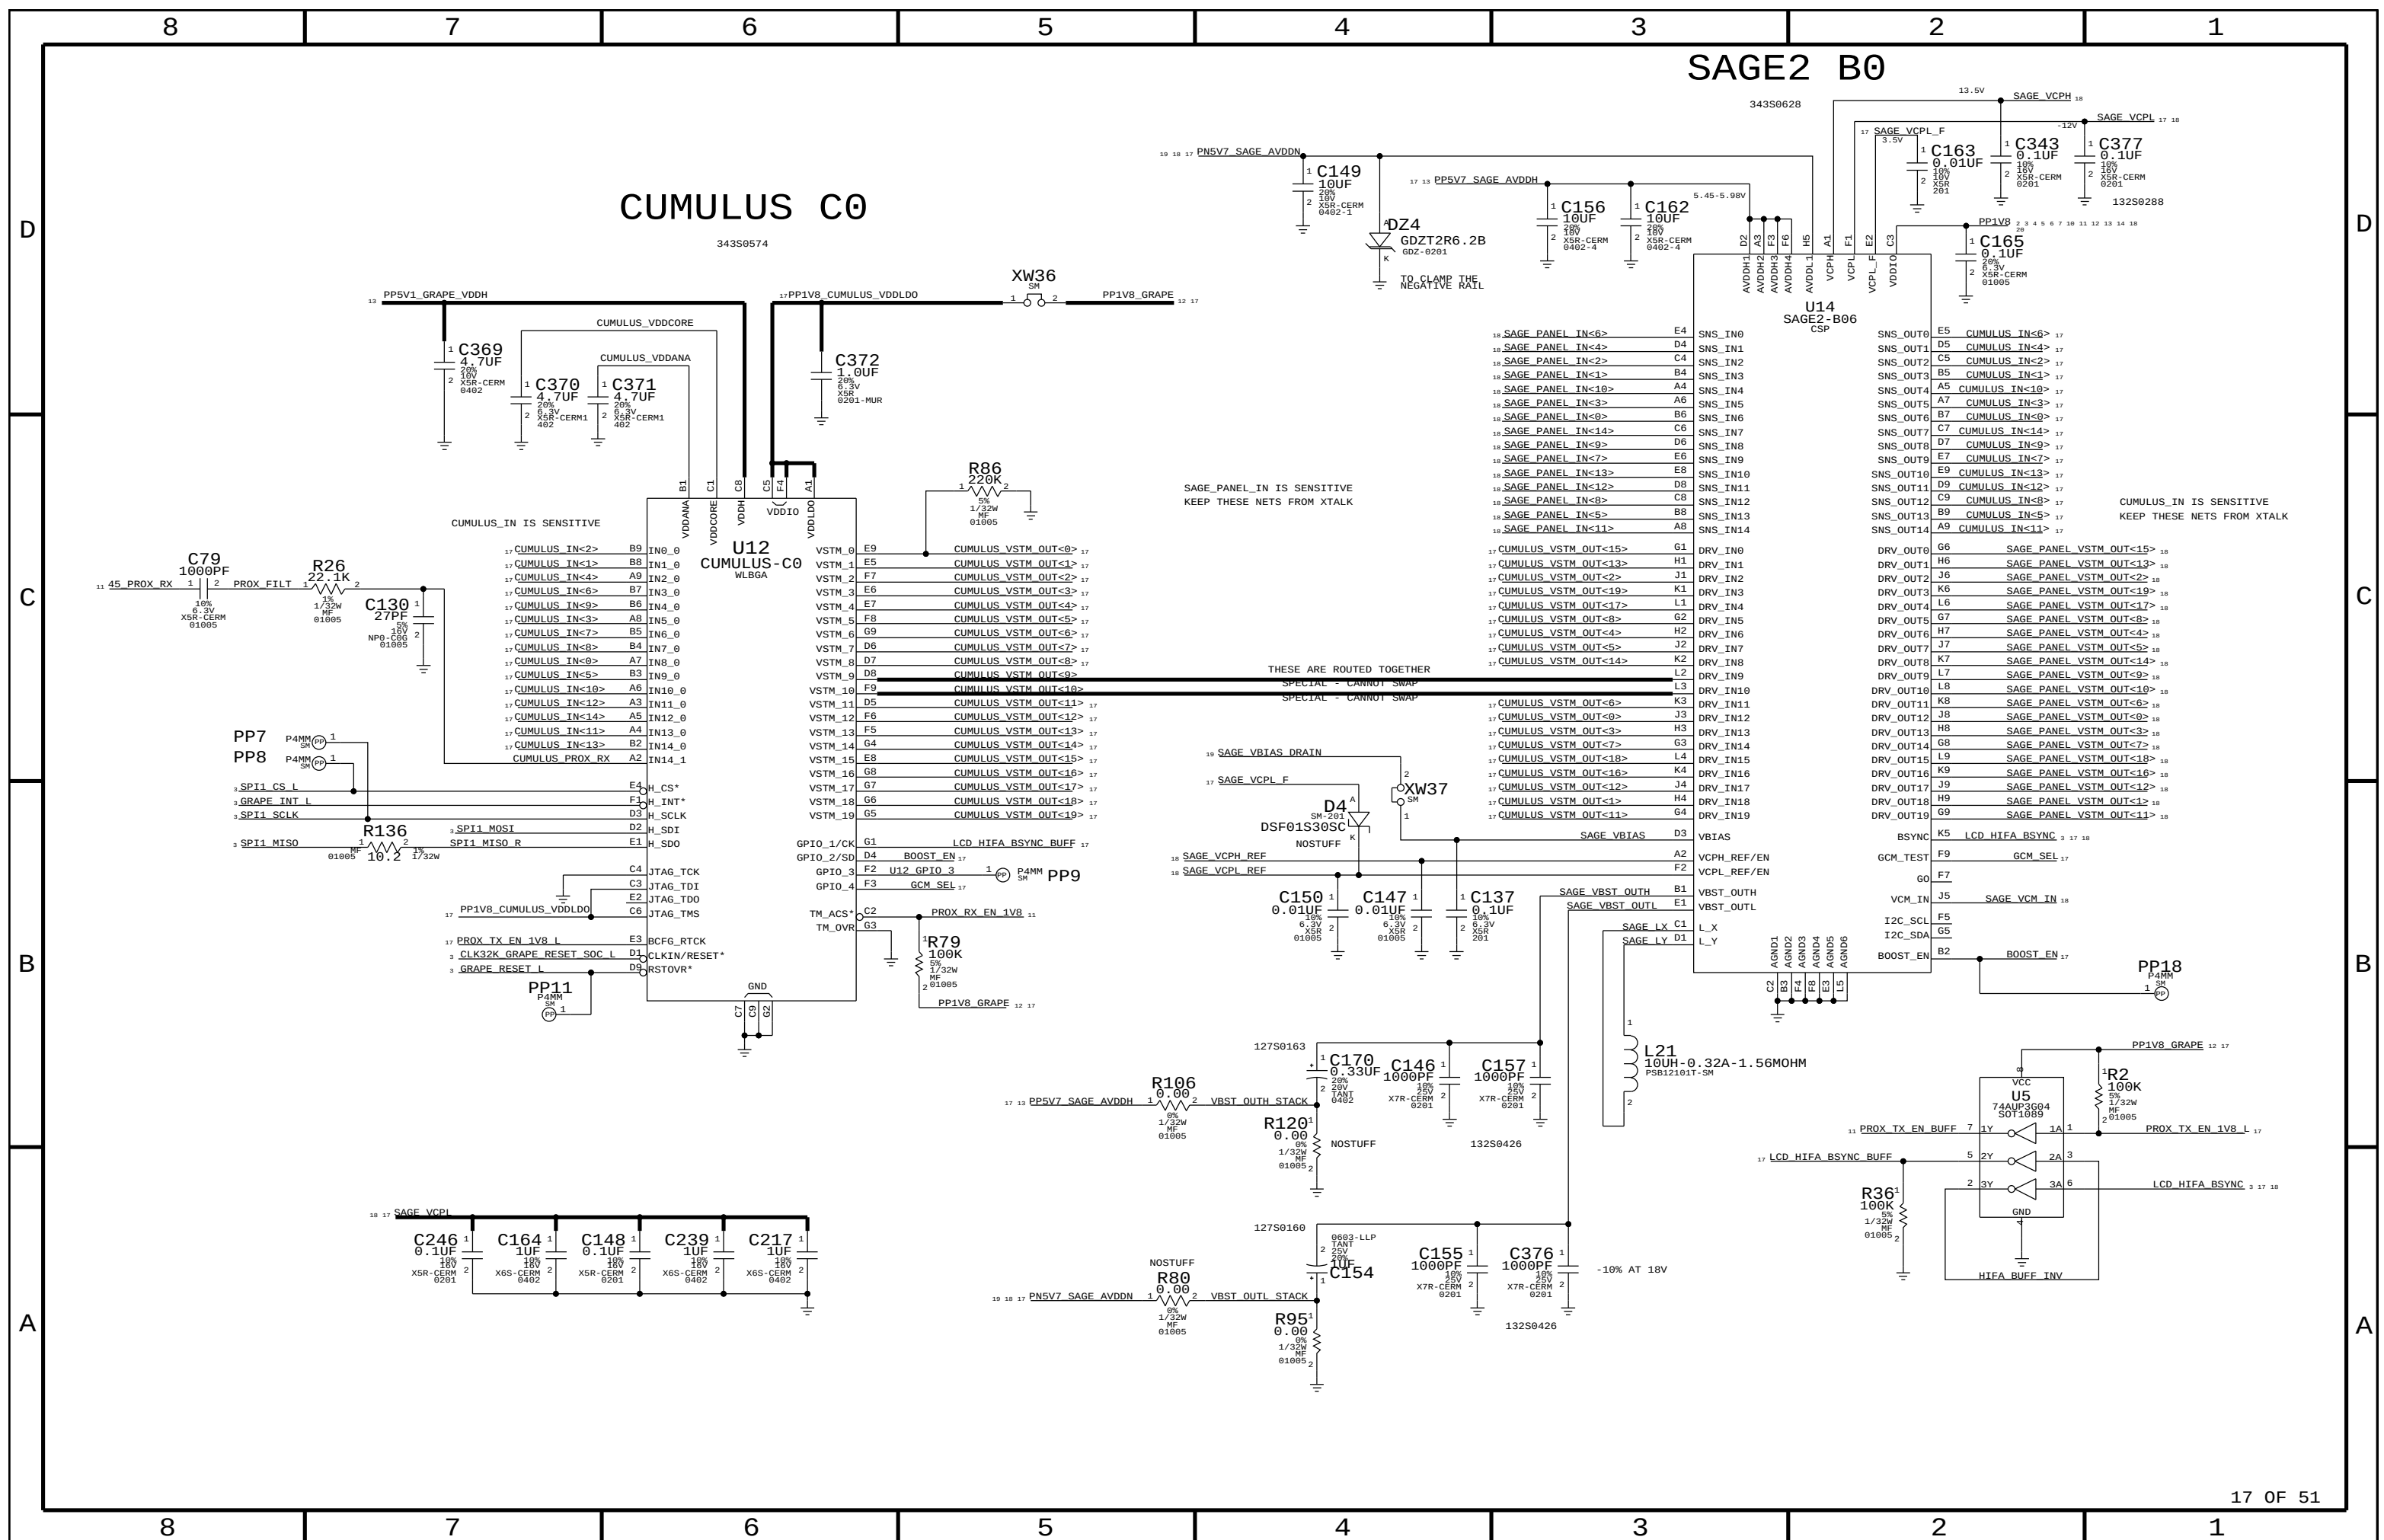

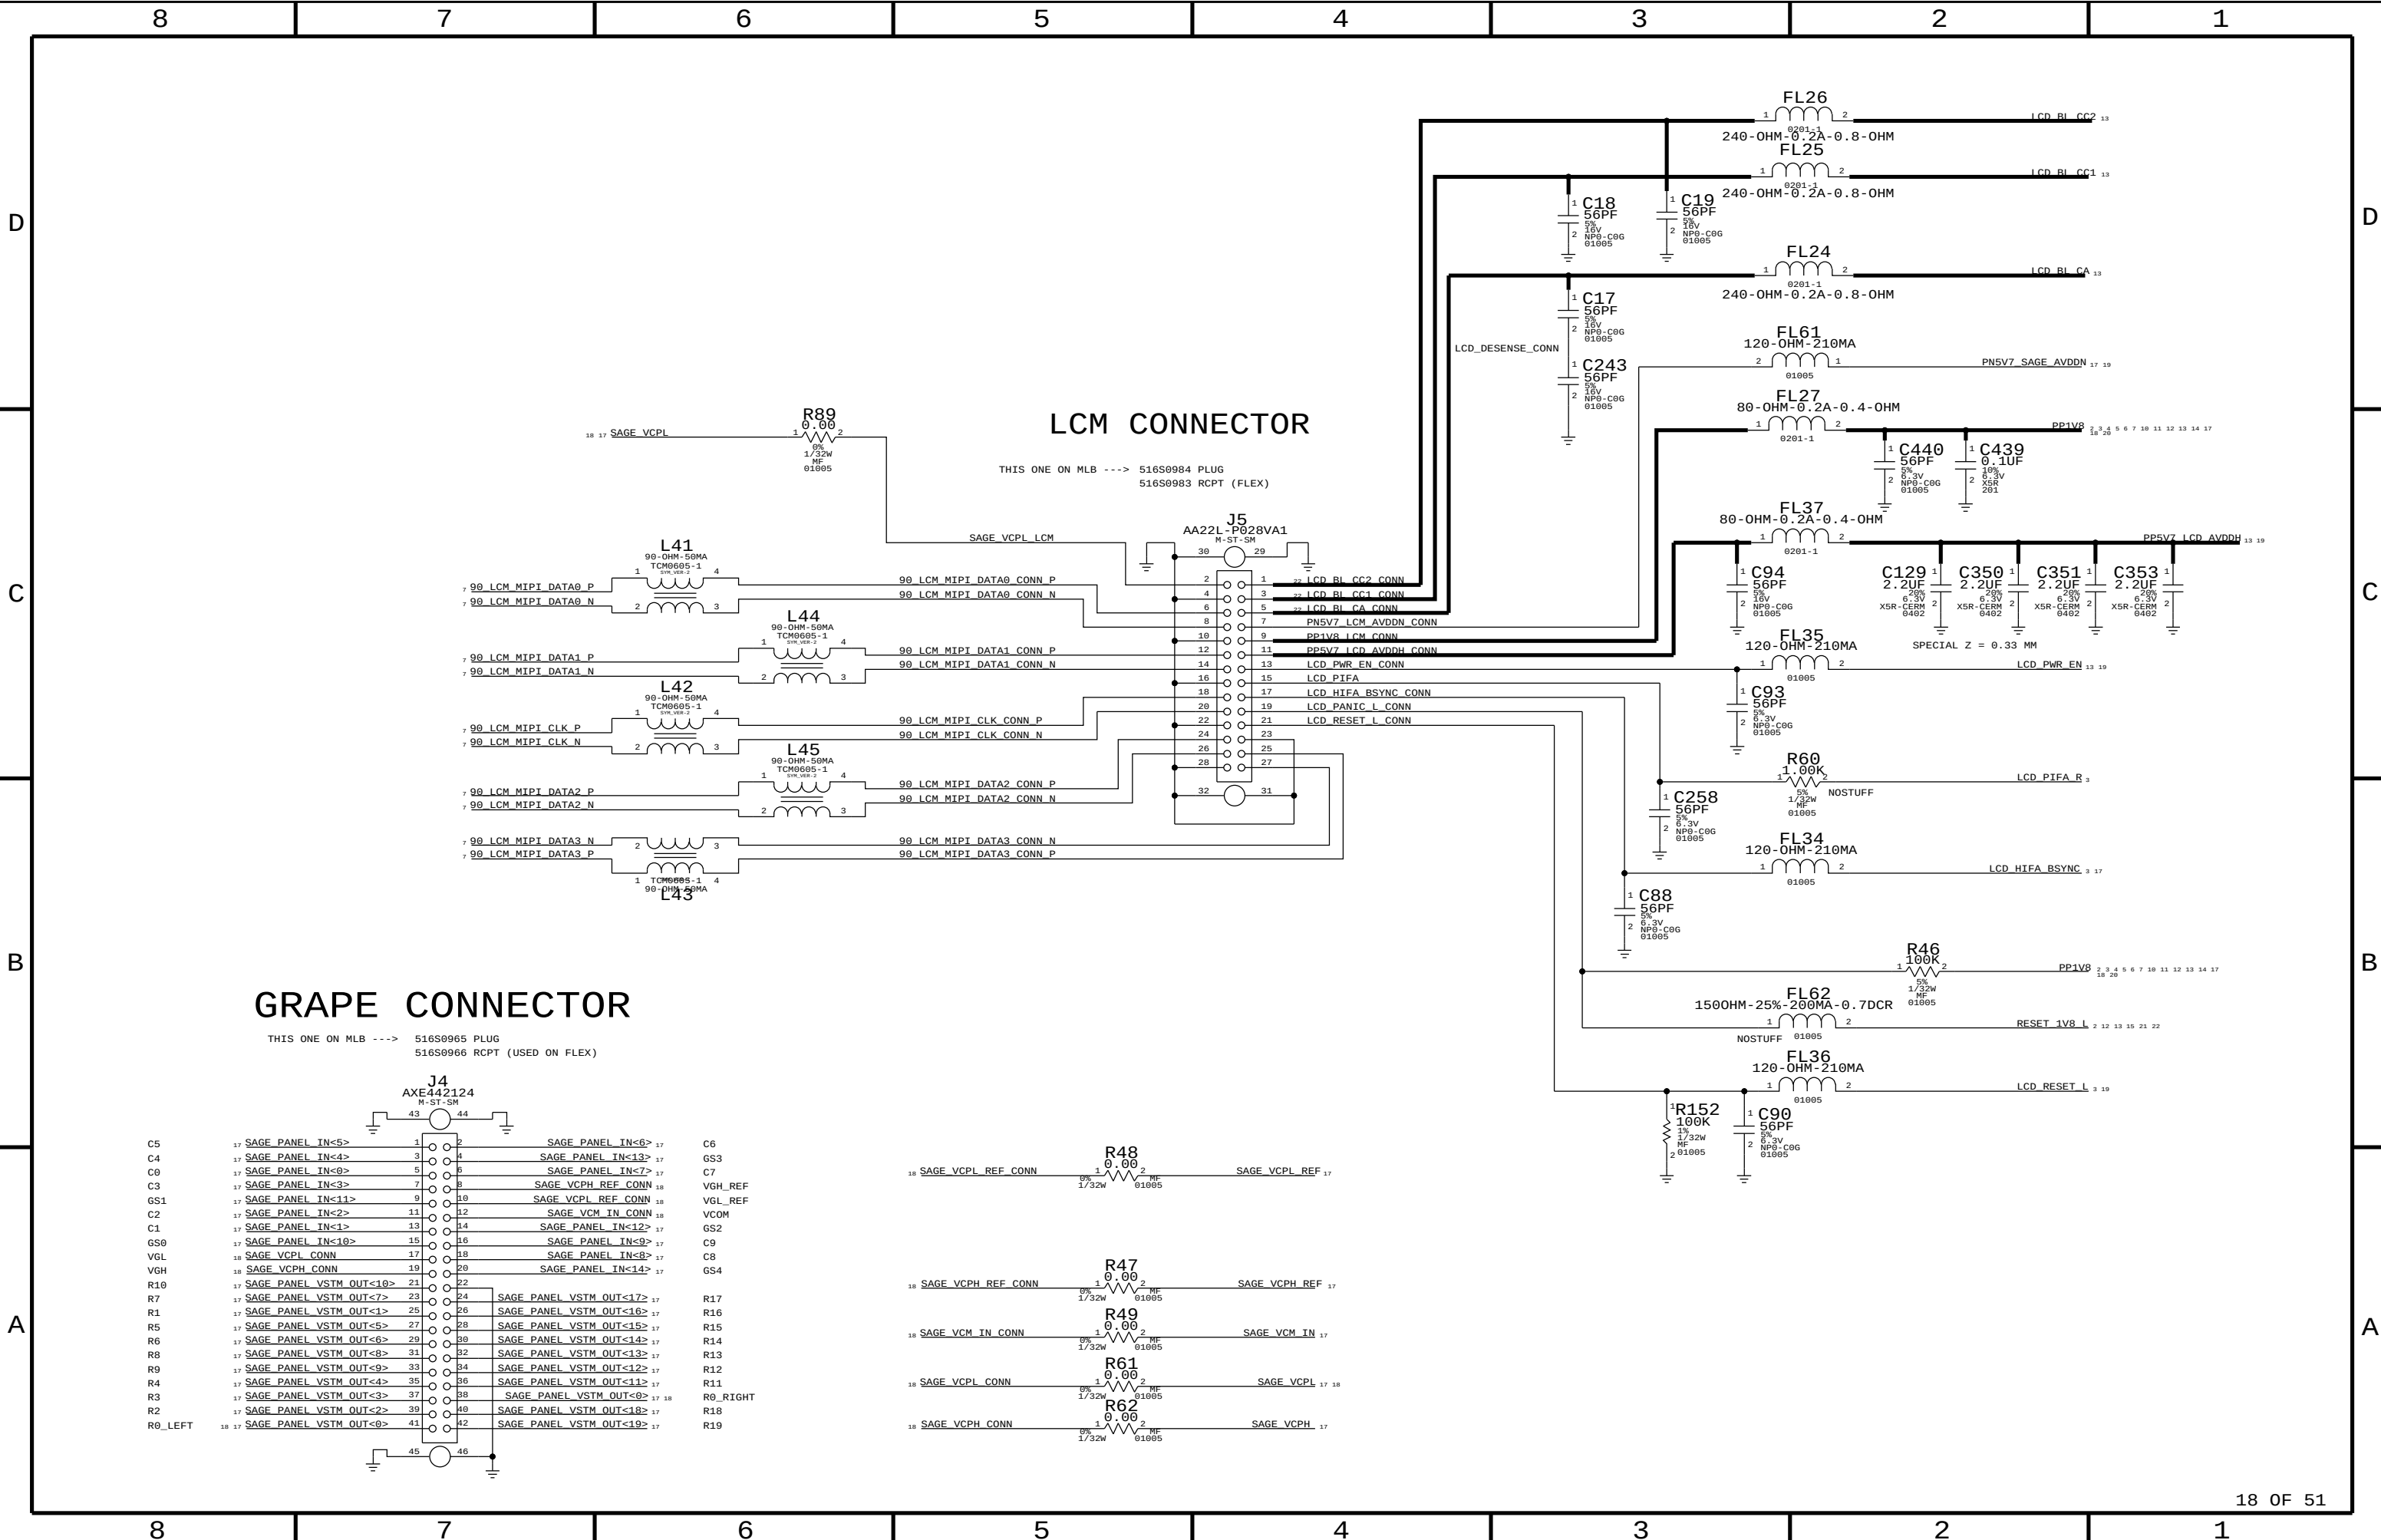

LCM CONNECTOR

THIS ONE ON MLB ---> 516S0984 PLUG
516S0983 RCPT (FLEX)

GRAPE CONNECTOR

THIS ONE ON MLB ---> 516S0965 PLUG
516S0966 RCPT (USED ON FLEX)

D

C

B

A

D


C

B


A

LED DRIVER


I2C ADDRESS: 1100011X

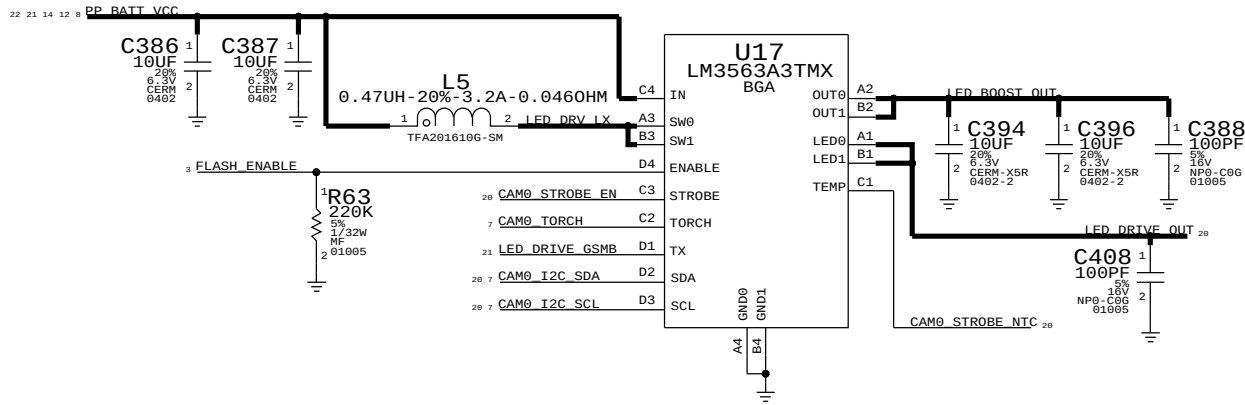


NEGATIVE BOOST SUPPLY

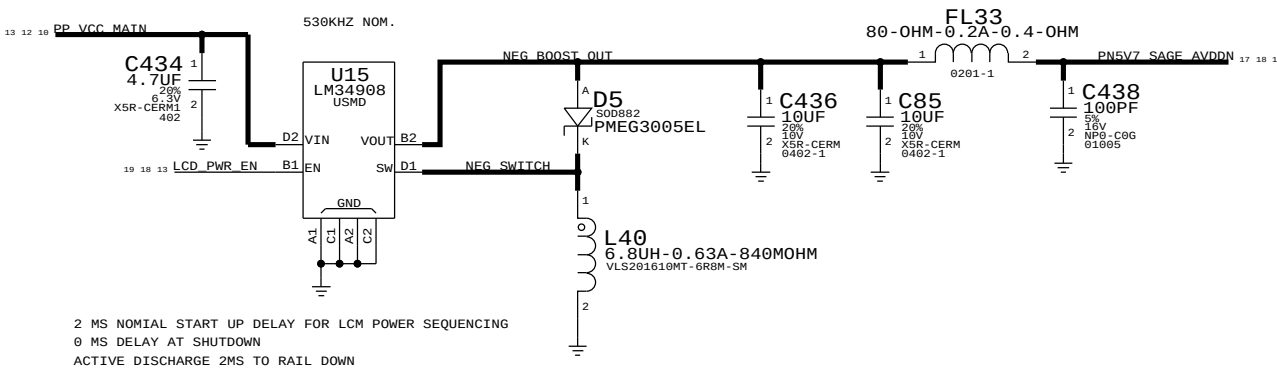

SAGE_VBIAS DISCHARGE

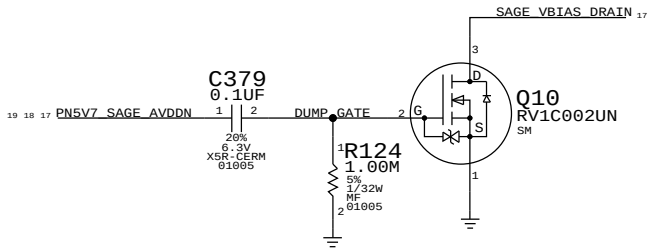


THIS CIRCUIT IS BEHIND THE SIM TRAY
INSIDE SHLD | OUSIDE SHLD

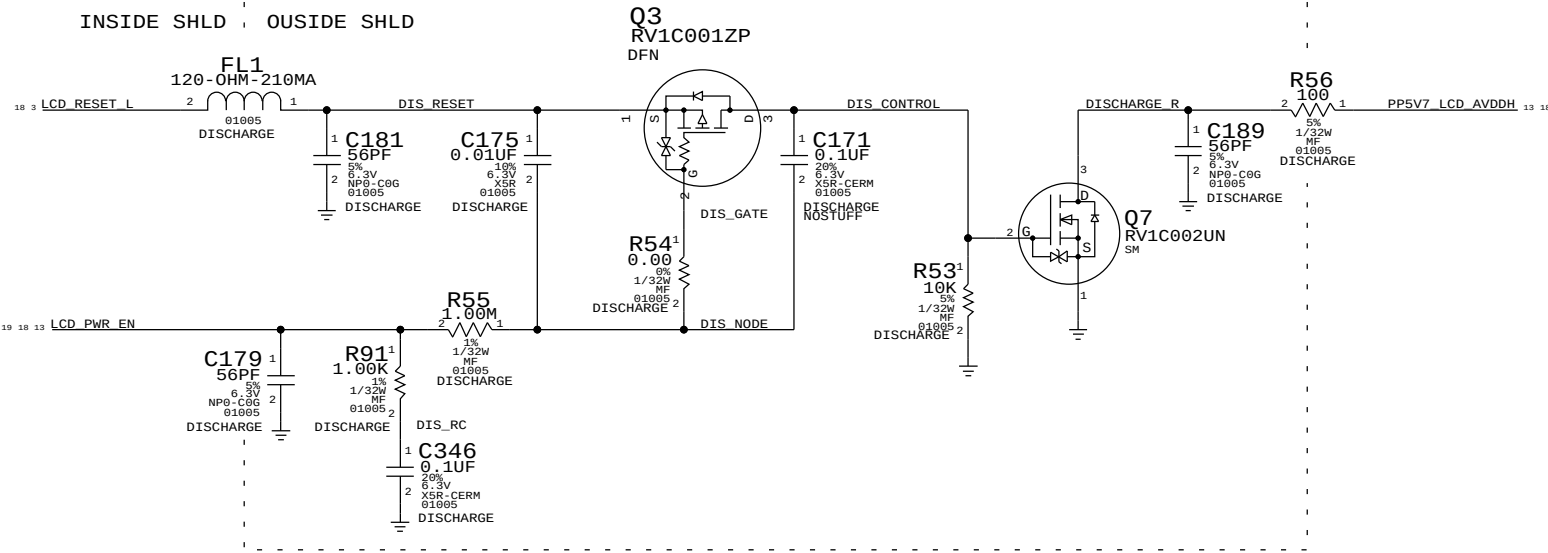


D




POWER TP

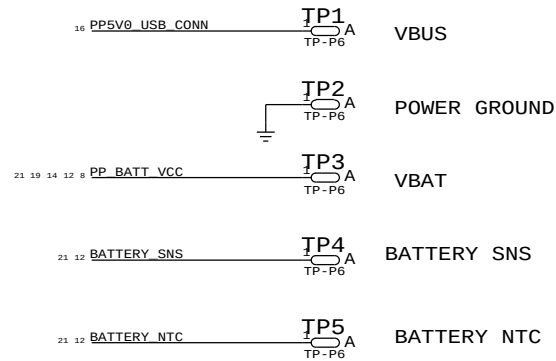


SUPER TP

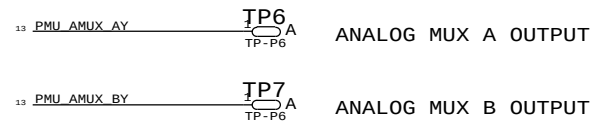


RESET




DFU




MIC AUDIO

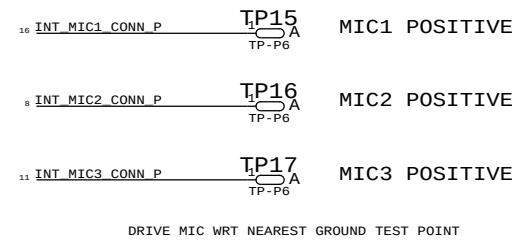


HEADPHONE MIC

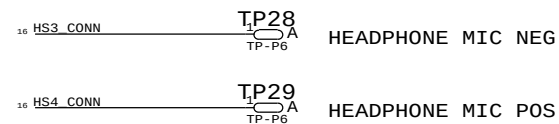

LCM BACKLIGHT

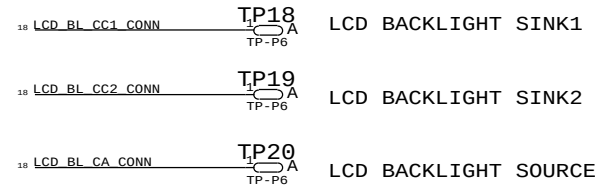

E75 - USB/UART/ID/POWER

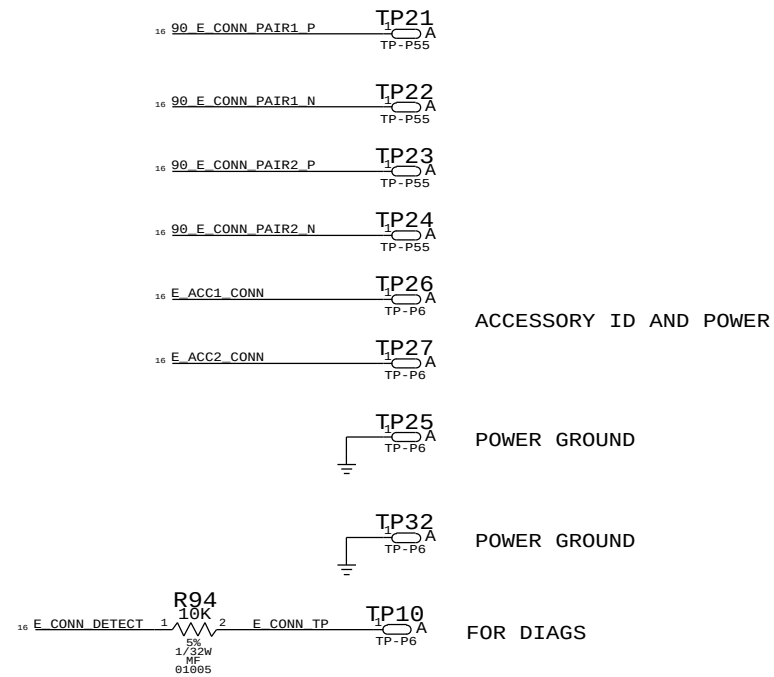

RADIO BOM OPTIONS

CONFIDENTIAL AND PROPRIETARY APPLE SYSTEM DESIGN. FOR REFERENCE PURPOSES ONLY - NOT A CHANGE REQUEST.

HW_ID PA_ID BOM OPTIONS

PART#	QTY	DESCRIPTION	REFERENCE DESIGNATOR(S)	CRITICAL	BOM OPTION
118S0685	1	PA_ID RES DIVIDER	R304_RF	Y	B4_17
118S0656	1	PA_ID RES DIVIDER	R304_RF	Y	B3_13
118S0719	1	PA_ID RES DIVIDER	R302_RF	Y	B4_17
118S0685	1	PA_ID RES DIVIDER	R302_RF	Y	B3_13

SPI NOR BOM OPTIONS

PART#	QTY	DESCRIPTION	REFERENCE DESIGNATOR(S)	CRITICAL	BOM OPTION
335S0874	1	SERIAL SPI NOR - MICRONIX	U001_RF	Y	B4_17
335S0874	1	SERIAL SPI NOR - MICRONIX	U001_RF	Y	B3_13

B5/B5E BOM OPTIONS

PART#	QTY	DESCRIPTION	REFERENCE DESIGNATOR(S)	CRITICAL	BOM OPTION
353S3415	1	SKY77487 BAND 5/8 PAD	U1001_RF	Y	B4_17
353S3568	1	SKY77491 BAND5E/8 PAD	U1001_RF	Y	B3_13
155S0552	1	BAND5 TX SAW	FL1001_RF	Y	B4_17
155S0742	1	BAND5/BC10 TX SAW	FL1001_RF	Y	B3_13
152S1563	1	1.5NH, INDUCTOR - MURATA	L1001_RF	Y	B4_17
152S1662	1	1.5NH, INDUCTOR - TDK	L1001_RF	Y	B3_13
152S1577	1	15NH, INDUCTOR - MURATA	L1002_RF	Y	B4_17
152S1665	1	15NH, INDUCTOR - TDK	L1002_RF	Y	B3_13
152S1576	1	12NH, INDUCTOR - MURATA	L1003_RF	Y	B4_17
152S1664	1	12NH, INDUCTOR - TDK	L1003_RF	Y	B3_13
152S1570	1	4.7NH, INDUCTOR - MURATA	L1010_RF	Y	B4_17
152S1663	1	4.7NH, INDUCTOR - TDK	L1010_RF	Y	B3_13

B13/17 BOM OPTIONS

PART#	QTY	DESCRIPTION	REFERENCE DESIGNATOR(S)	CRITICAL	BOM OPTION
152S1328	1	4.3NH INDUCTOR - 0201	C1111_RF	Y	B4_17
152S1353	1	3.6NH INDUCTOR - 0201	C1111_RF	Y	B3_13
131S0198	1	1.0PF CAPACITOR - 0201	L1103_RF	Y	B4_17
118S0724	1	0 OHM JUMPER - 0201	C1112_RF	Y	B4_17
131S0204	1	22PF CAPACITOR - 0201	C1112_RF	Y	B3_13
118S0724	1	0 OHM JUMPER - 0201	L1105_RF	Y	B4_17
152S1443	1	2.0NH INDUCTOR - 0201	L1105_RF	Y	B3_13
152S1320	1	7.5NH INDUCTOR - 0201	C1113_RF	Y	B4_17
131S0166	1	39PF CAPACITOR - 0201	C1113_RF	Y	B3_13
131S0176	1	2.4PF CAPACITOR - 0201	C1117_RF	Y	B4_17

DCDC BOM OPTIONS

PART#	QTY	DESCRIPTION	REFERENCE DESIGNATOR(S)	CRITICAL	BOM OPTION
152S1648	1	POWER INDUCTOR - TAIYO YUDEN	L1201_RF	Y	B4_17
152S1648	1	POWER INDUCTOR - TAIYO YUDEN	L1201_RF	Y	B3_13
152S1564	1	2.4NH, INDUCTOR - MURATA	L1205_RF	Y	B4_17
152S1564	1	2.4NH, INDUCTOR - MURATA	L1205_RF	Y	B3_13

WIFI BOM OPTIONS

PART#	QTY	DESCRIPTION	REFERENCE DESIGNATOR(S)	CRITICAL	BOM OPTION
339S0171	1	WIFI MODULE - MURATA	U1001_RF	Y	B4_17
339S0171	1	WIFI MODULE - MURATA	U1001_RF	Y	B3_13
339S0175	1	WIFI MODULE - USI	U1001_RF	Y	B4_17
339S0175	1	WIFI MODULE - USI	U1001_RF	Y	B3_13

SINGING CAP BOM OPTIONS
NEED TO COPY FROM AP TABLE
WHEN STAN FINISHES

B5/B5E BOM OPTIONS

PART#	QTY	DESCRIPTION	REFERENCE DESIGNATOR(S)	CRITICAL	BOM OPTION
117S0002	1	0 OHM RESISTOR - 0201	C1023_RF	Y	B4_17
152S1343	1	12NH INDUCTOR - 0201	C1012_RF	Y	B4_17
131S0428	1	10PF CAPACITOR - 0201	L1004_RF	Y	B4_17
131S0457	1	100PF CAPACITOR - 0201	C1023_RF	Y	B3_13
131S0425	1	0.5PF CAPACITOR - 0201	C1012_RF	Y	B3_13
152S1336	1	8.2NH INDUCTOR - 0201	L1004_RF	Y	B3_13

B13/17 BOM OPTIONS

PART#	QTY	DESCRIPTION	REFERENCE DESIGNATOR(S)	CRITICAL	BOM OPTION
155S0620	1	BAND17 TX SAW	FL1101_RF	Y	B4_17
155S0619	1	BAND13 TX SAW	FL1101_RF	Y	B3_13
353S3567	1	BAND17 PAM - SKYWORKS	U1101_RF	Y	B4_17
353S3441	1	BAND13 PAM - AVAGO	U1101_RF	Y	B3_13
155S0709	1	BAND17 DUPLEXER - MURATA	U1102_RF	Y	B4_17
155S0738	1	BAND13 DUPLEXER - EPCOS	U1102_RF	Y	B3_13
152S1336	1	BAND17 INDUCTOR - 8.2NH	L1104_RF	Y	B4_17
152S1342	1	BAND13 INDUCTOR - 15NH	L1104_RF	Y	B3_13
152S1577	1	15NH, INDUCTOR - MURATA	L1102_RF	Y	B4_17
152S1576	1	12NH, INDUCTOR - MURATA	L1102_RF	Y	B3_13

B2 PAD BOM OPTIONS

PART#	QTY	DESCRIPTION	REFERENCE DESIGNATOR(S)	CRITICAL	BOM OPTION
353S3715	1	TQM666084 B2 TQS PAD	U1501_RF	Y	B4_17
353S3459	1	TQM666083 B25 TQS PAD	U1501_RF	Y	B3_13

DIVERISTY MODULE BOM OPTIONS

PART#	QTY	DESCRIPTION	REFERENCE DESIGNATOR(S)	CRITICAL	BOM OPTION
353S3516	1	B17 MURATA DIVERSITY MODULE	U1601_RF	Y	B4_17
353S3562	1	B13/BC10 DIVERSITY MODULE	U1601_RF	Y	B3_13

B3/DCS1800 BOM OPTIONS

PART#	QTY	DESCRIPTION	REFERENCE DESIGNATOR(S)	CRITICAL	BOM OPTION
155S0596	1	DCS1800 RX FIL	FL1301_RF	Y	B4_17
155S0729	1	BAND3 RX FIL	FL1301_RF	Y	B3_13
155S0695	1	THRU LINE	FL1302_RF	Y	B4_17
155S0722	1	BAND13 TX LPF	FL1302_RF	Y	B3_13
152S1056	1	3.0NH INDUCTOR	R1301_RF	Y	B3_13
152S1742	1	1.6NH INDUCTOR	R1302_RF	Y	B4_17
118S0652	1	49.90HM RES	R1303_RF	Y	B3_13
118S0652	1	49.90HM RES	R1305_RF	Y	B4_17
152S1562	1	1.2NH INDUCTOR	L1304_RF	Y	B4_17
152S1720	1	1.8NH INDUCTOR	L1304_RF	Y	B3_13
152S1562	1	1.2NH INDUCTOR	L1305_RF	Y	B4_17
152S1720	1	1.8NH INDUCTOR	L1305_RF	Y	B3_13
152S1569	1	3.9NH INDUCTOR	L1301_RF	Y	B4_17
152S1570	1	4.7NH INDUCTOR	L1301_RF	Y	B3_13

B3/B4 RX BOM OPTIONS


PART#	QTY	DESCRIPTION	REFERENCE DESIGNATOR(S)	CRITICAL	BOM OPTION
152S1570	1	4.7NH INDUCTOR - 01005	C1414_RF	Y	B4_17
131S0375	1	1.0PF CAPACITOR - 01005	C1415_RF	Y	B4_17
131S0375	1	1.0PF CAPACITOR - 01005	C1420_RF	Y	B4_17
152S1570	1	4.7NH INDUCTOR - 01005	L1410_RF	Y	B4_17
152S1571	1	5.6NH INDUCTOR - 01005	C1414_RF	Y	B3_13
131S0377	1	1.2PF CAPACITOR - 01005	C1415_RF	Y	B3_13
131S0377	1	1.2PF CAPACITOR - 01005	C1420_RF	Y	B3_13
152S1571	1	5.6NH INDUCTOR - 01005	L1416_RF	Y	B3_13
131S0219	1	10PF CAPACITOR - 01005	L1420_RF	Y	B4_17
131S0219	1	10PF CAPACITOR - 01005	L1421_RF	Y	B4_17
152S1562	1	1.2NH INDUCTOR - 01005	L1420_RF	Y	B3_13
152S1562	1	1.2NH INDUCTOR - 01005	L1421_RF	Y	B3_13
152S1328	1	4.3NH INDUCTOR - 0201	R1402_RF	Y	B4_17
152S1688	1	3.5NH INDUCTOR - 0201	C1416_RF	Y	B4_17
152S1284	1	3.3NH INDUCTOR - 0201	R1402_RF	Y	B3_13
152S1284	1	3.3NH INDUCTOR - 0201	C1416_RF	Y	B3_13

B3/B4 TX BOM OPTIONS

PART#	QTY	DESCRIPTION	REFERENCE DESIGNATOR(S)	CRITICAL	BOM OPTION
131S0215	1	22PF CAPACITOR - 01005	L1417_RF	Y	B4_17
152S1569	1	3.9NH INDUCTOR - 01005	L1417_RF	Y	B3_13
131S0369	1	0.5PF CAPACITOR - 01005	L1408_RF	Y	B3_13
152S1284	1	3.3NH INDUCTOR - 0201	C1425_RF	Y	B4_17
152S1221	1	2.7NH INDUCTOR - 0201	L1419_RF	Y	B4_17
131S0551	1	1.2PF CAPACITOR - 0201	L1415_RF	Y	B4_17
152S1284	1	3.3NH INDUCTOR - 0201	C1425_RF	Y	B3_13
152S1221	1	2.7NH INDUCTOR - 0201	L1419_RF	Y	B3_13
131S0551	1	1.2PF CAPACITOR - 0201	L1415_RF	Y	B3_13

B3/B4 BOM OPTIONS

PART#	QTY	DESCRIPTION	REFERENCE DESIGNATOR(S)	CRITICAL	BOM OPTION
353S3255	1	B1/4 PAD - AVAGO	U1401_RF	Y	B4_17
353S3443	1	B1/3 PAD - AVAGO	U1401_RF	Y	B3_13
155S0590	1	B4 TX FIL	FL1402_RF	Y	B4_17
155S0712	1	B3 TX FIL	FL1402_RF	Y	B3_13



8

7

6

5

4

3

2

1

D

C

B

A

D

C

B

A

CREFRPT
I1

8

7

6

5

4


3

2

1

CONFIDENTIAL AND PROPRIETARY APPLE SYSTEM DESIGN. FOR REFERENCE PURPOSES ONLY - NOT A CHANGE REQUEST.

D

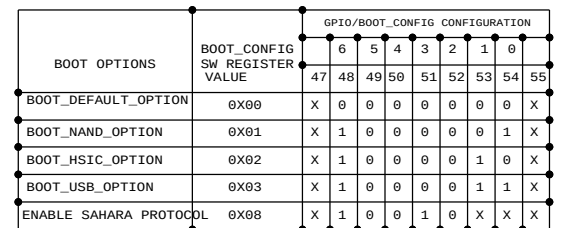

26 OF 51

BASEBAND PMU (1 OF 2)


CONFIDENTIAL AND PROPRIETARY APPLE SYSTEM DESIGN. FOR REFERENCE PURPOSES ONLY - NOT A CHANGE REQUEST.

The schematic diagram illustrates the power and ground connections for a Baseband PMU (1 OF 2). The diagram is organized into columns labeled 8, 7, 6, 5, 4, 3, 2, and 1 from left to right. The main components and their connections are as follows:

- U201_RF PM8018-0** (BGA VREG): The central component with pins VOUT_LVS1, VREG_RFCLK, VSW_S1, VREG_S1, VSW_S2, VREG_S2, VSW_S3, VREG_S3, VSW_S4, VREG_S4, VSW_S5, VREG_S5, VREG_X0, VREG_L2, VREG_L3, VREG_L4, VREG_L5, VREG_L6, VREG_L13, VREG_L14, VREG_L7, VREG_L8, VREG_L9, VREG_L10, VREG_L11, and VREG_L12.
- Power Input and Regulation:**
 - PP_BATT_VCC_CONN** connects to **C235_RF 10UF** and **C237_RF 10UF**.
 - PP_VSW_S1** through **PP_VSW_S5** are connected to **L207_RF** through **L211_RF** (all 2.2UH-20%-1.2A-0.150HM).
 - PP_VREG** is connected to **C231_RF 1.0UF** and **C207_RF 22UF**.
 - PP_VSW_S1** through **PP_VSW_S5** are connected to **C207_RF** through **C211_RF** (all 22UF).
 - PP_VSW_S1** through **PP_VSW_S5** are connected to **C208_RF** through **C210_RF** (all 22UF).
 - PP_VSW_S1** through **PP_VSW_S5** are connected to **C209_RF** (22UF).
 - PP_VSW_S1** through **PP_VSW_S5** are connected to **C210_RF** (22UF).
 - PP_VSW_S1** through **PP_VSW_S5** are connected to **C211_RF** (22UF).
- Ground Connections:**
 - S5_GND** through **S1_GND** are connected to **C226_RF** through **C206_RF** (all 4.7UF).
 - S5_GND** through **S1_GND** are connected to **C201_RF** through **C203_RF** (all 4.7UF).
 - S5_GND** through **S1_GND** are connected to **C204_RF** (4.7UF).
 - S5_GND** through **S1_GND** are connected to **C206_RF** (0.1UF).
 - S5_GND** through **S1_GND** are connected to **C223_RF** (0.1UF).
 - S5_GND** through **S1_GND** are connected to **C236_RF** (10UF).
 - S5_GND** through **S1_GND** are connected to **C237_RF** (10UF).
 - S5_GND** through **S1_GND** are connected to **C229_RF** (10UF).
 - S5_GND** through **S1_GND** are connected to **C230_RF** (10UF).
- Output Connections:**
 - PP_LD01** through **PP_LD012** are connected to **C212_RF** through **C229_RF** (all 1.0UF).
 - PP_LD01** through **PP_LD012** are connected to **C234_RF** through **C239_RF** (all 1.0UF).
 - PP_LD01** through **PP_LD012** are connected to **C213_RF** through **C220_RF** (all 1.0UF).
 - PP_LD01** through **PP_LD012** are connected to **C214_RF** through **C221_RF** (all 1.0UF).
 - PP_LD01** through **PP_LD012** are connected to **C215_RF** through **C222_RF** (all 1.0UF).
 - PP_LD01** through **PP_LD012** are connected to **C216_RF** through **C223_RF** (all 1.0UF).
 - PP_LD01** through **PP_LD012** are connected to **C217_RF** through **C224_RF** (all 1.0UF).
 - PP_LD01** through **PP_LD012** are connected to **C218_RF** through **C225_RF** (all 1.0UF).
 - PP_LD01** through **PP_LD012** are connected to **C219_RF** through **C226_RF** (all 1.0UF).
 - PP_LD01** through **PP_LD012** are connected to **C220_RF** through **C227_RF** (all 1.0UF).
 - PP_LD01** through **PP_LD012** are connected to **C221_RF** through **C228_RF** (all 1.0UF).
 - PP_LD01** through **PP_LD012** are connected to **C222_RF** through **C229_RF** (all 1.0UF).
 - PP_LD01** through **PP_LD012** are connected to **C223_RF** through **C230_RF** (all 1.0UF).

BASEBAND PMU (1 OF 2)



CONFIDENTIAL AND PROPRIETARY APPLE SYSTEM DESIGN. FOR REFERENCE PURPOSES ONLY - NOT A CHANGE REQUEST.

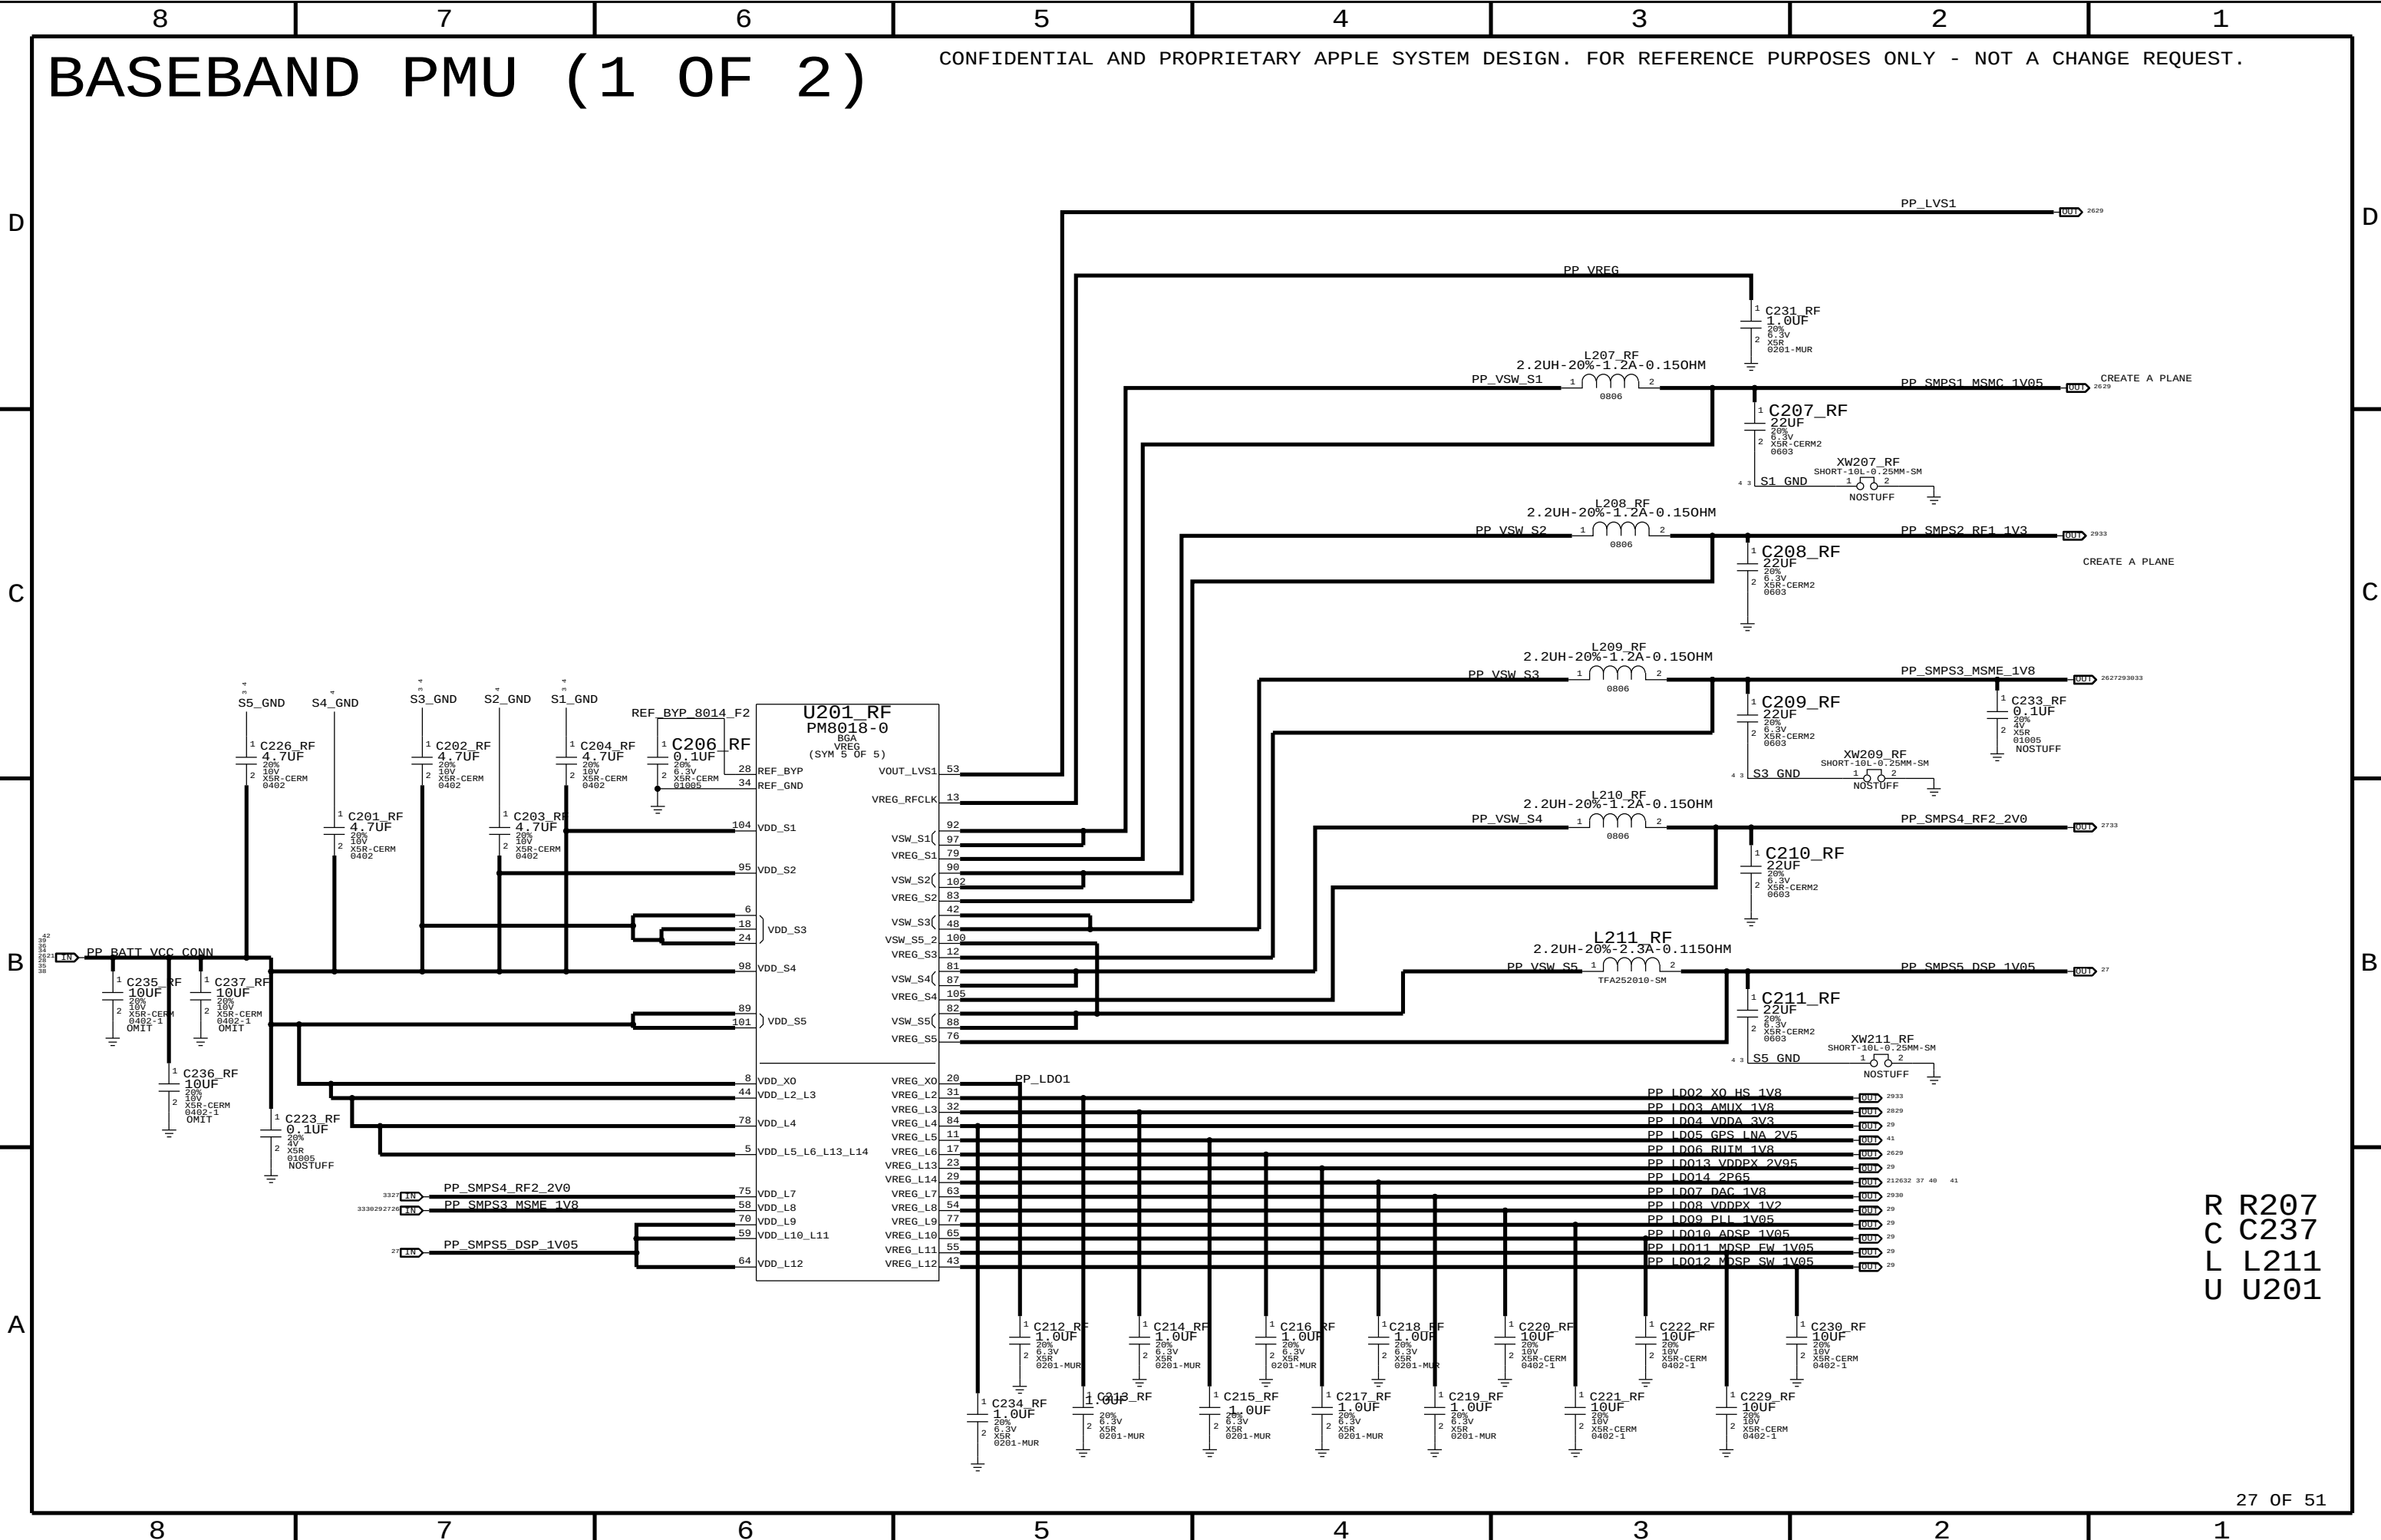[illegible]

A

B

PA_ID	PA_CONFIG
0.25V >0.2V && <0.4V	B4_17 MAIN
0.50V >0.4V && <0.6V	BUILD MATRIX
0.70V >0.6V && <0.8V	BUILD MATRIX
1.10V >1.0V && <1.2V	B3_13 MAIN
1.30V >1.2V && <1.4V	BUILD MATRIX
1.50V >1.4V && <1.6V	BUILD MATRIX

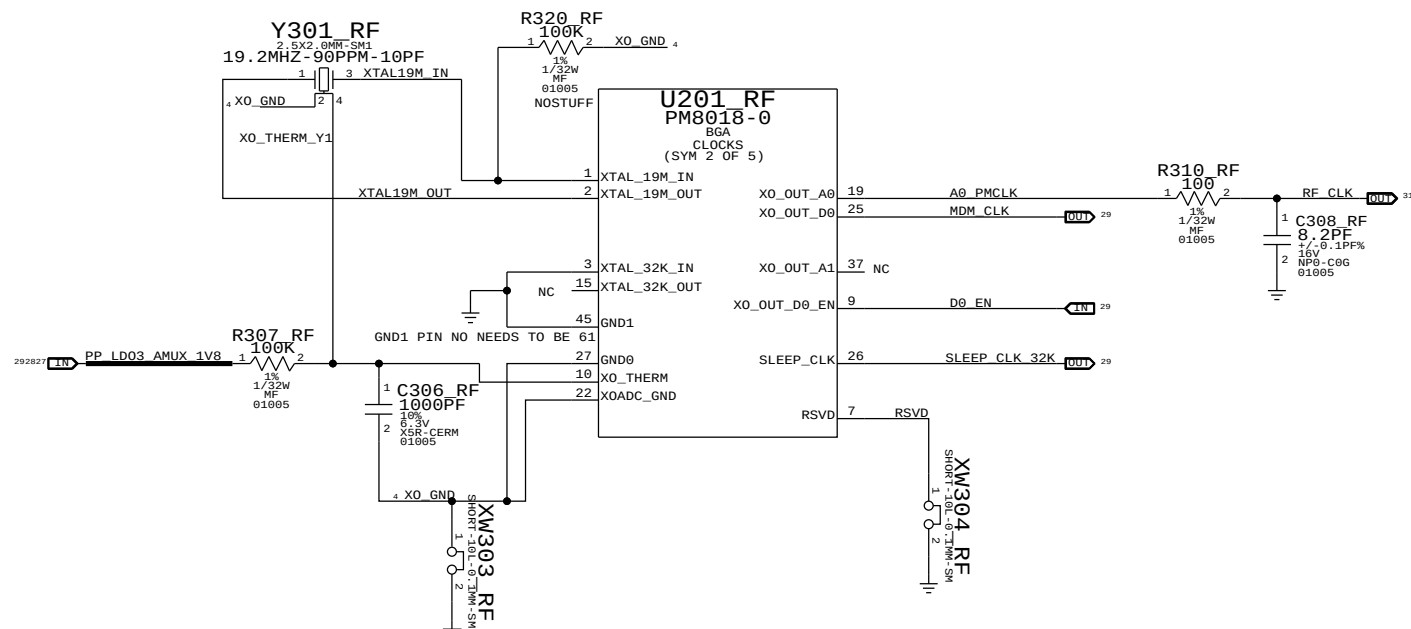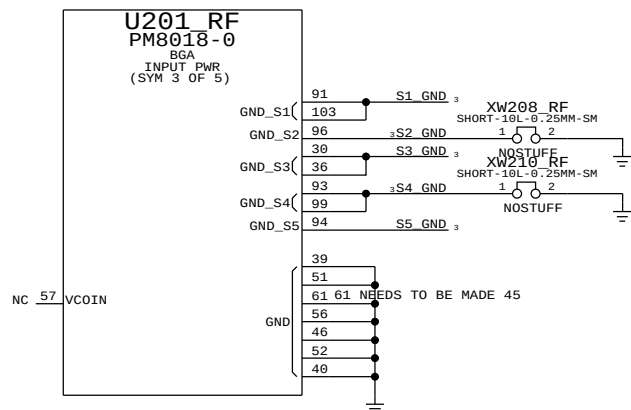

28 0F 51

BASEBAND (1 OF 2)

CONFIDENTIAL AND PROPRIETARY APPLE SYSTEM DESIGN. FOR REFERENCE PURPOSES ONLY - NOT A CHANGE REQUEST

D

D



C

C




B

B

A

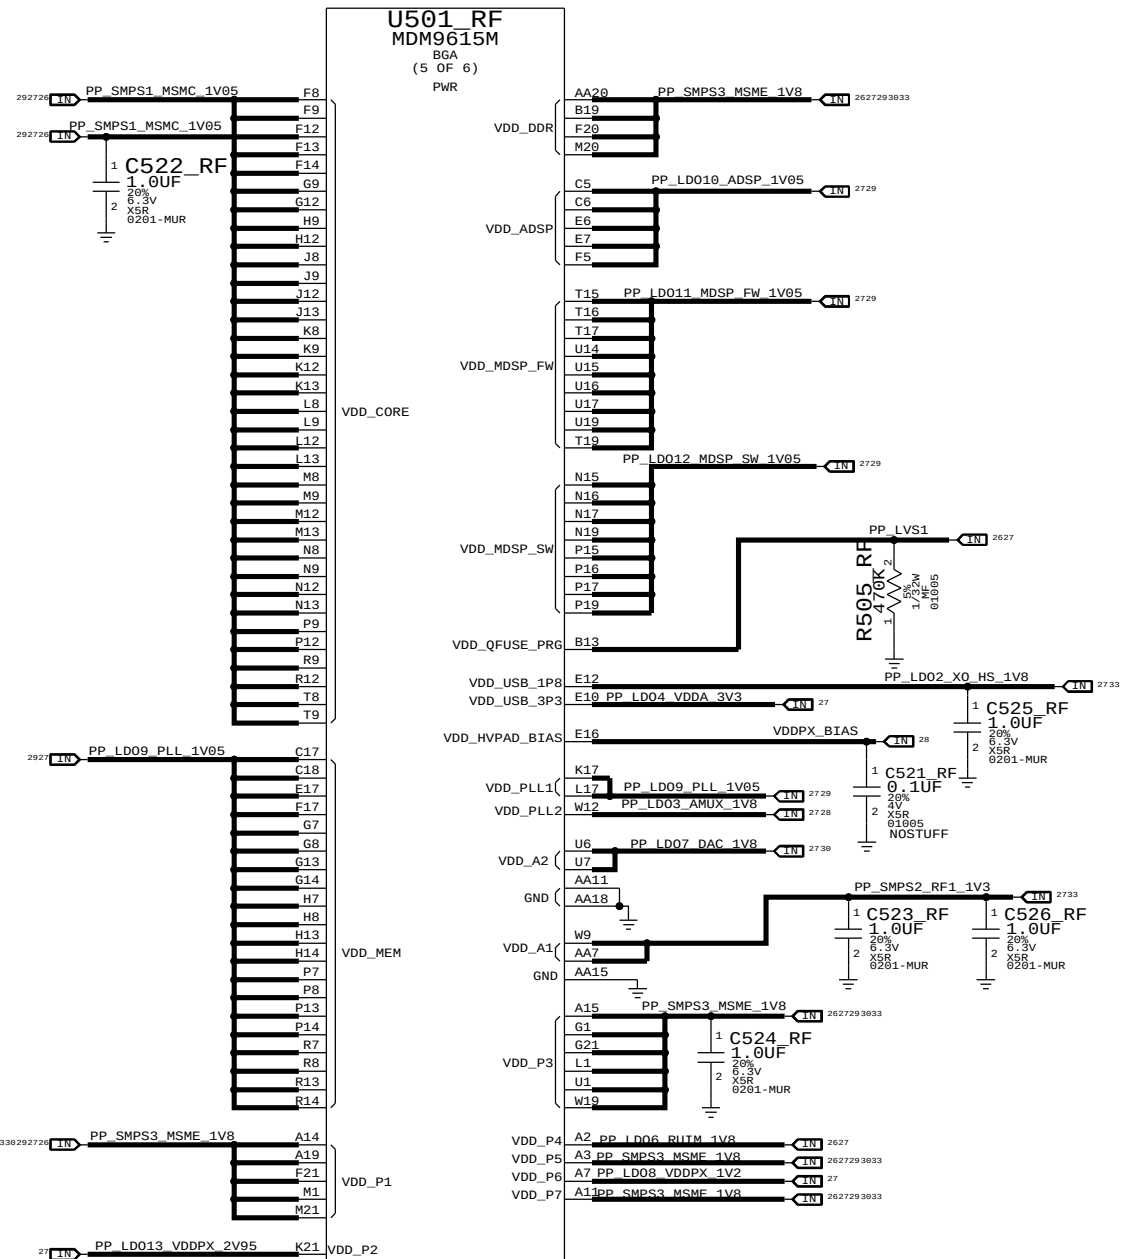
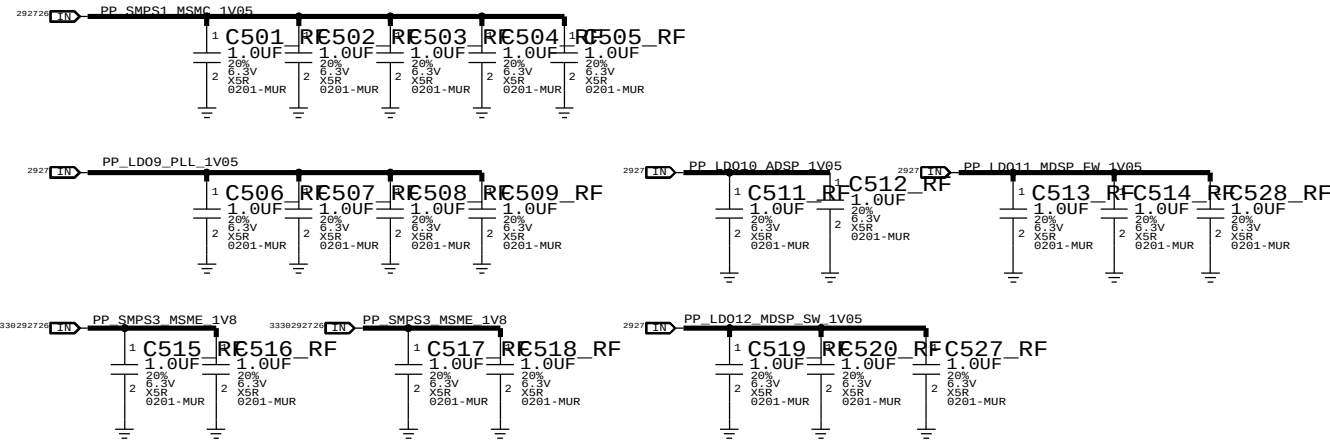


R504: TO BE DELETED AT EVT1

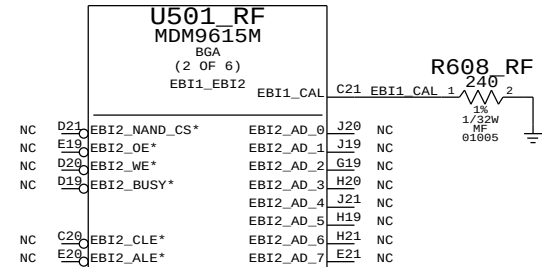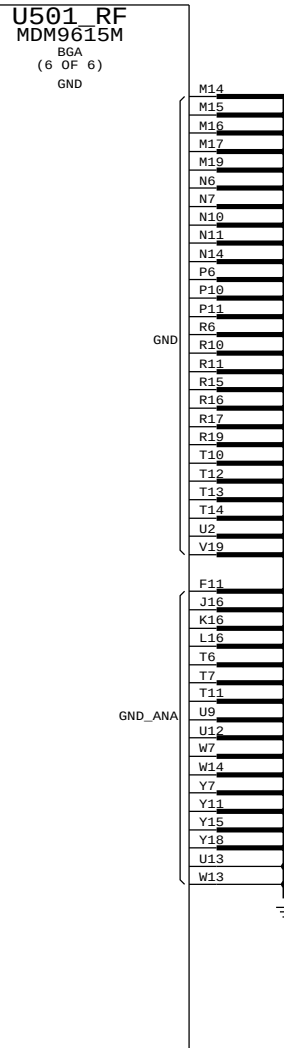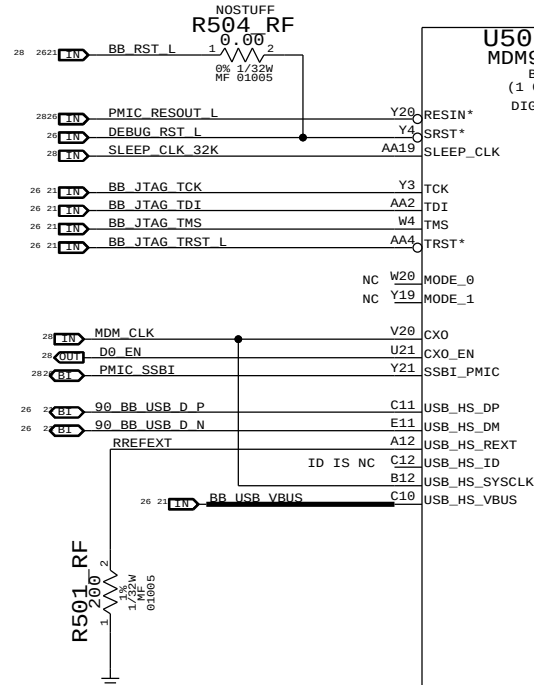


R R502
C C528
L LXXX
U U501

CONFIDENTIAL AND PROPRIETARY APPLE SYSTEM DESIGN. FOR REFERENCE PURPOSES ONLY - NOT A CHANGE REQUEST.

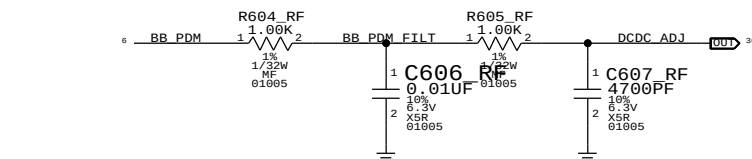

30 OF 51

CONFIDENTIAL AND PROPRIETARY APPLE SYSTEM DESIGN. FOR REFERENCE PURPOSES ONLY - NOT A CHANGE REQUEST.



RF TRANSCEIVER SWITCHING NETWORKS (2 OF 3)


CONFIDENTIAL AND PROPRIETARY APPLE SYSTEM DESIGN. FOR REFERENCE PURPOSES ONLY - NOT A CHANGE REQUEST.

BAND 5/BAND 8 PRX TRANSCEIVER SWITCH

XM0830SZ SWITCH LOGIC

PRX_B5_B8	ACTIVE BAND	PORT
HIGH	8	PORT 1 TO PORT 3
LOW	5	PORT 1 TO PORT 2

SWAPPED BAND5 AND BAND8 INPUTS FROM DEV0

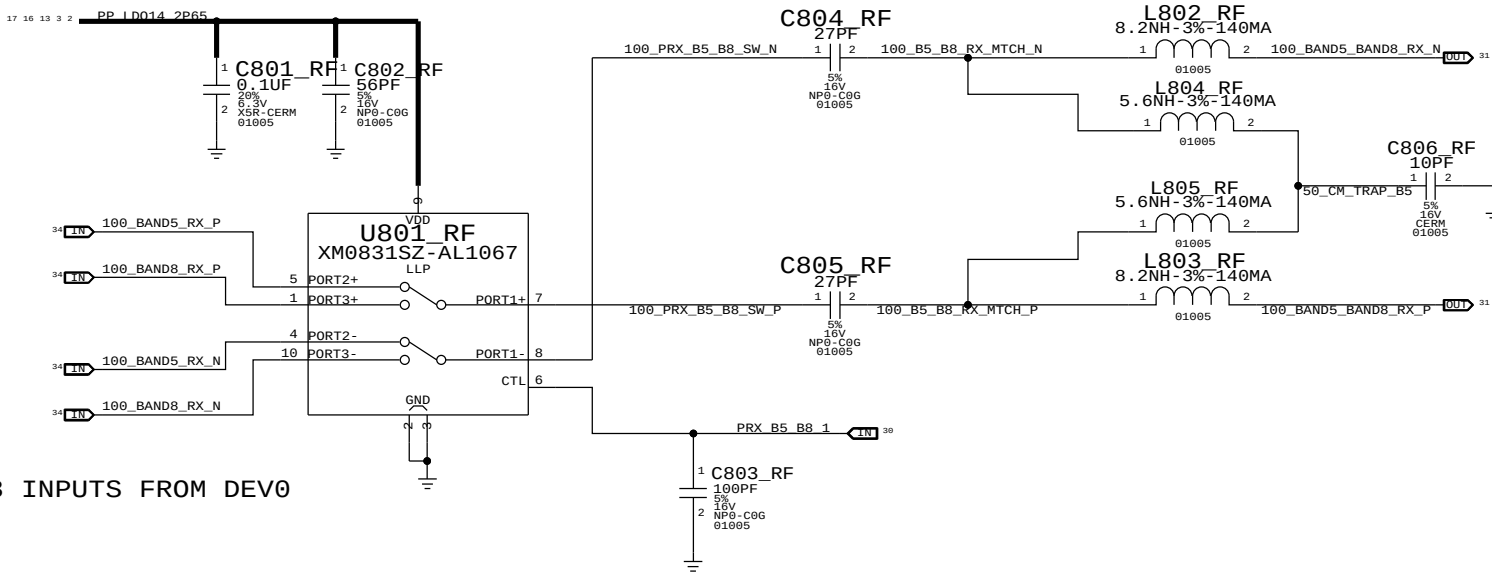

R RXXX
C C806
L L803
U U801

RF TRANSCEIVER DECOUPLING (3 OF 3)

ROUTE FROM C265 TO U6.T10 AND C269 TO U6.E7 IN A STAR CONFIGURATION FOR ISOLATION BETWEEN E7 AND T10

COMPONENTS AND CONNECTIONS:

- PP RF1 14 15** to **PP RF1 14 PRX LNA** via **XW901 RF** (SHORT-10L-0.1MM-SM)
- PP RF1 15 DRX LNA** via **XW902 RF** (SHORT-10L-0.1MM-SM)
- PP RF1 13 GPS LNA** via **XW903 RF** (SHORT-10L-0.1MM-SM)
- PP RF1 11 12 RX TX DIG** via **XW904 RF** (SHORT-10L-0.1MM-SM)
- PP RF1 12 DIG** via **XW906 RF** (SHORT-10L-0.1MM-SM)
- PP RF1 11 12 RX TX DIG E7** via **XW905 RF** (SHORT-10L-0.1MM-SM)
- PP RF1 21 GPS VCO** via **XW907 RF** (SHORT-10L-0.1MM-SM)
- PP RF1 9 HB DA** via **XW908 RF** (SHORT-10L-0.1MM-SM)
- PP RF1 5 PRE DRIVER** via **XW909 RF** (SHORT-10L-0.1MM-SM)
- PP RF1 8 TX MIXER LB DA** via **XW910 RF** (SHORT-10L-0.1MM-SM)
- PP RF1 14 PRX LNA** via **XW911 RF** (SHORT-10L-0.1MM-SM)
- PP RF1 15 DRX LNA** via **XW912 RF** (SHORT-10L-0.1MM-SM)
- PP RF1 17 PRX LNA** via **XW913 RF** (SHORT-10L-0.1MM-SM)
- PP RF1 18 DRX LNA** via **XW914 RF** (SHORT-10L-0.1MM-SM)
- PP RF1 19 GPS RX** via **XW915 RF** (SHORT-10L-0.1MM-SM)
- PP RF1 20 GPS/SHDR PLL** via **XW916 RF** (SHORT-10L-0.1MM-SM)
- PP RF1 21 GPS/SHDR OSCILLATOR AND LO** via **XW917 RF** (SHORT-10L-0.1MM-SM)
- PP RF1 22 GPS DIG** via **XW918 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 2 PDET** via **XW919 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW920 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 1 5 6 MASTER BIAS RX BB** via **XW921 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 3 RX VCO** via **XW922 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 4 TX VCO** via **XW923 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW924 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW925 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW926 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW927 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW928 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW929 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW930 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW931 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW932 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW933 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW934 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW935 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW936 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW937 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW938 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW939 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW940 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW941 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW942 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW943 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW944 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW945 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW946 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW947 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW948 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW949 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW950 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW951 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW952 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW953 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW954 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW955 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW956 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW957 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW958 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW959 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW960 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW961 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW962 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW963 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW964 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW965 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW966 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW967 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW968 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW969 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW970 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW971 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW972 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW973 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW974 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW975 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW976 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW977 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW978 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW979 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW980 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW981 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW982 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW983 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW984 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW985 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW986 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW987 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW988 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW989 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW990 RF** (SHORT-10L-0.1MM-SM)
- PP RF2 7 TX BB** via **XW991 RF** (SHORT-10

33 0F 51

BAND 5/8 PAD

CONFIDENTIAL AND PROPRIETARY APPLE SYSTEM DESIGN. FOR REFERENCE PURPOSES ONLY - NOT A CHANGE REQUEST.

Legend:

- R R1003
- C C1023
- L L1010
- U U1001

BAND 5/8 PAD

CONFIDENTIAL AND PROPRIETARY APPLE SYSTEM DESIGN. FOR REFERENCE PURPOSES ONLY - NOT A CHANGE REQUEST.

The schematic diagram illustrates the BAND 5/8 PAD circuit, which is a complex network of passive components and integrated circuits. The circuit is organized into several functional blocks, including input matching, attenuation, and signal processing stages. Key components include:


- Input Matching and Attenuation:** The input stage features a matching network with inductor L1001 and capacitor C1001, followed by a high attenuation block (FL1002) and a matching network with inductor L1002 and capacitor C1003.
- Signal Processing and Filtering:** The central part of the circuit includes a high attenuation block (FL1001) and a matching network with inductor L1003 and capacitor C1006. This is followed by a matching network with inductor L1004 and capacitor C1012, and a matching network with inductor L1005 and capacitor C1013.
- Output Matching and Attenuation:** The output stage features a matching network with inductor L1006 and capacitor C1005, followed by a high attenuation block (FL1001) and a matching network with inductor L1007 and capacitor C1014.
- Power Amplifier and Output:** The final stage includes a power amplifier (U1001) and a matching network with inductor L1009 and capacitor C1019, followed by a matching network with inductor L1010 and capacitor C1023.

The diagram also shows various signal paths and ground connections, including the 50 OHM and 100 OHM impedance levels. The components are labeled with their values and part numbers, and the circuit is organized into a clear, logical flow.

Component List:


- R R1003
- C C1023
- L L1010
- U U1001

34 OF 51

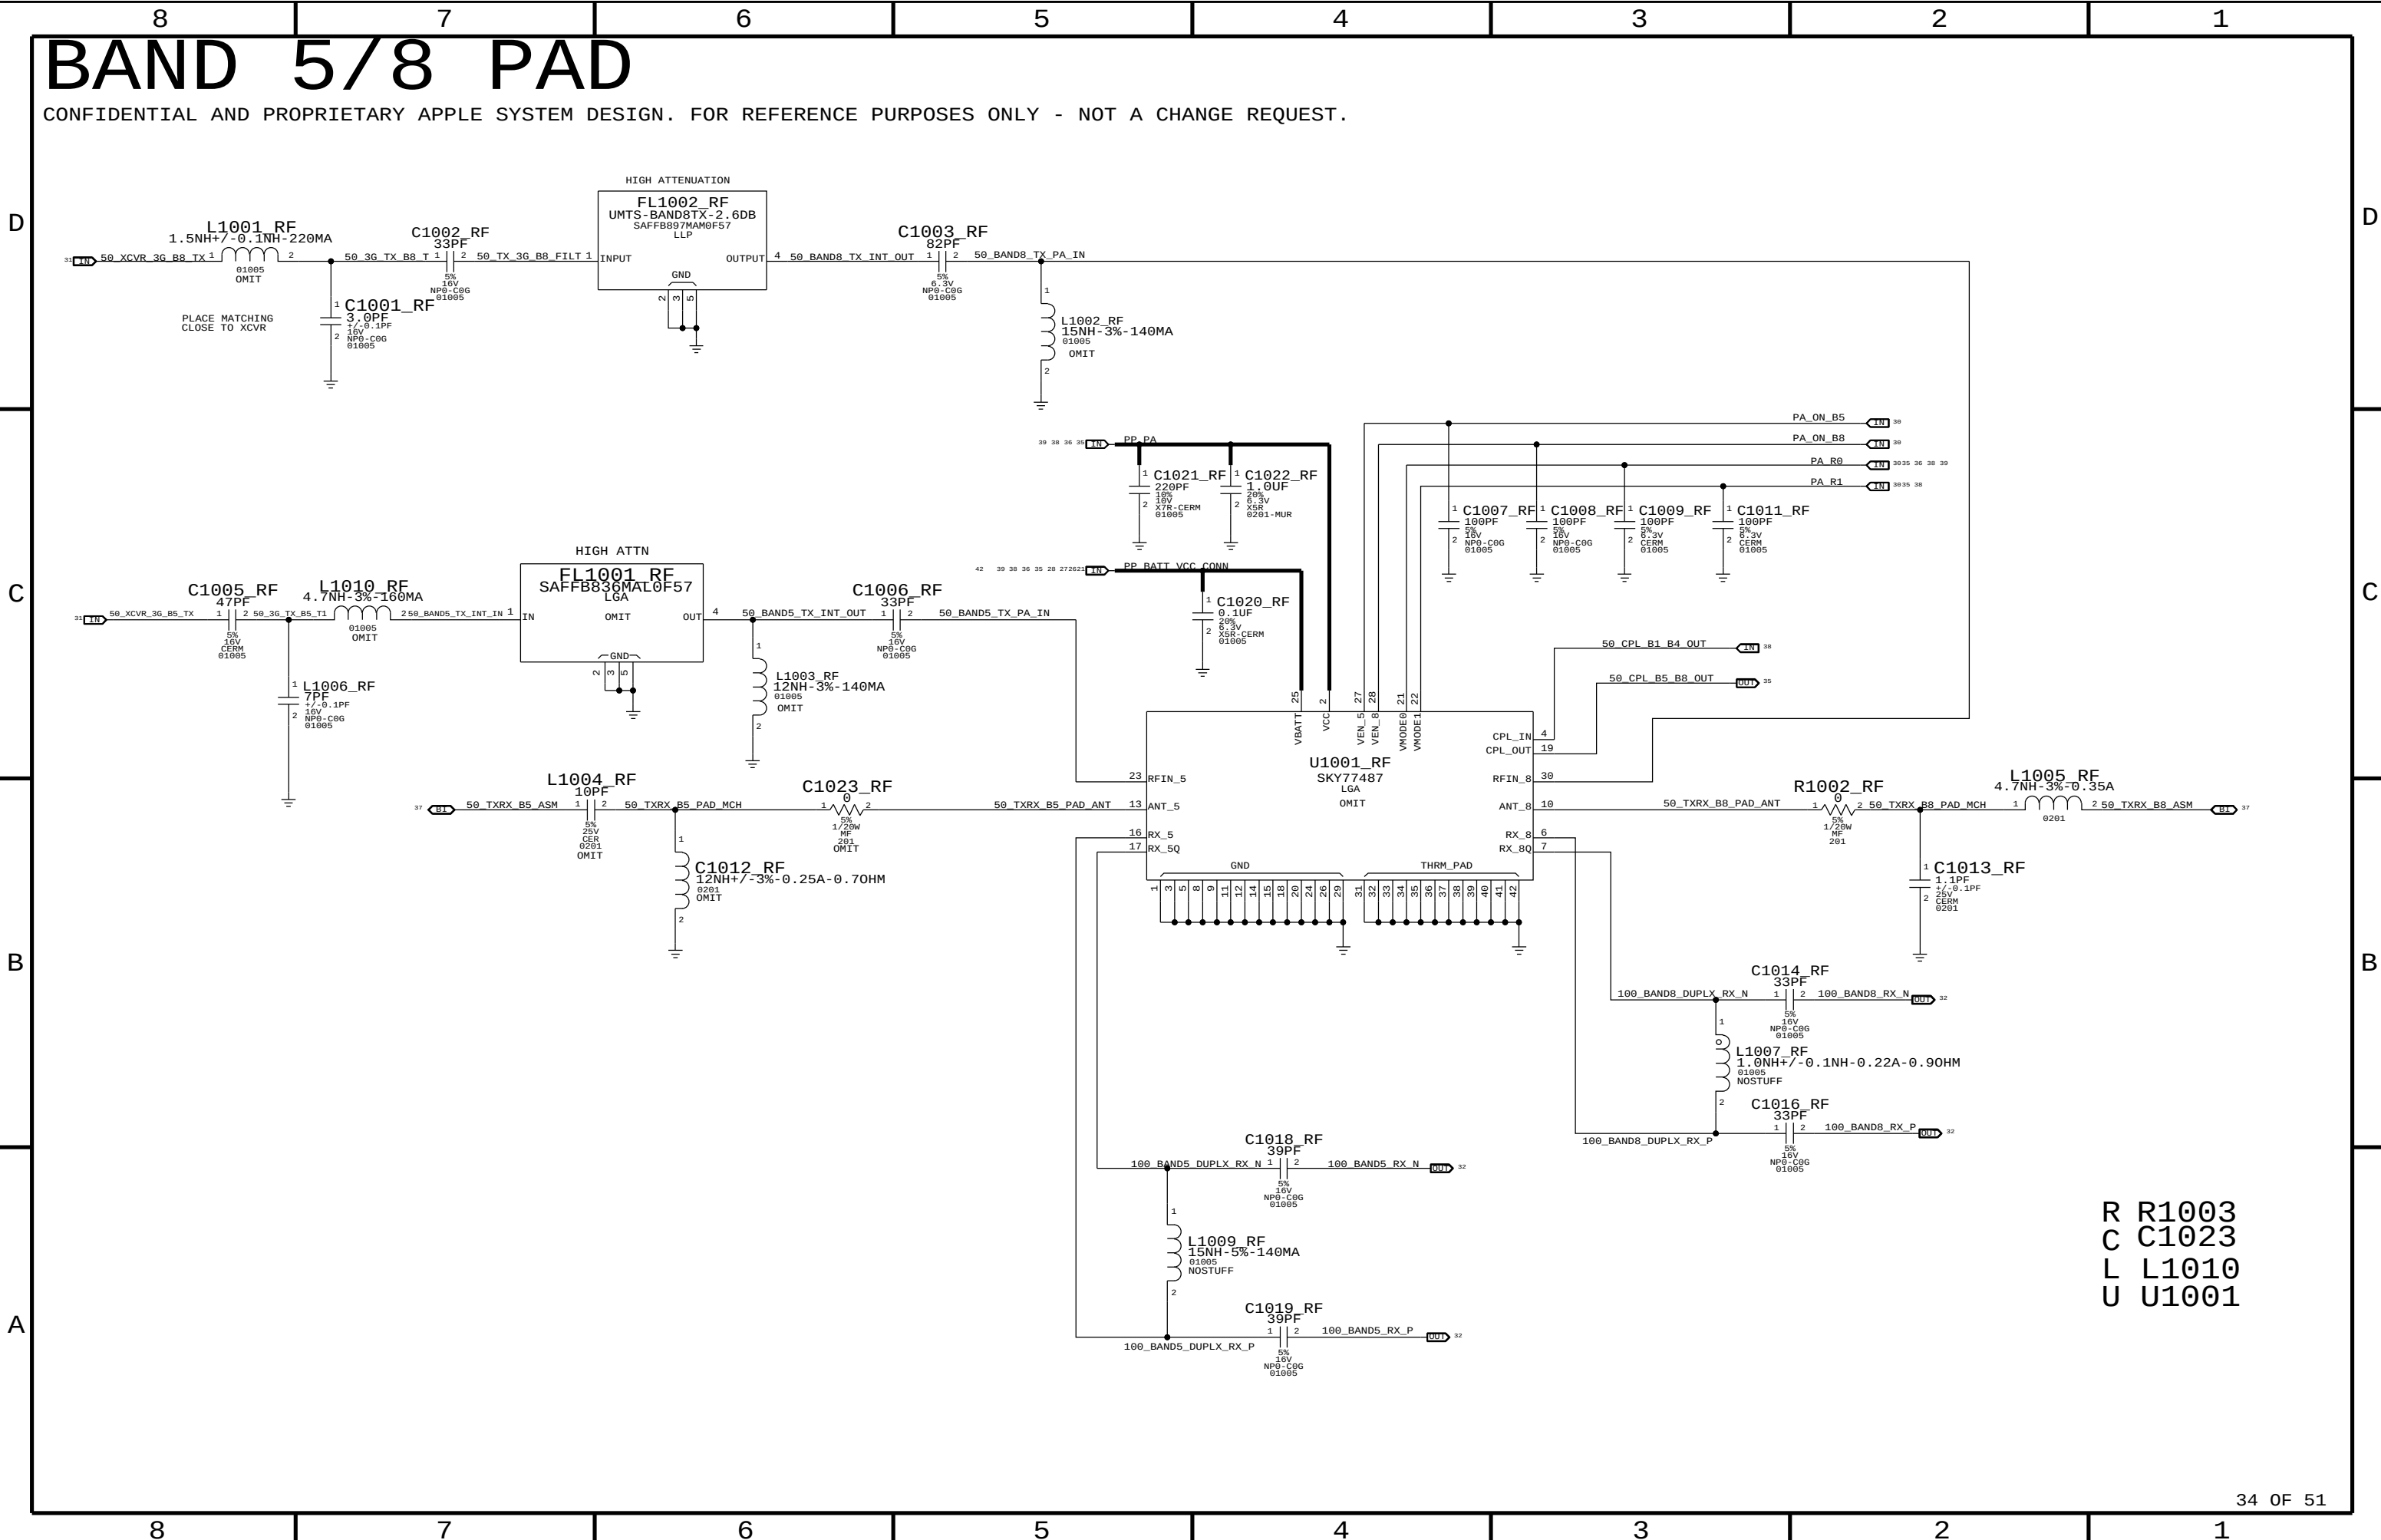[illegible]

B13/17 INTERSTAGE, PA, AND DUPLEXER

CONFIDENTIAL AND PROPRIETARY APPLE SYSTEM DESIGN. FOR REFERENCE PURPOSES ONLY - NOT A CHANGE REQUEST.

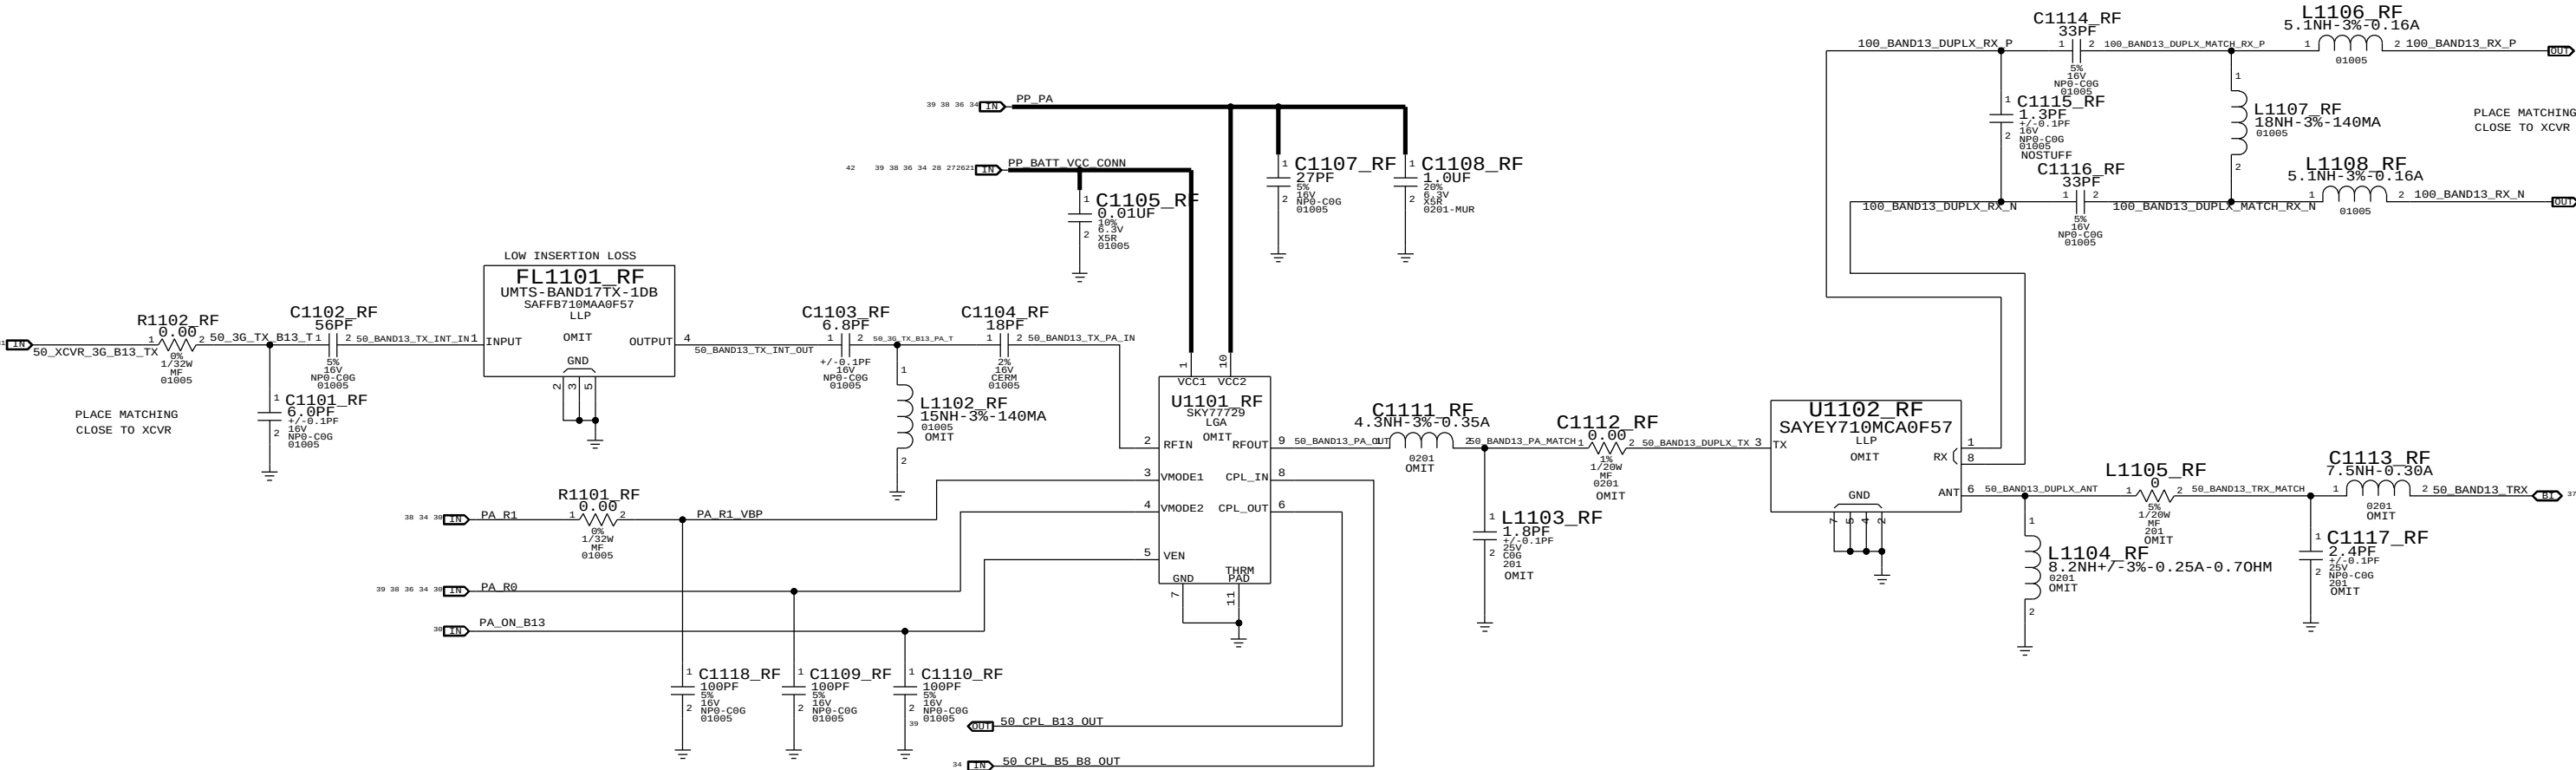

PA POWER MODES

MODE	PA_R0	PA_R1
LOW	HIGH	HIGH
MEDIUM	LOW	HIGH
HIGH	LOW	LOW


FLFL1101
R R1102
C C1118
L L1108
U U1102

2G PA, PA DC/DC CONVERTER

CONFIDENTIAL AND PROPRIETARY APPLE SYSTEM DESIGN. FOR REFERENCE PURPOSES ONLY - NOT A CHANGE REQUEST.


2G PA GAIN MODES

BAND	MODE	GAIN MODE	PA_R1	PCL RANGE
LOW BAND	GSM	ULTRA LOW	HIGH	16 TO 19
LOW BAND	GSM	LOW	HIGH	14 TO 15
LOW BAND	GSM	MEDIUM	LOW	7 TO 13
LOW BAND	GSM	HIGH	LOW	5 TO 6
HIGH BAND	GSM	ULTRA LOW	HIGH	10 TO 15
HIGH BAND	GSM	LOW	HIGH	7 TO 9
HIGH BAND	GSM	HIGH	LOW	0 TO 6
LOW BAND	EDGE	LOW	HIGH	15 TO 19
LOW BAND	EDGE	MEDIUM	LOW	10 TO 14
LOW BAND	EDGE	HIGH	LOW	8 TO 9
HIGH BAND	EDGE	LOW	HIGH	9 TO 15
HIGH BAND	EDGE	HIGH	LOW	2 TO 8

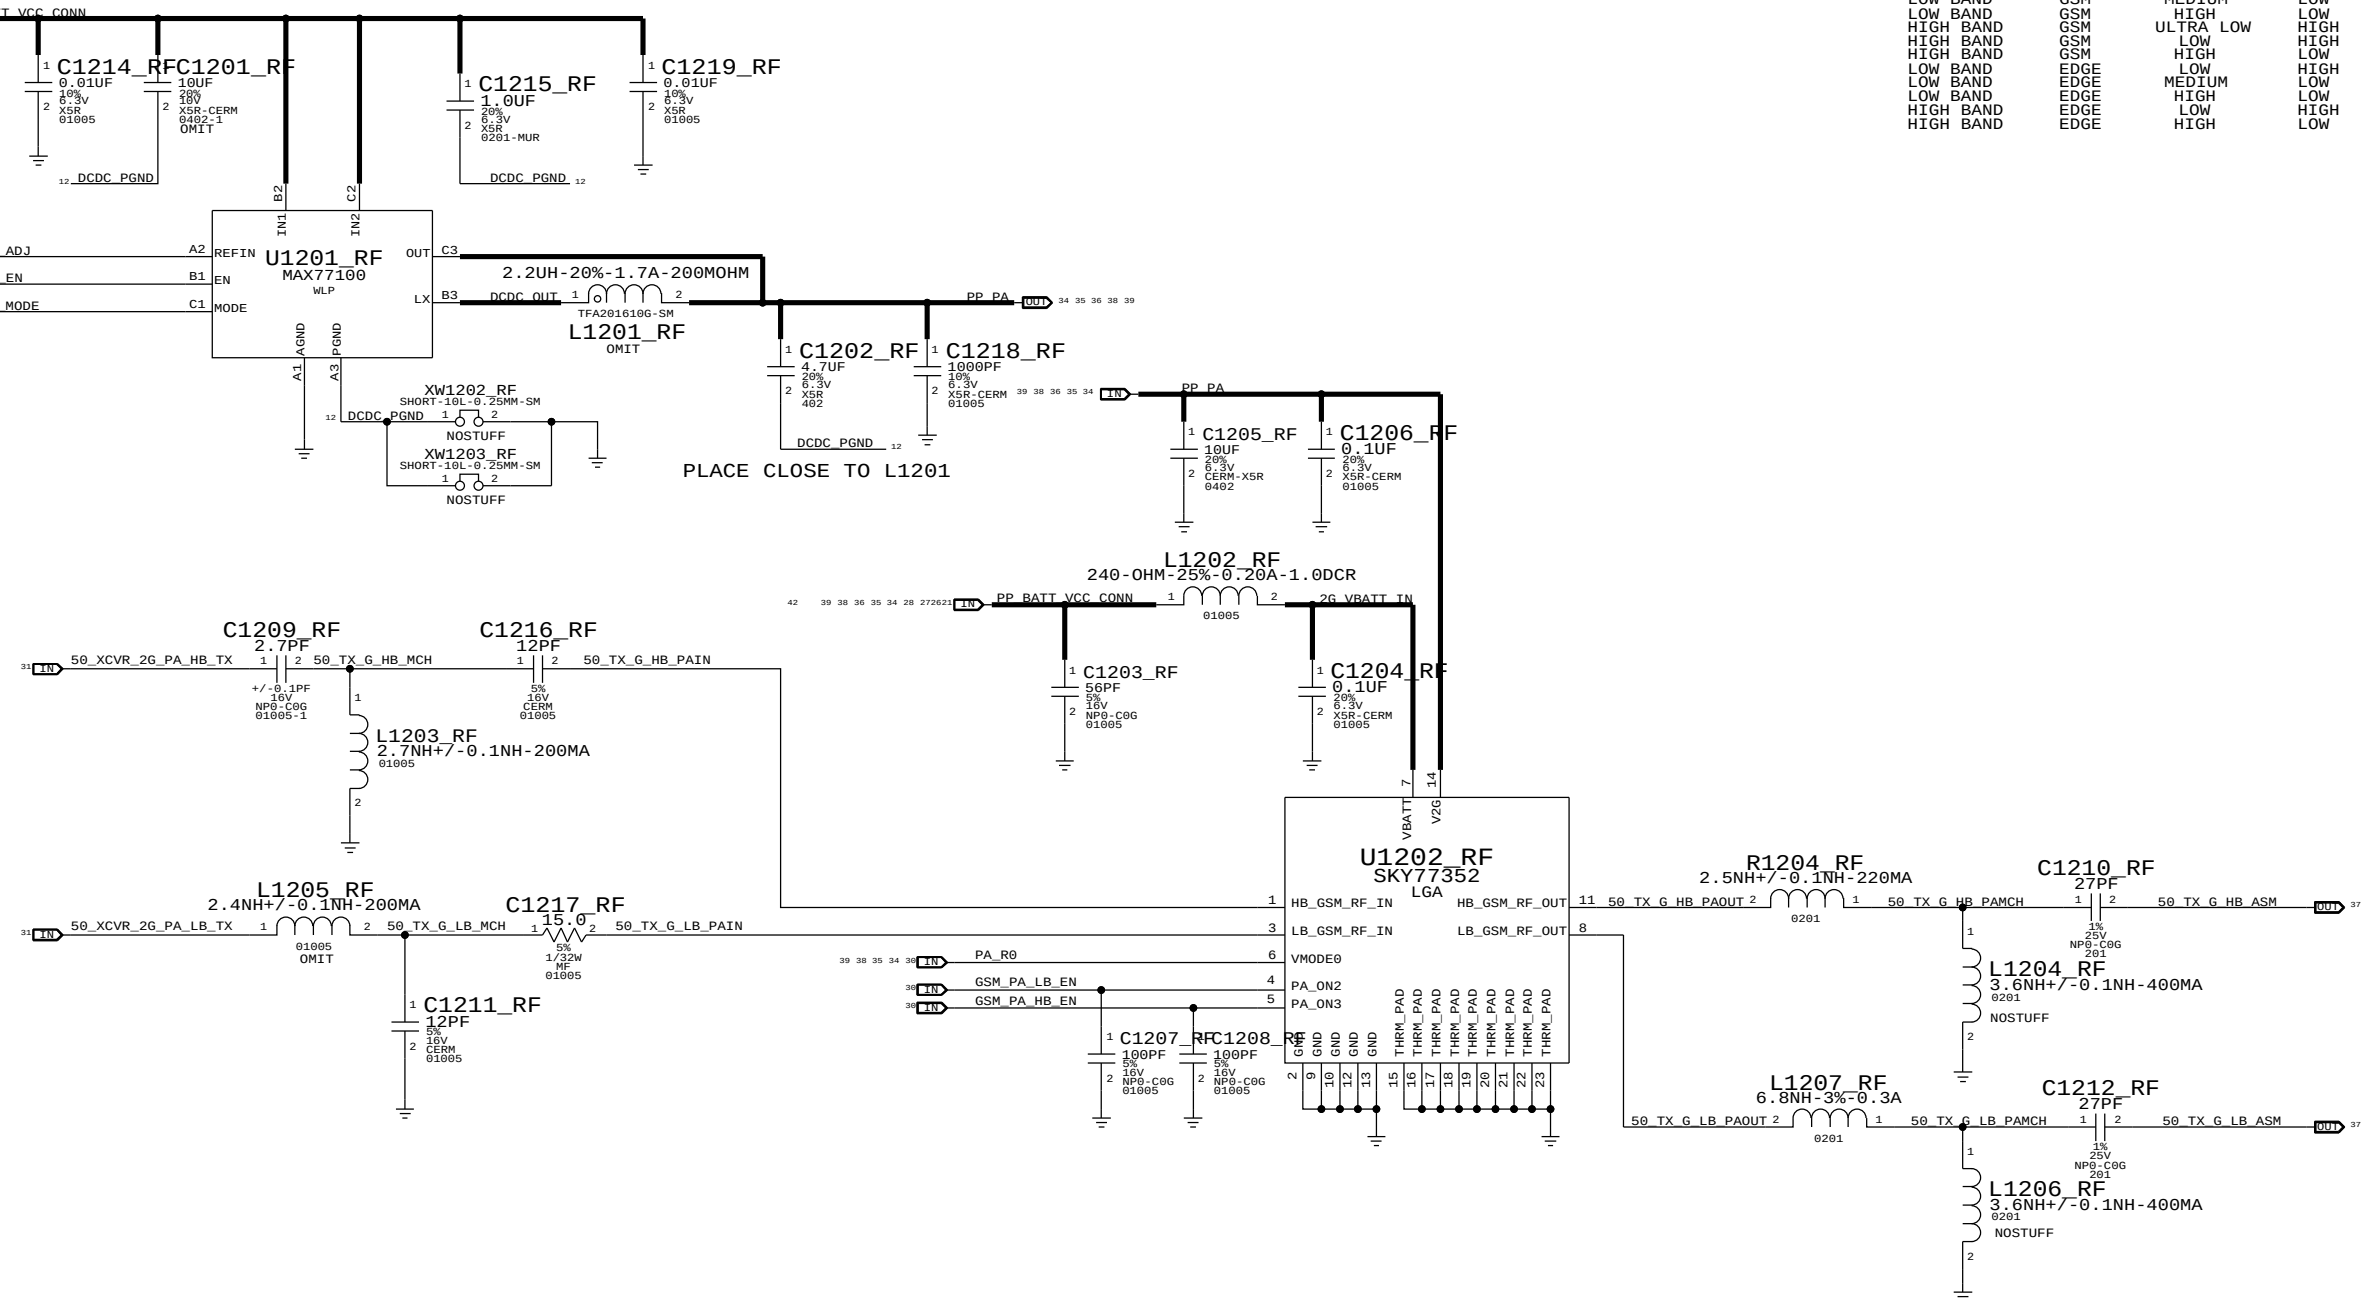

ASM, DCS RX

CONFIDENTIAL AND PROPRIETARY APPLE SYSTEM DESIGN. FOR REFERENCE PURPOSES ONLY - NOT A CHANGE REQUEST.

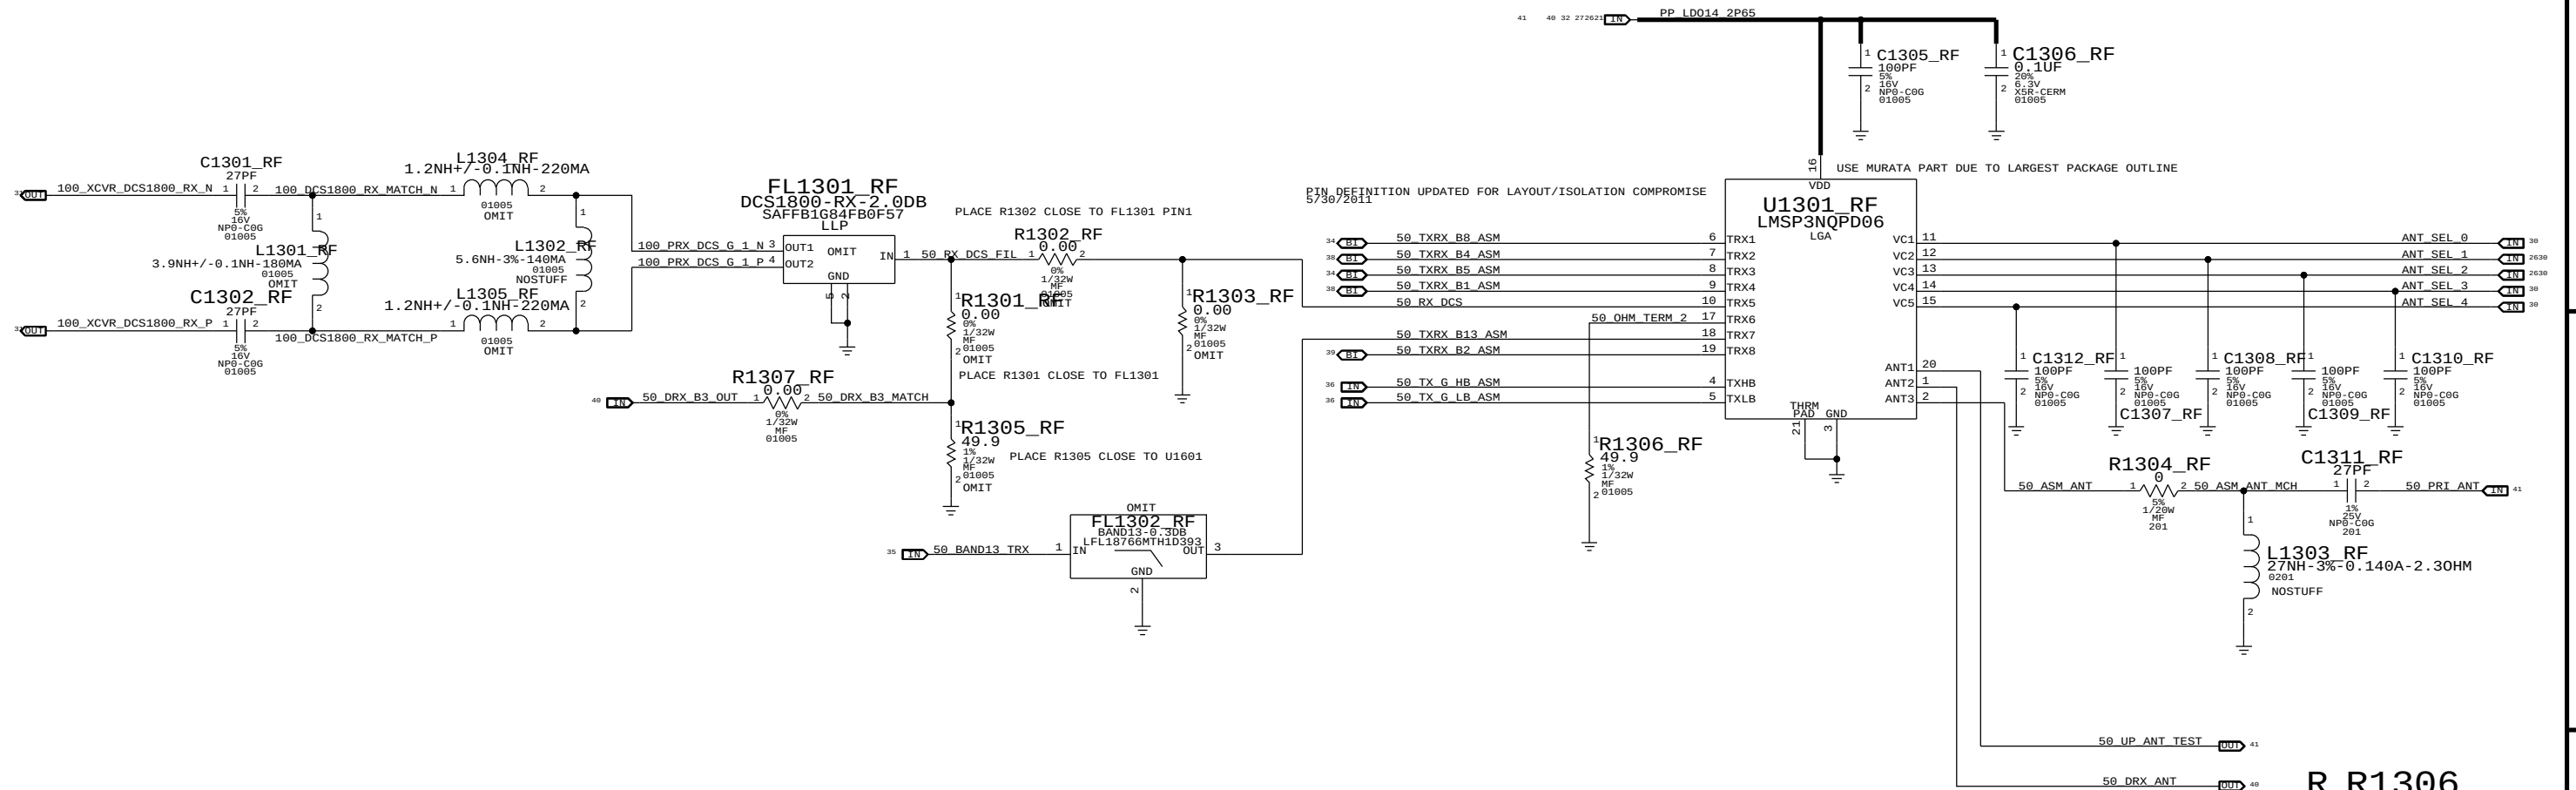

R R1306
C C1312
L 1305
U U1301
FL FL1302

BAND 1/4 PAD

CONFIDENTIAL AND PROPRIETARY APPLE SYSTEM DESIGN. FOR REFERENCE PURPOSES ONLY - NOT A CHANGE REQUEST.

LOW INSERTION LOSS

FL1401_RF
SAFFB1G95AA0F57
LGA

LOW INSERTION LOSS

FL1402_RF
BAND4-TX-1.6DB
SAFFB1G73KA0F57
LLP

U1401_RF
AFEM-7814
LGA

PP_PA
BYPASSING SHARED WITH B5/8 PAD

PP_BATT_VCC_CONN

C1401_RF 22PF

C1402_RF 1.0PF

L1401_RF 9.1NH-3%-140MA

C1403_RF 15NH-3%-140MA

L1402_RF 15NH-3%-140MA

C1409_RF 33PF

C1410_RF 1.0PF

L1407_RF 12NH-3%-140MA

C1411_RF 0.7PF

L1408_RF 6.2NH-5NH%-140MA

C1412_RF 100PF

C1413_RF 100PF

C1414_RF 4.7NH-3%-160MA

C1415_RF 1.0PF

C1416_RF 3.5NH+/-0.1NH-0.45A

C1417_RF 0.1UF

C1418_RF 5.0PF

C1419_RF 1.2PF

C1420_RF 1.0PF

C1421_RF 100PF

C1422_RF 1.2NH+/-0.1NH-220MA

C1423_RF 1.2NH+/-0.1NH-220MA

C1424_RF 1.2NH+/-0.1NH-220MA

C1425_RF 3.3NH+/-0.1NH-0.45A

L1411_RF 1.2PF

L1412_RF 100PF

L1413_RF 6.8NH-3%-140MA

L1414_RF 100PF

L1415_RF 1.2PF

L1416_RF 4.7NH-3%-160MA

L1417_RF 22PF

L1418_RF 5.0PF

L1419_RF 2.7NH+/-0.1NH-0.50A

L1420_RF 10PF

L1421_RF 10PF

L1422_RF 1.2NH+/-0.1NH-220MA

L1423_RF 1.2NH+/-0.1NH-220MA

L1424_RF 1.2NH+/-0.1NH-220MA

L1425_RF 3.3NH+/-0.1NH-0.45A

R1401_RF 49.9

R1402_RF 4.3NH-3%-0.35A

R1403_RF 5.6NH-3%-140MA

R1404_RF 0.00

R1405_RF 0.00

R1406_RF 0.00

R1407_RF 0.00

R1408_RF 0.00

R1409_RF 0.00

R1410_RF 0.00

R1411_RF 0.00

R1412_RF 0.00

R1413_RF 0.00

R1414_RF 0.00

R1415_RF 0.00

R1416_RF 0.00

R1417_RF 0.00

R1418_RF 0.00

R1419_RF 0.00

R1420_RF 0.00

R1421_RF 0.00

R1422_RF 0.00

R1423_RF 0.00

R1424_RF 0.00

R1425_RF 0.00

R1426_RF 0.00

R1427_RF 0.00

R1428_RF 0.00

R1429_RF 0.00

R1430_RF 0.00

R1431_RF 0.00

R1432_RF 0.00

R1433_RF 0.00

R1434_RF 0.00

R1435_RF 0.00

R1436_RF 0.00

R1437_RF 0.00

R1438_RF 0.00

R1439_RF 0.00

R1440_RF 0.00

R1441_RF 0.00

R1442_RF 0.00

R1443_RF 0.00

R1444_RF 0.00

R1445_RF 0.00

R1446_RF 0.00

R1447_RF 0.00

R1448_RF 0.00

R1449_RF 0.00

R1450_RF 0.00

R1451_RF 0.00

R1452_RF 0.00

R1453_RF 0.00

R1454_RF 0.00

R1455_RF 0.00

R1456_RF 0.00

R1457_RF 0.00

R1458_RF 0.00

R1459_RF 0.00

R1460_RF 0.00

R1461_RF 0.00

R1462_RF 0.00

R1463_RF 0.00

R1464_RF 0.00

R1465_RF 0.00

R1466_RF 0.00

R1467_RF 0.00

R1468_RF 0.00

R1469_RF 0.00

R1470_RF 0.00

R1471_RF 0.00

R1472_RF 0.00

R1473_RF 0.00

R1474_RF 0.00

R1475_RF 0.00

R1476_RF 0.00

R1477_RF 0.00

R1478_RF 0.00

R1479_RF 0.00

R1480_RF 0.00

R1481_RF 0.00

R1482_RF 0.00

R1483_RF 0.00

R1484_RF 0.00

R1485_RF 0.00

R1486_RF 0.00

R1487_RF 0.00

R1488_RF 0.00

R1489_RF 0.00

R1490_RF 0.00

R1491_RF 0.00

R1492_RF 0.00

R1493_RF 0.00

R1494_RF 0.00

R1495_RF 0.00

R1496_RF 0.00

R1497_RF 0.00

R1498_RF 0.00

R1499_RF 0.00

R1500_RF 0.00

R1501_RF 0.00

R1502_RF 0.00

R1503_RF 0.00

R1504_RF 0.00

R1505_RF 0.00

R1506_RF 0.00

R1507_RF 0.00

R1508_RF 0.00

R1509_RF 0.00

R1510_RF 0.00

R1511_RF 0.00

R1512_RF 0.00

R1513_RF 0.00

R1514_RF 0.00

R1515_RF 0.00

R1516_RF 0.00

R1517_RF 0.00

R1518_RF 0.00

R1519_RF 0.00

R1520_RF 0.00

R1521_RF 0.00

R1522_RF 0.00

R1523_RF 0.00

R1524_RF 0.00

R1525_RF 0.00

R1526_RF 0.00

R1527_RF 0.00

R1528_RF 0.00

R1529_RF 0.00

R1530_RF 0.00

R1531_RF 0.00

R1532_RF 0.00

R1533_RF 0.00

R1534_RF 0.00

R1535_RF 0.00

R1536_RF 0.00

R1537_RF 0.00

R1538_RF 0.00

R1539_RF 0.00

R1540_RF 0.00

R1541_RF 0.00

R1542_RF 0.00

R1543_RF 0.00

R1544_RF 0.00

R1545_RF 0.00

R1546_RF 0.00

R1547_RF 0.00

R1548_RF 0.00

R1549_RF 0.00

R1550_RF 0.00

R1551_RF 0.00

R1552_RF 0.00

R1553_RF 0.00

R1554_RF 0.00

R1555_RF 0.00

R1556_RF 0.00

R1557_RF 0.00

R1558_RF 0.00

R1559_RF 0.00

R1560_RF 0.00

R1561_RF 0.00

R1562_RF 0.00

R1563_RF 0.00

R1564_RF 0.00

R1565_RF 0.00

R1566_RF 0.00

R1567_RF 0.00

R1568_RF 0.00

R1569_RF 0.00

R1570_RF 0.00

R1571_RF 0.00

R1572_RF 0.00

R1573_RF 0.00

R1574_RF 0.00

R1575_RF 0.00

R1576_RF 0.00

R1577_RF 0.00

R1578_RF 0.00

R1579_RF 0.00


R1580_RF 0.00

R1581_RF 0.00

R1582_RF 0.00


R1583_RF 0.00

R1584_RF 0.00

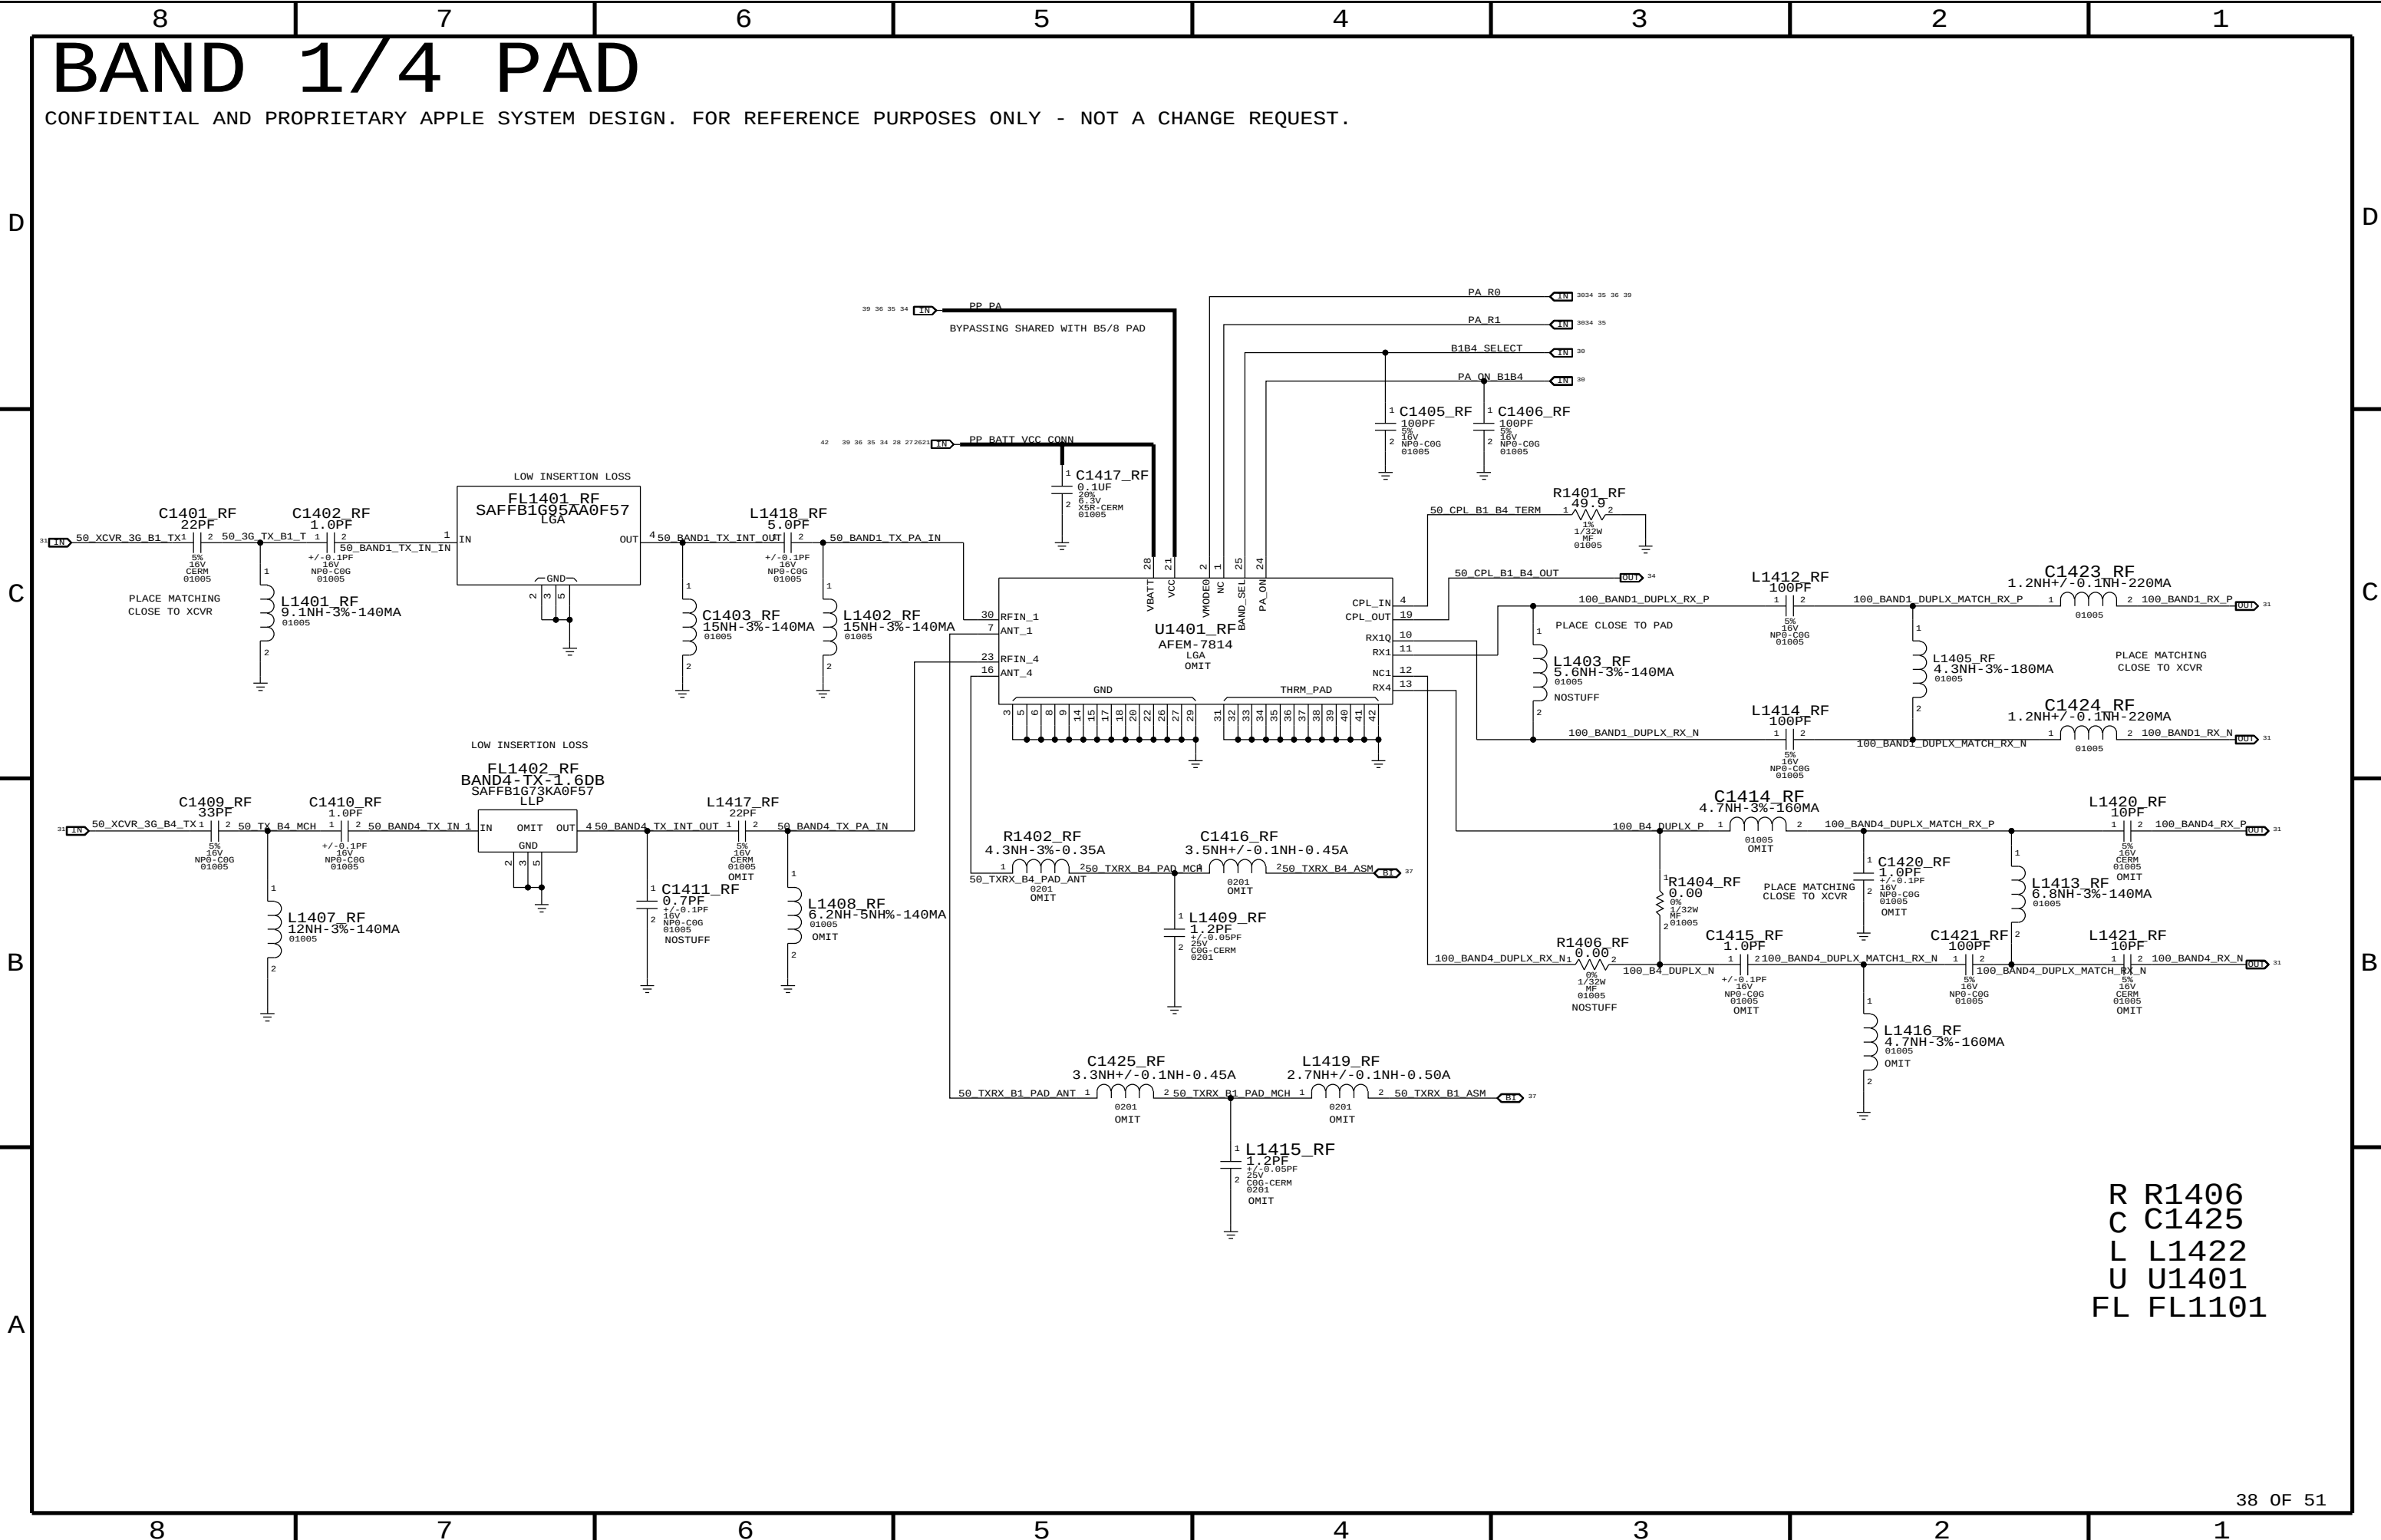[illegible]

BAND2 PAD

CONFIDENTIAL AND PROPRIETARY APPLE SYSTEM DESIGN. FOR REFERENCE PURPOSES ONLY - NOT A CHANGE REQUEST.

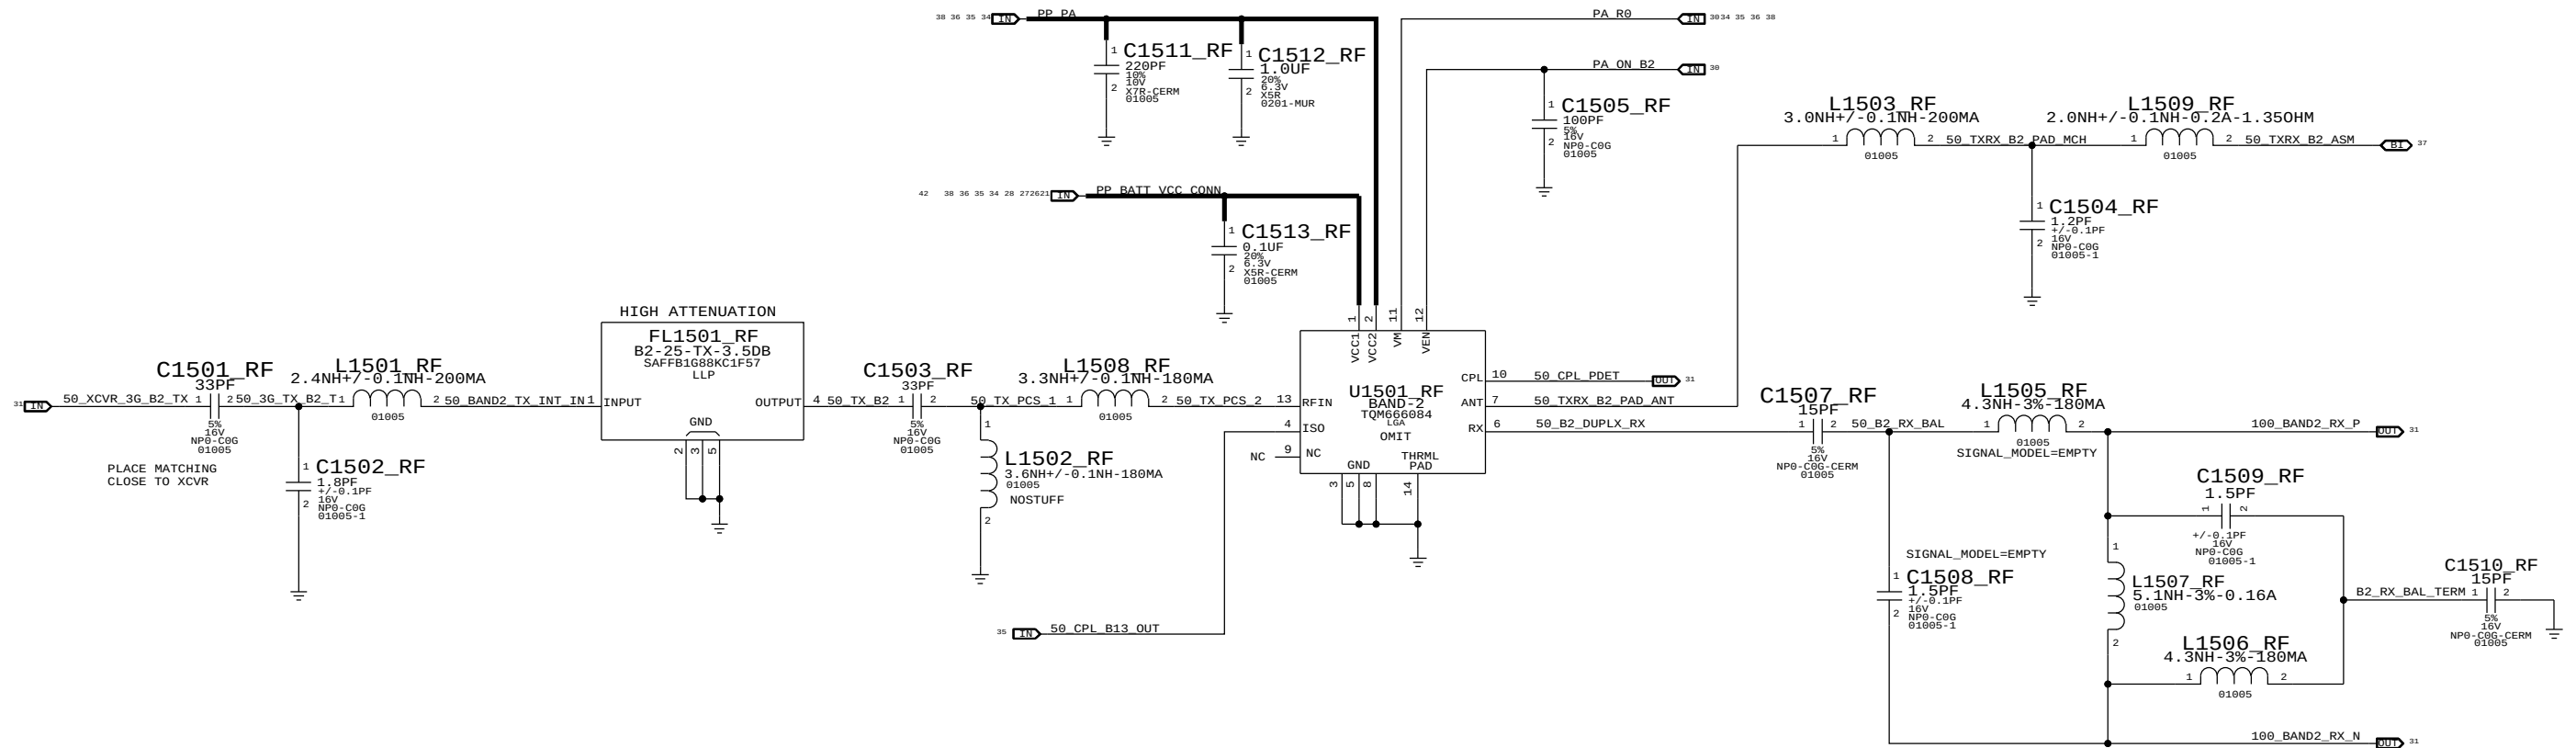

R R1501
C C1513
L L1509
U U1501
FL FL1501


RX DIVERSITY

CONFIDENTIAL AND PROPRIETARY APPLE SYSTEM DESIGN. FOR REFERENCE PURPOSES ONLY - NOT A CHANGE REQUEST.

DIVERSITY MODULE LOGIC

BAND VC1 VC2 VC3
=====

BAND 1/4
BAND 2
BAND 5
BAND 8
BAND 13/17

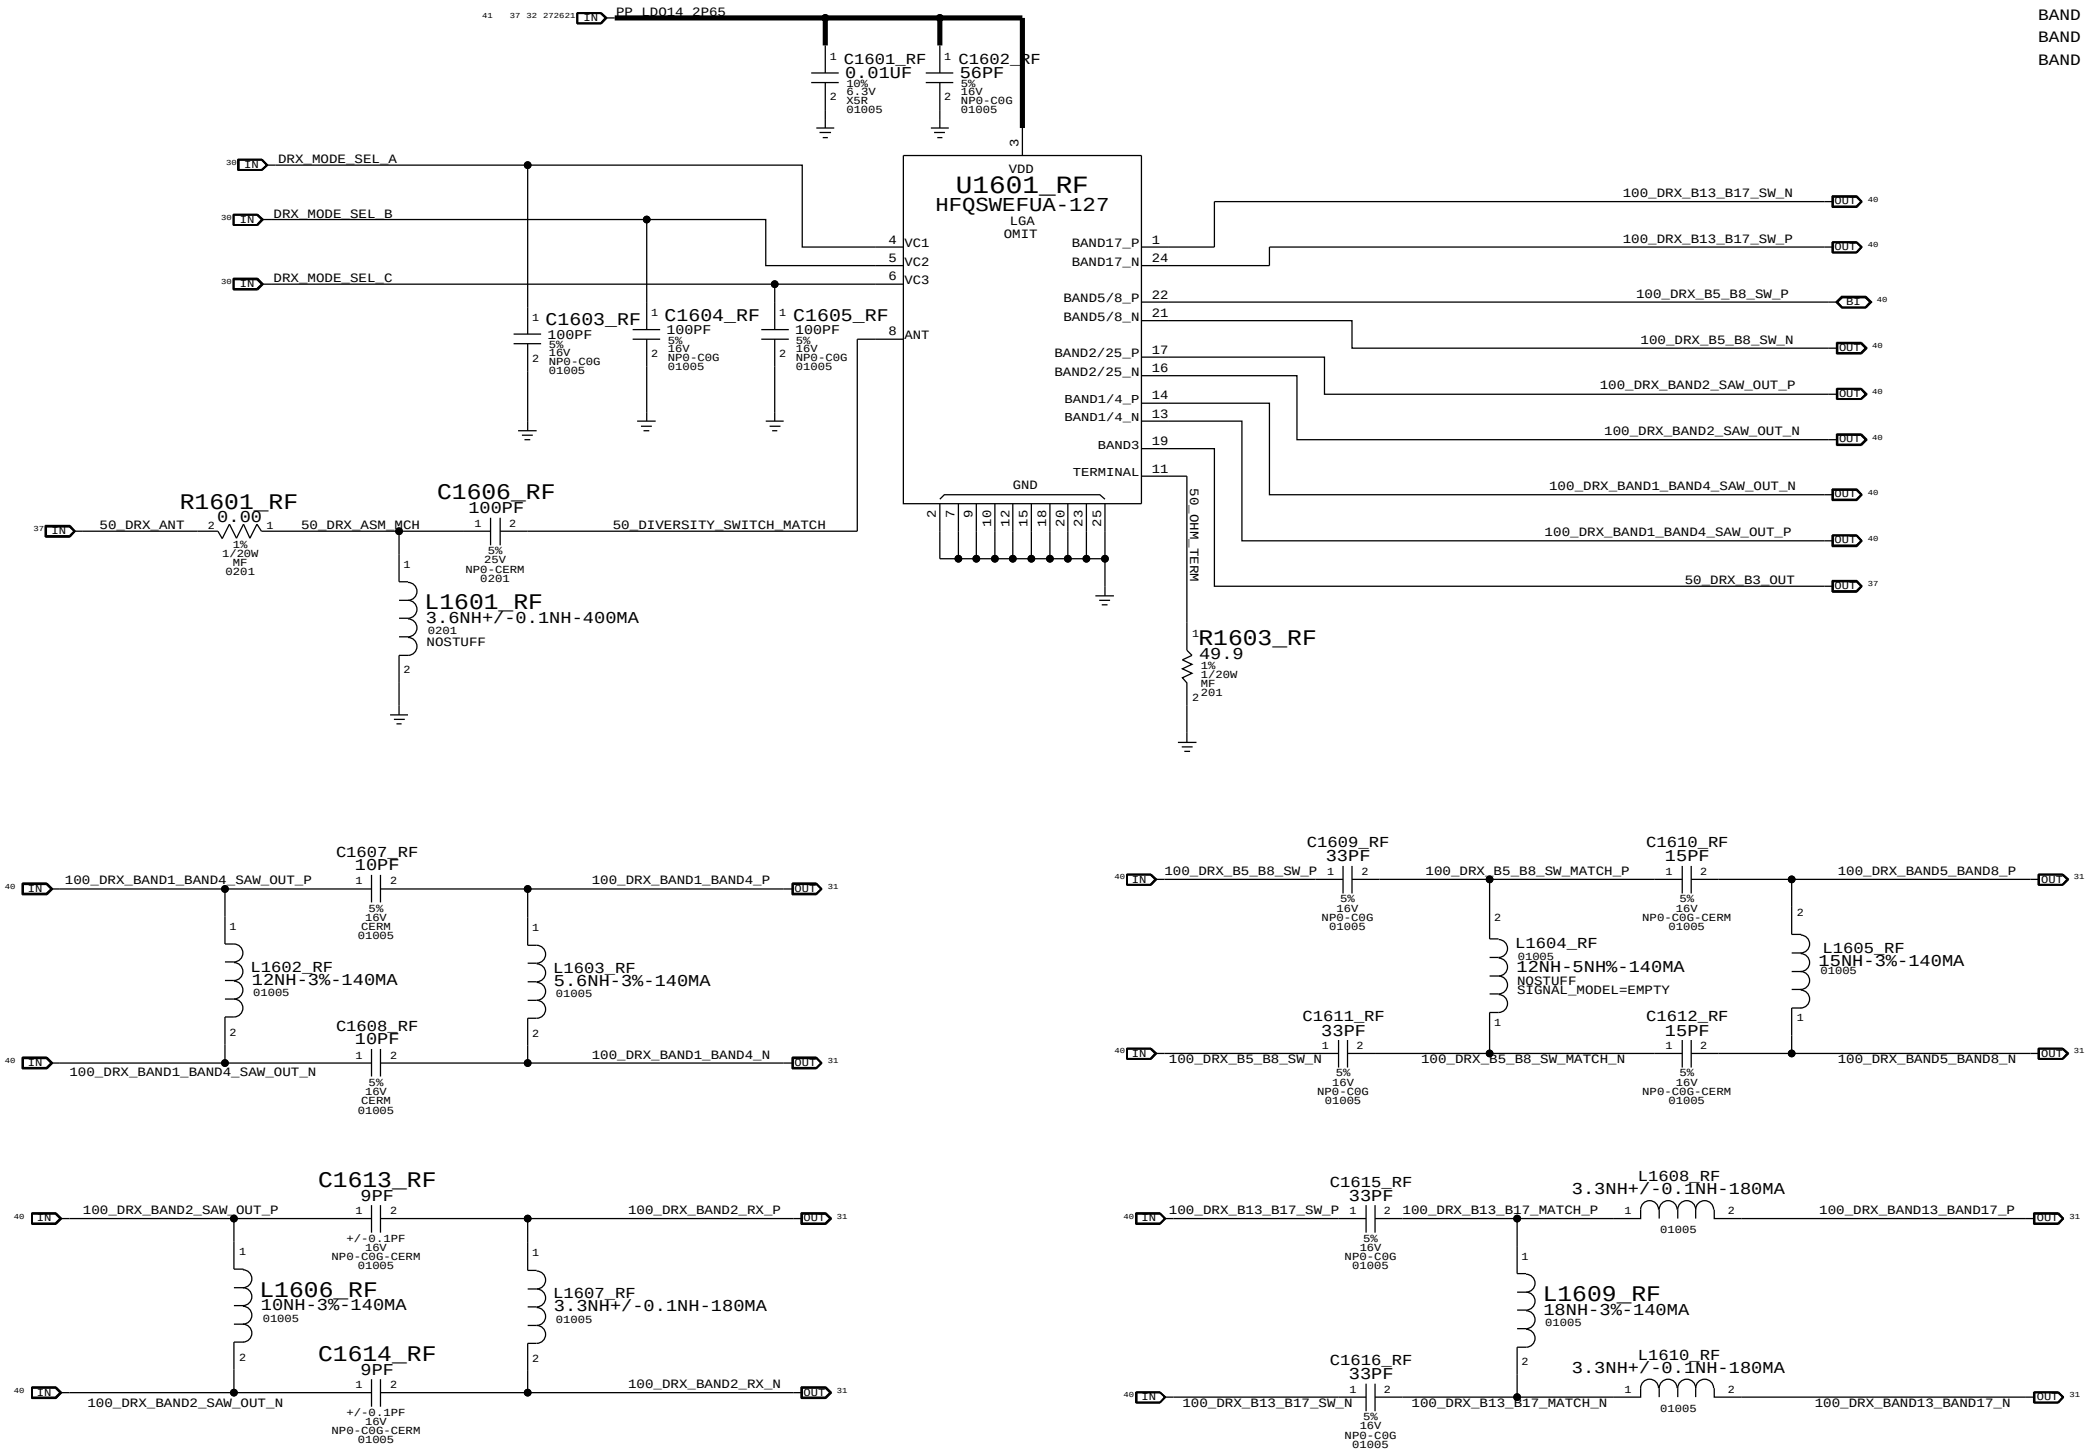

R R1603
C C1616
L L1610
U U1601

GPS

UPPER_ANT_CELL

UPPER_ANT_GPS

LOWER_ANT

R R1704
C C1729
L L1733
U U1703

CONFIDENTIAL AND PROPRIETARY APPLE SYSTEM DESIGN. FOR REFERENCE PURPOSES ONLY - NOT A CHANGE REQUEST.

41 OF 51

GPS

UPPER_ANT_CELL

UPPER_ANT_GPS

LOWER_ANT

R R1704
C C1729
L L1733
U U1703

CONFIDENTIAL AND PROPRIETARY APPLE SYSTEM DESIGN. FOR REFERENCE PURPOSES ONLY - NOT A CHANGE REQUEST.

41 OF 51

GPS

UPPER_ANT_CELL

UPPER_ANT_GPS

LOWER_ANT

R R1704
C C1729
L L1733
U U1703

CONFIDENTIAL AND PROPRIETARY APPLE SYSTEM DESIGN. FOR REFERENCE PURPOSES ONLY - NOT A CHANGE REQUEST.

41 OF 51

GPS

UPPER_ANT_CELL

UPPER_ANT_GPS

LOWER_ANT

R R1704
C C1729
L L1733
U U1703

CONFIDENTIAL AND PROPRIETARY APPLE SYSTEM DESIGN. FOR REFERENCE PURPOSES ONLY - NOT A CHANGE REQUEST.

41 OF 51

GPS

UPPER_ANT_CELL

UPPER_ANT_GPS

LOWER_ANT


R R1704
C C1729
L L1733
U U1703

CONFIDENTIAL AND PROPRIETARY APPLE SYSTEM DESIGN. FOR REFERENCE PURPOSES ONLY - NOT A CHANGE REQUEST.

41 OF 51

WLAN/BT

CONFIDENTIAL AND PROPRIETARY APPLE SYSTEM DESIGN. FOR REFERENCE PURPOSES ONLY - NOT A CHANGE REQUEST.

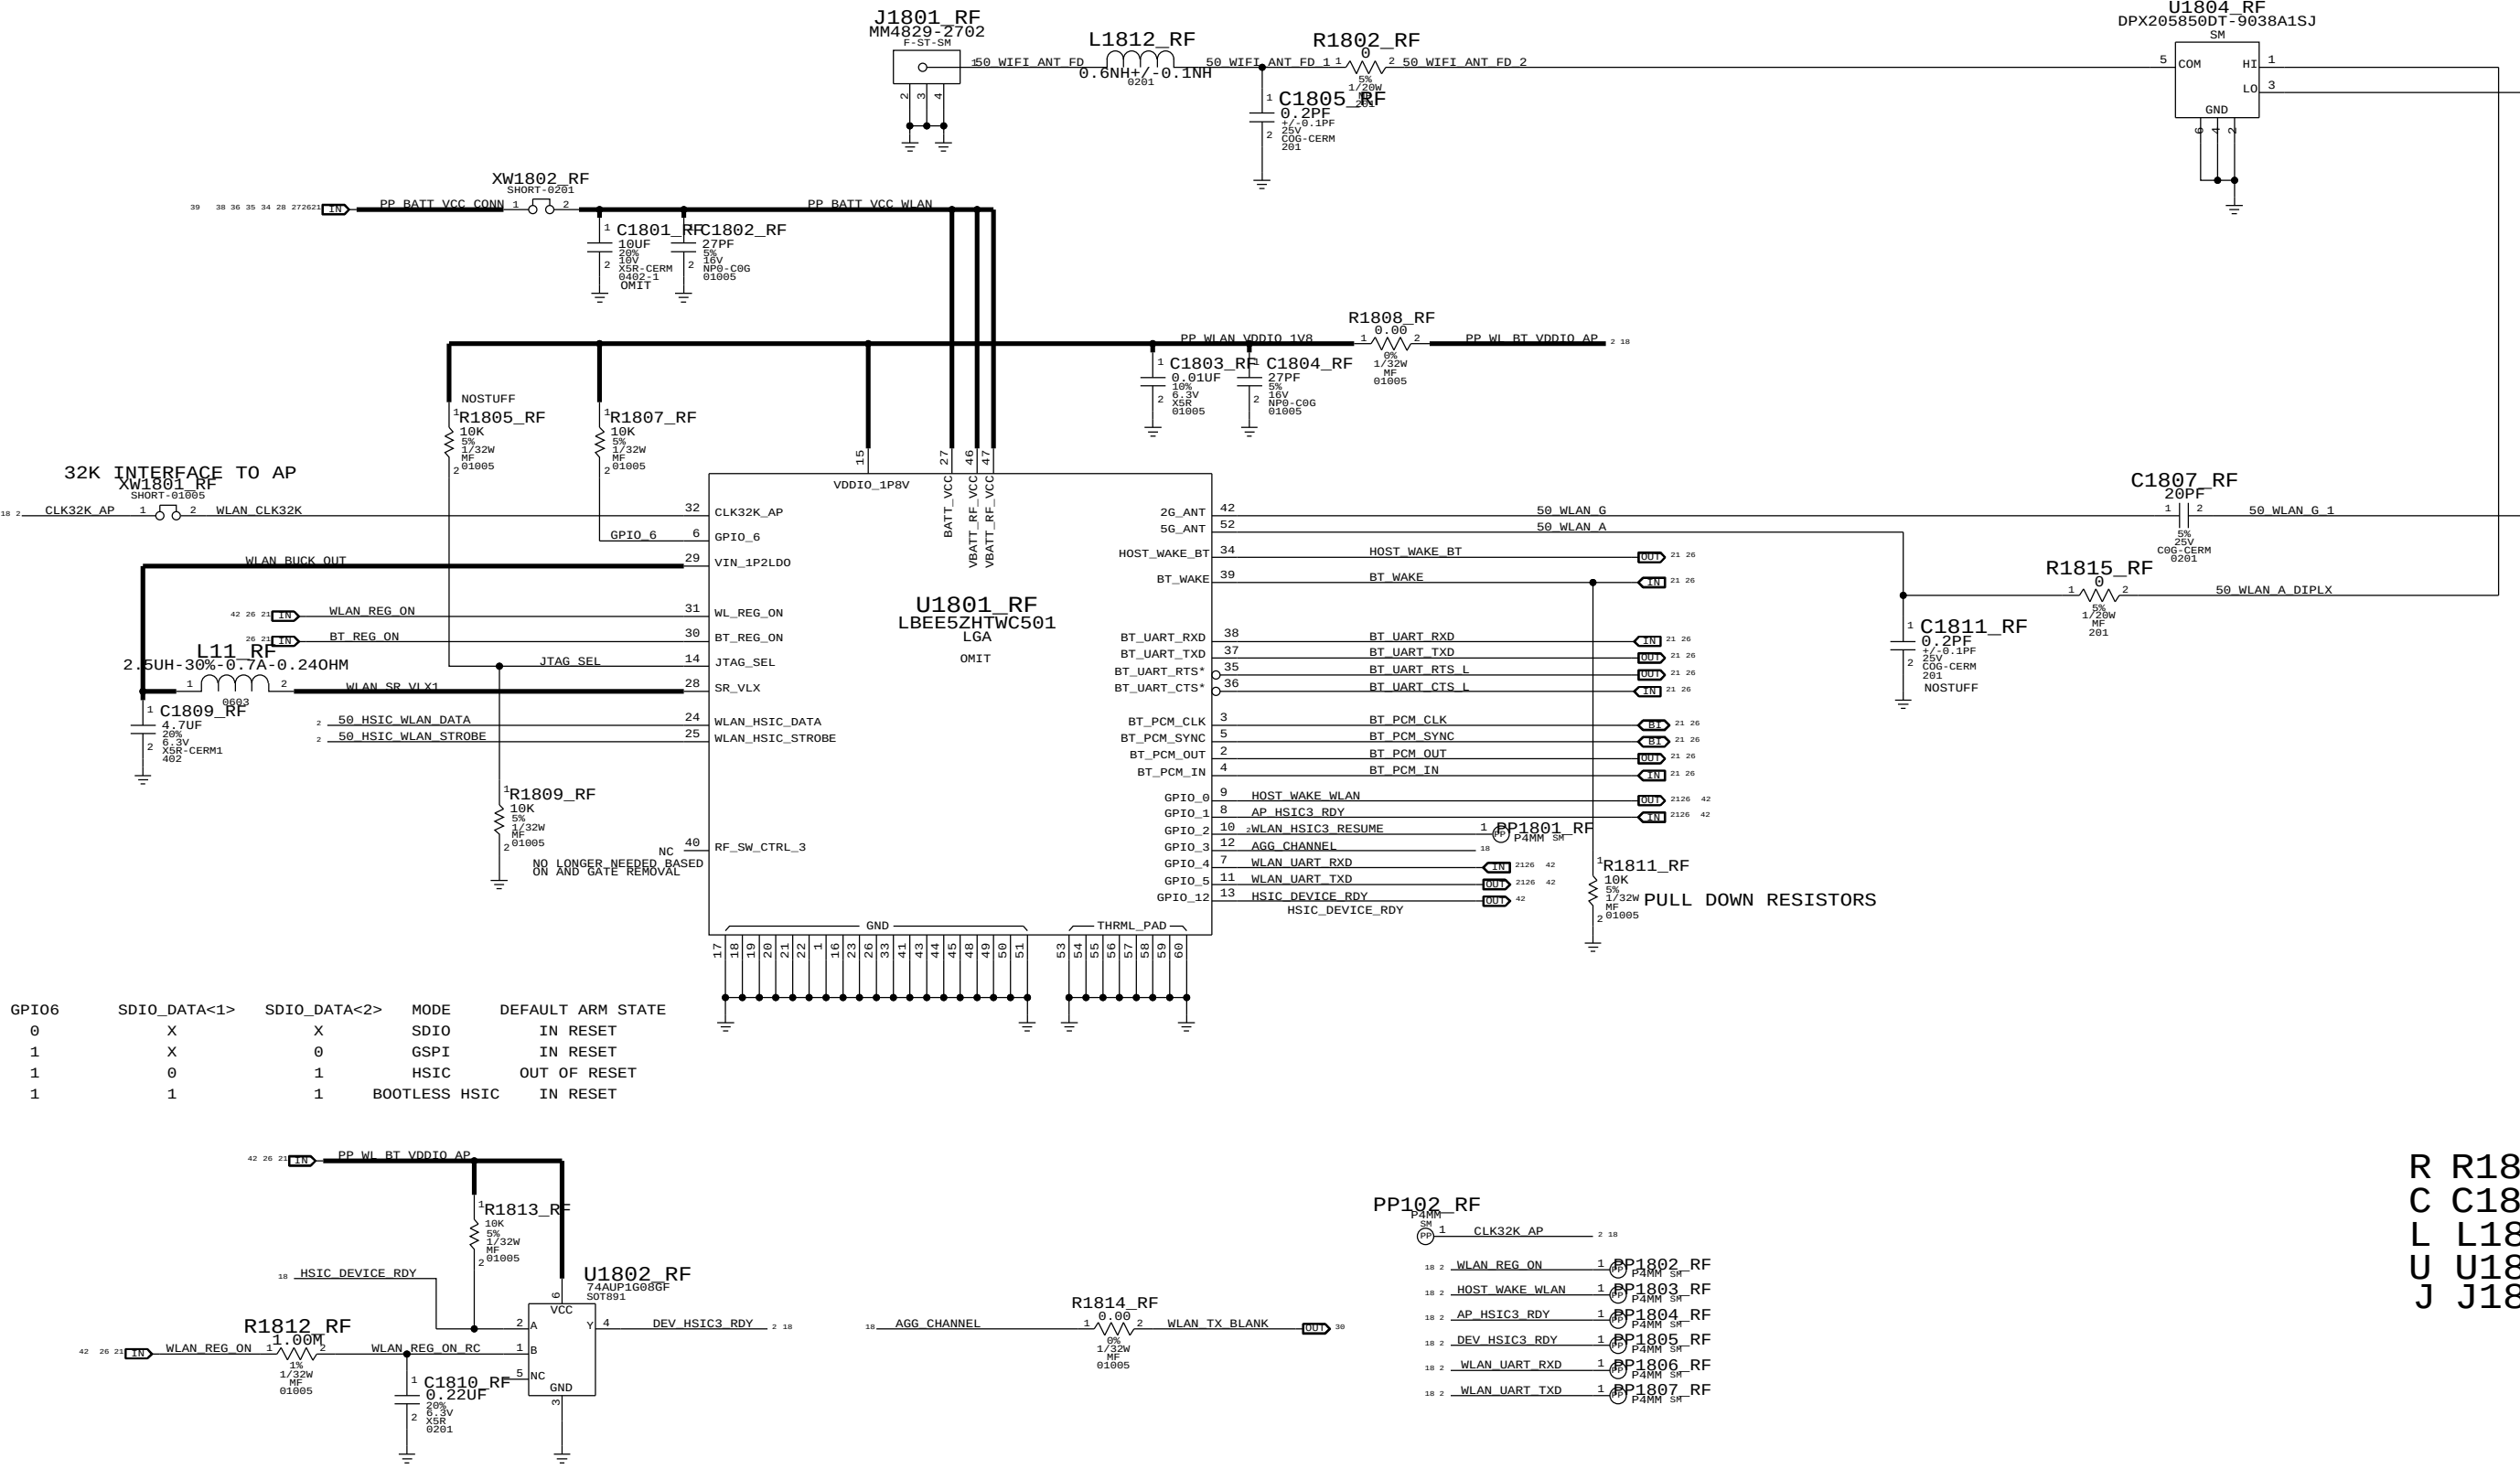

R R1815
C C1811
L L1812
U U1802
J J1802

RADIO BOM OPTIONS

CONFIDENTIAL AND PROPRIETARY APPLE SYSTEM DESIGN. FOR REFERENCE PURPOSES ONLY - NOT A CHANGE REQUEST.

HW_ID PA_ID BOM OPTIONS

PART#	QTY	DESCRIPTION	REFERENCE DESIGNATOR(S)	CRITICAL	BOM OPTION
118S0685	1	PA_ID RES DIVIDER	R304_RF	Y	B4_17
118S0656	1	PA_ID RES DIVIDER	R304_RF	Y	B3_13
118S0719	1	PA_ID RES DIVIDER	R302_RF	Y	B4_17
118S0685	1	PA_ID RES DIVIDER	R302_RF	Y	B3_13

SPI NOR BOM OPTIONS

PART#	QTY	DESCRIPTION	REFERENCE DESIGNATOR(S)	CRITICAL	BOM OPTION
335S0874	1	SERIAL SPI NOR - MICRONIX	U001_RF	Y	B4_17
335S0874	1	SERIAL SPI NOR - MICRONIX	U001_RF	Y	B3_13

B5/B5E BOM OPTIONS

PART#	QTY	DESCRIPTION	REFERENCE DESIGNATOR(S)	CRITICAL	BOM OPTION
353S3415	1	SKY77487 BAND 5/8 PAD	U1001_RF	Y	B4_17
353S3568	1	SKY77491 BAND5E/8 PAD	U1001_RF	Y	B3_13
155S0552	1	BAND5 TX SAW	FL1001_RF	Y	B4_17
155S0742	1	BAND5/BC10 TX SAW	FL1001_RF	Y	B3_13
152S1563	1	1.5NH, INDUCTOR - MURATA	L1001_RF	Y	B4_17
152S1662	1	1.5NH, INDUCTOR - TDK	L1001_RF	Y	B3_13
152S1577	1	15NH, INDUCTOR - MURATA	L1002_RF	Y	B4_17
152S1665	1	15NH, INDUCTOR - TDK	L1002_RF	Y	B3_13
152S1576	1	12NH, INDUCTOR - MURATA	L1003_RF	Y	B4_17
152S1664	1	12NH, INDUCTOR - TDK	L1003_RF	Y	B3_13
152S1570	1	4.7NH, INDUCTOR - MURATA	L1010_RF	Y	B4_17
152S1663	1	4.7NH, INDUCTOR - TDK	L1010_RF	Y	B3_13

B13/17 BOM OPTIONS

PART#	QTY	DESCRIPTION	REFERENCE DESIGNATOR(S)	CRITICAL	BOM OPTION
152S1328	1	4.3NH INDUCTOR - 0201	C1111_RF	Y	B4_17
152S1353	1	3.6NH INDUCTOR - 0201	C1111_RF	Y	B3_13
131S0198	1	1.8PF CAPACITOR - 0201	L1103_RF	Y	B4_17
118S0724	1	0 OHM JUMPER - 0201	C1112_RF	Y	B4_17
131S0204	1	22PF CAPACITOR - 0201	C1112_RF	Y	B3_13
118S0724	1	0 OHM JUMPER - 0201	L1105_RF	Y	B4_17
152S1443	1	2.0NH INDUCTOR - 0201	L1105_RF	Y	B3_13
152S1320	1	7.5NH INDUCTOR - 0201	C1113_RF	Y	B4_17
131S0166	1	39PF CAPACITOR - 0201	C1113_RF	Y	B3_13
131S0176	1	2.4PF CAPACITOR - 0201	C1117_RF	Y	B4_17

DCDC BOM OPTIONS

PART#	QTY	DESCRIPTION	REFERENCE DESIGNATOR(S)	CRITICAL	BOM OPTION
152S1648	1	POWER INDUCTOR - TAIYO YUDEN	L1201_RF	Y	B4_17
152S1648	1	POWER INDUCTOR - TAIYO YUDEN	L1201_RF	Y	B3_13
152S1564	1	2.4NH, INDUCTOR - MURATA	L1205_RF	Y	B4_17
152S1564	1	2.4NH, INDUCTOR - MURATA	L1205_RF	Y	B3_13

WIFI BOM OPTIONS

PART#	QTY	DESCRIPTION	REFERENCE DESIGNATOR(S)	CRITICAL	BOM OPTION
339S0171	1	WIFI MODULE - MURATA	U1001_RF	Y	B4_17
339S0171	1	WIFI MODULE - MURATA	U1001_RF	Y	B3_13
339S0175	1	WIFI MODULE - USI	U1001_RF	Y	B4_17
339S0175	1	WIFI MODULE - USI	U1001_RF	Y	B3_13

SINGING CAP BOM OPTIONS
NEED TO COPY FROM AP TABLE
WHEN STAN FINISHES

B5/B5E BOM OPTIONS

PART#	QTY	DESCRIPTION	REFERENCE DESIGNATOR(S)	CRITICAL	BOM OPTION
117S0002	1	0 OHM RESISTOR - 0201	C1023_RF	Y	B4_17
152S1343	1	12NH INDUCTOR - 0201	C1012_RF	Y	B4_17
131S0428	1	10PF CAPACITOR - 0201	L1004_RF	Y	B4_17
131S0457	1	100PF CAPACITOR - 0201	C1023_RF	Y	B3_13
131S0425	1	0.5PF CAPACITOR - 0201	C1012_RF	Y	B3_13
152S1336	1	8.2NH INDUCTOR - 0201	L1004_RF	Y	B3_13

B13/17 BOM OPTIONS

PART#	QTY	DESCRIPTION	REFERENCE DESIGNATOR(S)	CRITICAL	BOM OPTION
155S0620	1	BAND17 TX SAW	FL1101_RF	Y	B4_17
155S0619	1	BAND13 TX SAW	FL1101_RF	Y	B3_13
353S3507	1	BAND17 PAM - SKYWORKS	U1101_RF	Y	B4_17
353S3441	1	BAND13 PAM - AVAGO	U1101_RF	Y	B3_13
155S0709	1	BAND17 DUPLEXER - MURATA	U1102_RF	Y	B4_17
155S0738	1	BAND13 DUPLEXER - EPCOS	U1102_RF	Y	B3_13
152S1336	1	BAND17 INDUCTOR - 8.2NH	L1104_RF	Y	B4_17
152S1342	1	BAND13 INDUCTOR - 15NH	L1104_RF	Y	B3_13
152S1577	1	15NH, INDUCTOR - MURATA	L1102_RF	Y	B4_17
152S1576	1	12NH, INDUCTOR - MURATA	L1102_RF	Y	B3_13

B2 PAD BOM OPTIONS

PART#	QTY	DESCRIPTION	REFERENCE DESIGNATOR(S)	CRITICAL	BOM OPTION
353S3715	1	TQM666084 B2 TQS PAD	U1501_RF	Y	B4_17
353S3459	1	TQM666083 B25 TQS PAD	U1501_RF	Y	B3_13

DIVERISTY MODULE BOM OPTIONS

PART#	QTY	DESCRIPTION	REFERENCE DESIGNATOR(S)	CRITICAL	BOM OPTION
353S3516	1	B17 MURATA DIVERSITY MODULE	U1601_RF	Y	B4_17
353S3562	1	B13/BC10 DIVERSITY MODULE	U1601_RF	Y	B3_13

B3/DCS1800 BOM OPTIONS

PART#	QTY	DESCRIPTION	REFERENCE DESIGNATOR(S)	CRITICAL	BOM OPTION
155S0596	1	DCS1800 RX FIL	FL1301_RF	Y	B4_17
155S0729	1	BAND3 RX FIL	FL1301_RF	Y	B3_13
155S0695	1	THRU LINE	FL1302_RF	Y	B4_17
155S0722	1	BAND13 TX LPF	FL1302_RF	Y	B3_13
152S1656	1	3.0NH INDUCTOR	R1301_RF	Y	B3_13
152S1742	1	1.6NH INDUCTOR	R1302_RF	Y	B4_17
118S0652	1	49.90HM RES	R1303_RF	Y	B3_13
118S0652	1	49.90HM RES	R1305_RF	Y	B4_17
152S1562	1	1.2NH INDUCTOR	L1304_RF	Y	B4_17
152S1720	1	1.8NH INDUCTOR	L1304_RF	Y	B3_13
152S1562	1	1.2NH INDUCTOR	L1305_RF	Y	B4_17
152S1720	1	1.8NH INDUCTOR	L1305_RF	Y	B3_13
152S1569	1	3.9NH INDUCTOR	L1301_RF	Y	B4_17
152S1570	1	4.7NH INDUCTOR	L1301_RF	Y	B3_13

B3/B4 RX BOM OPTIONS

PART#	QTY	DESCRIPTION	REFERENCE DESIGNATOR(S)	CRITICAL	BOM OPTION
152S1570	1	4.7NH INDUCTOR - 01005	C1414_RF	Y	B4_17
131S0375	1	1.0PF CAPACITOR - 01005	C1415_RF	Y	B4_17
131S0375	1	1.0PF CAPACITOR - 01005	C1420_RF	Y	B4_17
152S1570	1	4.7NH INDUCTOR - 01005	L1416_RF	Y	B4_17
152S1571	1	5.6NH INDUCTOR - 01005	C1414_RF	Y	B3_13
131S0377	1	1.2PF CAPACITOR - 01005	C1415_RF	Y	B3_13
131S0377	1	1.2PF CAPACITOR - 01005	C1420_RF	Y	B3_13
152S1571	1	5.6NH INDUCTOR - 01005	L1416_RF	Y	B3_13
131S0219	1	10PF CAPACITOR - 01005	L1420_RF	Y	B4_17
131S0219	1	10PF CAPACITOR - 01005	L1421_RF	Y	B4_17
152S1562	1	1.2NH INDUCTOR - 01005	L1420_RF	Y	B3_13
152S1562	1	1.2NH INDUCTOR - 01005	L1421_RF	Y	B3_13
152S1328	1	4.3NH INDUCTOR - 0201	R1402_RF	Y	B4_17
152S1688	1	3.5NH INDUCTOR - 0201	C1416_RF	Y	B4_17
152S1284	1	3.3NH INDUCTOR - 0201	R1402_RF	Y	B3_13
152S1284	1	3.3NH INDUCTOR - 0201	C1416_RF	Y	B3_13

B3/B4 TX BOM OPTIONS

PART#	QTY	DESCRIPTION	REFERENCE DESIGNATOR(S)	CRITICAL	BOM OPTION
131S0215	1	22PF CAPACITOR - 01005	L1417_RF	Y	B4_17
152S1569	1	3.9NH INDUCTOR - 01005	L1417_RF	Y	B3_13
131S0369	1	0.5PF CAPACITOR - 01005	L1408_RF	Y	B3_13
152S1284	1	3.3NH INDUCTOR - 0201	C1425_RF	Y	B4_17
152S1221	1	2.7NH INDUCTOR - 0201	L1419_RF	Y	B4_17
131S0551	1	1.2PF CAPACITOR - 0201	L1415_RF	Y	B4_17
152S1284	1	3.3NH INDUCTOR - 0201	C1425_RF	Y	B3_13
152S1221	1	2.7NH INDUCTOR - 0201	L1419_RF	Y	B3_13
131S0551	1	1.2PF CAPACITOR - 0201	L1415_RF	Y	B3_13

B3/B4 BOM OPTIONS

PART#	QTY	DESCRIPTION	REFERENCE DESIGNATOR(S)	CRITICAL	BOM OPTION
353S3255	1	B1/4 PAD - AVAGO	U1401_RF	Y	B4_17
353S3443	1	B1/3 PAD - AVAGO	U1401_RF	Y	B3_13
155S0590	1	B4 TX FIL	FL1402_RF	Y	B4_17
155S0712	1	B3 TX FIL	FL1402_RF	Y	B3_13

8			7			6			5			4			3			2			1			
D	Title: Basenet Report Design: single_brd Date: Jul 2 13:25:05 2012			Base Signal			Location([Zone][dir])			Base Signal			Location([Zone][dir])			Base Signal			Location([Zone][dir])			Base Signal		
	Base nets and synonyms for single_brd_lib.SINGLE_BRD(@single_brd_lib.single_brd(sch.1))			Base Signal			Location([Zone][dir])			Base Signal			Location([Zone][dir])			Base Signal			Location([Zone][dir])			Base Signal		
	45_CAM0_CLK			45_CAM0_CLK - @single_brd_lib.SINGLE_BRD			7C1 2007			45_CAM0_CLK_R			45_CAM0_CLK_R - @single_brd_lib.SINGLE_BRD			7C3			45_CAM1_CLK			45_CAM1_CLK - @single_brd_lib.SINGLE_BRD		
	45_CAM1_CLK_R			45_CAM1_CLK_R - @single_brd_lib.SINGLE_BRD			7C1 1108			45_CAM1_CLK_R			45_CAM1_CLK_R - @single_brd_lib.SINGLE_BRD			7C3			45_DWI_AP_CLK			45_DWI_AP_CLK - @single_brd_lib.SINGLE_BRD		
	45_DWI_AP_CLK			45_DWI_AP_CLK - @single_brd_lib.SINGLE_BRD			3D3 13A2 13B7			45_DWI_AP_DO			45_DWI_AP_DO - @single_brd_lib.SINGLE_BRD			3D3 13A2 13B7			45_FMI0_DQS			45_FMI0_DQS - @single_brd_lib.SINGLE_BRD		
	45_FMI0_DQS			45_FMI0_DQS - @single_brd_lib.SINGLE_BRD			6B6 6B8 6C2			45_FMI0_RE_L			45_FMI0_RE_L - @single_brd_lib.SINGLE_BRD			6B6 6B8 6C2			45_FMI1_DQS			45_FMI1_DQS - @single_brd_lib.SINGLE_BRD		
	45_FMI1_DQS			45_FMI1_DQS - @single_brd_lib.SINGLE_BRD			6B3 6B5			45_FMI1_RE_L			45_FMI1_RE_L - @single_brd_lib.SINGLE_BRD			6B3 6B5			45_I2S0_BCLK			45_I2S0_BCLK - @single_brd_lib.SINGLE_BRD		
	45_I2S0_BCLK			45_I2S0_BCLK - @single_brd_lib.SINGLE_BRD			3D4 9C2			45_I2S0_MCK_R			45_I2S0_MCK_R - @single_brd_lib.SINGLE_BRD			3D5			45_I2S0_MCLK			45_I2S0_MCLK - @single_brd_lib.SINGLE_BRD		
	45_I2S0_MCLK			45_I2S0_MCLK - @single_brd_lib.SINGLE_BRD			3D5 9C2			45_I2S1_BCLK			45_I2S1_BCLK - @single_brd_lib.SINGLE_BRD			3D4 21C4			BB_I2S_CLK			BB_I2S_CLK - @single_brd_lib.RADIO_MLB(1594_page 19)		
	BB_I2S_CLK			BB_I2S_CLK - @single_brd_lib.RADIO_MLB(1594_page 19)			26C8 30B4			45_I2S2_BCLK			45_I2S2_BCLK - @single_brd_lib.SINGLE_BRD			3D4 9C2 14C5			45_I2S2_MCK_R			45_I2S2_MCK_R - @single_brd_lib.SINGLE_BRD		
C	45_I2S2_MCK_R			45_I2S2_MCK_R - @single_brd_lib.SINGLE_BRD			3D5			45_I2S2_MCLK			45_I2S2_MCLK - @single_brd_lib.SINGLE_BRD			3D5 14C5			45_I2S3_BCLK			45_I2S3_BCLK - @single_brd_lib.SINGLE_BRD		
	45_I2S3_BCLK			45_I2S3_BCLK - @single_brd_lib.SINGLE_BRD			3C4 21B4			BT_PCM_CLK			BT_PCM_CLK - @single_brd_lib.RADIO_MLB(1594_page 19)			26B8 42B3			45_I2S4_BCLK			45_I2S4_BCLK - @single_brd_lib.SINGLE_BRD		
	45_I2S4_BCLK			45_I2S4_BCLK - @single_brd_lib.SINGLE_BRD			3C4 9C2			45_PROX_RX			45_PROX_RX - @single_brd_lib.SINGLE_BRD			11C8 17C8			45_PROX_RX_CONN			45_PROX_RX_CONN - @single_brd_lib.SINGLE_BRD		
	45_PROX_RX_CONN			45_PROX_RX_CONN - @single_brd_lib.SINGLE_BRD			11C5			45_XTAL_24M_I			45_XTAL_24M_I - @single_brd_lib.SINGLE_BRD			2C4			45_XTAL_24M_O			45_XTAL_24M_O - @single_brd_lib.SINGLE_BRD		
	45_XTAL_24M_O			45_XTAL_24M_O - @single_brd_lib.SINGLE_BRD			2B4			50_HSIC1_DATA			50_HSIC1_DATA - @single_brd_lib.SINGLE_BRD			2C6 21B4			50_HSIC_BB_DATA			50_HSIC_BB_DATA - @single_brd_lib.RADIO_MLB(1594_page 19)		
	50_HSIC_BB_DATA			50_HSIC_BB_DATA - @single_brd_lib.RADIO_MLB(1594_page 19)			26B3 26D8 29B3			50_HSIC1_STB			50_HSIC1_STB - @single_brd_lib.SINGLE_BRD			2C6 21B4			50_HSIC_BB_STROBE			50_HSIC_BB_STROBE - @single_brd_lib.RADIO_MLB(1594_page 19)		
	50_HSIC_BB_STROBE			50_HSIC_BB_STROBE - @single_brd_lib.RADIO_MLB(1594_page 19)			26B3 26C8 29B3			50_HSIC3_DATA			50_HSIC3_DATA - @single_brd_lib.SINGLE_BRD			2B6 21B4			50_HSIC_WLAN_DATA			50_HSIC_WLAN_DATA - @single_brd_lib.RADIO_MLB(1594_page 19)		
	50_HSIC3_DATA			50_HSIC3_DATA - @single_brd_lib.SINGLE_BRD			26B8 42B7			50_HSIC3_STB			50_HSIC3_STB - @single_brd_lib.SINGLE_BRD			2B6 21B4			50_HSIC_WLAN_STROBE			50_HSIC_WLAN_STROBE - @single_brd_lib.RADIO_MLB(1594_page 19)		
	50_HSIC3_STB			50_HSIC3_STB - @single_brd_lib.SINGLE_BRD			26B8 42B7			90_BB_USB_N			90_BB_USB_N - @single_brd_lib.SINGLE_BRD			15B5 21C4			90_BB_USB_D_N			90_BB_USB_D_N - @single_brd_lib.RADIO_MLB(1594_page 19)		
	90_BB_USB_D_N			90_BB_USB_D_N - @single_brd_lib.RADIO_MLB(1594_page 19)			26C3 26C8 29A5			90_BB_USB_P			90_BB_USB_P - @single_brd_lib.SINGLE_BRD			15C5 21C4			90_BB_USB_D_P			90_BB_USB_D_P - @single_brd_lib.RADIO_MLB(1594_page 19)		
B	90_BB_USB_P			90_BB_USB_P - @single_brd_lib.SINGLE_BRD			26C3 26C8 29A5			90_CAM0_MIPI_CLK_CON			90_CAM0_MIPI_CLK_CON - @single_brd_lib.SINGLE_BRD			20C4			90_CAM0_MIPI_CLK_CON			90_CAM0_MIPI_CLK_CON - @single_brd_lib.SINGLE_BRD		
	90_CAM0_MIPI_CLK_CON			90_CAM0_MIPI_CLK_CON - @single_brd_lib.SINGLE_BRD			20B4			90_CAM0_MIPI_CLK_N			90_CAM0_MIPI_CLK_N - @single_brd_lib.SINGLE_BRD			7C5 20C1			90_CAM0_MIPI_CLK_P			90_CAM0_MIPI_CLK_P - @single_brd_lib.SINGLE_BRD		
	90_CAM0_MIPI_CLK_P			90_CAM0_MIPI_CLK_P - @single_brd_lib.SINGLE_BRD			7C5 20C1			90_CAM0_MIPI_DATA0_C			90_CAM0_MIPI_DATA0_C - @single_brd_lib.SINGLE_BRD			20C4			90_CAM0_MIPI_DATA0_C			90_CAM0_MIPI_DATA0_C - @single_brd_lib.SINGLE_BRD		
	90_CAM0_MIPI_DATA0_C			90_CAM0_MIPI_DATA0_C - @single_brd_lib.SINGLE_BRD			20C4			90_CAM0_MIPI_DATA0_N			90_CAM0_MIPI_DATA0_N - @single_brd_lib.SINGLE_BRD			7D5 20C1			90_CAM0_MIPI_DATA0_P			90_CAM0_MIPI_DATA0_P - @single_brd_lib.SINGLE_BRD		
	90_CAM0_MIPI_DATA0_P			90_CAM0_MIPI_DATA0_P - @single_brd_lib.SINGLE_BRD			7D5 20C1			90_CAM0_MIPI_DATA1_C			90_CAM0_MIPI_DATA1_C - @single_brd_lib.SINGLE_BRD			20C4			90_CAM0_MIPI_DATA1_C			90_CAM0_MIPI_DATA1_C - @single_brd_lib.SINGLE_BRD		
	90_CAM0_MIPI_DATA1_C			90_CAM0_MIPI_DATA1_C - @single_brd_lib.SINGLE_BRD			20C4			90_CAM0_MIPI_DATA1_N			90_CAM0_MIPI_DATA1_N - @single_brd_lib.SINGLE_BRD			7D5 20C1			90_CAM0_MIPI_DATA1_P			90_CAM0_MIPI_DATA1_P - @single_brd_lib.SINGLE_BRD		
	90_CAM0_MIPI_DATA1_P			90_CAM0_MIPI_DATA1_P - @single_brd_lib.SINGLE_BRD			7D5 20C1			90_CAM0_MIPI_DATA2_C			90_CAM0_MIPI_DATA2_C - @single_brd_lib.SINGLE_BRD			20B4			90_CAM0_MIPI_DATA2_C			90_CAM0_MIPI_DATA2_C - @single_brd_lib.SINGLE_BRD		
	90_CAM0_MIPI_DATA2_C			90_CAM0_MIPI_DATA2_C - @single_brd_lib.SINGLE_BRD			20B4			90_CAM0_MIPI_DATA2_N			90_CAM0_MIPI_DATA2_N - @single_brd_lib.SINGLE_BRD			7C5 20B1			90_CAM0_MIPI_DATA2_P			90_CAM0_MIPI_DATA2_P - @single_brd_lib.SINGLE_BRD		
	90_CAM0_MIPI_DATA2_P			90_CAM0_MIPI_DATA2_P - @single_brd_lib.SINGLE_BRD			7C5 20B1			90_CAM0_MIPI_DATA3_C			90_CAM0_MIPI_DATA3_C - @single_brd_lib.SINGLE_BRD			20B4			90_CAM0_MIPI_DATA3_C			90_CAM0_MIPI_DATA3_C - @single_brd_lib.SINGLE_BRD		
	90_CAM0_MIPI_DATA3_C			90_CAM0_MIPI_DATA3_C - @single_brd_lib.SINGLE_BRD			20B4			90_CAM0_MIPI_DATA3_N			90_CAM0_MIPI_DATA3_N - @single_brd_lib.SINGLE_BRD			20B4			90_CAM0_MIPI_DATA3_P			90_CAM0_MIPI_DATA3_P - @single_brd_lib.SINGLE_BRD		
A	90_CAM0_MIPI_DATA3_P			90_CAM0_MIPI_DATA3_P - @single_brd_lib.SINGLE_BRD			20B4			90_CAM0_MIPI_DATA3_N			90_CAM0_MIPI_DATA3_N - @single_brd_lib.SINGLE_BRD			20B4			90_CAM0_MIPI_DATA3_P			90_CAM0_MIPI_DATA3_P - @single_brd_lib.SINGLE_BRD		
	90_CAM0_MIPI_DATA3_N			90_CAM0_MIPI_DATA3_N - @single_brd_lib.SINGLE_BRD			20B4			90_CAM0_MIPI_DATA3_P			90_CAM0_MIPI_DATA3_P - @single_brd_lib.SINGLE_BRD			20B4			90_CAM0_MIPI_DATA3_N			90_CAM0_MIPI_DATA3_N - @single_brd_lib.SINGLE_BRD		
	90_CAM0_MIPI_DATA3_P			90_CAM0_MIPI_DATA3_P - @single_brd_lib.SINGLE_BRD			20B4			90_CAM0_MIPI_DATA3_N			90_CAM0_MIPI_DATA3_N - @single_brd_lib.SINGLE_BRD			20B4			90_CAM0_MIPI_DATA3_P			90_CAM0_MIPI_DATA3_P - @single_brd_lib.SINGLE_BRD		
	90_CAM0_MIPI_DATA3_N			90_CAM0_MIPI_DATA3_N - @single_brd_lib.SINGLE_BRD			20B4			90_CAM0_MIPI_DATA3_P														

D	Title: Basenet Report Design: single_brd Date: Jul 2 13:25:05 2012			Base Signal			Location([Zone][dir])			Base Signal			Location([Zone][dir])			Base Signal			Location([Zone][dir])			Base Signal		
	Base nets and synonyms for single_brd_lib.SINGLE_BRD(@single_brd_lib.single_brd(sch.1))			Base Signal			Location([Zone][dir])			Base Signal			Location([Zone][dir])			Base Signal			Location([Zone][dir])			Base Signal		
	45_CAM0_CLK			45_CAM0_CLK - @single_brd_lib.SINGLE_BRD			7C1 2007			45_CAM0_CLK_R			45_CAM0_CLK_R - @single_brd_lib.SINGLE_BRD			7C3			45_CAM1_CLK			45_CAM1_CLK - @single_brd_lib.SINGLE_BRD		
	45_CAM1_CLK_R			45_CAM1_CLK_R - @single_brd_lib.SINGLE_BRD			7C1 1108			45_CAM1_CLK_R			45_CAM1_CLK_R - @single_brd_lib.SINGLE_BRD			7C3			45_DWI_AP_CLK			45_DWI_AP_CLK - @single_brd_lib.SINGLE_BRD		
	45_DWI_AP_CLK			45_DWI_AP_CLK - @single_brd_lib.SINGLE_BRD			3D3 13A2 13B7			45_DWI_AP_DO			45_DWI_AP_DO - @single_brd_lib.SINGLE_BRD			3D3 13A2 13B7			45_FMI0_DQS			45_FMI0_DQS - @single_brd_lib.SINGLE_BRD		
	45_FMI0_DQS			45_FMI0_DQS - @single_brd_lib.SINGLE_BRD			6B6 6B8 6C2			45_FMI0_RE_L			45_FMI0_RE_L - @single_brd_lib.SINGLE_BRD			6B6 6B8 6C2			45_FMI1_DQS			45_FMI1_DQS - @single_brd_lib.SINGLE_BRD		
	45_FMI1_DQS			45_FMI1_DQS - @single_brd_lib.SINGLE_BRD			6B3 6B5			45_FMI1_RE_L			45_FMI1_RE_L - @single_brd_lib.SINGLE_BRD			6B3 6B5			45_I2S0_BCLK			45_I2S0_BCLK - @single_brd_lib.SINGLE_BRD		
	45_I2S0_BCLK			45_I2S0_BCLK - @single_brd_lib.SINGLE_BRD			3D4 9C2			45_I2S0_MCK_R			45_I2S0_MCK_R - @single_brd_lib.SINGLE_BRD			3D5			45_I2S0_MCLK			45_I2S0_MCLK - @single_brd_lib.SINGLE_BRD		
	45_I2S0_MCLK			45_I2S0_MCLK - @single_brd_lib.SINGLE_BRD			3D5 9C2			45_I2S1_BCLK			45_I2S1_BCLK - @single_brd_lib.SINGLE_BRD			3D4 21C4			BB_I2S_CLK			BB_I2S_CLK - @single_brd_lib.RADIO_MLB(1594_page 19)		
	BB_I2S_CLK			BB_I2S_CLK - @single_brd_lib.RADIO_MLB(1594_page 19)			26C8 30B4			45_I2S2_BCLK			45_I2S2_BCLK - @single_brd_lib.SINGLE_BRD			3D4 9C2 14C5			45_I2S2_MCK_R			45_I2S2_MCK_R - @single_brd_lib.SINGLE_BRD		
C	45_I2S2_MCK_R			45_I2S2_MCK_R - @single_brd_lib.SINGLE_BRD			3D5			45_I2S2_MCLK			45_I2S2_MCLK - @single_brd_lib.SINGLE_BRD			3D5 14C5			45_I2S3_BCLK			45_I2S3_BCLK - @single_brd_lib.SINGLE_BRD		
	45_I2S3_BCLK			45_I2S3_BCLK - @single_brd_lib.SINGLE_BRD			3C4 21B4			BT_PCM_CLK			BT_PCM_CLK - @single_brd_lib.RADIO_MLB(1594_page 19)			26B8 42B3			45_I2S4_BCLK			45_I2S4_BCLK - @single_brd_lib.SINGLE_BRD		
	45_I2S4_BCLK			45_I2S4_BCLK - @single_brd_lib.SINGLE_BRD			3C4 9C2			45_PROX_RX			45_PROX_RX - @single_brd_lib.SINGLE_BRD			11C8 17C8			45_PROX_RX_CONN			45_PROX_RX_CONN - @single_brd_lib.SINGLE_BRD		
	45_PROX_RX_CONN			45_PROX_RX_CONN - @single_brd_lib.SINGLE_BRD			11C5			45_XTAL_24M_I			45_XTAL_24M_I - @single_brd_lib.SINGLE_BRD			2C4			45_XTAL_24M_O			45_XTAL_24M_O - @single_brd_lib.SINGLE_BRD		
	45_XTAL_24M_O			45_XTAL_24M_O - @single_brd_lib.SINGLE_BRD			2B4			50_HSIC1_DATA			50_HSIC1_DATA - @single_brd_lib.SINGLE_BRD			2C6 21B4			50_HSIC_BB_DATA			50_HSIC_BB_DATA - @single_brd_lib.RADIO_MLB(1594_page 19)		
	50_HSIC_BB_DATA			50_HSIC_BB_DATA - @single_brd_lib.RADIO_MLB(1594_page 19)			26B3 26D8 29B3			50_HSIC1_STB			50_HSIC1_STB - @single_brd_lib.SINGLE_BRD			2C6 21B4			50_HSIC_BB_STROBE			50_HSIC_BB_STROBE - @single_brd_lib.RADIO_MLB(1594_page 19)		
	50_HSIC_BB_STROBE			50_HSIC_BB_STROBE - @single_brd_lib.RADIO_MLB(1594_page 19)			26B3 26C8 29B3			50_HSIC3_DATA			50_HSIC3_DATA - @single_brd_lib.SINGLE_BRD			2B6 21B4			50_HSIC_WLAN_DATA			50_HSIC_WLAN_DATA - @single_brd_lib.RADIO_MLB(1594_page 19)		
	50_HSIC3_DATA			50_HSIC3_DATA - @single_brd_lib.SINGLE_BRD			26B8 42B7			50_HSIC3_STB			50_HSIC3_STB - @single_brd_lib.SINGLE_BRD			2B6 21B4			50_HSIC_WLAN_STROBE			50_HSIC_WLAN_STROBE - @single_brd_lib.RADIO_MLB(1594_page 19)		
	50_HSIC3_STB			50_HSIC3_STB - @single_brd_lib.SINGLE_BRD			26B8 42B7			90_BB_USB_N			90_BB_USB_N - @single_brd_lib.SINGLE_BRD			15B5 21C4			90_BB_USB_D_N			90_BB_USB_D_N - @single_brd_lib.RADIO_MLB(1594_page 19)		
	90_BB_USB_D_N			90_BB_USB_D_N - @single_brd_lib.RADIO_MLB(1594_page 19)			26C3 26C8 29A5			90_BB_USB_P			90_BB_USB_P - @single_brd_lib.SINGLE_BRD			15C5 21C4			90_BB_USB_D_P			90_BB_USB_D_P - @single_brd_lib.RADIO_MLB(1594_page 19)		
B	90_BB_USB_P			90_BB_USB_P - @single_brd_lib.SINGLE_BRD			26C3 26C8 29A5			90_CAM0_MIPI_CLK_CON			90_CAM0_MIPI_CLK_CON - @single_brd_lib.SINGLE_BRD			20C4			90_CAM0_MIPI_CLK_CON			90_CAM0_MIPI_CLK_CON - @single_brd_lib.SINGLE_BRD		
	90_CAM0_MIPI_CLK_CON			90_CAM0_MIPI_CLK_CON - @single_brd_lib.SINGLE_BRD			20B4			90_CAM0_MIPI_CLK_N			90_CAM0_MIPI_CLK_N - @single_brd_lib.SINGLE_BRD			7C5 20C1			90_CAM0_MIPI_CLK_P			90_CAM0_MIPI_CLK_P - @single_brd_lib.SINGLE_BRD		
	90_CAM0_MIPI_CLK_P			90_CAM0_MIPI_CLK_P - @single_brd_lib.SINGLE_BRD			7C5 20C1			90_CAM0_MIPI_DATA0_C			90_CAM0_MIPI_DATA0_C - @single_brd_lib.SINGLE_BRD			20C4			90_CAM0_MIPI_DATA0_C			90_CAM0_MIPI_DATA0_C - @single_brd_lib.SINGLE_BRD		
	90_CAM0_MIPI_DATA0_C			90_CAM0_MIPI_DATA0_C - @single_brd_lib.SINGLE_BRD			20C4			90_CAM0_MIPI_DATA0_N			90_CAM0_MIPI_DATA0_N - @single_brd_lib.SINGLE_BRD			7D5 20C1			90_CAM0_MIPI_DATA0_P			90_CAM0_MIPI_DATA0_P - @single_brd_lib.SINGLE_BRD		
	90_CAM0_MIPI_DATA0_P			90_CAM0_MIPI_DATA0_P - @single_brd_lib.SINGLE_BRD			7D5 20C1			90_CAM0_MIPI_DATA1_C			90_CAM0_MIPI_DATA1_C - @single_brd_lib.SINGLE_BRD			20C4			90_CAM0_MIPI_DATA1_C			90_CAM0_MIPI_DATA1_C - @single_brd_lib.SINGLE_BRD		
	90_CAM0_MIPI_DATA1_C			90_CAM0_MIPI_DATA1_C - @single_brd_lib.SINGLE_BRD			20C4			90_CAM0_MIPI_DATA1_N			90_CAM0_MIPI_DATA1_N - @single_brd_lib.SINGLE_BRD			7D5 20C1			90_CAM0_MIPI_DATA1_P			90_CAM0_MIPI_DATA1_P - @single_brd_lib.SINGLE_BRD		
	90_CAM0_MIPI_DATA1_P			90_CAM0_MIPI_DATA1_P - @single_brd_lib.SINGLE_BRD			7D5 20C1			90_CAM0_MIPI_DATA2_C			90_CAM0_MIPI_DATA2_C - @single_brd_lib.SINGLE_BRD			20B4			90_CAM0_MIPI_DATA2_C			90_CAM0_MIPI_DATA2_C - @single_brd_lib.SINGLE_BRD		
	90_CAM0_MIPI_DATA2_C			90_CAM0_MIPI_DATA2_C - @single_brd_lib.SINGLE_BRD			20B4			90_CAM0_MIPI_DATA2_N			90_CAM0_MIPI_DATA2_N - @single_brd_lib.SINGLE_BRD			7C5 20B1			90_CAM0_MIPI_DATA2_P			90_CAM0_MIPI_DATA2_P - @single_brd_lib.SINGLE_BRD		
	90_CAM0_MIPI_DATA2_P			90_CAM0_MIPI_DATA2_P - @single_brd_lib.SINGLE_BRD			7C5 20B1			90_CAM0_MIPI_DATA3_C			90_CAM0_MIPI_DATA3_C - @single_brd_lib.SINGLE_BRD			20B4			90_CAM0_MIPI_DATA3_C			90_CAM0_MIPI_DATA3_C - @single_brd_lib.SINGLE_BRD		
	90_CAM0_MIPI_DATA3_C			90_CAM0_MIPI_DATA3_C - @single_brd_lib.SINGLE_BRD			20B4			90_CAM0_MIPI_DATA3_N			90_CAM0_MIPI_DATA3_N - @single_brd_lib.SINGLE_BRD			20B4			90_CAM0_MIPI_DATA3_P			90_CAM0_MIPI_DATA3_P - @single_brd_lib.SINGLE_BRD		
A	90_CAM0_MIPI_DATA3_P			90_CAM0_MIPI_DATA3_P - @single_brd_lib.SINGLE_BRD			20B4			90_CAM0_MIPI_DATA3_N			90_CAM0_MIPI_DATA3_N - @single_brd_lib.SINGLE_BRD			20B4			90_CAM0_MIPI_DATA3_P			90_CAM0_MIPI_DATA3_P - @single_brd_lib.SINGLE_BRD		
	90_CAM0_MIPI_DATA3_N			90_CAM0_MIPI_DATA3_N - @single_brd_lib.SINGLE_BRD			20B4			90_CAM0_MIPI_DATA3_P			90_CAM0_MIPI_DATA3_P - @single_brd_lib.SINGLE_BRD			20B4			90_CAM0_MIPI_DATA3_N			90_CAM0_MIPI_DATA3_N - @single_brd_lib.SINGLE_BRD		
	90_CAM0_MIPI_DATA3_P			90_CAM0_MIPI_DATA3_P - @single_brd_lib.SINGLE_BRD			20B4			90_CAM0_MIPI_DATA3_N			90_CAM0_MIPI_DATA3_N - @single_brd_lib.SINGLE_BRD			20B4			90_CAM0_MIPI_DATA3_P			90_CAM0_MIPI_DATA3_P - @single_brd_lib.SINGLE_BRD		
	90_CAM0_MIPI_DATA3_N			90_CAM0_MIPI_DATA3_N - @single_brd_lib.SINGLE_BRD			20B4			90_CAM0_MIPI_DATA3_P														

D	Title: Basenet Report Design: single_brd Date: Jul 2 13:25:05 2012			Base Signal			Location([Zone][dir])			Base Signal			Location([Zone][dir])			Base Signal			Location([Zone][dir])			Base Signal		
	Base nets and synonyms for single_brd_lib.SINGLE_BRD(@single_brd_lib.single_brd(sch.1))			Base Signal			Location([Zone][dir])			Base Signal			Location([Zone][dir])			Base Signal			Location([Zone][dir])			Base Signal		
	45_CAM0_CLK			45_CAM0_CLK - @single_brd_lib.SINGLE_BRD			7C1 2007			45_CAM0_CLK_R			45_CAM0_CLK_R - @single_brd_lib.SINGLE_BRD			7C3			45_CAM1_CLK			45_CAM1_CLK - @single_brd_lib.SINGLE_BRD		
	45_CAM1_CLK_R			45_CAM1_CLK_R - @single_brd_lib.SINGLE_BRD			7C1 1108			45_CAM1_CLK_R			45_CAM1_CLK_R - @single_brd_lib.SINGLE_BRD			7C3			45_DWI_AP_CLK			45_DWI_AP_CLK - @single_brd_lib.SINGLE_BRD		
	45_DWI_AP_CLK			45_DWI_AP_CLK - @single_brd_lib.SINGLE_BRD			3D3 13A2 13B7			45_DWI_AP_DO			45_DWI_AP_DO - @single_brd_lib.SINGLE_BRD			3D3 13A2 13B7			45_FMI0_DQS			45_FMI0_DQS - @single_brd_lib.SINGLE_BRD		
	45_FMI0_DQS			45_FMI0_DQS - @single_brd_lib.SINGLE_BRD			6B6 6B8 6C2			45_FMI0_RE_L			45_FMI0_RE_L - @single_brd_lib.SINGLE_BRD			6B6 6B8 6C2			45_FMI1_DQS			45_FMI1_DQS - @single_brd_lib.SINGLE_BRD		
	45_FMI1_DQS			45_FMI1_DQS - @single_brd_lib.SINGLE_BRD			6B3 6B5			45_FMI1_RE_L</														

8			7			6			5			4			3			2			1		
D	CUMULUS_IN<4>	CUMULUS_IN<4> - @single_brd_lib.SINGLE_BRD	17C7 17D2	E_ACC2_CONN	E_ACC2_CONN - @single_brd_lib.SINGLE_BRD	16B4 22B4	HS4_CONTROL_CONN	HS4_CONTROL_CONN - @single_brd_lib.SINGLE_BRD	16C5	INT_MIC3_N	@single_brd_lib.SINGLE_BRD INT_MIC3_N -	987 11B2	D										
	CUMULUS_IN<5>	CUMULUS_IN<5> - @single_brd_lib.SINGLE_BRD	17C2 17C7	E_CONN_DETECT	E_CONN_DETECT - @single_brd_lib.SINGLE_BRD	16C4 22B5	HS4_REF	HS4_REF - @single_brd_lib.SINGLE_BRD	10A4 16D8	INT_MIC3_P	@single_brd_lib.SINGLE_BRD INT_MIC3_P -	987 11B2											
	CUMULUS_IN<6>	CUMULUS_IN<6> - @single_brd_lib.SINGLE_BRD	17C7 17D2	E_CONN_TP	E_CONN_TP - @single_brd_lib.SINGLE_BRD	22B4	HS4_REF_CONN	HS4_REF_CONN - @single_brd_lib.SINGLE_BRD	16C4 16D5	INT_MIC3_RET	@single_brd_lib.SINGLE_BRD INT_MIC3_RET -	11C4											
	CUMULUS_IN<7>	CUMULUS_IN<7> - @single_brd_lib.SINGLE_BRD	17C2 17C7	E_DETECT	E_DETECT - @single_brd_lib.SINGLE_BRD	13C2 16B2	I2C0_SCL_I1V8	I2C0_SCL_I1V8 - @single_brd_lib.SINGLE_BRD	302 13A4 13B6 14B1 14D6 15B4	IREF	@single_brd_lib.SINGLE_BRD IREF - @single_brd_lib.SINGLE_BRD	13C5											
	CUMULUS_IN<8>	CUMULUS_IN<8> - @single_brd_lib.SINGLE_BRD	17C2 17C7	E_DET_PMU_TRISTAR	E_DET_PMU_TRISTAR - @single_brd_lib.SINGLE_BRD	13C4 15B4	I2C0_SDA_I1V8	I2C0_SDA_I1V8 - @single_brd_lib.SINGLE_BRD	302 13A4 13B6 14B1 14D6 15B4	IRLED_DRAIN	@single_brd_lib.SINGLE_BRD IRLED_DRAIN -	11C4											
	CUMULUS_IN<9>	CUMULUS_IN<9> - @single_brd_lib.SINGLE_BRD	17C2 17C7	FLASH_ENABLE	FLASH_ENABLE - @single_brd_lib.SINGLE_BRD	3B5 19C7	I2C1_SCL_I1V8	I2C1_SCL_I1V8 - @single_brd_lib.SINGLE_BRD	302 14A4	IRLED_K	@single_brd_lib.SINGLE_BRD IRLED_K -	11C4											
	CUMULUS_IN<10>	CUMULUS_IN<10> - @single_brd_lib.SINGLE_BRD	17C7 17D2	FM10_ALE	FM10_ALE - @single_brd_lib.SINGLE_BRD	6B7 6C3	I2C1_SDA_I1V8	I2C1_SDA_I1V8 - @single_brd_lib.SINGLE_BRD	302 14A4	JTAG_SWCLK	@single_brd_lib.SINGLE_BRD JTAG_SWCLK -	2B6 15B5											
	CUMULUS_IN<11>	CUMULUS_IN<11> - @single_brd_lib.SINGLE_BRD	17C2 17C7	FM10_CEN0	FM10_CEN0 - @single_brd_lib.SINGLE_BRD	6C3 6C8	I2C2_SCL_I1V8	I2C2_SCL_I1V8 - @single_brd_lib.SINGLE_BRD	302 11B8	JTAG_SWDIO	@single_brd_lib.SINGLE_BRD JTAG_SWDIO -	2B6 15B5											
	CUMULUS_IN<12>	CUMULUS_IN<12> - @single_brd_lib.SINGLE_BRD	17C2 17C7	FM10_CLE	FM10_CLE - @single_brd_lib.SINGLE_BRD	6B7 6C3	I2C2_SDA_I1V8	I2C2_SDA_I1V8 - @single_brd_lib.SINGLE_BRD	302 11B8	KEEPACT	@single_brd_lib.SINGLE_BRD KEEPACT -	3B7 13C2											
	CUMULUS_IN<13>	CUMULUS_IN<13> - @single_brd_lib.SINGLE_BRD	17C2 17C7	FM10_DQVREF	FM10_DQVREF - @single_brd_lib.SINGLE_BRD	6B3 6B6 6B6 6B7 6B7 6C5	I2C_SCL_ALS	I2C_SCL_ALS - @single_brd_lib.SINGLE_BRD	11C5	L19_FILT	@single_brd_lib.SINGLE_BRD L19_FILT -	14D4	C										
CUMULUS_IN<14>	CUMULUS_IN<14> - @single_brd_lib.SINGLE_BRD	17C2 17C7	FM10_I0<0>	FM10_I0<0> - @single_brd_lib.SINGLE_BRD	6B6 6C4 6C8	I2C_SCL_COMP	I2C_SCL_COMP - @single_brd_lib.SINGLE_BRD	14A5 14A7 14B6	L19_IREF	@single_brd_lib.SINGLE_BRD L19_IREF -	14C4												
CUMULUS_PROX_RX	CUMULUS_PROX_RX - @single_brd_lib.SINGLE_BRD	17C7	FM10_I0<1>	FM10_I0<1> - @single_brd_lib.SINGLE_BRD	6C4 6C8	I2C_SDA_ALS	I2C_SDA_ALS - @single_brd_lib.SINGLE_BRD	11C5	L19_LDO_FILT	@single_brd_lib.SINGLE_BRD L19_LDO_FILT -	14D4												
CUMULUS_VDDANA	CUMULUS_VDDANA - @single_brd_lib.SINGLE_BRD	17D7	FM10_I0<2>	FM10_I0<2> - @single_brd_lib.SINGLE_BRD	6C4 6C8	I2C_SDA_COMP	I2C_SDA_COMP - @single_brd_lib.SINGLE_BRD	14A5 14A7 14B6	L19_SES_N	@single_brd_lib.SINGLE_BRD L19_SES_N -	14D4												
CUMULUS_VDDCORE	CUMULUS_VDDCORE - @single_brd_lib.SINGLE_BRD	17D7	FM10_I0<3>	FM10_I0<3> - @single_brd_lib.SINGLE_BRD	6C4 6C8	I2S0_DIN	I2S0_DIN - @single_brd_lib.SINGLE_BRD	3D4 9C2	L19_SES_P	@single_brd_lib.SINGLE_BRD L19_SES_P -	14D4												
CUMULUS_VSTM_OUT<8>	CUMULUS_VSTM_OUT<8> - @single_brd_lib.SINGLE_BRD	17C3 17C5	FM10_I0<4>	FM10_I0<4> - @single_brd_lib.SINGLE_BRD	6C4 6C8	I2S0_DOUT	I2S0_DOUT - @single_brd_lib.SINGLE_BRD	3D4 9C2	L19_SWITCH	@single_brd_lib.SINGLE_BRD L19_SWITCH -	14D6												
CUMULUS_VSTM_OUT<1>	CUMULUS_VSTM_OUT<1> - @single_brd_lib.SINGLE_BRD	17B3 17C5	FM10_I0<5>	FM10_I0<5> - @single_brd_lib.SINGLE_BRD	6C4 6C8	I2S0_LRCLK	I2S0_LRCLK - @single_brd_lib.SINGLE_BRD	3D4 9C2	L19_VSENSE_N	@single_brd_lib.SINGLE_BRD L19_VSENSE_N -	14D4												
CUMULUS_VSTM_OUT<2>	CUMULUS_VSTM_OUT<2> - @single_brd_lib.SINGLE_BRD	17C3 17C5	FM10_I0<6>	FM10_I0<6> - @single_brd_lib.SINGLE_BRD	6C4 6C8	I2S1_DIN	I2S1_DIN - @single_brd_lib.SINGLE_BRD	3D4 21C4	L19_VSENSE_P	@single_brd_lib.SINGLE_BRD L19_VSENSE_P -	14D4												
CUMULUS_VSTM_OUT<3>	CUMULUS_VSTM_OUT<3> - @single_brd_lib.SINGLE_BRD	17C3 17C5	FM10_I0<7>	FM10_I0<7> - @single_brd_lib.SINGLE_BRD	6C4 6C8	BB_I2S_TXD	BB_I2S_TXD - @single_brd_lib.RADIO_MLB(1594_page 19)	26C8 30B4	L65_FILT+	@single_brd_lib.SINGLE_BRD L65_FILT+ -	10B4												
CUMULUS_VSTM_OUT<4>	CUMULUS_VSTM_OUT<4> - @single_brd_lib.SINGLE_BRD	17C3 17C5	FM10_WE_L	FM10_WE_L - @single_brd_lib.SINGLE_BRD	6B7 6C3	I2S1_DOUT	I2S1_DOUT - @single_brd_lib.SINGLE_BRD	3D4 21C4	L65_VCPFILT+	@single_brd_lib.SINGLE_BRD L65_VCPFILT+ -	10C4												
CUMULUS_VSTM_OUT<5>	CUMULUS_VSTM_OUT<5> - @single_brd_lib.SINGLE_BRD	17C3 17C5	FM11_ALE	FM11_ALE - @single_brd_lib.SINGLE_BRD	6B6 6C3	I2S1_DOUT	I2S1_DOUT - @single_brd_lib.SINGLE_BRD	3D4 21C4	L65_VCPFILT-	@single_brd_lib.SINGLE_BRD L65_VCPFILT- -	10C4												
C	CUMULUS_VSTM_OUT<6>	CUMULUS_VSTM_OUT<6> - @single_brd_lib.SINGLE_BRD	17C3 17C5	FM11_CEN0	FM11_CEN0 - @single_brd_lib.SINGLE_BRD	6C3 6C6	I2S1_LRCLK	I2S1_LRCLK - @single_brd_lib.SINGLE_BRD	3D4 21C4	LAT_SW1_CTL	@single_brd_lib.SINGLE_BRD LAT_SW1_CTL -	16C5 21A4	C										
	CUMULUS_VSTM_OUT<7>	CUMULUS_VSTM_OUT<7> - @single_brd_lib.SINGLE_BRD	17C3 17C5	FM11_CLE	FM11_CLE - @single_brd_lib.SINGLE_BRD	6B6 6C3	I2S1_LRCLK	I2S1_LRCLK - @single_brd_lib.SINGLE_BRD	3D4 21C4	LCD_BL_CA	@single_brd_lib.SINGLE_BRD LCD_BL_CA -	13B1 18D1											
	CUMULUS_VSTM_OUT<8>	CUMULUS_VSTM_OUT<8> - @single_brd_lib.SINGLE_BRD	17C3 17C5	FM11_I0<0>	FM11_I0<0> - @single_brd_lib.SINGLE_BRD	6C5	I2S2_DIN	I2S2_DIN - @single_brd_lib.SINGLE_BRD	3D4 9B2 14C5	LCD_BL_CA_CONN	@single_brd_lib.SINGLE_BRD LCD_BL_CA_CONN -	18C4 22D4											
	CUMULUS_VSTM_OUT<9>	CUMULUS_VSTM_OUT<9> - @single_brd_lib.SINGLE_BRD	17C5	FM11_I0<1>	FM11_I0<1> - @single_brd_lib.SINGLE_BRD	6C5	I2S2_DOUT	I2S2_DOUT - @single_brd_lib.SINGLE_BRD	3D4 9C2 14C5	LCD_BL_CC1	@single_brd_lib.SINGLE_BRD LCD_BL_CC1 -	13A2 18D1											
	CUMULUS_VSTM_OUT<10>	CUMULUS_VSTM_OUT<10> - @single_brd_lib.SINGLE_BRD	17C5	FM11_I0<2>	FM11_I0<2> - @single_brd_lib.SINGLE_BRD	6C5	I2S2_LRCLK	I2S2_LRCLK - @single_brd_lib.SINGLE_BRD	3D4 9C2 14C5	LCD_BL_CC1_CONN	@single_brd_lib.SINGLE_BRD LCD_BL_CC1_CONN -	18C4 22D4											
	CUMULUS_VSTM_OUT<11>	CUMULUS_VSTM_OUT<11> - @single_brd_lib.SINGLE_BRD	17B3 17C5	FM11_I0<3>	FM11_I0<3> - @single_brd_lib.SINGLE_BRD	6C5	I2S3_DIN	I2S3_DIN - @single_brd_lib.SINGLE_BRD	3C4 21B4	LCD_BL_CC2	@single_brd_lib.SINGLE_BRD LCD_BL_CC2 -	13A2 18D1											
	CUMULUS_VSTM_OUT<12>	CUMULUS_VSTM_OUT<12> - @single_brd_lib.SINGLE_BRD	17B3 17C5	FM11_I0<4>	FM11_I0<4> - @single_brd_lib.SINGLE_BRD	6C5	I2S3_DOUT	I2S3_DOUT - @single_brd_lib.SINGLE_BRD	3C4 21B4	LCD_BL_CC2_CONN	@single_brd_lib.SINGLE_BRD LCD_BL_CC2_CONN -	18C4 22D4											
	CUMULUS_VSTM_OUT<13>	CUMULUS_VSTM_OUT<13> - @single_brd_lib.SINGLE_BRD	17C3 17C5	FM11_I0<5>	FM11_I0<5> - @single_brd_lib.SINGLE_BRD	6C5	BT_PCM_OUT	BT_PCM_OUT - @single_brd_lib.RADIO_MLB(1594_page 19)	26B8 42B3	LCD_DESENSE	@single_brd_lib.SINGLE_BRD LCD_DESENSE -	13A2											
	CUMULUS_VSTM_OUT<14>	CUMULUS_VSTM_OUT<14> - @single_brd_lib.SINGLE_BRD	17C3 17C5	FM11_I0<6>	FM11_I0<6> - @single_brd_lib.SINGLE_BRD	6C5	I2S3_DOUT	I2S3_DOUT - @single_brd_lib.SINGLE_BRD	3C4 21B4	LCD_DESENSE_CONN	@single_brd_lib.SINGLE_BRD LCD_DESENSE_CONN -	18D4											
	CUMULUS_VSTM_OUT<15>	CUMULUS_VSTM_OUT<15> - @single_brd_lib.SINGLE_BRD	17C3 17C5	FM11_I0<7>	FM11_I0<7> - @single_brd_lib.SINGLE_BRD	6C5	I2S3_DOUT	I2S3_DOUT - @single_brd_lib.SINGLE_BRD	3C4 21B4	LCD_DESENSE_CONN	@single_brd_lib.SINGLE_BRD LCD_DESENSE_CONN -	18D4											
B	CUMULUS_VSTM_OUT<16>	CUMULUS_VSTM_OUT<16> - @single_brd_lib.SINGLE_BRD	17C3 17C5	FM11_WE_L	FM11_WE_L - @single_brd_lib.SINGLE_BRD	6B6 6C3	I2S3_LRCLK	I2S3_LRCLK - @single_brd_lib.SINGLE_BRD	3C4 21B4	LCD_HIFA_BSYN	@single_brd_lib.SINGLE_BRD LCD_HIFA_BSYN -	3B7 17A1 17B2 18B1	B										
	CUMULUS_VSTM_OUT<17>	CUMULUS_VSTM_OUT<17> - @single_brd_lib.SINGLE_BRD	17B5 17C3	FORCE_DFU	FORCE_DFU - @single_brd_lib.SINGLE_BRD																		

8			7			6			5			4			3			2			1			
D	NAND_VDDI	NAND_VDDI - @single_brd_lib.SINGLE_BRD	604	PP2V5_CAM0_AF_GROUND	PP2V5_CAM0_AF_GROUND - @single_brd_lib.SINGLE_BRD	12A3 20B5	SAGE_PANEL_IN<11>	@single_brd_lib.SINGLE_BRD SAGE_PANEL_IN<11> -	17C3 18A8	UART1_CTS_L	UART1_CTS_L - @single_brd_lib.SINGLE_BRD	3B5 21C4	D											
	NEG_BOOST_OUT	NEG_BOOST_OUT - @single_brd_lib.SINGLE_BRD	19D3	PP2V8_CAM0_CONN	PP2V8_CAM0_CONN - @single_brd_lib.SINGLE_BRD	20C5	SAGE_PANEL_IN<12>	@single_brd_lib.SINGLE_BRD SAGE_PANEL_IN<12> -	17C3 18A6	UART1_RTS_L	UART1_RTS_L - @single_brd_lib.SINGLE_BRD	26C8 30C4												
	NEG_SWITCH	NEG_SWITCH - @single_brd_lib.SINGLE_BRD	19D3	PP2V8_CAM1_CONN	PP2V8_CAM1_CONN - @single_brd_lib.SINGLE_BRD	11C4	SAGE_PANEL_IN<13>	@single_brd_lib.SINGLE_BRD SAGE_PANEL_IN<13> -	17C3 18A6	UART1_RXD	UART1_RXD - @single_brd_lib.SINGLE_BRD	3B5 21C4												
	NTC_CAM_N	NTC_CAM_N - @single_brd_lib.SINGLE_BRD	12A6	PP2V8_CAM_AVDD	PP2V8_CAM_AVDD - @single_brd_lib.SINGLE_BRD	11C2 12B5 20B7	SAGE_PANEL_IN<14>	@single_brd_lib.SINGLE_BRD SAGE_PANEL_IN<14> -	17C3 18A6	UART1_TXD	UART1_TXD - @single_brd_lib.SINGLE_BRD	26C8 30C4												
	NTC_CAM_P	NTC_CAM_P - @single_brd_lib.SINGLE_BRD	12A6 12B7	PP3V0_ACC	PP3V0_ACC - @single_brd_lib.SINGLE_BRD	12B4 15C4	SAGE_PANEL_VSTM_OUT<0>	@single_brd_lib.SINGLE_BRD SAGE_PANEL_VSTM_OUT<0> -	17C1 18A6 18A8	UART2_RXD	UART2_RXD - @single_brd_lib.SINGLE_BRD	3B5 15B5 21C4												
	NTC_FOREHEAD_N	NTC_FOREHEAD_N - @single_brd_lib.SINGLE_BRD	12A8	PP3V0_ALS	PP3V0_ALS - @single_brd_lib.SINGLE_BRD	11C5	SAGE_PANEL_VSTM_OUT<1>	@single_brd_lib.SINGLE_BRD SAGE_PANEL_VSTM_OUT<1> -	17B1 18A8	UART2_TXD	UART2_TXD - @single_brd_lib.SINGLE_BRD	26C8 30C4												
	NTC_FOREHEAD_P	NTC_FOREHEAD_P - @single_brd_lib.SINGLE_BRD	12A7 12B7	PP3V0_COMP	PP3V0_COMP - @single_brd_lib.SINGLE_BRD	14A5 14A8 14B8	SAGE_PANEL_VSTM_OUT<2>	@single_brd_lib.SINGLE_BRD SAGE_PANEL_VSTM_OUT<2> -	17C1 18A8	UART3_CTS_L	UART3_CTS_L - @single_brd_lib.SINGLE_BRD	3B5 21B4												
	NTC_HSP_N	NTC_HSP_N - @single_brd_lib.SINGLE_BRD	12A5	PP3V0_IMU	PP3V0_IMU - @single_brd_lib.SINGLE_BRD	12B5 14A4 14B1	SAGE_PANEL_VSTM_OUT<3>	@single_brd_lib.SINGLE_BRD SAGE_PANEL_VSTM_OUT<3> -	17C1 18A8	UART3_RTS_L	UART3_RTS_L - @single_brd_lib.SINGLE_BRD	26B8 42B3												
	NTC_HSP_P	NTC_HSP_P - @single_brd_lib.SINGLE_BRD	12A5 12B7	PP3V0_IO	PP3V0_IO - @single_brd_lib.SINGLE_BRD	2D3 5B7 12B5	SAGE_PANEL_VSTM_OUT<4>	@single_brd_lib.SINGLE_BRD SAGE_PANEL_VSTM_OUT<4> -	17C1 18A8	UART3_RXD	UART3_RXD - @single_brd_lib.SINGLE_BRD	26B8 42C3												
	NTC_PA_N	NTC_PA_N - @single_brd_lib.SINGLE_BRD	12A4	PP3V0_NAND	PP3V0_NAND - @single_brd_lib.SINGLE_BRD	6D1 12B5	SAGE_PANEL_VSTM_OUT<5>	@single_brd_lib.SINGLE_BRD SAGE_PANEL_VSTM_OUT<5> -	17C1 18A8	UART4_CTS_L	UART4_CTS_L - @single_brd_lib.SINGLE_BRD	3A5 21B4												
C	NTC_PA_P	NTC_PA_P - @single_brd_lib.SINGLE_BRD	12A4 12B7	PP3V0_NAND_XW	PP3V0_NAND_XW - @single_brd_lib.SINGLE_BRD	6D3	SAGE_PANEL_VSTM_OUT<6>	@single_brd_lib.SINGLE_BRD SAGE_PANEL_VSTM_OUT<6> -	17C1 18A8	UART4_RXD	UART4_RXD - @single_brd_lib.SINGLE_BRD	26B8 42C3	C											
	OSC32I	OSC32I - @single_brd_lib.SINGLE_BRD	12B6	PP3V0_PROX	PP3V0_PROX - @single_brd_lib.SINGLE_BRD	11C5	SAGE_PANEL_VSTM_OUT<7>	@single_brd_lib.SINGLE_BRD SAGE_PANEL_VSTM_OUT<7> -	17C1 18A8	UART6_RXD	UART6_RXD - @single_brd_lib.SINGLE_BRD	3A5 15B5												
	OSC32O	OSC32O - @single_brd_lib.SINGLE_BRD	12A6	PP3V0_PROX_ALS	PP3V0_PROX_ALS - @single_brd_lib.SINGLE_BRD	11B8 11C8 12B5	SAGE_PANEL_VSTM_OUT<8>	@single_brd_lib.SINGLE_BRD SAGE_PANEL_VSTM_OUT<8> -	17C1 18A8	UART6_TXD	UART6_TXD - @single_brd_lib.SINGLE_BRD	3A5 15B5												
	OVP_GATE	OVP_GATE - @single_brd_lib.SINGLE_BRD	16B7	PP3V0_PROX_IR	PP3V0_PROX_IR - @single_brd_lib.SINGLE_BRD	11C2 12B5	SAGE_PANEL_VSTM_OUT<9>	@single_brd_lib.SINGLE_BRD SAGE_PANEL_VSTM_OUT<9> -	17C1 18A8	USB_BRICKID	USB_BRICKID - @single_brd_lib.SINGLE_BRD	13C2 15B5												
	OVP_SW_EN_L	@single_brd_lib.SINGLE_BRD	15B4 16B8	PP3V0_USBMUX	PP3V0_USBMUX - @single_brd_lib.SINGLE_BRD	12B5 15C7	SAGE_PANEL_VSTM_OUT<10>	@single_brd_lib.SINGLE_BRD SAGE_PANEL_VSTM_OUT<10> -	17C1 18A8	USB_BRICKID_PMU	USB_BRICKID_PMU - @single_brd_lib.SINGLE_BRD	13C4 13C6												
	PBL_RUN_BB_HSIIC1_RDY	PBL_RUN_BB_HSIIC1_RDY - @single_brd_lib.RADIO_MLB(i594_page 19)	3A7 21D4	PP3V2_CODEC	@single_brd_lib.SINGLE_BRD	10D3	SAGE_PANEL_VSTM_OUT<11>	@single_brd_lib.SINGLE_BRD SAGE_PANEL_VSTM_OUT<11> -	17B1 18A6	USB_CONN_SNUB	USB_CONN_SNUB - @single_brd_lib.SINGLE_BRD	16B5												
	PMU_ADC_IN7	PMU_ADC_IN7 - @single_brd_lib.SINGLE_BRD	13C3 13C6	PP3V3_VIB	@single_brd_lib.SINGLE_BRD	8C6	SAGE_PANEL_VSTM_OUT<12>	@single_brd_lib.SINGLE_BRD SAGE_PANEL_VSTM_OUT<12> -	17B1 18A6	USB_REXT	USB_REXT - @single_brd_lib.SINGLE_BRD	2B4												
	PMU_AMUX_AY	PMU_AMUX_AY - @single_brd_lib.SINGLE_BRD	13C6 13D5 22C8	PP5V0_TRISTAR	PP5V0_TRISTAR - @single_brd_lib.SINGLE_BRD	15C4	SAGE_PANEL_VSTM_OUT<13>	@single_brd_lib.SINGLE_BRD SAGE_PANEL_VSTM_OUT<13> -	17C1 18A6	USB_VBUS_DETECT	USB_VBUS_DETECT - @single_brd_lib.SINGLE_BRD	2B4 12C8												
	PMU_AMUX_AY_CTRL	PMU_AMUX_AY_CTRL - @single_brd_lib.SINGLE_BRD	3C5 13D7	PP5V0_USB_CONN	@single_brd_lib.SINGLE_BRD	16C5 22D8	SAGE_PANEL_VSTM_OUT<14>	@single_brd_lib.SINGLE_BRD SAGE_PANEL_VSTM_OUT<14> -	17C1 18A6	VBST_OUTH_STACK	VBST_OUTH_STACK - @single_brd_lib.SINGLE_BRD	17B4												
	PMU_AMUX_AY_R	@single_brd_lib.SINGLE_BRD	13D6	PP5V0_USB_PROTECT	@single_brd_lib.SINGLE_BRD	12C8 16B8	SAGE_PANEL_VSTM_OUT<15>	@single_brd_lib.SINGLE_BRD SAGE_PANEL_VSTM_OUT<15> -	17C1 18A6	VBST_OUTL_STACK	VBST_OUTL_STACK - @single_brd_lib.SINGLE_BRD	17A4		B										
B	PMU_AMUX_BY	@single_brd_lib.SINGLE_BRD	13B6 13D5 22C8	PP5V0_USB_RPROT	@single_brd_lib.SINGLE_BRD	15C2 16B8	SAGE_PANEL_VSTM_OUT<16>	@single_brd_lib.SINGLE_BRD SAGE_PANEL_VSTM_OUT<16> -	17C1 18A6	VCENTER	VCENTER - @single_brd_lib.SINGLE_BRD	12C7												
	PMU_AMUX_BY_CTRL	PMU_AMUX_BY_CTRL - @single_brd_lib.SINGLE_BRD	3B5 13D7	PP5V1_GRAPE_VDDH	@single_brd_lib.SINGLE_BRD	13B3 17D7	SAGE_PANEL_VSTM_OUT<17>	@single_brd_lib.SINGLE_BRD SAGE_PANEL_VSTM_OUT<17> -	17C1 18A6	VDD_REF	VDD_REF - @single_brd_lib.SINGLE_BRD	13C5												
	PMU_AMUX_BY_R	PMU_AMUX_BY_R - @single_brd_lib.SINGLE_BRD	13D6	PP5V7_LCD_AVDDH	@single_brd_lib.SINGLE_BRD	13B3 18C1 19B2	SAGE_PANEL_VSTM_OUT<18>	@single_brd_lib.SINGLE_BRD SAGE_PANEL_VSTM_OUT<18> -	17C1 18A6	VDD_RTC	VDD_RTC - @single_brd_lib.SINGLE_BRD	13C5												
	PMU_DWI_CLK	PMU_DWI_CLK - @single_brd_lib.SINGLE_BRD	13B6	PP5V7_LCD_AVDDH_CONN	@single_brd_lib.SINGLE_BRD	18C4	SAGE_PANEL_VSTM_OUT<19>	@single_brd_lib.SINGLE_BRD SAGE_PANEL_VSTM_OUT<19> -	17C1 18A6	VHP_FLYC	VHP_FLYC - @single_brd_lib.SINGLE_BRD	10C4												
	PMU_DWI_DI	PMU_DWI_DI - @single_brd_lib.SINGLE_BRD	13B6	PP5V7_SAGE_AVDDH	@single_brd_lib.SINGLE_BRD	13B1 17B5 17D4	SAGE_PANEL_VSTM_OUT<20>	@single_brd_lib.SINGLE_BRD SAGE_PANEL_VSTM_OUT<20> -	17B3	VHP_FLYN	VHP_FLYN - @single_brd_lib.SINGLE_BRD	10C4												
	PMU_DWI_DO	@single_brd_lib.SINGLE_BRD	13B6	PPM_ZQ	PPM_ZQ - @single_brd_lib.SINGLE_BRD	6B3	SAGE_PANEL_VSTM_OUT<21>	@single_brd_lib.SINGLE_BRD SAGE_PANEL_VSTM_OUT<21> -	17C4 19B6	VHP_FLYP	VHP_FLYP - @single_brd_lib.SINGLE_BRD	10C4												
	PMU_IRQ_L	@single_brd_lib.SINGLE_BRD	3B7 13B6	PP_BATT_VCC	@single_brd_lib.SINGLE_BRD	8C7 12D8 14D7 19D7 21C5	SAGE_PANEL_VSTM_OUT<22>	@single_brd_lib.SINGLE_BRD SAGE_PANEL_VSTM_OUT<22> -	17B3	VIB	VIB - @single_brd_lib.SINGLE_BRD	8B5												
	PMU_RESET_IN	@single_brd_lib.SINGLE_BRD	13B6	PP_LD014_2P65	@single_brd_lib.SINGLE_BRD	26D1 26D8 27B8 28C8 34C5	SAGE_PANEL_VSTM_OUT<23>	@single_brd_lib.SINGLE_BRD SAGE_PANEL_VSTM_OUT<23> -	17B3	VIB_LDO_EN	VIB_LDO_EN - @single_brd_lib.SINGLE_BRD	3B5 8C7												
	PNSV7_LCM_AVDDN_CONN	PNSV7_LCM_AVDDN_CONN - @single_brd_lib.SINGLE_BRD	18C4	PP_L19_VB00ST	@single_brd_lib.SINGLE_BRD	14D5	SAGE_PANEL_VSTM_OUT<24>	@single_brd_lib.SINGLE_BRD SAGE_PANEL_VSTM_OUT<24> -	17B2 18A4	VIB_PWM	VIB_PWM - @single_brd_lib.SINGLE_BRD	3B5 8C7												
	A	PNSV7_SAGE_AVDDN	PNSV7_SAGE_AVDDN - @single_brd_lib.SINGLE_BRD	17A5 17D4 18D1 19B8 19D1	PP_LD014_2P65	@single_brd_lib.SINGLE_BRD	16C2 21A4	SAGE_PANEL_VSTM_OUT<25>	@single_brd_lib.SINGLE_BRD SAGE_PANEL_VSTM_OUT<25> -	18A5 18A6	VIB_PWM_G	VIB_PWM_G - @single_brd_lib.SINGLE_BRD	8C7	A										
PP1V0		PP1V0 - @single_brd_lib.SINGLE_BRD	2C7 2D3 7B4 7D5 12A4	PP_LD014_2P65	@single_brd_lib.SINGLE_BRD	26B8 27A2 32C6 37C3 40D6	SAGE_PANEL_VSTM_OUT<26>	@single_brd_lib.SINGLE_BRD SAGE_PANEL_VSTM_OUT<26> -	17D2 18A4	WLAN_REG_ON	WLAN_REG_ON - @single_brd_lib.RADIO_MLB(i594_page 19)	26C8 42A4 42A8 42C7												
PP1V0_SRAM		PP1V0_SRAM - @single_brd_lib.SINGLE_BRD	5C7 12A4	PP_VCC_MAIN	@single_brd_lib.SINGLE_BRD	10D1 12C8 12D8 13B4 13C2	SAGE_PANEL_VSTM_OUT<27>	@single_brd_lib.SINGLE_BRD SAGE_PANEL_VSTM_OUT<27> -	18A5 18A8	WLAN_REG_ON_R	WLAN_REG_ON_R - @single_brd_lib.SINGLE_BRD	13B6												
PP1V1_CPU0		@single_brd_lib.SINGLE_BRD	5D8 12D5	PROX_FILT	@single_brd_lib.SINGLE_BRD	13C3 19D4	SAGE_PANEL_VSTM_OUT<28>	@single_brd_lib.SINGLE_BRD SAGE_PANEL_VSTM_OUT<28> -	17B5 18A4	WLAN_HSIC3_RESUME	WLAN_HSIC3_RESUME - @single_brd_lib.SINGLE_BRD	26D8 42B5												
PP1V1_CPU0_FET		@single_brd_lib.SINGLE_BRD	12D4	PROX_RX_EN_I1V8	@single_brd_lib.SINGLE_BRD	11C8 17B5	SAGE_PANEL_VSTM_OUT<29>	@single_brd_lib.SINGLE_BRD SAGE_PANEL_VSTM_OUT<29> -	18A5 18A6	WLED_LX	WLED_LX - @single_brd_lib.SINGLE_BRD	13B3												
PP1V1_CPU1		@single_brd_lib.SINGLE_BRD	5C8 12D3	PROX_RX_EN_CONN	@single_brd_lib.SINGLE_BRD	11C5	SAGE_PANEL_VSTM_OUT<30>	@single_brd_lib.SINGLE_BRD SAGE_PANEL_VSTM_OUT<30> -	17A7 17D1 18A4 18C6	XTAL_24M_O_R	XTAL_24M_O_R - @single_brd_lib.SINGLE_BRD	2C3												
PP1V1_CPU1_FET		@single_brd_lib.SINGLE_BRD	12D2	PROX_TX_EN_I1V8_L	@single_brd_lib.SINGLE_BRD	17B1 17B7	SAGE_PANEL_VSTM_OUT<31>	@single_brd_lib.SINGLE_BRD SAGE_PANEL_VSTM_OUT<31> -	18A5 18A8	XTAL_GND	XTAL_GND - @single_brd_lib.SINGLE_BRD	2B2												
PP1V1_CPU8		@single_brd_lib.SINGLE_BRD	5D8 12D1	PROX_TX_EN_BUFF	@single_brd_lib.SINGLE_BRD	11B2 17B2	SAGE_PANEL_VSTM_OUT<32>	@single_brd_lib.SINGLE_BRD SAGE_PANEL_VSTM_OUT<32> -	17B4 17D2															
PP1V1_SOC		PP1V1_SOC - @single_brd_lib.SINGLE_BRD	5D4 12C2	RADIO_ON_L	RADIO_ON_L - @single_brd_lib.SINGLE_BRD	3A7 21D4	SAGE_PANEL_VSTM_OUT<33>	@single_brd_lib.SINGLE_BRD SAGE_PANEL_VSTM_OUT<33> -	18C5															
PP1V2		PP1V2 - @single_brd_lib.SINGLE_BRD	2C6 4A6 4C7 4D3 12B5	RADIO_ON_L	@single_brd_lib.SINGLE_BRD	26D3 26D8 28C8	SAGE_PANEL_VSTM_OUT<34>	@single_brd_lib.SINGLE_BRD SAGE_PANEL_VSTM_OUT<34> -	17B5 18A4															
	PP1V2_CAM0_CONN	@single_brd_lib.SINGLE_BRD	20B5	RCVR_CONN_N	RCVR_CONN_N - @single_brd_lib.SINGLE_BRD	11C5	SAGE_PANEL_VSTM_OUT<35>	@single_brd_lib.SINGLE_BRD SAGE_PANEL_VSTM_OUT<35> -	18A5 18A6															
	PP1V2_SDRAM	@single_brd_lib.SINGLE_BRD	4A8 4D7 4D8 12B7 12C1	RCVR_CONN_P	RCVR_CONN_P - @single_brd_lib.SINGLE_BRD	11C5	SPI1_CS_L	SPI1_CS_L - @single_brd_lib.SINGLE_BRD	3C4 17B8															
	PP1V7_VA_DAC	PP1V7_VA_DAC - @single_brd_lib.SINGLE_BRD	12B4 14D4	RCVR_N	RCVR_N - @single_brd_lib.SINGLE_BRD	9C4 11A8	SPI1_MISO	SPI1_MISO - @single_brd_lib.SINGLE_BRD	3C4 17B8															
	PP1V8	PP1V8 - @single_brd_lib.SINGLE_BRD	2B7 2C3 2D7 3C7 3C7 3D2	RCVR_P	RCVR_P - @single_brd_lib.SINGLE_BRD	9C4 11B8	SPI1_MISO_R	SPI1_MISO_R - @single_brd_lib.SINGLE_BRD	17B7															
			2C2 4B3 5A7 5B5 6B6 6B7	RCVR_TEST	RCVR_TEST - @single_brd_lib.SINGLE_BRD	10C6 11A8	SPI1_MOSI	SPI1_MOSI - @single_brd_lib.SINGLE_BRD	3C4 17B7															
			6C8 6D1 7B2 7D1 7D2 10D6	RESET_I1V8_L	RESET_I1V8_L - @single_brd_lib.SINGLE_BRD	2B7 12B2 13B6 15B4 18B1	SPI1_SCLK	SPI1_SCLK - @single_brd_lib.SINGLE_BRD	3C4 17B8															
			11C2 12B1 12B5 13A4 13D6	RF_RESET_L	RF_RESET_L - @single_brd_lib.RADIO_MLB(i594_page 19)	21D4 22B8	SPKAMP_INT_L	SPKAMP_INT_L - @single_brd_lib.SINGLE_BRD	3B7 14D6															
			14B3 14B4 17D2 18B1 18C1	REVERSE_GATE	REVERSE_GATE - @single_brd_lib.SINGLE_BRD	26C3 26D8	SPKAMP_RESET_L	SPKAMP_RESET_L - @single_brd_lib.SINGLE_BRD	3A5 14D6															
	PP1V8_ALWAYS	PP1V8_ALWAYS - @single_brd_lib.SINGLE_BRD	3A4 12A5	RINGER_A	RINGER_A - @single_brd_lib.SINGLE_BRD	3B8 8B7 13B4 13C6	SPKR_CONN_N	SPKR_CONN_N - @single_brd_lib.SINGLE_BRD	14C1 16A6															
	PP1V8_CAM0_CONN	PP1V8_CAM0_CONN - @single_brd_lib.SINGLE_BRD	20C5	RINGER_A_CONN	RINGER_A_CONN - @single_brd_lib.SINGLE_BRD	8B5	SPKR_CONN_P	SPKR_CONN_P - @single_brd_lib.SINGLE_BRD	14C1 16A6															
	PP1V8_CAM0_REG	@single_brd_lib.SINGLE_BRD	20B7	SAGE_LX	@single_brd_lib.SINGLE_BRD	17B3	SPKR_FLR	SPKR_FLR - @single_brd_lib.SINGLE_BRD	14C3															
	PP1V8_CAM1_CONN	@single_brd_lib.SINGLE_BRD	11C4	SAGE_LY	@single_brd_lib.SINGLE_BRD	17B3	SPKR_N	SPKR_N - @single_brd_lib.SINGLE_BRD	14C4															
	PP1V8_COMP	@single_brd_lib.SINGLE_BRD	14A7 14A8 14B5 14B7	SAGE_PANEL_IN<0>	@single_brd_lib.SINGLE_BRD	17C3 18A8	SPKR_P	SPKR_P - @single_brd_lib.SINGLE_BRD	14C4															
	PP1V8_CUMULUS_VDDLO	@single_brd_lib.SINGLE_BRD	17B7 17D6	SAGE_PANEL_IN<1>	@single_brd_lib.SINGLE_BRD	17D3 18A8	SPKR_SES_N	SPKR_SES_N - @single_brd_lib.SINGLE_BRD	14D3															
	PP1V8_GRAPE	@single_brd_lib.SINGLE_BRD	12B5 17B1 17B5 17D5	SAGE_PANEL_IN<2>	@single_brd_lib.SINGLE_BRD	17D3 18A8	SPKR_SES_P	SPKR_SES_P - @single_brd_lib.SINGLE_BRD	14C3															
	PP1V8_LCM_CONN	@single_brd_lib.SINGLE_BRD	18C4	SAGE_PANEL_IN<3>	@single_brd_lib.SINGLE_BRD	17D3 18A8	SPKR_VQ	SPKR_VQ - @single_brd_lib.SINGLE_BRD	10B5															
	PP1V8_PLL	@single_brd_lib.SINGLE_BRD	2D6	SAGE_PANEL_IN<4>	@single_brd_lib.SINGLE_BRD	17D3 18A8	SPKR_VSENSE_N	SPKR_VSENSE_N - @single_brd_lib.SINGLE_BRD	14D1 16B5															
	PP1V8_SDRAM	PP1V8_SDRAM - @single_brd_lib.SINGLE_BRD	3C8 4C7 9B3 12B2 12C1	SAGE_PANEL_IN<5>	@single_brd_lib.SINGLE_BRD	17C3 18A8	SPKR_VSENSE_P	SPKR_VSENSE_P - @single_brd_lib.SINGLE_BRD	14D1 16B5															
		PP_WL_BT_VDDIO_AP - @single_brd_lib.RADIO_MLB(i594_page 19)	12C7 13A7 15C5 21C4	SAGE_PANEL_IN<6>	@single_brd_lib.SINGLE_BRD	17D3 18A6	TCAL	TCAL - @single_brd_lib.SINGLE_BRD	12B7															

8			7			6			5			4			3			2			1					
D	Base nets and synonyms for single_brd_lib.RADIO_MLB(@single_brd_lib.single_brd(sch_1)):page19_i594@radio_mlb_1 ib.radio_mlb(sch_1))		Base Signal		Synonyms		Location([Zone][dir])		50_OHM_TERM_2		50_OHM_TERM_2 - @single_brd_lib.RADIO_MLB		37B3		100_B4_DUPLEX_N		100_B4_DUPLEX_N - @single_brd_lib.RADIO_MLB		38B3		100_PRX_DCS_G_1_N		100_PRX_DCS_G_1_N - @single_brd_lib.RADIO_MLB		37C6	
	2G_VBATT_IN		2G_VBATT_IN -		36C4				50_PDET_IN		50_PDET_IN -		31C7		100_B4_DUPLEX_P		100_B4_DUPLEX_P -		38B3		100_PRX_DCS_G_1_P		100_PRX_DCS_G_1_P -		37C6	
	50_3G_TX_B1_T		@single_brd_lib.RADIO_MLB		38C8				50_PDET_PAD		50_PDET_PAD -		31D7		100_B5_B8_RX_MTCH_N		100_B5_B8_RX_MTCH_N -		32C4		100_XCVR_DCS1800_RX_N		100_XCVR_DCS1800_RX_N -		31B7 37C8	
	50_3G_TX_B2_T		@single_brd_lib.RADIO_MLB		39C8				50_PRI_ANT		50_PRI_ANT -		37B1 41A5		100_B5_B8_RX_MTCH_P		100_B5_B8_RX_MTCH_P -		32B4		100_XCVR_DCS1800_RX_P		100_XCVR_DCS1800_RX_P -		31B7 37B8	
	50_3G_TX_B5_T		@single_brd_lib.RADIO_MLB		34C8				50_RX_DCS		50_RX_DCS -		37C4		100_BAND1_DUPLEX_MATC		100_BAND1_DUPLEX_MATC -		38C2		A0_PMCCLK		A0_PMCCLK -		28B3	
	50_3G_TX_B8_T		@single_brd_lib.RADIO_MLB		34D7				50_RX_DCS_FIL		50_RX_DCS_FIL -		37C5		100_BAND1_DUPLEX_MATC		100_BAND1_DUPLEX_MATC -		38C2		ADC_LD06_RUIM_1V8		ADC_LD06_RUIM_1V8 -		13B6 21C4	
	50_3G_TX_B13_PA_T		@single_brd_lib.RADIO_MLB		35C6				50_TXRX_B1_ASM		50_TXRX_B1_ASM -		37C4 38B3		100_BAND1_DUPLEX_RX_N		100_BAND1_DUPLEX_RX_N -		38C3		ADC_LD06_RUIM_1V8		ADC_LD06_RUIM_1V8 -		26D5	
	50_3G_TX_B13_T		@single_brd_lib.RADIO_MLB		35C8				50_TXRX_B1_PAD_ANT		50_TXRX_B1_PAD_ANT -		38B5		100_BAND1_DUPLEX_RX_N		100_BAND1_DUPLEX_RX_N -		38C3		ADC_LVS1		ADC_LVS1 -		13B6 21C4	
	50_ASM_ANT		50_ASM_ANT -		37B2				50_TXRX_B1_PAD_MCH		50_TXRX_B1_PAD_MCH -		38B5		100_BAND1_RX_N		100_BAND1_RX_N -		31B7 38C1		ADC_SMP31_MSMC_1V05		ADC_SMP31_MSMC_1V05 -		13C6 21C4	
	50_ASM_ANT_MCH		50_ASM_ANT_MCH -		37B2				50_TXRX_B2_ASM		50_TXRX_B2_ASM -		37B4 39C1		100_BAND1_RX_P		100_BAND1_RX_P -		31B7 38C1		ADC_SMP31_MSMC_1V05		ADC_SMP31_MSMC_1V05 -		26D5	
C	50_B2_DUPLEX_RX		50_B2_DUPLEX_RX -		39C4				50_TXRX_B2_PAD_ANT		50_TXRX_B2_PAD_ANT -		39C4		100_BAND2_RX_N		100_BAND2_RX_N -		31B7 39B1		ADC_SMP31_MSMC_1V05		ADC_SMP31_MSMC_1V05 -		26D5	
	50_B2_RX_BAL		50_B2_RX_BAL -		39C3				50_TXRX_B2_PAD_MCH		50_TXRX_B2_PAD_MCH -		39C3		100_BAND2_RX_P		100_BAND2_RX_P -		31B7 39C1		ADC_SMP31_MSMC_1V05		ADC_SMP31_MSMC_1V05 -		26D5	
	50_BAND1_TX_INT_OUT		50_BAND1_TX_INT_OUT -		38C6				50_TXRX_B4_ASM		50_TXRX_B4_ASM -		37C4 38B4		100_BAND4_DUPLEX_MATC		100_BAND4_DUPLEX_MATC -		38B3		ADC_SMP31_MSMC_1V05		ADC_SMP31_MSMC_1V05 -		26D5	
	50_BAND1_TX_IN_IN		50_BAND1_TX_IN_IN -		38C7				50_TXRX_B4_PAD_ANT		50_TXRX_B4_PAD_ANT -		38B5		100_BAND4_DUPLEX_MATC		100_BAND4_DUPLEX_MATC -		38B2		ADC_SMP31_MSMC_1V05		ADC_SMP31_MSMC_1V05 -		26D5	
	50_BAND1_TX_PA_IN		50_BAND1_TX_PA_IN -		38C6				50_TXRX_B4_PAD_MCH		50_TXRX_B4_PAD_MCH -		38B5		100_BAND4_DUPLEX_MATC		100_BAND4_DUPLEX_MATC -		38B2		ADC_SMP31_MSMC_1V05		ADC_SMP31_MSMC_1V05 -		26D5	
	50_BAND2_TX_INT_IN		50_BAND2_TX_INT_IN -		39C7				50_TXRX_B5_ASM		50_TXRX_B5_ASM -		34B7 37C4		100_BAND4_DUPLEX_MATC		100_BAND4_DUPLEX_MATC -		38B2		ADC_SMP31_MSMC_1V05		ADC_SMP31_MSMC_1V05 -		26D5	
	50_BAND4_TX_IN		50_BAND4_TX_IN -		38B7				50_TXRX_B5_PAD_ANT		50_TXRX_B5_PAD_ANT -		34B5		100_BAND4_DUPLEX_MATC		100_BAND4_DUPLEX_MATC -		38B2		ADC_SMP31_MSMC_1V05		ADC_SMP31_MSMC_1V05 -		26D5	
	50_BAND4_TX_INT_OUT		50_BAND4_TX_INT_OUT -		38B6				50_TXRX_B5_PAD_MCH		50_TXRX_B5_PAD_MCH -		34B6		100_BAND4_DUPLEX_MATC		100_BAND4_DUPLEX_MATC -		38B2		ADC_SMP31_MSMC_1V05		ADC_SMP31_MSMC_1V05 -		26D5	
	50_BAND4_TX_PA_IN		50_BAND4_TX_PA_IN -		38B6				50_TXRX_B8_ASM		50_TXRX_B8_ASM -		34B1 37C4		100_BAND4_DUPLEX_MATC		100_BAND4_DUPLEX_MATC -		38B2		ADC_SMP31_MSMC_1V05		ADC_SMP31_MSMC_1V05 -		26D5	
	50_BAND5_TX_INT_IN		50_BAND5_TX_INT_IN -		34C7				50_TXRX_B8_PAD_ANT		50_TXRX_B8_PAD_ANT -		34B3		100_BAND5_BAND8_RX_N		100_BAND5_BAND8_RX_N -		31C7 32C3		ADC_SMP31_MSMC_1V05		ADC_SMP31_MSMC_1V05 -		26D5	
B	50_BAND5_TX_INT_OUT		50_BAND5_TX_INT_OUT -		34C6				50_TXRX_B8_PAD_MCH		50_TXRX_B8_PAD_MCH -		34B2		100_BAND5_BAND8_RX_P		100_BAND5_BAND8_RX_P -		31C7 32B3		ADC_SMP31_MSMC_1V05		ADC_SMP31_MSMC_1V05 -		26D5	
	50_BAND5_TX_PA_IN		50_BAND5_TX_PA_IN -		34C5				50_TXRX_B13_ASM		50_TXRX_B13_ASM -		37B4		100_BAND5_BAND8_RX_P		100_BAND5_BAND8_RX_P -		31C7 32B3		ADC_SMP31_MSMC_1V05		ADC_SMP31_MSMC_1V05 -		26D5	
	50_BAND8_TX_INT_OUT		50_BAND8_TX_INT_OUT -		34D6				50_TX_3G_B8_FILT		50_TX_3G_B8_FILT -		34D7		100_BAND5_BAND8_RX_P		100_BAND5_BAND8_RX_P -		31C7 32B3		ADC_SMP31_MSMC_1V05		ADC_SMP31_MSMC_1V05 -		26D5	
	50_BAND8_TX_PA_IN		50_BAND8_TX_PA_IN -		34D5				50_TX_B2		50_TX_B2 -		39C6		100_BAND5_BAND8_RX_P		100_BAND5_BAND8_RX_P -		31C7 32B3		ADC_SMP31_MSMC_1V05		ADC_SMP31_MSMC_1V05 -		26D5	
	50_BAND13_DUPLEX_ANT		50_BAND13_DUPLEX_ANT -		35C2				50_TX_B4_MCH		50_TX_B4_MCH -		38B8		100_BAND5_BAND8_RX_P		100_BAND5_BAND8_RX_P -		31C7 32B3		ADC_SMP31_MSMC_1V05		ADC_SMP31_MSMC_1V05 -		26D5	
	50_BAND13_DUPLEX_TX		50_BAND13_DUPLEX_TX -		35C3				50_TX_G_HB_ASM		50_TX_G_HB_ASM -		36B2 37B4		100_BAND5_BAND8_RX_P		100_BAND5_BAND8_RX_P -		31C7 32B3		ADC_SMP31_MSMC_1V05		ADC_SMP31_MSMC_1V05 -		26D5	
	50_BAND13_PA_MATCH		50_BAND13_PA_MATCH -		35C4				50_TX_G_HB_MCH		50_TX_G_HB_MCH -		36C7		100_BAND5_BAND8_RX_P		100_BAND5_BAND8_RX_P -		31C7 32B3		ADC_SMP31_MSMC_1V05		ADC_SMP31_MSMC_1V05 -		26D5	
	50_BAND13_PA_OUT		50_BAND13_PA_OUT -		35C4				50_TX_G_HB_PAIN		50_TX_G_HB_PAIN -		36C6		100_BAND5_BAND8_RX_P		100_BAND5_BAND8_RX_P -		31C7 32B3		ADC_SMP31_MSMC_1V05		ADC_SMP31_MSMC_1V05 -		26D5	
	50_BAND13_PA_OUT		50_BAND13_PA_OUT -		35C4				50_TX_G_HB_PAMCH		50_TX_G_HB_PAMCH -		36B3		100_BAND5_BAND8_RX_P		100_BAND5_BAND8_RX_P -		31C7 32B3		ADC_SMP31_MSMC_1V05		ADC_SMP31_MSMC_1V05 -		26D5	
	50_BAND13_TRX		50_BAND13_TRX -		35C1 37B6				50_TX_G_HB_PAOUT		50_TX_G_HB_PAOUT -		36B4		100_BAND5_BAND8_RX_P		100_BAND5_BAND8_RX_P -		31C7 32B3		ADC_SMP31_MSMC_1V05		ADC_SMP31_MSMC_1V05 -		26D5	
A	50_BAND13_TRX_MATCH		50_BAND13_TRX_MATCH -		35C2				50_TX_G_LB_ASM		50_TX_G_LB_ASM -		36B2 37B4		100_BAND13_DUPLEX_MATC		100_BAND13_DUPLEX_MATC -		35C2		AP_HSIC1_RDY		AP_HSIC1_RDY -		3B7 21A4	
	50_BAND13_TX_INT_IN		50_BAND13_TX_INT_IN -		35C7				50_TX_G_LB_MCH		50_TX_G_LB_MCH -		36B7		100_BAND13_DUPLEX_MATC		100_BAND13_DUPLEX_MATC -		35C2		AP_HSIC3_RDY		AP_HSIC3_RDY -		3B7 21A4	
	50_BAND13_TX_INT_OUT		50_BAND13_TX_INT_OUT -		35C6				50_TX_G_LB_PAIN		50_TX_G_LB_PAIN -		36B6		100_BAND13_DUPLEX_MATC		100_BAND13_DUPLEX_MATC -		35C2		AP_HSIC3_RDY		AP_HSIC3_RDY -		3B7 21A4	
	50_BAND13_TX_INT_OUT		50_BAND13_TX_INT_OUT -		35C6				50_TX_G_LB_PAIN		50_TX_G_LB_PAIN -		36B6		100_BAND13_DUPLEX_MATC		100_BAND13_DUPLEX_MATC -		35C2		AP_HSIC3_RDY		AP_HSIC3_RDY -		3B7 21A4	
	50_BAND13_TX_PA_IN		50_BAND13_TX_PA_IN -		35C5				50_TX_G_LB_PAMCH		50_TX_G_LB_PAMCH -		36B3		100_BAND13_DUPLEX_MATC		100_BAND13_DUPLEX_MATC -		35C2		AP_HSIC3_RDY		AP_HSIC3_RDY -		3B7 21A4	
	50_BAND13_TX_PA_IN		50_BAND13_TX_PA_IN -		35C5				50_TX_G_LB_PAMCH		50_TX_G_LB_PAMCH -		36B3		100_BAND13_DUPLEX_MATC		100_BAND13_DUPLEX_MATC -		35C2		AP_HSIC3_RDY		AP_HSIC3_RDY -		3B7 21A4	
	50_CM_TRAP_B5		50_CM_TRAP_B5 -		32C3				50_TX_G_LB_PAOUT		50_TX_G_LB_PAOUT -		36B4		100_BAND13_DUPLEX_MATC		100_BAND13_DUPLEX_MATC -		35C2		AP_HSIC3_RDY		AP_HSIC3_RDY -		3B7 21A4	
	50_CPL_B1_B4_OUT		50_CPL_B1_B4_OUT -		34C3 38C3				50_TX_G_LB_ASM		50_TX_G_LB_ASM -		36B2 37B4		100_BAND13_DUPLEX_MATC		100_BAND13_DUPLEX_MATC -		35C2		AP_HSIC3_RDY		AP_HSIC3_RDY -		3B7 21A4	
	50_CPL_B1_B4_TERM		50_CPL_B1_B4_TERM -		38C4				50_TX_G_LB_MCH		50_TX_G_LB_MCH -		36B7		100_BAND13_DUPLEX_MATC		100_BAND13_DUPLEX_MATC -		35C2		AP_HSIC3_RDY		AP_HSIC3_RDY -		3B7 21A4	
	50_CPL_B5_B8_OUT		50_CPL_B5_B8_OUT -		34C3 35B5				50_TX_G_LB_PAIN		50_TX_G_LB_PAIN -		36B6		100_BAND13_DUPLEX_MATC		100_BAND13_DUPLEX_MATC -		35C2		AP_HSIC3_RDY		AP_HSIC3_RDY -		3B7 21A4	

8			7			6			5			4			3			2			1		
D	BOARD_ID	@single_brd_lib.RADIO_MLB BOARD_ID -	28D4	PA_ON_B8	@single_brd_lib.RADIO_MLB PA_ON_B8 -	30B4 34C2	PP_SMPS2_RF1_1V3	PP_SMPS2_RF1_1V3 -	27C1 29A5 33D6 33D8	WAN_GP_DATA9	WAN_GP_DATA9 -	30B2 31C4	D										
	BT_PCM_CLK	@single_brd_lib.RADIO_MLB 45_I2S3_BCLK -	3C4 21B4	PA_ON_B13	@single_brd_lib.RADIO_MLB PA_ON_B13 -	30B4 35B7	PP_SMPS3_MSME_1V8	PP_SMPS3_MSME_1V8 -	26D1 26D6 27A7 27C1 29A6 29A6 29A6 29A8 29C6 29D7 29D8 30B8 30C4 33A4 27A7 27B1 33C5	WAN_GP_DATA1	WAN_GP_DATA1 -	30B2 31C4											
	BT_PCM_IN	@single_brd_lib.SINGLE_BRD BT_PCM_CLK -	26B8 42B3	PA_R0	@single_brd_lib.RADIO_MLB PA_R0 - @single_brd_lib.RADIO_MLB	30A4 34C2 35B7 36B5 38D3 39D3	PP_SMPS4_RF2_2V0	PP_SMPS4_RF2_2V0 -	27A7 27B1	WAN_GP_DATA2	WAN_GP_DATA2 -	30B2 31C4											
	BT_PCM_OUT	@single_brd_lib.RADIO_MLB I2S3_DOUT -	3C4 21B4	PA_R1_VBP	@single_brd_lib.RADIO_MLB PA_R1_VBP -	39C2 34C2 35C7 38D3 35C6	PP_SMPS5_DSP_1V05	PP_SMPS5_DSP_1V05 -	27A7 27B1	WLAN_BUCK_OUT	WLAN_BUCK_OUT -	42C7											
	BT_PCM_SYNC	@single_brd_lib.SINGLE_BRD BT_PCM_IN -	26B8 42B3	PBL_RUN_BB_HSIC1_RDY	@single_brd_lib.RADIO_MLB PBL_RUN_BB_HSIC1_RDY -	3A7 21D4	PP_SYNC	PP_SYNC -	3A5 21C4	WLAN_CLK32K	WLAN_CLK32K -	42C7											
	BT_REG_ON	@single_brd_lib.RADIO_MLB BT_REG_ON -	13B7 21C4	PMIC_RESOUT_L	@single_brd_lib.SINGLE_BRD PBL_RUN_BB_HSIC1_RDY -	26C1 26D8 30B2	PP_VREG	PP_VREG - @single_brd_lib.RADIO_MLB	26C8 30B2	WLAN_HSIC3_RESUME	WLAN_HSIC3_RESUME -	3B7 21A4											
	BT_UART_CTS_L	@single_brd_lib.SINGLE_BRD BT_UART_CTS_L -	26B8 42B3	PMIC_SSBI	@single_brd_lib.SINGLE_BRD PBL_RUN_BB_HSIC1_RDY -	26C1 28C6 29B5	PP_VSW_S1	PP_VSW_S1 -	27D4	WLAN_REG_ON	WLAN_REG_ON -	13B7 21C4											
	BT_UART_RTS_L	@single_brd_lib.RADIO_MLB UART3_RTS_L -	3B5 21B4	PM_MDM_IRQ_L	@single_brd_lib.SINGLE_BRD PBL_RUN_BB_HSIC1_RDY -	26C6 28C8 29A5	PP_VSW_S2	PP_VSW_S2 -	27C4	WLAN_REG_ON_RC	WLAN_REG_ON_RC -	42A7											
	BT_UART_RXD	@single_brd_lib.SINGLE_BRD BT_UART_RTS_L -	26B8 42B3	PM_USR_IRQ_L	@single_brd_lib.RADIO_MLB PM_USR_IRQ_L -	28C6 30B2	PP_VSW_S3	PP_VSW_S3 -	27C4	WLAN_SR_VLX1	WLAN_SR_VLX1 -	42B7											
	BT_WAKE	@single_brd_lib.RADIO_MLB UART3_TXD -	3A5 21B4	PP_BATT_VCC_CONN	@single_brd_lib.RADIO_MLB PM_USR_IRQ_L -	28C6 30A2	PP_VSW_S4	PP_VSW_S4 -	27B4	WLAN_TX_BLANK	WLAN_TX_BLANK -	30B2 42A4											
C	CLK32K_AP	@single_brd_lib.SINGLE_BRD BT_UART_CTS_L -	26B8 42B3	PP_BATT_VCC_WLAN	@single_brd_lib.RADIO_MLB PP_BATT_VCC_CONN -	8C7 12D8 14D7 19D7 21C5 21C7 21D4 22D8	PP_WLAN_VDDIO_1V8	PP_WLAN_VDDIO_1V8 -	42C5	WLAN_UART_RXD	WLAN_UART_RXD -	26B8 42A4 42B4	C										
	DB_EN	@single_brd_lib.RADIO_MLB UART3_CTS_L -	3B5 21B4	PP_D1G	@single_brd_lib.RADIO_MLB PP_BATT_VCC_CONN -	26D1 26D8 27B8 28C8 34C5 35C5 36C5 36D8 38C5 39C5	PP_WL_BT_VDDIO_AP	PP_WL_BT_VDDIO_AP -	26C8 42A7 42C4	WLAN_UART_TXD	WLAN_UART_TXD -	3A5 21B4											
	DCDC_ADJ	@single_brd_lib.SINGLE_BRD BT_UART_RTS_L -	26B8 42B3	PP_LD01	@single_brd_lib.RADIO_MLB PP_LD02_X0_HS_1V8 -	42D6	PRX_B5_B8_1	PRX_B5_B8_1 -	33A4 33C3	XO_GND	XO_GND - @single_brd_lib.RADIO_MLB	28A4 28B3 28B4											
	DCDC_EN	@single_brd_lib.RADIO_MLB UART3_TXD -	3A5 21B4	PP_LD03_AMUX_1V8	@single_brd_lib.RADIO_MLB PP_LD03_AMUX_1V8 -	27B2 28B5 28D4 29B6	PRX_BB_I_N	PRX_BB_I_N -	30C8 31C7	XO_REF	XO_REF - @single_brd_lib.RADIO_MLB	31D7											
	DCDC_MODE	@single_brd_lib.SINGLE_BRD BT_UART_TXD -	26B8 42C3	PP_LD04_VDDA_3V3	@single_brd_lib.RADIO_MLB PP_LD04_VDDA_3V3 -	27B2 29B6	PRX_BB_I_P	PRX_BB_I_P -	30C8 31C7	XO_THERM_Y1	XO_THERM_Y1 -	28B4											
	DCDC_OUT	@single_brd_lib.RADIO_MLB BT_WAKE -	3B7 21B4	PP_LD05_GPS_LNA_2V5	@single_brd_lib.RADIO_MLB PP_LD05_GPS_LNA_2V5 -	27B2 41C6	PRX_BB_Q_N	PRX_BB_Q_N -	30C8 31C7	XTAL19M_IN	XTAL19M_IN -	28B4											
	DCDC_PGND	@single_brd_lib.SINGLE_BRD BT_WAKE -	26B8 42C3	PP_LD05_GPS_LNA_2V5_CONN	@single_brd_lib.RADIO_MLB PP_LD05_GPS_LNA_2V5_CONN -	41C8	PRX_BB_Q_P	PRX_BB_Q_P -	30C8 31C7	XTAL19M_OUT	XTAL19M_OUT -	28B4											
	DEBU8_RST_L	@single_brd_lib.RADIO_MLB CLK32K_AP -	26C8 42A4 42C8	PP_LD06_RUIM_1V8	@single_brd_lib.RADIO_MLB PP_LD06_RUIM_1V8 -	26A3 26A6 26D1 26D6 27A2 29A6	PS_HOLD	PS_HOLD - @single_brd_lib.RADIO_MLB	28C8 30B2														
	DEV_HSIC3_RDY	@single_brd_lib.RADIO_MLB DEBU8_RST_L -	26D3 29B5	PP_LD07_DAC_1V8	@single_brd_lib.RADIO_MLB PP_LD07_DAC_1V8 -	27A2 29A6 30C6	PS_HOLD_PMIC	PS_HOLD_PMIC -	26C3 28C7														
	DRX_BB_I_N	@single_brd_lib.RADIO_MLB DEBU8_RST_L -	26D3 29B5	PP_LD08_VDDPX_1V2	@single_brd_lib.RADIO_MLB PP_LD08_VDDPX_1V2 -	27A2 29A6	RADIO_ON_L	RADIO_ON_L -	3A7 21D4														
B	GPIO_5	@single_brd_lib.RADIO_MLB GPIO_51 -	26C3 30C2	PP_LD09_PLL_1V05	@single_brd_lib.RADIO_MLB PP_LD09_PLL_1V05 -	27A2 29B6 29B8 29D8	REF_BYP_8014_F2	REF_BYP_8014_F2 -	27C6				B										
	GPIO_51	@single_brd_lib.RADIO_MLB GPIO_DEBUG_LED -	26C3 30B4	PP_LD010_ADSP_1V05	@single_brd_lib.RADIO_MLB PP_LD010_ADSP_1V05 -	27A2 29C6 29D7	REF_BYP_8014_F2	REF_BYP_8014_F2 -	27C6														
	GPIO_DEBUG_LED	@single_brd_lib.RADIO_MLB GPIO_DEBUG_LED -	26C3 30B4	PP_LD011_MDSP_FW_1V05	@single_brd_lib.RADIO_MLB PP_LD011_MDSP_FW_1V05 -	27A2 29C6 29D6	RESET_DET_L	RESET_DET_L -	3A5 21D4														
	GPS_SYNC	@single_brd_lib.RADIO_MLB GPS_BB_I_N -	31C3 30C8 31C4	PP_LD012_MDSP_SW_1V05	@single_brd_lib.RADIO_MLB PP_LD012_MDSP_SW_1V05 -	27A2 29B6 29D7	RESET_PMU_L	RESET_PMU_L -	26C1 26D8 30B4														
	GPS_BB_I_P	@single_brd_lib.RADIO_MLB GPS_BB_I_P -	30C8 31B7	PP_LD013_VDDPX_2V95	@single_brd_lib.RADIO_MLB PP_LD013_VDDPX_2V95 -	27A2 29A8	RF_CLK	RF_CLK - @single_brd_lib.RADIO_MLB	28B1 31D8														
	GPS_BB_Q_N	@single_brd_lib.RADIO_MLB GPS_BB_Q_N -	30C8 31B7	PP_LD014_2P65	@single_brd_lib.SINGLE_BRD PP_LD014_2P65 -	16C2 21A4	RF_RBIA5	RF_RBIA5 -	31D7														
	GPS_BB_Q_P	@single_brd_lib.RADIO_MLB GPS_BB_Q_P -	30C8 31C4	PP_LVS1	@single_brd_lib.RADIO_MLB PP_LVS1 - @single_brd_lib.RADIO_MLB	26C6 27D1 29B6	RF_RESET_L	RF_RESET_L -	2B7 12B2 13B6 15B4 18B1														
	GSM_PA_HB_EN	@single_brd_lib.RADIO_MLB GSM_PA_LB_EN -	30B4 36B5	PP_PA	@single_brd_lib.RADIO_MLB PP_PA - @single_brd_lib.RADIO_MLB	34C5 35D5 36C5 36D5 38D5 39D5	RESET_V8_L	RESET_V8_L -	21D4 22B8 26C3 26D8														
	GSM_PA_LB_EN	@single_brd_lib.RADIO_MLB BB_WAKE_AP -	13B6 21D4	PP_RF1_1_PRX_VCO	@single_brd_lib.RADIO_MLB PP_RF1_1_PRX_VCO -	33C3 33D3	RSVD	RSVD - @single_brd_lib.RADIO_MLB	28B3														
	HOST_WAKE_BB	@single_brd_lib.SINGLE_BRD HOST_WAKE_BB -	26C1 26D8 30B2	PP_RF1_2_TX_VCO	@single_brd_lib.RADIO_MLB PP_RF1_2_TX_VCO -	33C6 33D3	RTR_SSBI_PRX_DRX	RTR_SSBI_PRX_DRX -	30B2 31C1														
A	HOST_WAKE_BT	@single_brd_lib.SINGLE_BRD HOST_WAKE_BT -	13B6 21B4	PP_RF1_3_20_23	@single_brd_lib.RADIO_MLB PP_RF1_3_20_23 -	33B7	RTR_SSBI_TX_GPS	RTR_SSBI_TX_GPS -	30B2 31C1				A										
	HOST_WAKE_WLAN	@single_brd_lib.RADIO_MLB HOST_WAKE_WLAN -	13B6 21B4	PP_RF1_3_20_23_GPS_P	@single_brd_lib.RADIO_MLB PP_RF1_3_20_23_GPS_P -	33A6 33C3	S1_GND	S1_GND - @single_brd_lib.RADIO_MLB	27C3 27C7 28B6														
	HSIC_DEVICE_RDY	@single_brd_lib.RADIO_MLB HSIC_DEVICE_RDY -	26B8 42A4 42B3	PP_RF1_3_20_23_RX_PL	@single_brd_lib.RADIO_MLB PP_RF1_3_20_23_RX_PL -	33B6 33C3	S2_GND	S2_GND - @single_brd_lib.RADIO_MLB	27C7 28B6														
	IREF	@single_brd_lib.RADIO_MLB JTAG_SEL -	30C6 31D8 42C7	PP_RF1_3_20_23_TX_PL	@single_brd_lib.RADIO_MLB PP_RF1_3_20_23_TX_PL -	33A6 33C3	S3_GND	S3_GND - @single_brd_lib.RADIO_MLB	27C3 27C7 28B6														
	JTAG_SEL	@single_brd_lib.RADIO_MLB LAT_SW1_CTL -	16C5 21A4	PP_RF1_4_TX_LO	@single_brd_lib.RADIO_MLB PP_RF1_4_TX_LO -	33C3 33C6	S4_GND	S4_GND - @single_brd_lib.RADIO_MLB	27C7 28B6														
	LAT_SW1_CTL	@single_brd_lib.SINGLE_BRD LAT_SW1_CTL -	26B8 26C1 30C2	PP_RF1_5_8_9	@single_brd_lib.RADIO_MLB PP_RF1_5_8_9 -	33B7	S5_GND	S5_GND - @single_brd_lib.RADIO_MLB	27B3 27C8 28B6														
	MDM_CLK	@single_brd_lib.RADIO_MLB MDM_CLK -	28B2 29A5	PP_RF1_5_PRE_DRIVER	@single_brd_lib.RADIO_MLB PP_RF1_5_PRE_DRIVER -	33B6 33C3	SIMCRD_CLK_CONN	SIMCRD_CLK_CONN -	26A3 26A6 26C1 30C4														
	MDM_CLK	@single_brd_lib.RADIO_MLB OPT_2 -	28C7 28D3	PP_RF1_5_PRE_DRIVER	@single_brd_lib.RADIO_MLB PP_RF1_5_PRE_DRIVER -	33B6 33C3	SIMCRD_IO_CONN	SIMCRD_IO_CONN -	26A4 26A4 26C1 30C4														
	PA_ID	@single_brd_lib.RADIO_MLB PA_ON_B1B4 -	30B4 38D3	PP_RF1_8_TX_MIXER_LB	@single_brd_lib.RADIO_MLB PP_RF1_8_TX_MIXER_LB -	33B6 33C3	SIMCRD_RST_CONN	SIMCRD_RST_CONN -	26A4 26A6 26C1 30C4														
	PA_ON_B2	@single_brd_lib.RADIO_MLB PA_ON_B5 -	30B4 39C3 30B4 34C2	PP_RF1_9_HB_DA	@single_brd_lib.RADIO_MLB PP_RF1_9_HB_DA -	33B6 33C3	SIM_TRAY_DETECT	SIM_TRAY_DETECT -	26A3 26A4 26C1 30C4														

8			7			6			5			4			3			2			1		
Title: Cref Part Report Design: single_brd Date: Jul 2 13:25:05 2012			BS1 PCB_STANDOFF single_brd[21B7] BS2 PCB_STANDOFF single_brd[21B7] BS3 PCB_STANDOFF single_brd[21B7] BS4 PCB_STANDOFF single_brd[21B7] BS5 PCB_STANDOFF single_brd[21B7] C1 CAP_01005 single_brd[2A6] C2 CAP_0201 single_brd[2C6] C3 CAP_0204 single_brd[6D3] C4 CAP_01005 single_brd[7D5] C5 CAP_01005 single_brd[7D5] C6 CAP_01005 single_brd[7D3] C7 CAP_01005 single_brd[7D3] C8 CAP_01005 single_brd[7B4] C9 CAP_01005 single_brd[21C6] C10 CAP_201 single_brd[12D5] C11 CAP_0201 single_brd[14A1] C12 CAP_01005 single_brd[16B6] C13 CAP_01005 single_brd[16B6] C14 CAP_01005 single_brd[16B5] C15 CAP_01005 single_brd[16B5] C16 CAP_0402 single_brd[12D8] C17 CAP_01005 single_brd[18D3] C18 CAP_01005 single_brd[18D3] C19 CAP_01005 single_brd[18D3] C20 CAP_01005 single_brd[2D6] C21 CAP_01005 single_brd[2D6] C22 CAP_01005 single_brd[2D6] C23 CAP_0201 single_brd[2C7] C24 CAP_01005 single_brd[2D6] C25 CAP_0201 single_brd[2C6] C26 CAP_01005 single_brd[16B6] C27 CAP_0201-MUR single_brd[11B4] C28 CAP_0201 single_brd[2C6] C29 CAP_0201-MUR single_brd[14D3] C30 CAP_0610 single_brd[5A7] C31 CAP_201 single_brd[12A5] C32 CAP_01005 single_brd[2D4] C33 CAP_0402 single_brd[12D8] C34 CAP_01005 single_brd[2D4] C35 CAP_01005 single_brd[2D4] C36 CAP_01005 single_brd[2C2] C37 CAP_01005 single_brd[2B2] C38 CAP_0201-MUR single_brd[15C7] C39 CAP_01005 single_brd[15C5] C40 CAP_0610 single_brd[4B7] C41 CAP_01005 single_brd[4D7] C42 CAP_0402-2 single_brd[4B7] C43 CAP_0204 single_brd[4B7] C44 CAP_01005 single_brd[11C2] C45 CAP_01005 single_brd[9B4] C46 CAP_0402 single_brd[12D7] C47 CAP_0402 single_brd[12C3] C48 CAP_0204 single_brd[4B7] C49 CAP_0204 single_brd[4C7] C50 CAP_0201-MUR single_brd[6C4] C51 CAP_01005 single_brd[10C2] C52 CAP_0402-2 single_brd[4C7] C53 CAP_0204 single_brd[4C7] C54 CAP_0610 single_brd[4B7] C55 CAP_01005 single_brd[9B4] C56 CAP_01005 single_brd[11B6] C57 CAP_0610 single_brd[4C6] C58 CAP_0402 single_brd[12D1] C59 CAP_0204 single_brd[4C6] C60 CAP_0204 single_brd[4B6] C61 CAP_01005 single_brd[9B7] C62 CAP_01005 single_brd[11C6] C63 CAP_01005 single_brd[11C6] C64 CAP_01005 single_brd[9B7] C65 CAP_01005 single_brd[9B6] C66 CAP_0402 single_brd[12C2] C67 CAP_01005 single_brd[11B4] C68 CAP_0610 single_brd[5D6] C69 CAP_0402 single_brd[12C2] C70 CAP_0402 single_brd[12C2] C71 CAP_0402-2 single_brd[5A7] C72 CAP_0204 single_brd[5C7] C73 CAP_01005 single_brd[11B2] C74 CAP_0610 single_brd[5C7] C75 CAP_0610 single_brd[5C7] C76 CAP_0402-2 single_brd[12C2] C77 CAP_0402-2 single_brd[12C1] C78 CAP_01005 single_brd[16A3] C79 CAP_01005 single_brd[17C8] C80 CAP_0610 single_brd[5C7] C81 CAP_0204 single_brd[5C6] C82 CAP_01005 single_brd[29D7] C83 CAP_0204 single_brd[5D6] C84 CAP_01005 single_brd[29D7] C85 CAP_0402-1 single_brd[19D2] C86 CAP_0402-2 single_brd[5A6] C87 CAP_0204 single_brd[5C7] C88 CAP_01005 single_brd[18B3] C89 CAP_0204 single_brd[5C7] C90 CAP_01005 single_brd[18B3] C91 CAP_0204 single_brd[5C6] C92 CAP_0402-2 single_brd[5B6] C93 CAP_01005 single_brd[18C3] C94 CAP_0201 single_brd[4B3] C96 CAP_0402 single_brd[13B4] C97 CAP_0204 single_brd[5D6] C98 CAP_0204 single_brd[5C6] C99 CAP_01005 single_brd[16A6] C100 CAP_0204 single_brd[5C6] C100_RF CAP_01005 radio_mlb[26A6]single_brd[21] C101 CAP_01005 single_brd[8C5] C101_RF CAP_01005 radio_mlb[26A5]single_brd[21] C102 CAP_01005 single_brd[16A5] C103 CAP_0610 single_brd[5C7] C104 CAP_0201 single_brd[5B6] C105 CAP_01005 single_brd[10B7] C106 CAP_01005 single_brd[4A8] C107 CAP_0402-2 single_brd[5A6] C108 CAP_01005 single_brd[4A8] C109 CAP_0402-2 single_brd[12C1] C110 CAP_0204 single_brd[5C6] C111 CAP_01005 single_brd[4A7] C112 CAP_0204 single_brd[5C6]			C113 CAP_01005 single_brd[4A7] C114 CAP_01005 single_brd[4A6] C115 CAP_0204 single_brd[5C6] C116 CAP_0201 single_brd[5B6] C117 CAP_01005 single_brd[4A6] C118 CAP_01005 single_brd[4A5] C119 CAP_0402-2 single_brd[5A5] C120 CAP_01005 single_brd[4A5] C121 CAP_0204 single_brd[5D6] C122 CAP_0610 single_brd[5C6] C123 CAP_0402-4 single_brd[13B2] C124 CAP_0204 single_brd[5C6] C125 CAP_0402 single_brd[13A1] C126 CAP_0402-2 single_brd[5C7] C127 CAP_0201 single_brd[10B6] C128 CAP_0201 single_brd[5B6] C129 CAP_0402 single_brd[18C2] C130 CAP_01005 single_brd[17C7] C131 CAP_0402 single_brd[13A2] C132 CAP_01005 single_brd[13B2] C133 CAP_0610 single_brd[5C7] C134 CAP_0204 single_brd[5C6] C135 CAP_0402-1 single_brd[13B1] C136 CAP_01005 single_brd[6C5] C137 CAP_201 single_brd[17B4] C138 CAP_01005 single_brd[10C2] C140 CAP_0402 single_brd[12C3] C141 CAP_0402-2 single_brd[5D3] C142 CAP_0402-2 single_brd[5D3] C143 CAP_01005 single_brd[10B2] C144 CAP_01005 single_brd[6C5] C145 CAP_0402 single_brd[12D3] C146 CAP_0201 single_brd[17B4] C147 CAP_01005 single_brd[17B4] C148 CAP_0201 single_brd[17A6] C149 CAP_0402-1 single_brd[17D4] C150 CAP_01005 single_brd[17B4] C151 CAP_0204 single_brd[5C3] C152 CAP_0610 single_brd[5D3] C153 CAP_0204 single_brd[5D3] C154 CAP_P_0603-LLP single_brd[17A4] C155 CAP_0201 single_brd[17A4] C156 CAP_0402-1 single_brd[17D3] C157 CAP_0201 single_brd[17B3] C158 CAP_0204 single_brd[5C3] C159 CAP_01005 single_brd[12A8] C160 CAP_0610 single_brd[5D3] C161 CAP_0204 single_brd[5D3] C162 CAP_0402-1 single_brd[17D3] C163 CAP_201 single_brd[17D2] C164 CAP_0402 single_brd[17A7] C165 CAP_01005 single_brd[17D2] C166 CAP_0204 single_brd[5C3] C167 CAP_01005 single_brd[12A7] C168 CAP_01005 single_brd[12A5] C169 CAP_0204 single_brd[5D3] C170 CAP_P_0402 single_brd[17B4] C171 CAP_01005 single_brd[19B4] C172 CAP_01005 single_brd[5C3] C173 CAP_01005 single_brd[5C3] C174 CAP_0204 single_brd[5C3] C175 CAP_01005 single_brd[19B4] C176 CAP_01005 single_brd[16B7] C177 CAP_0204 single_brd[5D3] C178 CAP_0201-MUR single_brd[6C4] C179 CAP_01005 single_brd[19A5] C179_RF CAP_0402-1 radio_mlb[33C7]single_brd[21] C180 CAP_0204 single_brd[6D4] C181 CAP_01005 single_brd[19B5] C182 CAP_0402-2 single_brd[6D3] C183 CAP_0402-2 single_brd[6D3] C184 CAP_0402-2 single_brd[6D3] C185 CAP_0204 single_brd[6D3] C186 CAP_0204 single_brd[6D3] C187 CAP_0402-2 single_brd[6D2] C188 CAP_0204 single_brd[6D2] C189 CAP_01005 single_brd[19B3] C190 CAP_402 single_brd[7D4] C190_RF CAP_0402 radio_mlb[33B5]single_brd[21] C191 CAP_01005 single_brd[7D2] C192 CAP_01005 single_brd[11D6] C193 CAP_0603 single_brd[11C2] C194 CAP_0201-MUR single_brd[11C7] C195 CAP_0402 single_brd[11C2] C196 CAP_01005 single_brd[11C6] C197 CAP_01005 single_brd[8B7] C198 CAP_01005 single_brd[11D5] C199 CAP_01005 single_brd[11B6] C200 CAP_01005 single_brd[11C3] C201 CAP_01005 single_brd[11C6] C201_RF CAP_0402 radio_mlb[27B7]single_brd[21] C202 CAP_01005 single_brd[11C6] C202_RF CAP_0402 radio_mlb[27C7]single_brd[21] C203 CAP_0402 single_brd[18D2] C203_RF CAP_0402 radio_mlb[27B7]single_brd[21] C204 CAP_0402-2 single_brd[12C7] C204_RF CAP_0402 radio_mlb[27C7]single_brd[21] C205 CAP_01005 single_brd[12D5] C206 CAP_01005 single_brd[12C3] C206_RF CAP_01005 radio_mlb[27C6]single_brd[21] C207 CAP_01005 single_brd[7B3] C207_RF CAP_01005 radio_mlb[27C3]single_brd[21] C208 CAP_01005 single_brd[12D3] C208_RF CAP_0603 radio_mlb[27C3]single_brd[21] C209 CAP_0402-2 single_brd[6D2] C209_RF CAP_0603 radio_mlb[27C3]single_brd[21] C210 CAP_01005 single_brd[11B6] C210_RF CAP_0603 radio_mlb[27B3]single_brd[21] C211 CAP_01005 single_brd[11B6] C211_RF CAP_0603 radio_mlb[27B3]single_brd[21] C212 CAP_01005 single_brd[11B6] C212_RF CAP_01005 radio_mlb[27A5]single_brd[21] C213 CAP_01005 single_brd[13A2] C213_RF CAP_0201-MUR radio_mlb[27A5]single_brd[21] C214 CAP_01005 single_brd[13A2] C214_RF CAP_0201-MUR radio_mlb[27A5]single_brd[21] C215 CAP_0201-MUR single_brd[16C3] C215_RF CAP_0201-MUR radio_mlb[27A4]single_brd[21] C216 CAP_0201-MUR single_brd[8B4] C216_RF CAP_0201-MUR radio_mlb[27A4]single_brd[21] C217 CAP_0402 single_brd[17A6] C217_RF CAP_0201-MUR radio_mlb[27A5]single_brd[21] C218 CAP_402 single_brd[9C6] C218_RF CAP_0201-MUR radio_mlb[27A4]single_brd[21]			C219 CAP_402 single_brd[9C6] C219_RF CAP_0201-MUR radio_mlb[27A4]single_brd[21] C220 CAP_01005 single_brd[10C7] C220_RF CAP_0402-1 radio_mlb[27A3]single_brd[21] C221 CAP_01005 single_brd[10C7] C221_RF CAP_0402-1 radio_mlb[27A3]single_brd[21] C222 CAP_01005 single_brd[9C7] C222_RF CAP_0402-1 radio_mlb[27A3]single_brd[21] C223 CAP_01005 single_brd[9C7] C223_RF CAP_01005 radio_mlb[27B8]single_brd[21] C224 CAP_01005 single_brd[9C7] C225 CAP_01005 single_brd[9C7] C226 CAP_01005 single_brd[10C6] C226_RF CAP_0402 radio_mlb[27C8]single_brd[21] C227 CAP_01005 single_brd[9C7] C228 CAP_01005 single_brd[9C7] C229 CAP_01005 single_brd[18C6] C229_RF CAP_0402-1 radio_mlb[27A3]single_brd[21] C230 CAP_01005 single_brd[9C7] C230_RF CAP_0402-1 radio_mlb[27A2]single_brd[21] C231 CAP_01005 single_brd[9C6] C231_RF CAP_0201-MUR radio_mlb[27D3]single_brd[21] C232 CAP_402 single_brd[10C4] C233 CAP_402 single_brd[10C4] C233_RF CAP_01005 radio_mlb[27C2]single_brd[21] C234 CAP_402 single_brd[10B5] C234_RF CAP_0201-MUR radio_mlb[27A5]single_brd[21] C235 CAP_01005 single_brd[10B2] C235_RF CAP_0402-1 radio_mlb[27B8]single_brd[21] C236 CAP_01005 single_brd[10B2] C236_RF CAP_0402-1 radio_mlb[27B8]single_brd[21] C237 CAP_402 single_brd[10B6] C237_RF CAP_0402-1 radio_mlb[27B8]single_brd[21] C238 CAP_402 single_brd[10B6] C239 CAP_0402 single_brd[17A6] C240 CAP_01005 single_brd[16B3] C241 CAP_01005 single_brd[8B3] C242 CAP_01005 single_brd[16D7] C243 CAP_01005 single_brd[18D3] C244 CAP_01005 single_brd[8B4] C245 CAP_01005 single_brd[10D4] C246 CAP_0201 single_brd[17A7] C247 CAP_0402 single_brd[12D7] C248 CAP_0201-MUR single_brd[20A6] C249 CAP_0201-MUR single_brd[20B7] C250 CAP_0402 single_brd[12D6] C251 CAP_0402 single_brd[12D6] C252 CAP_0402 single_brd[13B4] C253 CAP_01005 single_brd[11A4] C254 CAP_0402 single_brd[13A1] C255 CAP_0201-1 single_brd[16B7] C256 CAP_0402 single_brd[11C3] C258 CAP_01005 single_brd[18B3] C259 CAP_01005 single_brd[7C3] C260 CAP_01005 single_brd[12B8] C261 CAP_0402 single_brd[12B8] C262 CAP_0402 single_brd[13B3] C263 CAP_0402 single_brd[12B8] C264 CAP_0402 single_brd[12B8] C265 CAP_01005 single_brd[12B8] C266 CAP_0201-MUR single_brd[12C8] C267 CAP_0402 single_brd[12B8] C268 CAP_0402 single_brd[12B8] C269 CAP_0402 single_brd[12C7] C270 CAP_0402 single_brd[12B7] C271 CAP_0402 single_brd[12B7] C272 CAP_0402 single_brd[12C7] C273 CAP_01005 single_brd[21D6] C274 CAP_01005 single_brd[7C2] C275 CAP_01005 single_brd[21C6] C276 CAP_01005 single_brd[12A7] C277 CAP_01005 single_brd[12B7] C278 CAP_402 single_brd[12B7] C279 CAP_01005 single_brd[21D6] C280 CAP_01005 single_brd[7C2] C281 CAP_0402-2 single_brd[12C7] C282 CAP_402 single_brd[12B7] C283 CAP_01005 single_brd[12A6] C284 CAP_01005 single_brd[7C2] C285 CAP_01005 single_brd[12A5] C286 CAP_01005 single_brd[20C5] C287 CAP_01005 single_brd[20C6] C288 CAP_0402 single_brd[11C2] C289 CAP_0402-2 single_brd[9C6] C290 CAP_0402 single_brd[12D4] C291 CAP_0402 single_brd[12C3] C292 CAP_0402 single_brd[12D4] C293 CAP_0402 single_brd[12C2] C294 CAP_0402 single_brd[12D4] C295 CAP_0402 single_brd[12D2] C296 CAP_0402 single_brd[12D4] C297 CAP_0402 single_brd[12D7] C298 CAP_0201-MUR single_brd[14A8] C299 CAP_402 single_brd[12B4] C300 CAP_01005 single_brd[14A7] C301 CAP_0402 single_brd[12D1] C302 CAP_0402 single_brd[6C2] C303 CAP_0402 single_brd[12D2] C304 CAP_0402 single_brd[15C3] C305 CAP_0402 single_brd[12D2] C306 CAP_402 single_brd[12B4] C307 CAP_01005 radio_mlb[28B4]single_brd[21] C308 CAP_0402-2 single_brd[6D2] C308_RF CAP_01005 single_brd[12C3] C309 CAP_01005 radio_mlb[28B2]single_brd[21] C310 CAP_01005 single_brd[14C4] C311 CAP_0402 single_brd[8B7] C312 CAP_0402 single_brd[12D4] C313 CAP_01005 single_brd[8B7] C314 CAP_01005 single_brd[8B6] C315 CAP_0402-2 single_brd[12C1] C316 CAP_0402-2 single_brd[12C2] C317 CAP_201 single_brd[13D4] C318 CAP_0201-MUR single_brd[13C4] C319 CAP_201 single_brd[13C4] C320 CAP_0402-4 single_brd[13B4] C321 CAP_0402-4 single_brd[13B4] C322 CAP_01005 single_brd[12A4] C323 CAP_01005 single_brd[13C4] C324 CAP_0402 single_brd[13B4] C325 CAP_0402 single_brd[12D6] C326 CAP_01005 single_brd[13C4] C327 CAP_0402-1 single_brd[13B3]			C328 CAP_0201-MUR single_brd[13B3] C329 CAP_0402-2 single_brd[12C1] C330 CAP_0402-2 single_brd[12C1] C331 CAP_0603-1 single_brd[14D6] C332 CAP_0402 single_brd[14D7] C333 CAP_0402 single_brd[14D7] C334 CAP_0201-MUR single_brd[14B8] C335 CAP_0402 single_brd[14D7] C336 CAP_01005 single_brd[14B8] C337 CAP_0201-1 single_brd[14D6] C338 CAP_0201-MUR single_brd[15B4] C339 CAP_201 single_brd[14D4] C340 CAP_402 single_brd[14D3] C341 CAP_0201-MUR single_brd[14D3] C342 CAP_0201 single_brd[14D5] C343 CAP_01005 single_brd[17D2] C344 CAP_01005 single_brd[14B2] C345 CAP_01005 single_brd[14B2] C346 CAP_01005 single_brd[19A5] C347 CAP_0201-MUR single_brd[14B1] C348 CAP_0603-1 single_brd[14D5] C349 CAP_201 single_brd[12A4] C350 CAP_0402 single_brd[18C2] C351 CAP_0402 single_brd[18C1] C352 CAP_01005 single_brd[16C2] C353 CAP_0402 single_brd[18C1] C354 CAP_01005 single_brd[10C6] C355 CAP_01005 single_brd[16C3] C356 CAP_01005 single_brd[10C6] C357 CAP_0402 single_brd[12C8] C358 CAP_0402 single_brd[12C8] C359 CAP_01005 single_brd[16C3] C360 CAP_01005 single_brd[14C3] C361 CAP_01005 single_brd[14D2] C362 CAP_01005 single_brd[16A3] C363 CAP_01005 single_brd[14C2] C364 CAP_01005 single_brd[21C8] C365 CAP_01005 single_brd[21C8] C366 CAP_01005 single_brd[21C8] C367 CAP_01005 single_brd[21C7] C368 CAP_01005 single_brd[14D6] C369 CAP_0402 single_brd[17D7] C370 CAP_402 single_brd[17D7] C371 CAP_402 single_brd[17D6] C372 CAP_0201-MUR single_brd[17B6] C373 CAP_01005 single_brd[14A6] C374 CAP_01005 single_brd[8C6] C375 CAP_0402 single_brd[12D7] C376 CAP_0201 single_brd[17A3] C377 CAP_0201 single_brd[17D1] C378 CAP_01005 single_brd[16C3] C379 CAP_01005 single_brd[19B7] C380 CAP_01005 single_brd[15C6] C381 CAP_01005 single_brd[15C5] C382 CAP_01005 single_brd[15C4] C383 CAP_0402 single_brd[12D7] C384 CAP_0402 single_brd[12D6] C385 CAP_0201 single_brd[12C7] C386 CAP_0402 single_brd[19D7] C387 CAP_0402 single_brd[19D7] C388 CAP_01005 single_brd[19D5] C389 CAP_0201-MUR single_brd[20B6] C390 CAP_0201-MUR single_brd[20B7] C391 CAP_0201-MUR single_brd[20A6] C392 CAP_01005 single_brd[20B5] C393 CAP_01005 single_brd[20A5] C394 CAP_0402-2 single_brd[19D5] C395 CAP_01005 single_brd[20C6] C396 CAP_0402-2 single_brd[19D5] C397 CAP_01005 single_brd[20A5] C398 CAP_01005 single_brd[12B2] C399 CAP_01005 single_brd[12B2] C400 CAP_01005 single_brd[28C5] C401 CAP_01005 single_brd[14A6] C402 CAP_01005 single_brd[11C3] C403 CAP_0201-MUR single_brd[20B6] C404 CAP_01005 single_brd[20B6] C405 CAP_01005 single_brd[14A6] C406 CAP_01005 single_brd[20C4] C407 CAP_01005 single_brd[11C3] C408 CAP_01005 single_brd[19C5] C409 CAP_01005 single_brd[20C3] C410 CAP_01005 single_brd[11C3] C411 CAP_0201-MUR single_brd[18C5] C412 CAP_0201-MUR single_brd[18C5] C413 CAP_01005 single_brd[10D5] C414 CAP_0402-2 single_brd[10D5] C416 CAP_01005 single_brd[10D5] C417 CAP_0201-MUR single_brd[16C5] C420 CAP_201 single_brd[10D4] C421 CAP_01005 single_brd[18D4] C422 CAP_402 single_brd[10D3] C424 CAP_0402 single_brd[10B4] C425 CAP_402 single_brd[18C3] C429 CAP_402 single_brd[19D4] C434 CAP_402 single_brd[19D2] C436 CAP_0402-1 single_brd[19D2] C438 CAP_01005 single_brd[19D2] C439 CAP_201 single_brd[18C2] C440 CAP_01005 single_brd[18C2] C500 CAP_01005 single_brd[14C2] C501 CAP_01005 single_brd[14C2] C501_RF CAP_0201-MUR radio_mlb[29D8]single_brd[21] C502 CAP_0201-MUR radio_mlb[29D7]single_brd[21] C503 RF CAP_0201-MUR radio_mlb[29D7]single_brd[21] C504 RF CAP_0201-MUR radio_mlb[29D7]single_brd[21] C505 RF CAP_0201-MUR radio_mlb[29D7]single_brd[21] C506 RF CAP_0201-MUR radio_mlb[29D8]single_brd[21] C507 RF CAP_0201-MUR radio_mlb[29D7]single_brd[21] C508 RF CAP_0201-MUR radio_mlb[29D7]single_brd[21] C509 RF CAP_0201-MUR radio_mlb[29D7]single_brd[21] C511 RF CAP_0201-MUR radio_mlb[29D7]single_brd[21] C512 RF CAP_0201-MUR radio_mlb[29D7]single_brd[21] C513 RF CAP_0201-MUR radio_mlb[29D6]single_brd[21] C514 RF CAP_0201-MUR radio_mlb[29D5]single_brd[21] C515 RF CAP_0201-MUR radio_mlb[29D8]single_brd[21] C516 RF CAP_0201-MUR radio_mlb[29D8]single_brd[21] C517 RF CAP_0201-MUR radio_mlb[29D7]single_brd[21] C518 RF CAP_0201-MUR radio_mlb[29D7]single_brd[21] C519 RF CAP_0201-MUR radio_mlb[29D6]single_brd[21] C520 RF CAP_0201-MUR radio_mlb[29D6]single_brd[21] C521 RF CAP_0201-MUR radio_mlb[29D6]single_brd[21] C522 RF CAP_0201-MUR radio_mlb[29D5]single_brd[21] C523 RF CAP_0201-MUR radio_mlb[29A6]single_brd[21] C524 RF CAP_0201-MUR radio_mlb[29A6]single_brd[21]											

[illegible]

[illegible]