
# **5X7 Dot Character VFD Module**

# **CU20045SCPB-T23A**

- □ 4 Lines of 20 Characters 5mm High
- ☐ High Speed Parallel/Serial Interface
- □ Operating Temp -10°C to +65°C
- □ Single 5V Supply
- ☐ High Brightness Blue Green Display
- □ ASCII, Katakana & Extended Character Font
- ☐ 2 User Definable Character RAM

The module includes the Vacuum Fluorescent Display glass, driver and micro-controller ICs with refresh RAM, character generator and interface logic. The high speed 8 bit parallel interface is 5V CMOS compatible suitable for connection to a host CPU bus. The asynchronous serial interface accepts baud rates up to 19,200 with or without parity. Two character font tables can be hardware or software selected. User defined characters and many control commands are available.

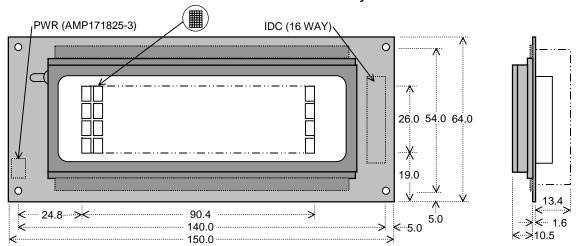

Dimensions in mm & subject to tolerances. Mounting holes 3.5mm dia.

International Font

Additional Katakana Font

#### **ELECTRICAL SPECIFICATION**

ELECTRICAL SI ECITICATION									
Parameter	Symbol	Value	Condition						
Power Supply Voltage	Vcc	5.0VDC +/- 5%	GND=0V						
Power Supply Current	Icc	400mADC typ.	Vcc=5V						
Logic High Input	VIH	2.0VDC min.	Vcc=5V						
Logic Low Input	VIL	0.8VDC max.	Vcc=5V						
Logic High Output	Voн	2.4VDC min.	IOH = -2.0mA						
Logic Low Output	Vol	0.5VDC max.	IoL =2.0mA						

The power on rise time should be less than 50ms. The inrush current at power on can be 2 x lcc.

### **OPTICAL and ENVIRONMENTAL SPECIFICATIONS**

Parameter	Value
Character Size/Pitch (XxY mm)	3.0 x 5.0/4.6 x 7.0
Dot Size/Pitch (XxY mm)	0.4 x 0.5/0.65 x 0.75
Luminance	700 cd/m <sup>2</sup> (204 fL) Typ.
Colour of Illumination	Blue-Green (Filter for colours)
Operating Temperature	-10°C to +65°C
Storage Temperature	-40°C to +85°C
Operating Humidity (non condensing)	20 to 80% RH @ 25°C

#### **SOFTWARE COMMANDS**

SOI TWAKE COMMANDS									
Instruction	D0-D7	Instruction	D0-D7						
Back Space	08H	Katakana Font	19H						
Horizontal Tab	09H	Escape	1BH						
Line Feed	0AH	➤ Send User Font	+43H						
Form Feed	0CH	➤ Position cursor	+48H						
Carriage Return	0DH	➤ Software Reset	+49H						
Clear Display	0EH	> Luminance	+4CH						
Increment Write Mode	11H	➤ Flickerless Write	+53H						
Vertical Scroll Mode	12H	➤ Cursor Blink Speed	+54H						
5x7 Block Cursor On	15H	Character Data	20H+						
Cursor Off	16H	User Character Data	00H+						
International Font	18H								

## **TIMING PARAMETERS (min)**

	·····
Data Set Up To Write	100ns
Write Pulse Width	160ns
Hold After Write	10nc

Subject to change without notice. Detailed specification on request. IUK Doc Ref:0829 lss:5 3OCT00

CHARACTER FONTS

	00	10	20	30	40	50	60	70	80	90	AO	В0	СО	DO	E0	FO	80	90	AO	BO	co	DO	ΕO	F0
00				0	a	P	7	<b> </b>	Ħ	Σ		123	曲	Ð	à	ó	Б	Ы			9	<b>.</b>		П
01			Τ	1	A	Q	a	q	ं	Ω	ī	±	Á	М		n	Г	3	133	F	#	Ċ,	Ħ	
02			11	2	В	R	Ь	m	Ť	===	4	2	Ā	Ò	ā	ò	Д	Ю	Т	4	ij	$\varkappa'$	沈	
03			#	3	C	5		=	Ţ.	×	£	9	Ħ	Ó	ā	ं	$\mathbb{X}$	Я		ņ	Ŧ	Œ	#.	
04			\$	4	D	T	d	†;	Ŀ	÷		•	Ħ	ō	ä	៊	3	0	٠.	I	ŀ	†	#:	П
05			7.	5	Е	U	≘	U	O:		#	μ	A	ō	å	5	И	9	=	7	+	1	â	-
06			8:	6	-	Ų	Ť	Ų	r	়	Τ.	1	Æ	ö	æ	픙	Й	Ð	7	Ħ		3	±	
07			7	7	G	IJ	9	ij.	á	E	9	-	Ç	×	Ģ		Л	0	77	#	77	ij	#	
08			(	8	Н	X	h	×	#	<u></u>	•••	٠,	Ė	Ø	è	gb.	П	-#:-	4	7	#	IJ	Ĥ	
09			)	9	I	Y	i	У	η	à		1	É	Ù	é	ù	Э	<b> </b> -	÷	Ή.	J	ıİ,	H	Ŧ
OA			*	:	J	Z	ij	Z	0	;#				Ú	ē	்	Ф	.ii.	333		rì.	Ŀ	<u>"</u> ::	4
OB			+	;	K	Е	k	€	λ	Ţ	4	>	Ħ		ë	Ü	Щ	4	7	Ħ				
ОС			,	K	L	٦.	1	Т	T	а		1.4	Ì	U	ì	Ü	Ч	Ш	†7	57	J	ņ	1111	丰
OD				===	M	I	m	)	Ţ	J.		12	Í	Ŷ	ï	$ \cdot $	Ш	Ш		Z	^,			+
0E				>	Н	^	n	-	ф	(0)			Ī	$\Box$	:	Þ	Щ	#		t	##		#	**
OF			/	?	0		ា	¥	60	**		Ċ	Ï	Ď	ï	흣	Ъ	Ą		늿	7	E3	়	jh

#### **IDC DATA CONNECTOR**

Pin	Sig	Pin	Sig
1	D7	9	WR
2	D6	10	CS
3	D5	11	SIN/TEST
4	D4	12	BUSY
5	D3	13	GND (0V)
6	D2	14	GND (0V)
7	D1	15	Vcc (5V)
8	D0	16	Vcc (5V)

# **3 PIN POWER CONNECTOR**

Pin	Sig
1	Vcc (5V)
2	SIN/TEST
3	GND (0V)

Mates with AMP171822-3

#### PCB JUMPERS (O)PEN (L)INK

Baud J2 J1 J0										
J2	J	1	J0							
0		)	0							
0		)	L							
0	L	_	0							
0	L	_	L							
Г		)	0							
J4		J3								
0		0								
0		L								
L L/O										
	J2 O O O L J4	J2 J	J2 J1 O O O O O L O L L O J4							

Noritake Sales Office Tel Nos Nagoya Japan: +81 (0)52-561-9867 Canada: +1-416-291-2946 Chicago USA: +1-847-439-9020 Munchen (D): +49 (0)89-3214-290 Itron UK: +44 (0)1493 601144 Rest Europe: +49 (0)61-0520-9220 www.noritake-elec.com