

123456789

A

B

C

D

E

F

G

H

CAN-DECOATING

Equipment

Electrical Construction Drawings

FOR APPROVAL

Client : SEJIN METAL CO.,LTD
Contractor : youngone FA CO.,LTD
Plant Section : SEJIN METAL Ulsan Plant, HeadQuarters

CUSTOMER			5			TITLE		PART DESCRIPTION COVER	INS CODE	SECTION SPEC	SUB-SECTION COVER	D-PAGE 1
SEJIN METAL			4			Can-Decoating						
Ulsan Plant, HeadQuarters			3			Equipment						
CO.,LTD.			2									
			1									
SUPPLIER			2				J.W.Lee	J.H.Kim		LOC CODE	DWG No.	TORAL-PAGE
youngone FA			1	24.11.11	first draft design							
FA system creator			No.	DATE	REVISIONS	TRACED	DESIGNED	CHECKED	APPROVED			
CO.,LTD.											CANDC-CONS-S001-001	1/64

123456789

A

B

C

D

E

F

G

H

Cable Route Diagram Index


Electrical Construction Drawings

TORAL-PAGE	Section	SUB-SECTION	Description
1	SPEC	COVER	Cover
2	SPEC	INDEX	Drawings index
3-6	SPEC	AREA	Setting the construction area
7	ROUTE	R_COVER	Cover and section index
8	ROUTE	ENTIRE	Main cable route line
9-11	ROUTE	ENTRY	Entry & Flow A zone branch conduit
12-14	ROUTE	FLOWB	Flow B zone branch conduit
15-17	ROUTE	DUST	Dust zone branch conduit
18	CONDUIT	E_COVER	Cover and section index
19	CONDUIT	E_GUIDE	How to read drawings guide
20	CONDUIT	LAYING	Tray & Duct structure diagram
21-23	CONDUIT	ENTRY	Entry route conduit piping
24-25	CONDUIT	ROTARY	Rotary route conduit piping
26-30	CONDUIT	FLOWA	Flow A route conduit piping
31-33	CONDUIT	FLOWB	Flow B route conduit piping
34	CONDUIT	EXIT	Exit route conduit piping
35-48	CONDUIT	DUST	Dust route conduit piping
49	C_GUIDE	C_COVER	Cover and section index
50	C_GUIDE	C_GUIDE	How to read drawings guide
51-64	SCHEDULE	SCHEDULE	Cable schedule

CUSTOMER SEJIN METAL Ulsan Plant, HeadQuarters CO.,LTD.		5		TITLE Can-Decoating Equipment				PART DESCRIPTION INDEX	INS CODE	SECTION SPEC	SUB-SECTION INDEX	D-PAGE 2
		4										
		3										
SUPPLIER youngone FA FA system creator CO.,LTD.		2			J.W.Lee	J.H.Kim			LOC CODE	DWG No.		TORAL-PAGE
		1	24.11.11	first draft design								
		No.	DATE	REVISIONS	TRACED	DESIGNED	CHECKED	APPROVED		CANDC-CONS-S002-002		2/64

Setting the construction area

Assign ins code for zone setting					
Zone	LOC code	Motor	Sensor & Sol	JB	PB & Indication
ENTRY	BC-01	M02	SS-01/SSL-01	ENT1TB1/ENT1TB2	
ENTRY	SC-12	M08			
ENTRY	FN-03	M25			
ENTRY	FN-06	M26			
ENTRY	PV-01		LS-01-08/EV-01-02	ENT2TB2/ENT2TB3/	PB15
ENTRY	PV-04		LS-32-33/EV-07	ENT2TB4	PB18
ENTRY	CC-01		TC-06/RO-04	ENT2TB1/81RO-04/81RO-04/BR-01	125B3/17HA1
ENTRY	AB-01				65B2
ROTARY	RD-01	M03/M04	EV-03	ROT1TB2	
ROTARY	PV-02		LS-25-32/E-04-05		PB16
FLOW_A	MV-05	M15	LS-15-16/ZT-06	FLO1TB2	
FLOW_A	MV-02	M16	LS-17-18/ZT-03		
FLOW_A	MV-03	M17	LS-19-20/ZT-04	FLO1TB1/81RO-01/81RO-02	
FLOW_A	FN-02	M19			
FLOW_A	MV-01	M20	LS-23-24/ZT-02		
FLOW_A	AB-01		TC-07		
FLOW_A	MV-04	M18A/M18B	LS-21AB-22AB	AMPP	
FLOW_A	HE-01		TC-01-02/RO-01-02/PSH-01/PSH-03	FLO1TB4/FLO2TB1	
FLOW_B	FN-01	M22/M29	TC-04-05/ZT-01	FLO4TB3	
FLOW_B	MV-06	M14	LS-34-35/ZT-06	FLO4TB2	
FLOW_B	CH-01	M24			
FLOW_B	VR-01	M21			
FLOW_B	VR-02	M23			
FLOW_B	CY-02				65B3/17HL1
FLOW_B	UC-01		PSH-02/PV-05-06/TC-03/RO-03	ROT1TB1/FLO3TB1/FLO4TB1/NVBOX/81RO-03	
EXIT				EX1TB1	125B4
EXIT	MC-04	M09	SS-10	EX1TB2	
EXIT	MC-05	M10	SS-11		
EXIT	VS-01	M06/M07			
EXIT	PV-03		LS-09-11/EV-06	EX1TB3	PB17
DUST					125B5
DUST	SC-01	M28		DUS1TB1	
DUST	VR-03	M37			
DUST	PV-14		TC-09/ZS.O/ZS.C/PV-14	DUS1TB2	
DUST	LD-01	M32/M33	LT-01/68FC1/LD-01	DUS2TB1	PB14
DUST	VR-06	M40			
DUST	FN-05	M41/ER01			
DUST	BF-01		DP-01/EV-11-50	JB01/JB01TB1-4/JB01TB5	
DUST	BF-02		DP-02/EV-51-90	JB02/JB02TB1-4/JB01TB6	
DUST	FN-04				
DUST	SC-10	M34			
DUST	VR-04	M38			
DUST	SC-11	M35			
DUST	VR-05	M39			
DUST	FN-04	M31/M36			

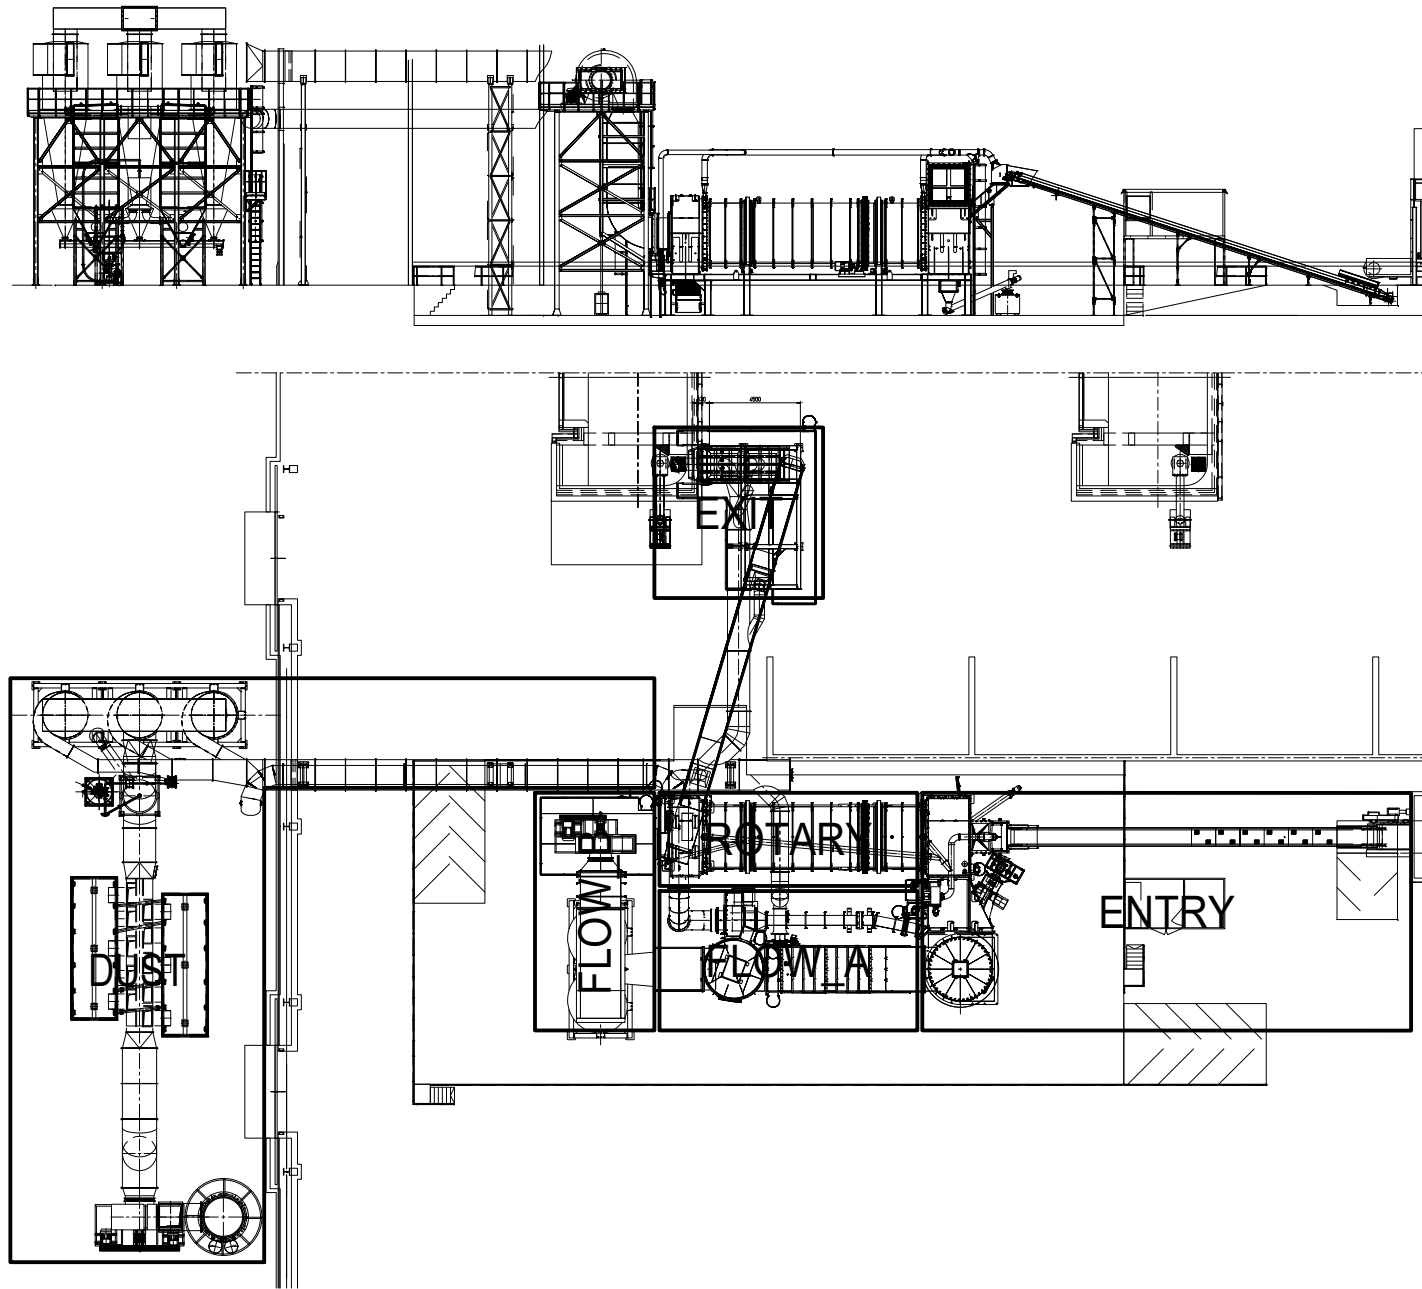

CUSTOMER
SEJIN METAL Ulsan Plant, HeadQuarters
CO.,LTD.

SUPPLIER
youngone FA FA system creator
CO.,LTD.

5		
4		
3		
2		
1	24.11.11	first draft design
No.	DATE	REVISIONS


TITLE Can-Decoating Equipment			
	J.W.Lee	J.H.Kim	
TRACED	DESIGNED	CHECKED	APPROVED

PART DESCRIPTION
SETTING
THE CONSTRUCTION
AREA

INS CODE	SECTION SPEC	SUB-SECTION AREA	D-PAGE 3
LOC CODE	DWG No. CANDC-CONS-S003-003	TOTAL-PAGE 3/64	

Motor Location Map

Motor Position Point				
Zone	LOC code	TAG	SPEC	Note
ENTRY	BC-01	M02		
ENTRY	SC-12	M08		
ENTRY	FN-03	M25		
ENTRY	FN-06	M26		
ROTARY	RD-01	M03		
ROTARY	RD-01	M04		
FLOW_A	MV-05	M15		
FLOW_A	MV-02	M16		
FLOW_A	MV-03	M17		
FLOW_A	FN-02	M19		
FLOW_A	MV-01	M20		
FLOW_A	MV-04	M18A		
FLOW_A	MV-04	M18B		
FLOW_B	FN-01	M22		
FLOW_B	FN-01	M29		
FLOW_B	MV-06	M14		
FLOW_B	CH-01	M24		
FLOW_B	VR-01	M21		
FLOW_B	VR-02	M23		
EXIT	MC-04	M09		
EXIT	MC-05	M10		
EXIT	VS-01	M06		
EXIT	VS-01	M07		
DUST	SC-01	M28		
DUST	VR-03	M37		
DUST	LD-01	M32		
DUST	LD-01	M33		
DUST	VR-06	M40		
DUST	FN-05	M41		
DUST	FN-05	ER01		
DUST	SC-10	M34		
DUST	VR-04	M38		
DUST	SC-11	M35		
DUST	VR-05	M39		
DUST	FN-04	M31		
DUST	FN-04	M36		

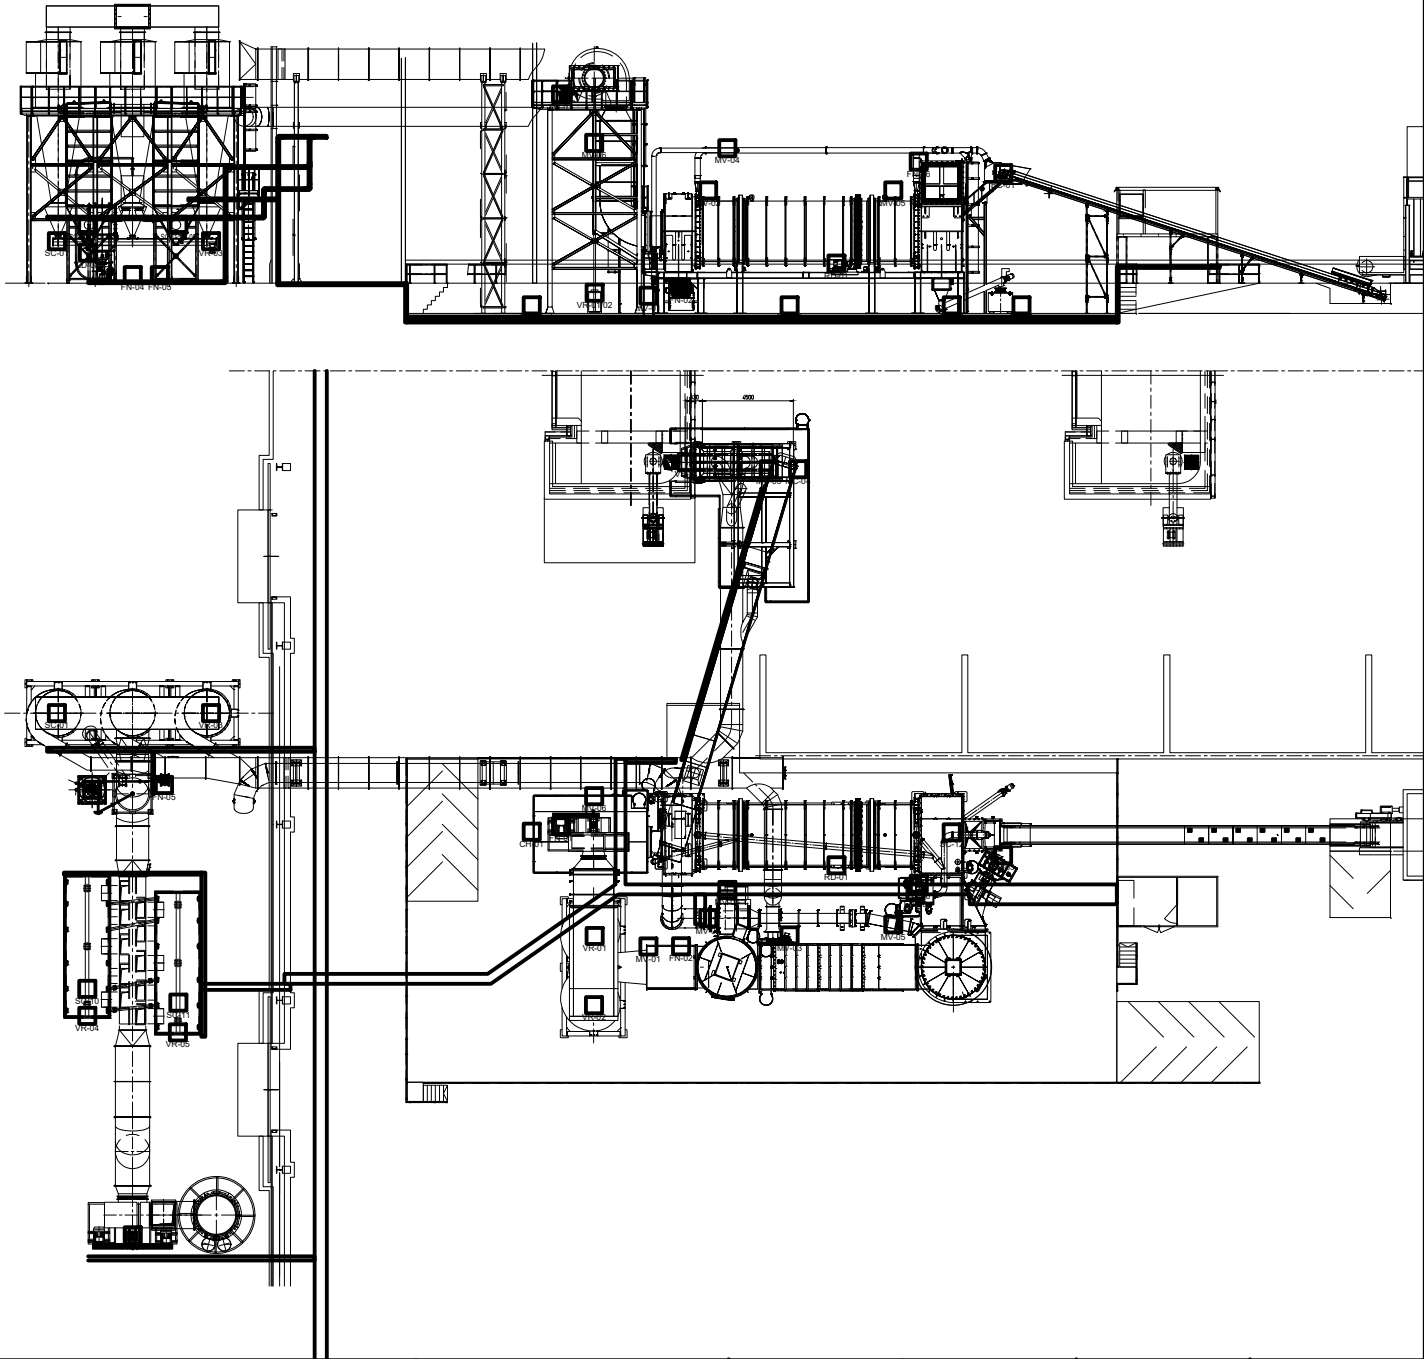

CUSTOMER
SEJIN METAL Ulsan Plant, HeadQuarters
CO.,LTD.

SUPPLIER
youngone FA FA system creator
CO.,LTD.


5			TITLE			
4			Can-Decoating			
3			Equipment			
2				J.W.Lee	J.H.Kim	
1	24.11.11	first draft design				
No.	DATE	REVISIONS	TRACED	DESIGNED	CHECKED	APPROVED

PART DESCRIPTION
MOTOR POSITION MAP

INS CODE	SECTION SPEC	SUB-SECTION AREA	D-PAGE 4
LOC CODE	DWG No. CANDC-CONS-S004-004	TOTAL-PAGE 4/64	

Control & Sensor Map

Control and Sensor Position		
Zone	LOC code	Sensor & Sol
ENTRY	BC-01	SS-01/SSL-01
ENTRY	PV-01	LS-01-08/EV-01-02
ENTRY	PV-04	LS-32-33/EV-07
ENTRY	CC-01	TC-06/RO-04
ROTARY	RD-01	EV-03
ROTARY	PV-02	LS-25-32/E-04-05
FLOW_A	MV-05	LS-15-16/ZT-06
FLOW_A	MV-02	LS-17-18/ZT-03
FLOW_A	MV-03	LS-19-20/ZT-04
FLOW_A	MV-01	LS-23-24/ZT-02
FLOW_A	MV-04	LS-21AB-22AB
FLOW_A	AB-01	TC-07
FLOW_A	HE-01	TC-01-02/RO-01-02/PSH-01/PSH-03
FLOW_B	FN-01	TC-04-05/ZT-01
FLOW_B	MV-06	LS-34-35/ZT-06
FLOW_B	UC-01	PSH-02/PV-05-06/TC-03/RO-03
EXIT	MC-04	SS-10
EXIT	MC-05	SS-11
EXIT	PV-03	LS-09-11/EV-06
DUST	PV-14	TC-09/ZS-0/ZS-C/PV-14
DUST	LD-01	LT-01/6BFC1/LD-01
DUST	BF-01	DP-01/EV-11-50
DUST	BF-02	DP-02/EV-51-90

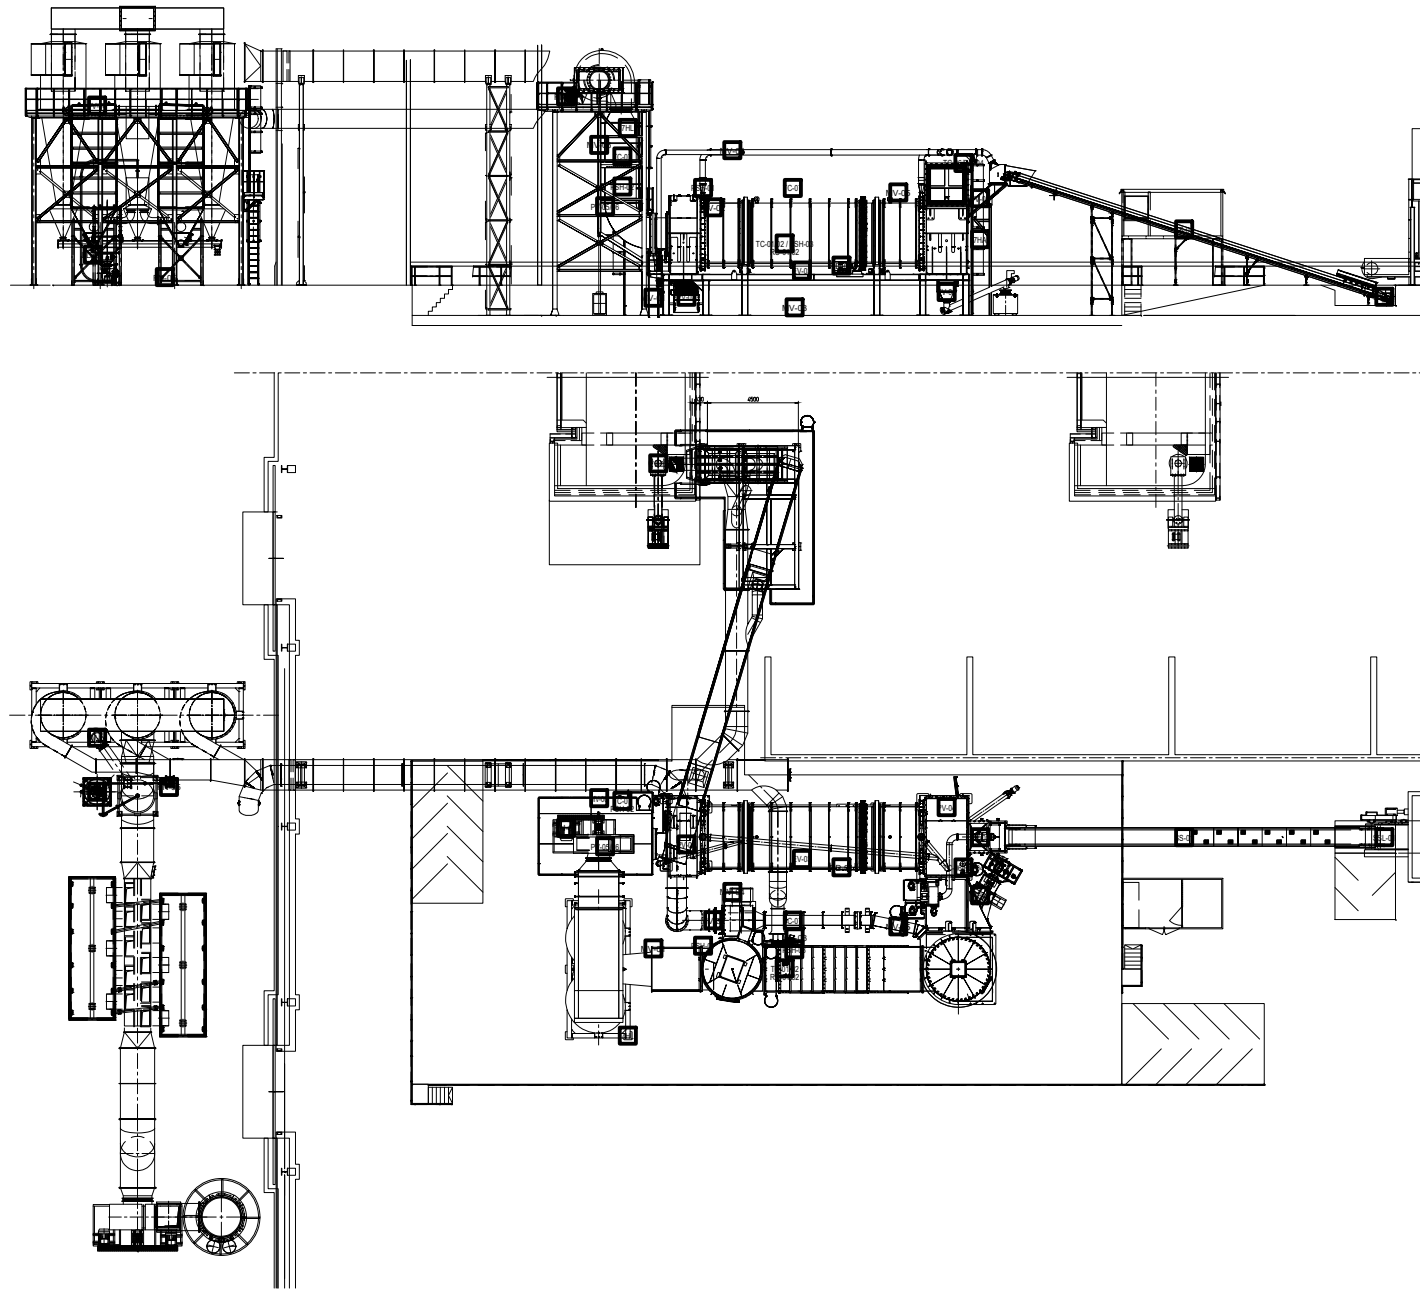

CUSTOMER
SEJIN METAL Ulsan Plant, HeadQuarters
CO.,LTD.

SUPPLIER
youngone FA FA system creator
CO.,LTD.

5		
4		
3		
2		
1	24.11.11	first draft design
No.	DATE	REVISIONS


TITLE Can-Decoating Equipment			
	J.W.Lee	J.H.Kim	
TRACED	DESIGNED	CHECKED	APPROVED

PART DESCRIPTION
CONTROL AND SENSOR
MAP

INS CODE	SECTION SPEC	SUB-SECTION AREA	D-PAGE 5
LOC CODE	DWG No. CANDC-CONS-S005-005	TOTAL-PAGE 5/64	

Junction box & PB Map

Junction box and PB Position			
Zone	LOC code	JB	PB & Indication
ENTRY	BC-01	ENT1T81/ENT1T82	
ENTRY	PV-01	ENT2T82/ENT2T83/	P815
ENTRY	PV-04	ENT2T84	P818
ENTRY	CC-01	ENT2T81/81RO-04/81RO-04/BR-01	12S83/17HA1
ENTRY	AB-01		65B2
ROTARY	RD-01	ROT1T82	
ROTARY	PV-02		P816
FLOW_A	MV-05	FLO1T82	
FLOW_A	MV-03	FLO1T81/81RO-01/81RO-02	
FLOW_A	MV-04	AMPP	
FLOW_A	HE-01	FLO1T84/FLO2T81	
FLOW_B	FN-01	FLO4T83	
FLOW_B	MV-06	FLO4T82	
FLOW_B	CY-02		65B3/17HL1
FLOW_B	UC-01	ROT1T81/FLO3T81/FLO4T81/ANVBOX/81RO-03	
EXIT	EX-01	EX1T81	12S84
EXIT	MC-04	EX1T82	
EXIT	PV-03	EX1T83	P817
DUST			12S85
DUST	SC-01	DUS1T81	
DUST	PV-14	DUS1T82	
DUST	LD-01	DUS2T81	P814
DUST	BF-01	JB01/JB01T81-4/JB01T85	
DUST	BF-02	JB02/JB02T81-4/JB01T86	

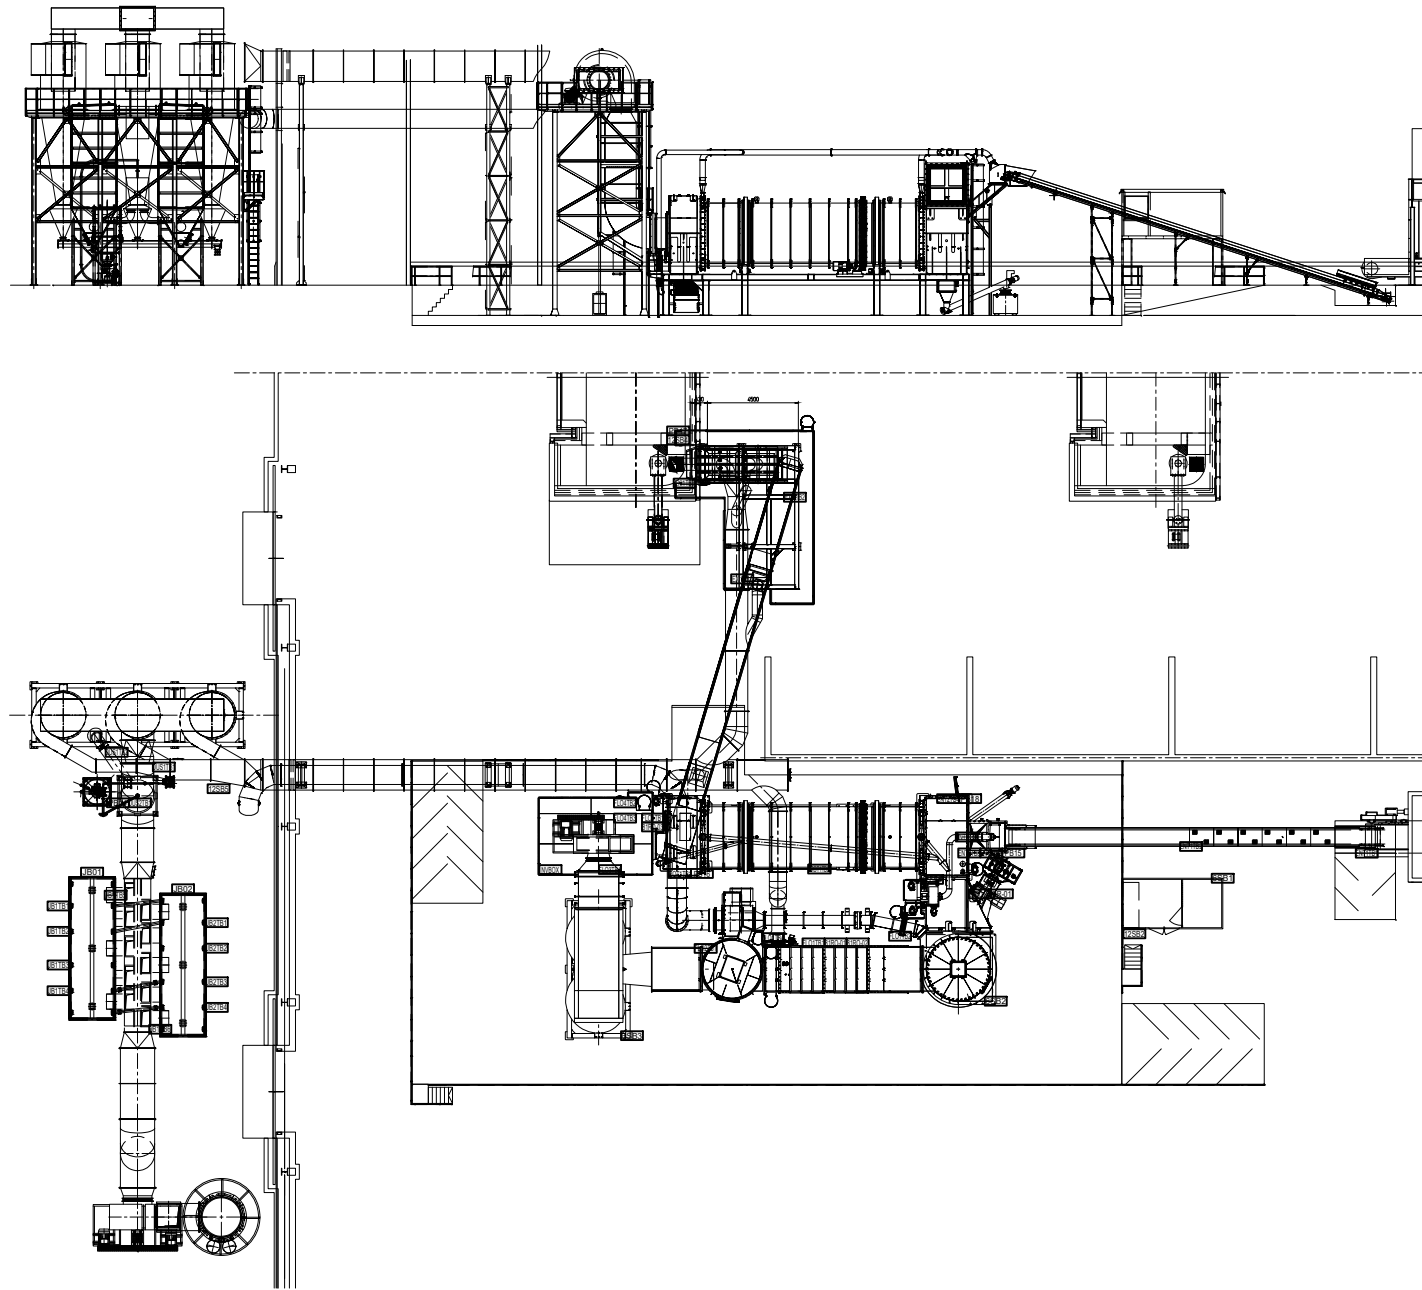

CUSTOMER
SEJIN METAL Ulsan Plant, HeadQuarters
CO.,LTD.

SUPPLIER
youngone FA FA system creator
CO.,LTD.

5			TITLE			
4			Can-Decoating			
3			Equipment			
2				J.W.Lee	J.H.Kim	
1	24.11.11	first draft design				
No.	DATE	REVISIONS	TRACED	DESIGNED	CHECKED	APPROVED

PART DESCRIPTION
SWITCH AND CONNECTION
BOX MAP

INS CODE	SECTION SPEC	SUB-SECTION AREA	D-PAGE 6
LOC CODE	DWG No. CANDC-CONS-S006-006	TOTAL-PAGE 6/64	

123456789

A

B

C

D

E

F

G



H

Cable Route Feeder Diagram


Main route and branch route drawing

D-Page	Sub-Section	Cable Route	Description
1	R_COVER		Cover and Index
2	ENTIRE	ALL	Cable Route Line
3	ENTRY	100 / 110	Entry & Flow A zone Floor plan
4	ENTRY	100 / 110	Entry & Flow A zone "A" SESSION
5	ENTRY	100 / 110	Entry & Flow A zone "B" SESSION
6	FLOWB	100 / 120 / 200	Flow B zone Floor plan
7	FLOWB	100 / 120 / 200	Flow B zone "A" SESSION
8	FLOWB	100 / 120 / 200	Flow B zone "B" SESSION
9	DUST	211 / 212 / 221 / 222 / 223	Dust zone Floor plan
10	DUST	211 / 212 / 221 / 222 / 223	Dust zone "A" SESSION
11	DUST	211 / 212 / 221 / 222 / 223	Dust zone "B" SESSION


Specs in Cable Route				
Route No.	WireWay	Specs	Distance	Note
100	Tray	W400 x H100	35,300mm	
110	Tray	W400 x H100	2,000mm	
120	Tray	W400 x H100	6,000mm	
121	Duct	W300 x H100	3,000mm	
122	Pipe	42mm	15,000mm	3 Line
200	Tray	W400 x H100	29,600mm	
210	Tray	W600 x H100	11,000mm	Factory Tray Line
211	Tray	W200 x H100	17,500mm	
212	Tray	W200 x H100	5,000mm	
220	Tray	W200 x H100	1,000mm	
221	Tray	W200 x H100	7,000mm	
222	Tray	W200 x H100	14,000mm	
223	Tray	W100 x H100	5,000mm	
230	Tray	W600 x H100	13,500mm	Factory Tray Line
231	Tray	W200 x H100	19,700mm	

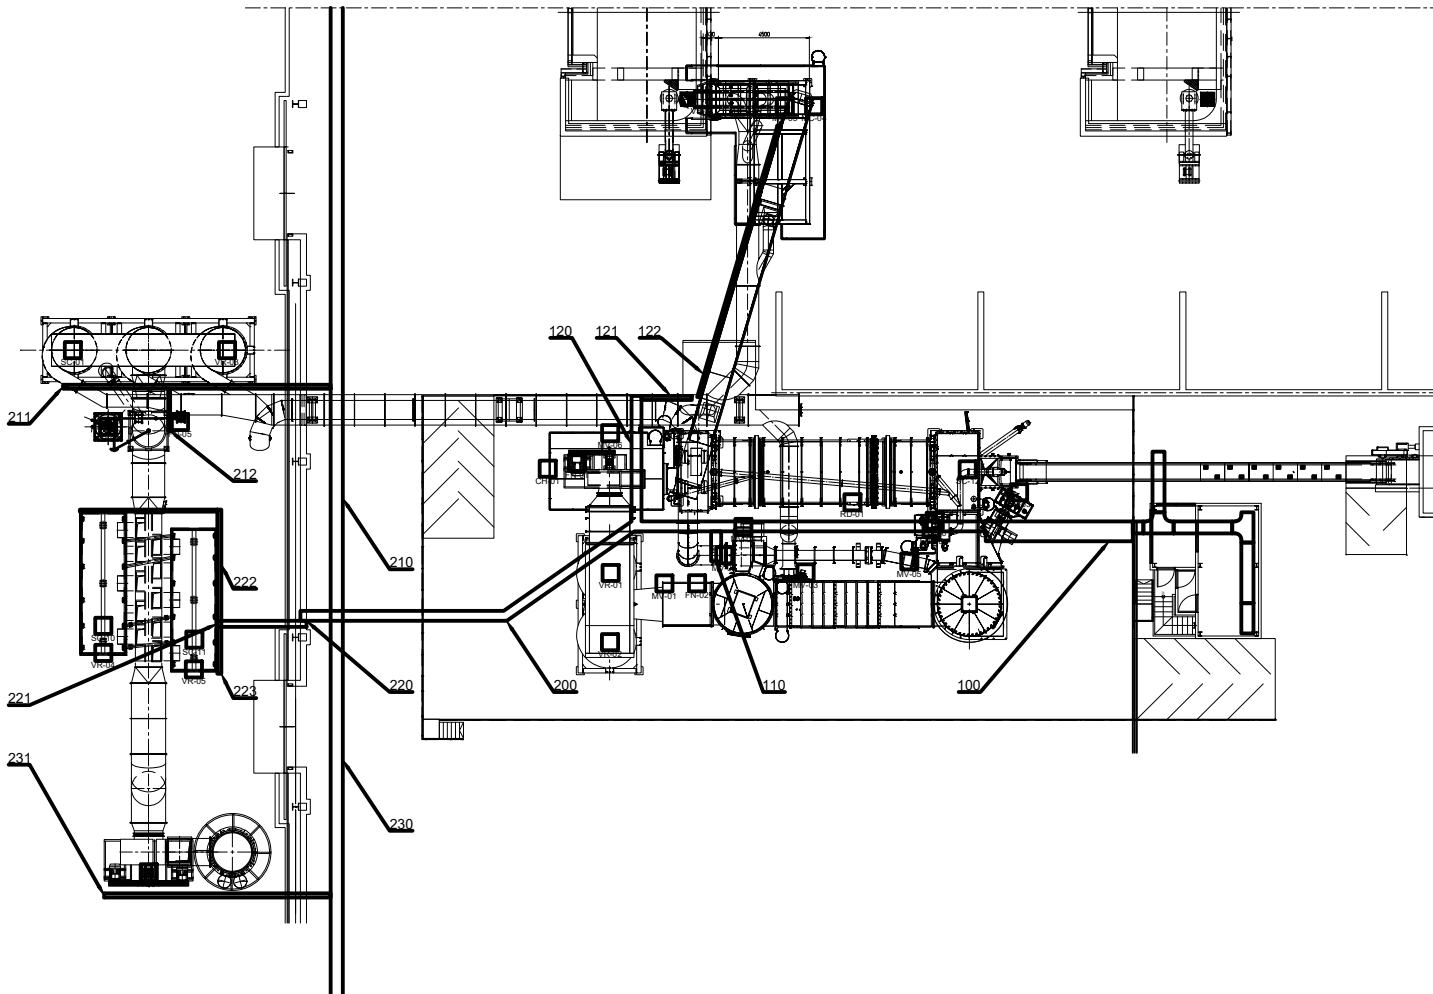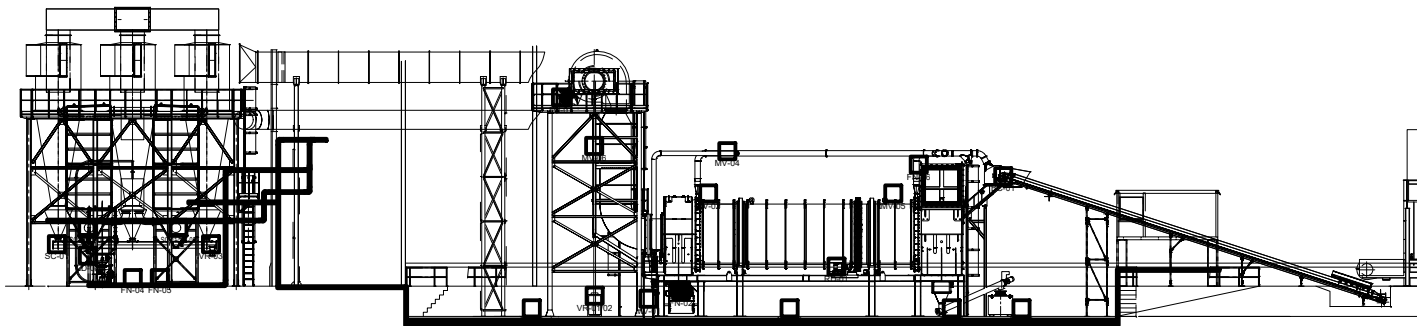


CUSTOMER			5			TITLE				PART DESCRIPTION MAIN CABLE ROUTE LINE		INS CODE		SECTION		SUB-SECTION		D-PAGE	
SEJIN METAL Ulsan Plant, HeadQuarters CO.,LTD.			4			Can-Decoating Equipment						ROUTE		ENTIRE		2			
			3																
			2																
SUPPLIER			2				J.W.Lee	J.H.Kim		LOC CODE		DWG No. CANDC-CONS-R002-008		TOTAL-PAGE 8/64					
youngone FA FA system creator CO.,LTD.			1	24.11.11	first draft design														
			No.	DATE	REVISIONS	TRACED	DESIGNED	CHECKED	APPROVED										

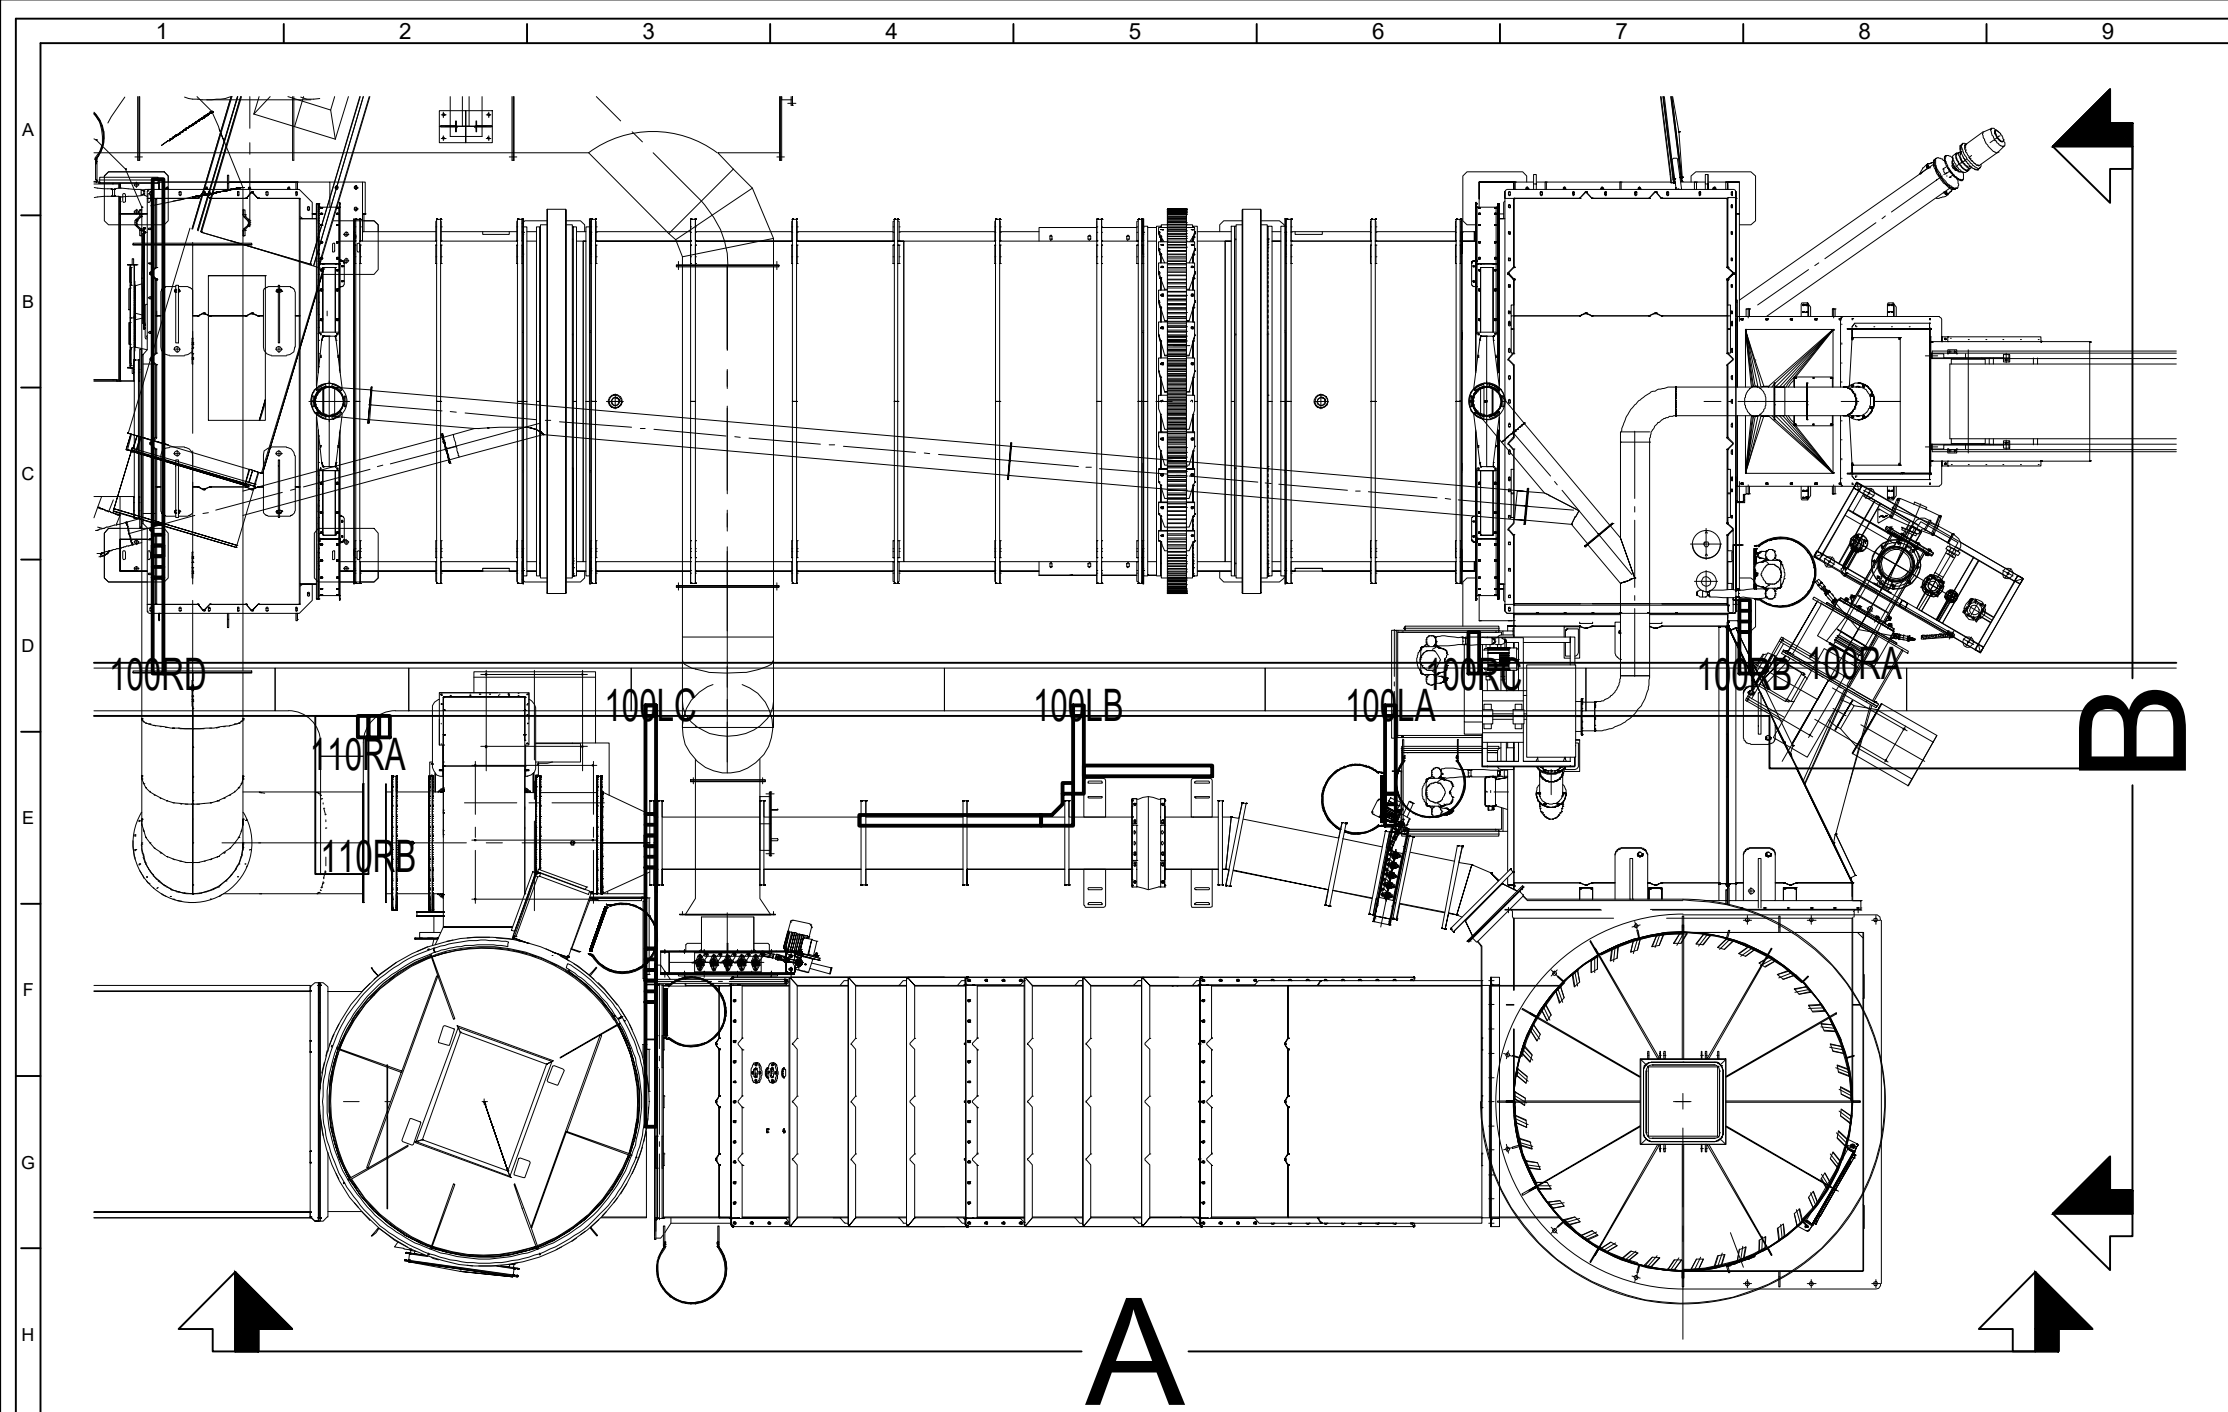



CUSTOMER SEJIN METAL Ulsan Plant, HeadQuarters CO.,LTD.		5		TITLE Can-Decoating Equipment			PART DESCRIPTION ENTRY & FLOW A ZONE BRANCH CONDUIT	INS CODE	SECTION ROUTE	SUB-SECTION ENTRY	D-PAGE 3
		4									
		3									
SUPPLIER youngone FA FA system creator CO.,LTD.		2			J.W.Lee	J.H.Kim		LOC CODE	DWG No. CANDC-CONS-R003-009	TOTAL-PAGE 9/64	
		1	24.11.11								first draft design
		No.	DATE	REVISIONS	TRACED	DESIGNED	CHECKED	APPROVED			

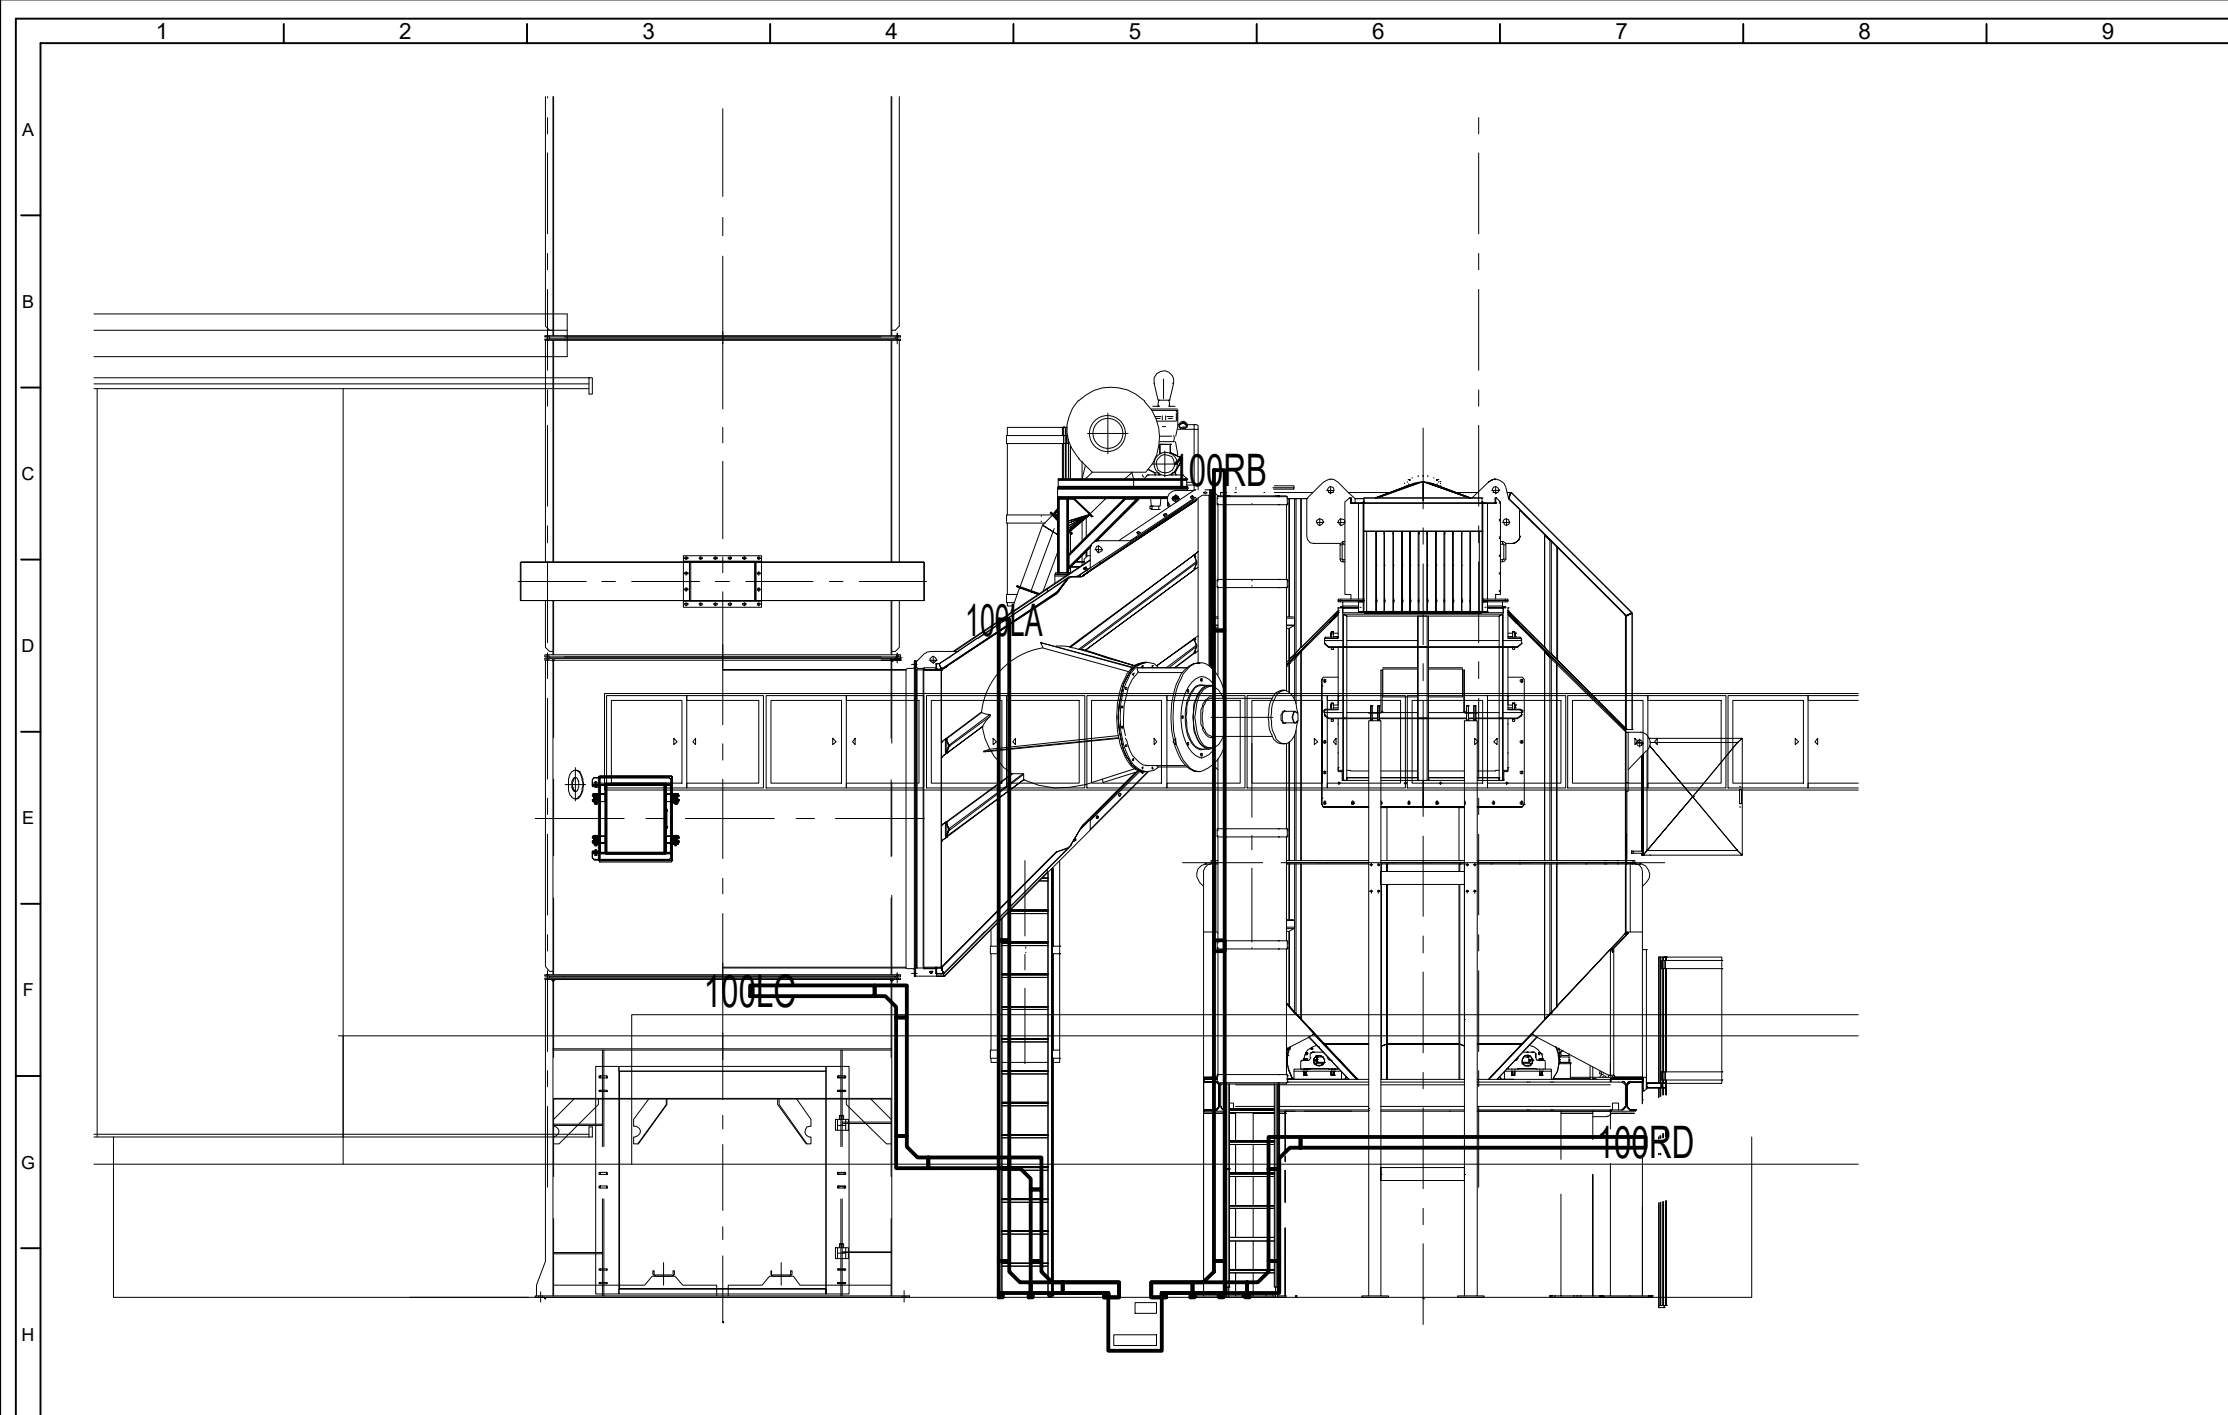


CUSTOMER SEJIN METAL Ulsan Plant, HeadQuarters CO.,LTD.		5		TITLE Can-Decoating Equipment				PART DESCRIPTION ENTRY & FLOW A ZONE BRANCH CONDUIT "B" SESSION	INS CODE	SECTION ROUTE	SUB-SECTION ENTRY	D-PAGE 5
		4								LOC CODE	DWG No. CANDC-CONS-R005-011	
		3										
SUPPLIER youngone FA FA system creator CO.,LTD.		2			J.W.Lee	J.H.Kim						
		1	24.11.11	first draft design								
		No.	DATE	REVISIONS	TRACED	DESIGNED	CHECKED	APPROVED				

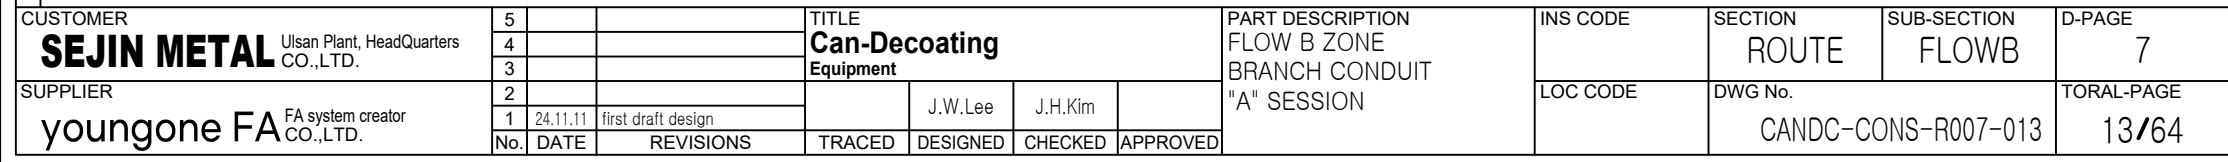

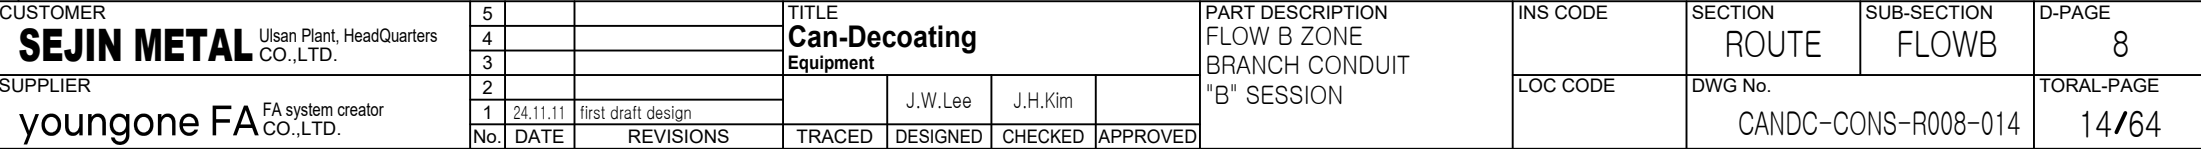

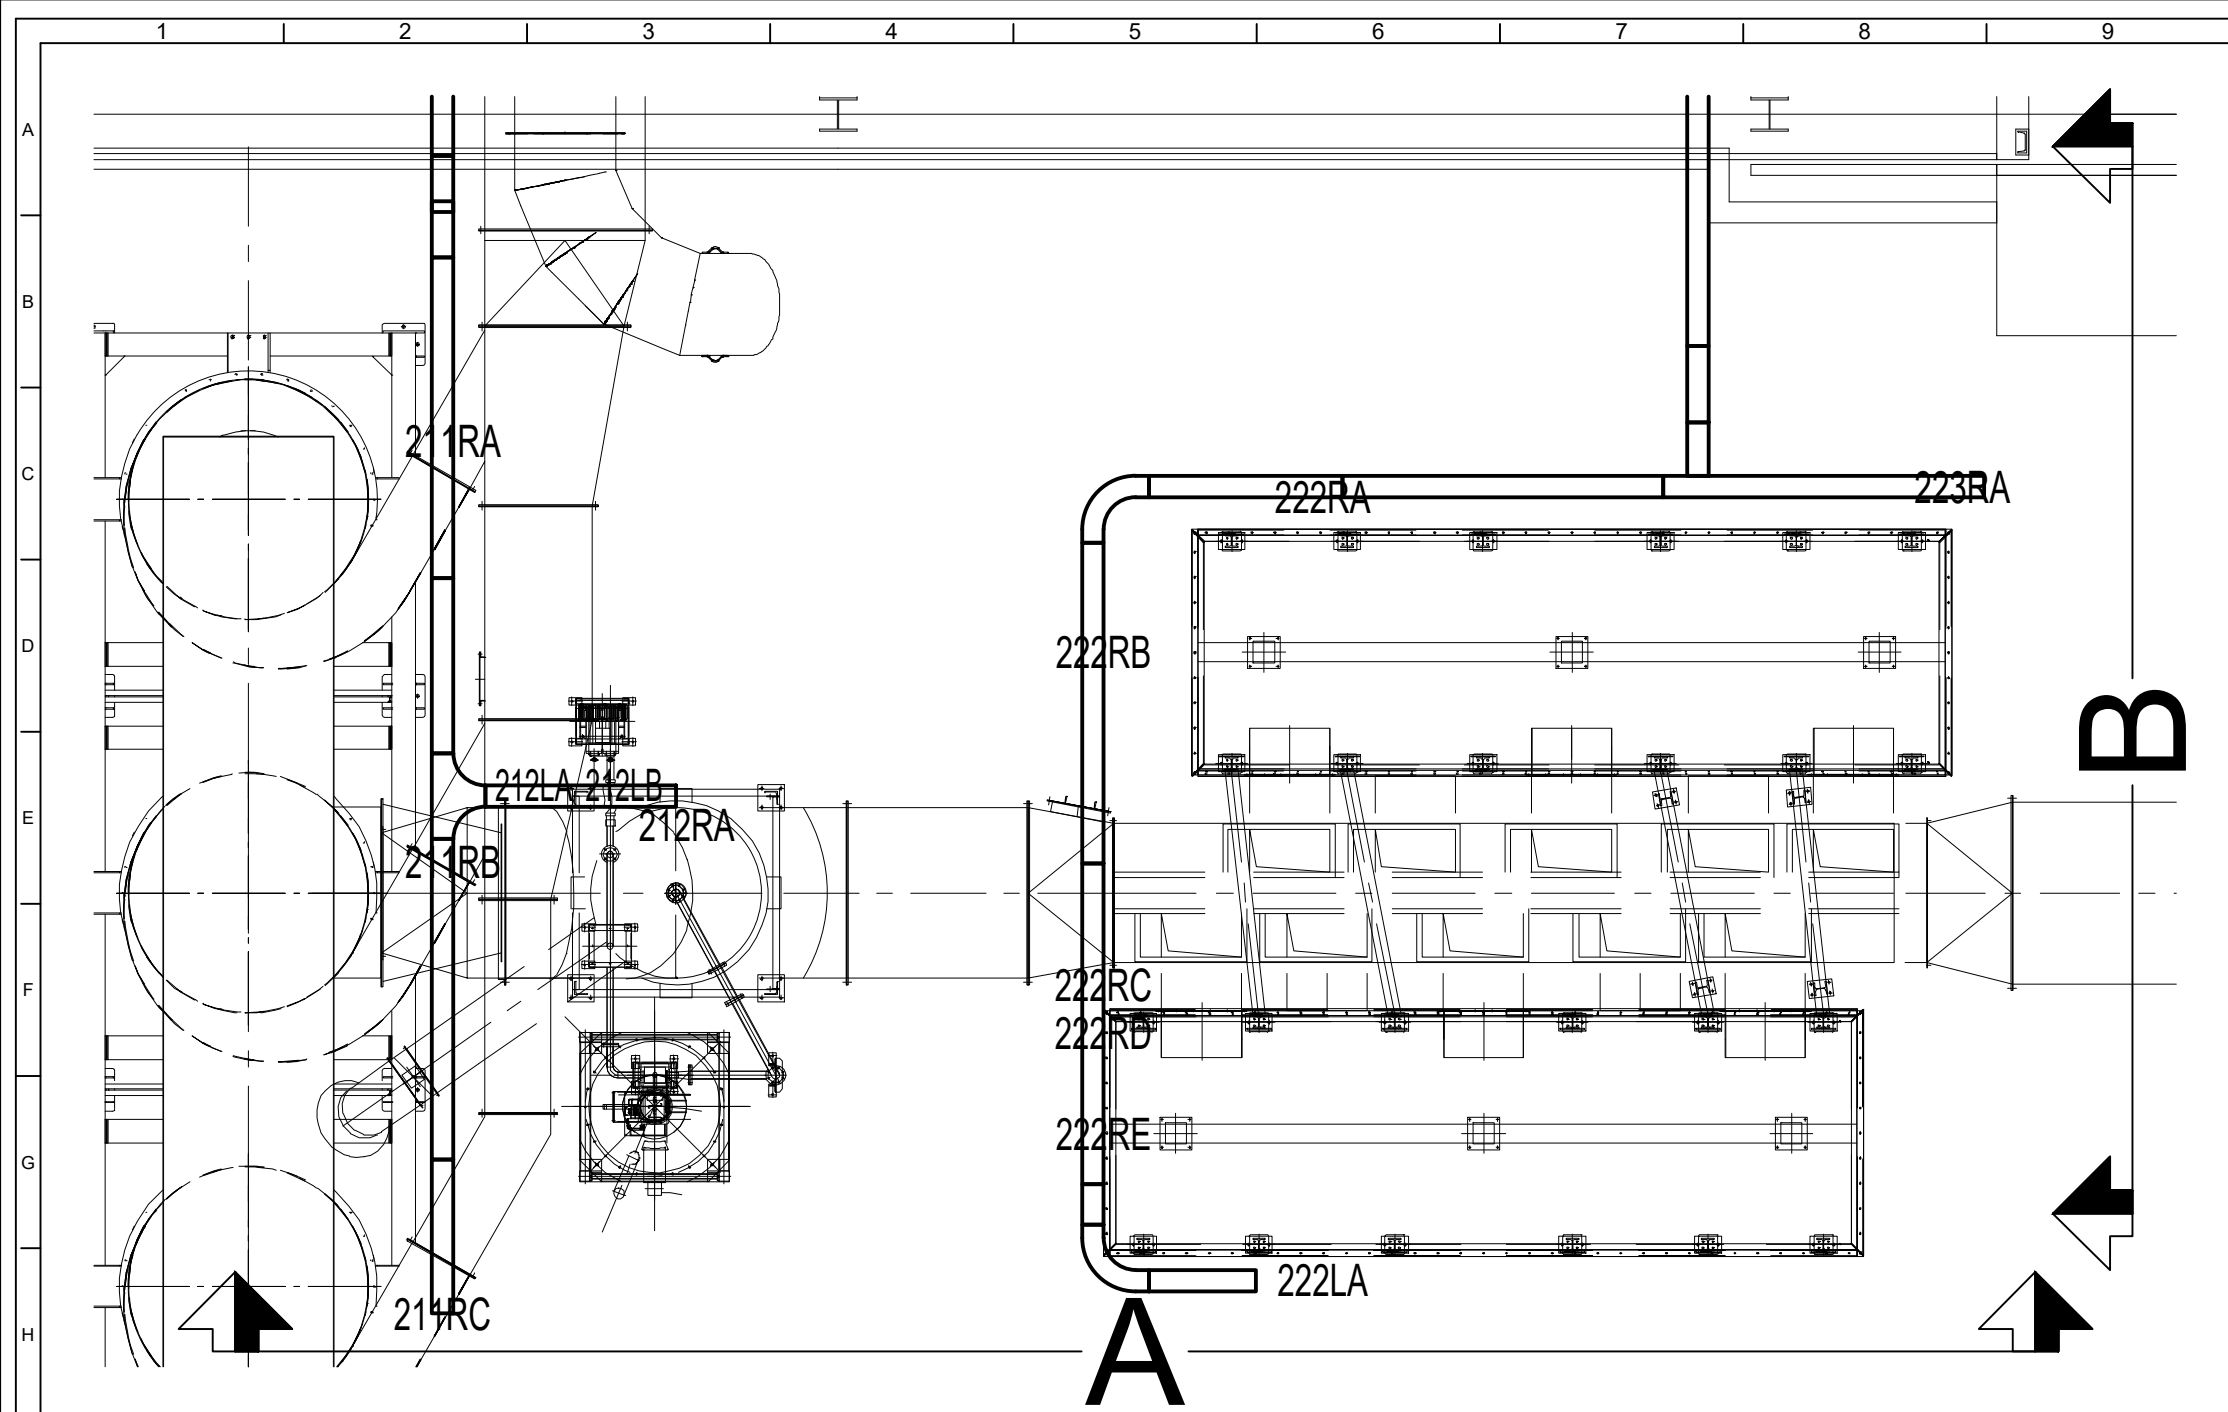

CUSTOMER SEJIN METAL Ulsan Plant, HeadQuarters CO.,LTD.		5		TITLE Can-Decoating Equipment				PART DESCRIPTION DUST ZONE BRANCH CONDUIT	INS CODE	SECTION ROUTE	SUB-SECTION DUST	D-PAGE 9			
		4													
		3													
SUPPLIER youngone FA FA system creator CO.,LTD.		2											LOC CODE	DWG No. CANDC-CONS-R009-015	TORAL-PAGE 15/64
		1	24.11.11	first draft design		J.W.Lee	J.H.Kim								
		No.	DATE	REVISIONS	TRACED	DESIGNED	CHECKED	APPROVED							

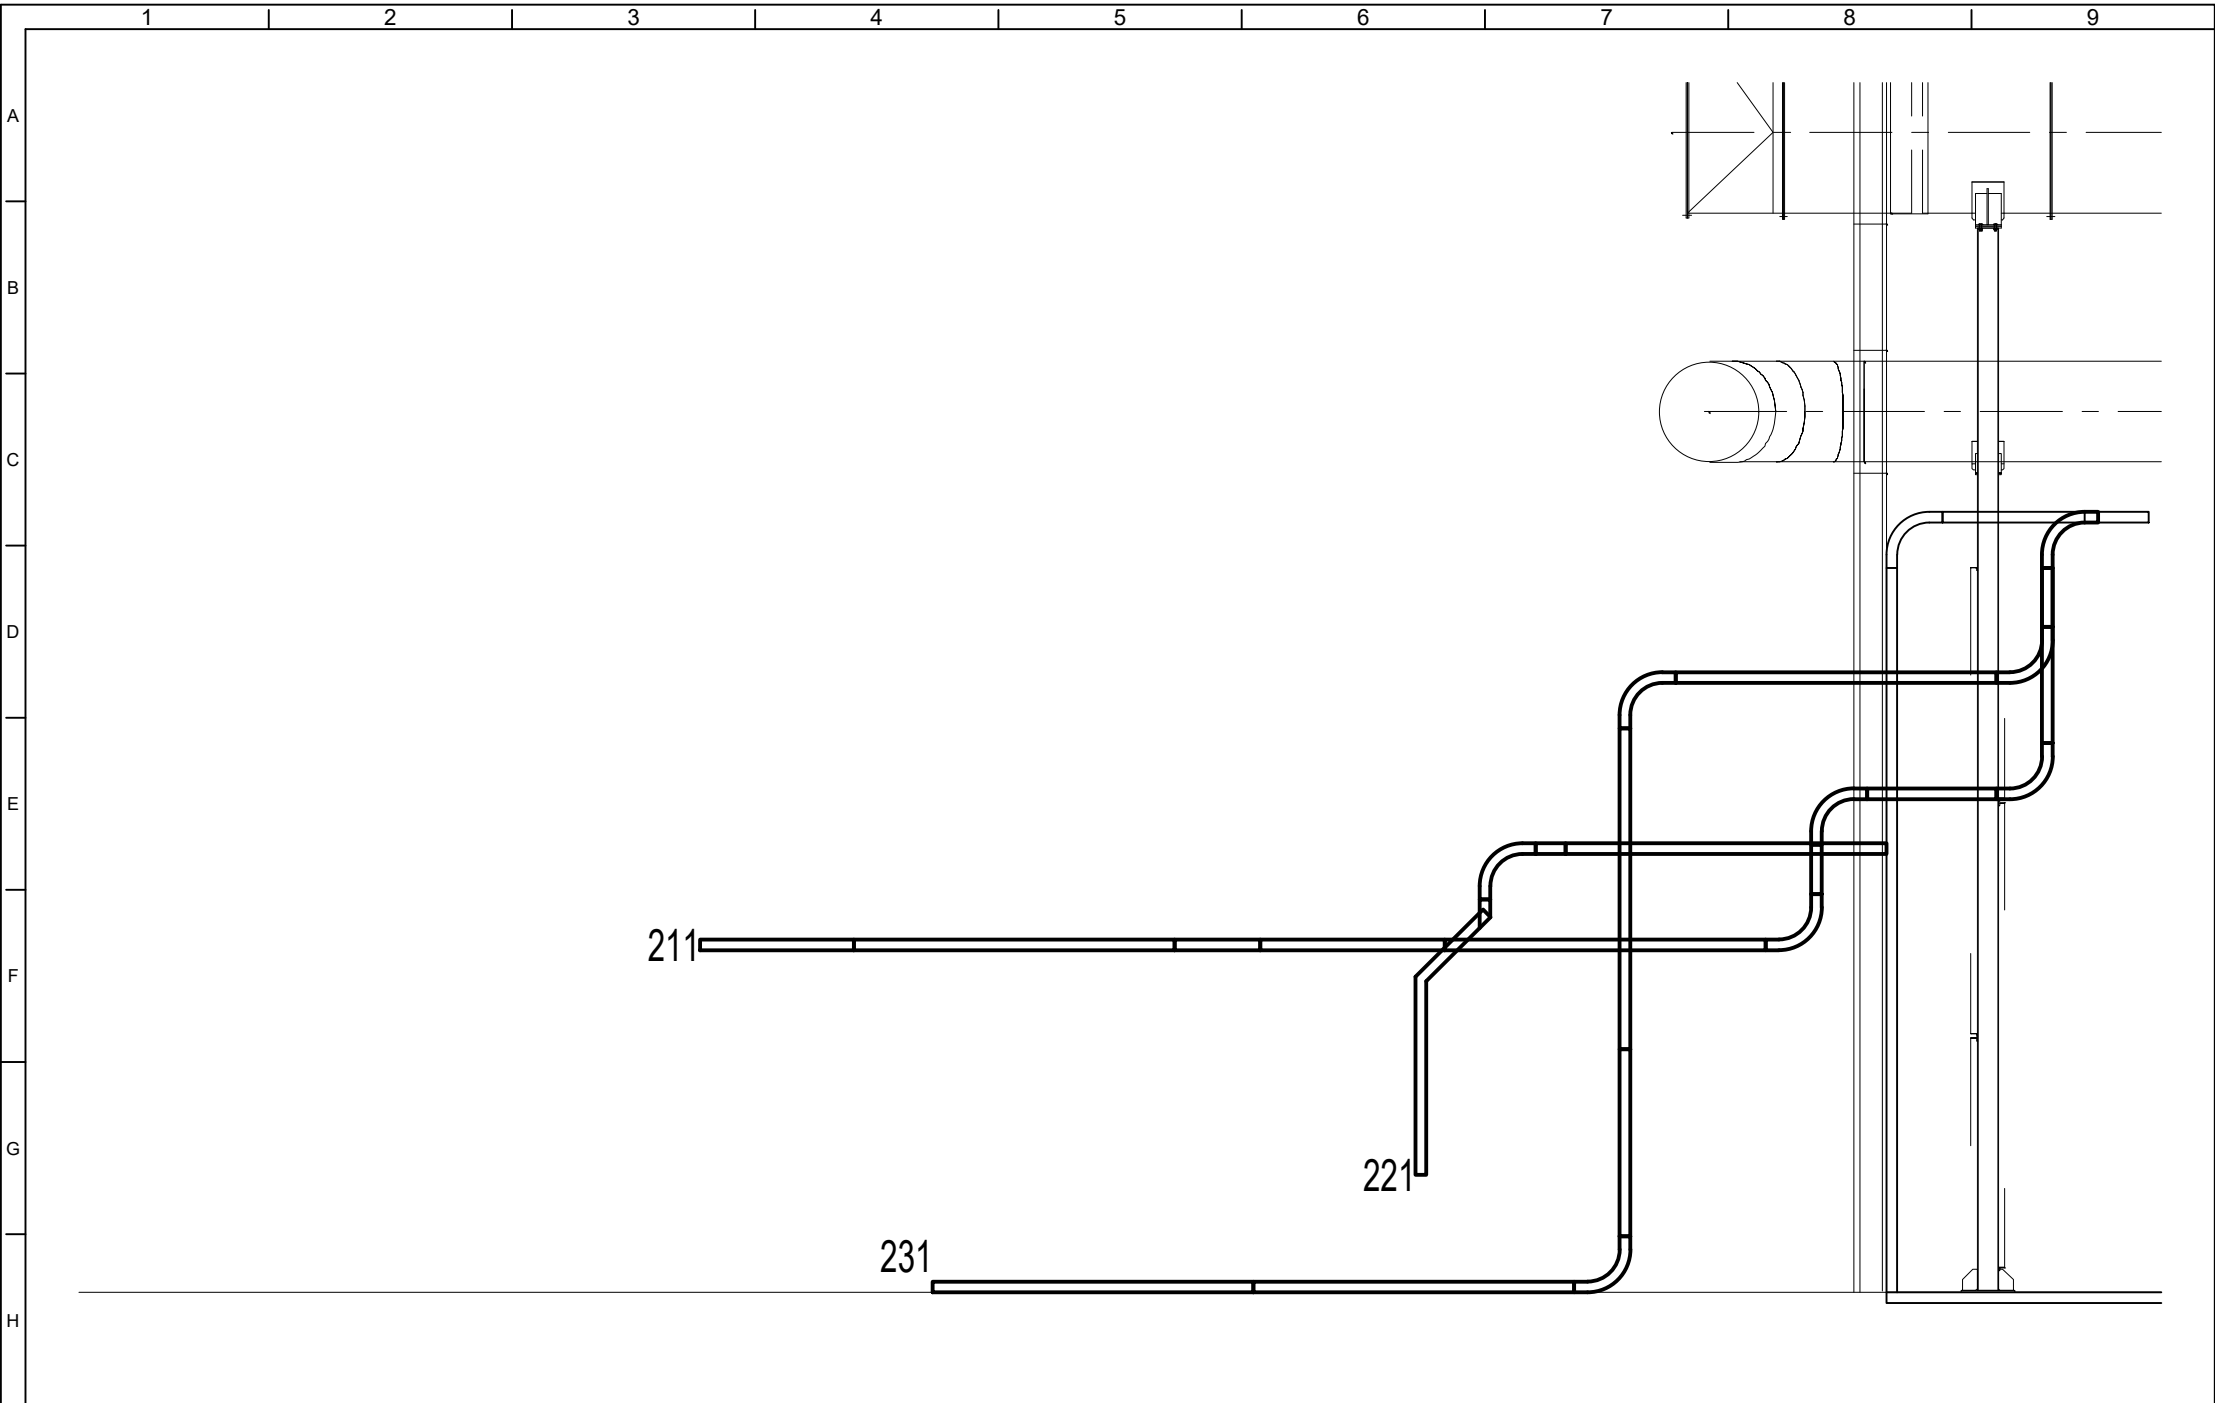

CUSTOMER SEJIN METAL Ulsan Plant, HeadQuarters CO.,LTD.			5			TITLE Can-Decoating Equipment		PART DESCRIPTION DUST ZONE BRANCH CONDUIT "B" SESSION	INS CODE	SECTION ROUTE	SUB-SECTION DUST	D-PAGE 11
			4									
			3									
SUPPLIER youngone FA FA system creator CO.,LTD.			2				LOC CODE		DWG No. CANDC-CONS-R011-017	TORAL-PAGE 17/64		
			1	24.11.11	first draft design						J.W.Lee	J.H.Kim
			No.	DATE	REVISIONS	TRACED		DESIGNED			CHECKED	APPROVED

123456789

A

B

C

D

E

F

G

H


Cable Route Branch Diagram

Exposed conduit piping drawing

D-Page	Sub-Section	Cable Route	Description
1	E_COVER		Cover
2	E_GUIDE		How to read drawings
3	LAYING		Tray & Duct structure diagram
4	ENTRY	CR / 100RA / 100RB	Entry route conduit piping (1)
5	ENTRY	100RB	Entry route conduit piping (2)
6	ENTRY	CR / 100RA / 100RB	Entry route conduit piping (3)
7	ROTARY	100RC / 100RD	Rotary route conduit piping (1)
8	ROTARY	100RD	Rotary route conduit piping (2)
9	FLOWA	100LA / 100LB	Flow A route conduit piping (1)
10	FLOWA	100LB	Flow A route conduit piping (2)
11	FLOWA	100LC	Flow A route conduit piping (3)
12	FLOWA	110LA	Flow A route conduit piping (4)
13	FLOWA	110LA / 110LB	Flow A route conduit piping (5)
14	FLOWB	100LD / 120RA	Flow B route conduit piping (1)
15	FLOWB	120RB	Flow B route conduit piping (2)
16	FLOWB	120RB	Flow B route conduit piping (3)
17	EXIT	122RA	Exit route conduit piping (1)
18	DUST	211RA / 211RB / 211RC	Dust route conduit piping (1)
19	DUST	212LA / 212LB / 212RA	Dust route conduit piping (2)
20	DUST	222RB / 222RA	Dust route conduit piping (3)
21	DUST	222RA	Dust route conduit piping (4)
22	DUST	222RA	Dust route conduit piping (5)
23	DUST	222RA	Dust route conduit piping (6)
24	DUST	222RA	Dust route conduit piping (7)
25	DUST	222RC / 222RD / 222RE	Dust route conduit piping (8)
26	DUST	222LA	Dust route conduit piping (9)
27	DUST	222LA	Dust route conduit piping (10)
28	DUST	222LA	Dust route conduit piping (11)
29	DUST	222LA	Dust route conduit piping (12)
30	DUST	223RA	Dust route conduit piping (13)
31	DUST	231RA / 231RB	Dust route conduit piping (14)

CUSTOMER SEJIN METAL Ulsan Plant, HeadQuarters CO.,LTD.		5		TITLE Can-Decoating Equipment				PART DESCRIPTION COVER EXPOSED CONDUIT PIPING DRAWING	INS CODE	SECTION CONDUIT	SUB-SECTION E_COVER	D-PAGE 1
		4										
		3										
SUPPLIER youngone FA FA system creator CO.,LTD.		2			J.W.Lee	J.H.Kim		LOC CODE	DWG No. CANDC-CONS-E001-018	TORAL-PAGE 18/64		
		1	24.11.11	first draft design								
		No.	DATE	REVISIONS		TRACED	DESIGNED				CHECKED	APPROVED

How to read conduit drawings

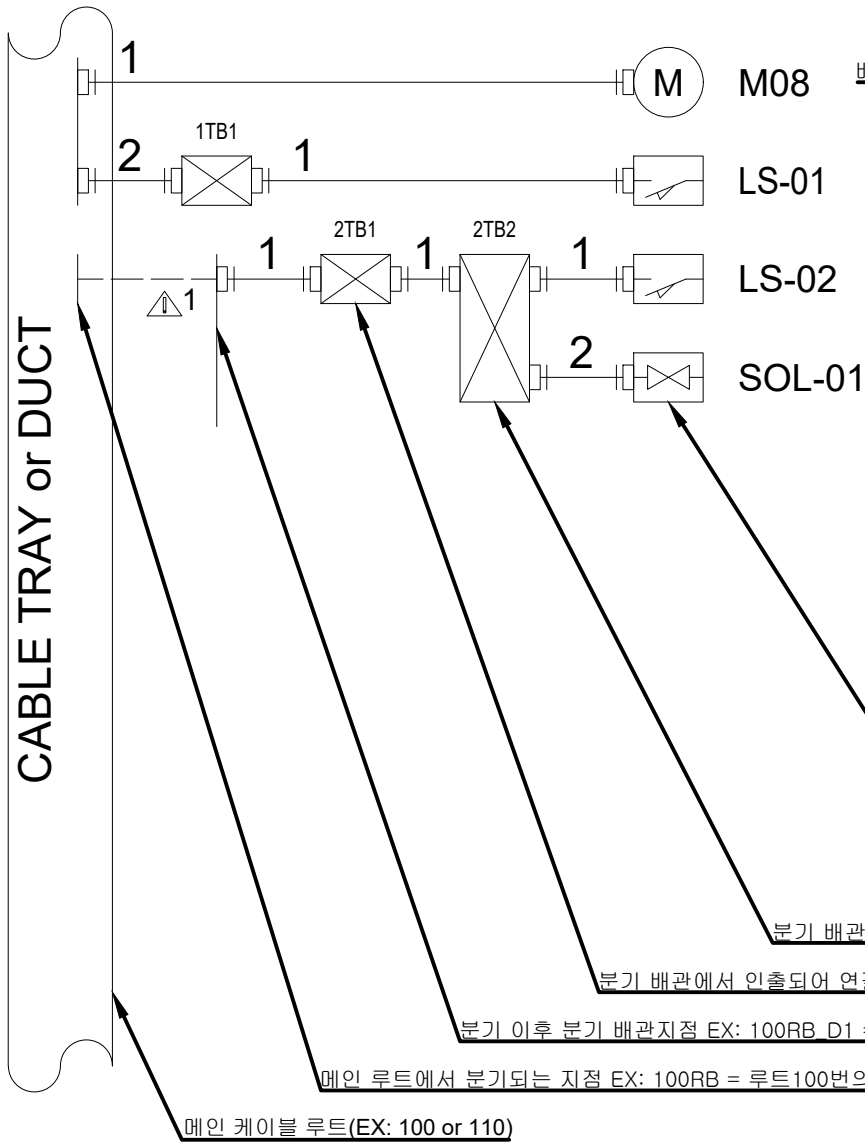



Cable Route	EMBEDDED CP		PULL BOX01	EXPOSED CP01		PULL BOX02	EXPOSED CP02		DEVICE No.		CABLE			
	No.	CONDUIT		No.	CONDUIT		No.	CONDUIT	LOC	TAG	No.	KIND	SIZE	CORE
100 RB	1	Pipe 16	2TB1						BC-02	2TB1	3_2=ENT+BC02-2TB1A	CWV	1.0	3
				1	Flexible 16	2TB2			BC-02	2TB2	3_19=ENT+BC02-2TB2A	CWV	1.0	2
							1		BC-02	LS-02	1_2=ENT+BC02-LS02A	PVC-S	2.5	4
							2		BC-02	SOL-01	1_3=ENT+BC02-SOL01A	PVC-S	25	4

메인 루트에서 디바이스까지 가는 배관 루트를 정의 하는 도면으로 최대 3단계까지 루트가 정의 될수 있습니다.
정의 될수 있습니다.
각 단계마다 번호가 부여 되며 관리자는 현장의 배관 번호를 보고 도면에서 배관 루트를 파악 할 수 있습니다.


예를 들어 현장에서 메인 루트 100의 RB분기점에서 나온 덕트에서 1번 인출 배관은 2TB1로 연결 된다는것을 알 수 있습니다. 또한 해당 배관에 포설 된 케이블이 LS-02 제어 케이블이라는 사실도 알 수 있습니다.

CUSTOMER SEJIN METAL Ulsan Plant, HeadQuarters CO.,LTD.	5		TITLE Can-Decoating Equipment			PART DESCRIPTION HOW TO READ CONDUIT DRAWINGS GUIDE	INS CODE	SECTION CONDUIT	SUB-SECTION E_GUIDE	D-PAGE 2
	4						LOC CODE	DWG No.	TOTAL-PAGE	
SUPPLIER youngone FA FA system creator CO.,LTD.	2			J.W.Lee	J.H.Kim					
	1	24.11.11	first draft design							
	No.	DATE	REVISIONS	TRACED	DESIGNED	CHECKED	APPROVED	CANDC-CONS-E002-019		19/64


Tray & Duct structure diagram

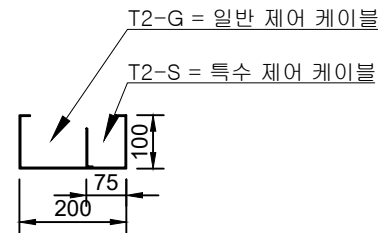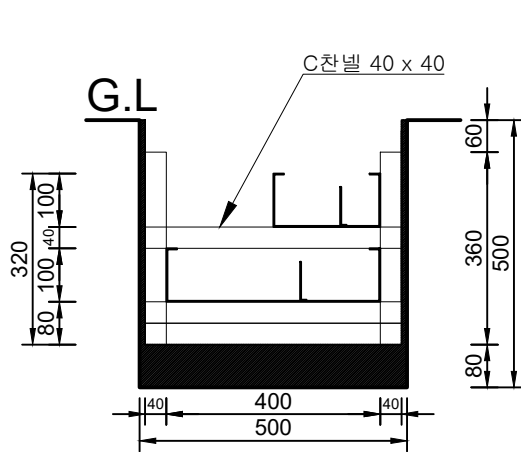


상단 트레이 단면도

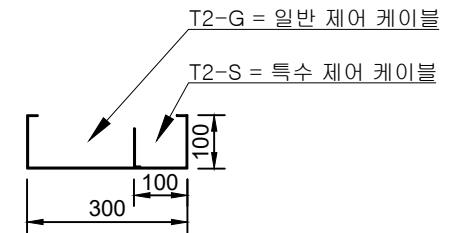

CR룸 상단 트레이 단면도

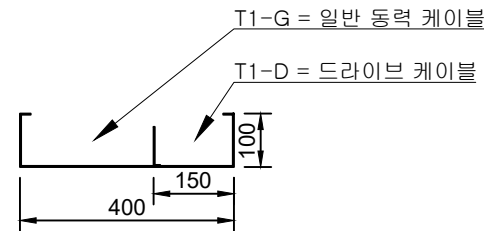


하단 트레이 단면도

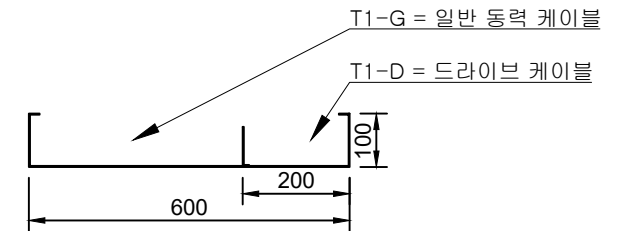


CR룸 하단 트레이 단면도


메인 루트 100/200/110/120 비트 단면도

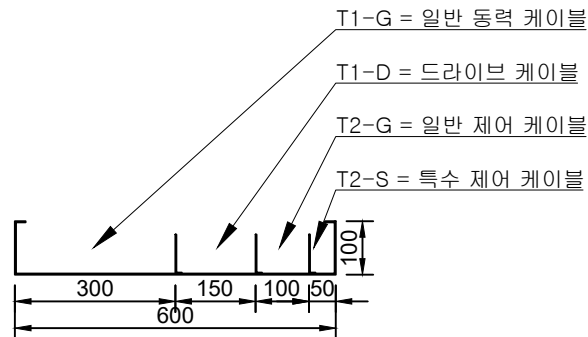

200 수직 구간 트레이 단면도

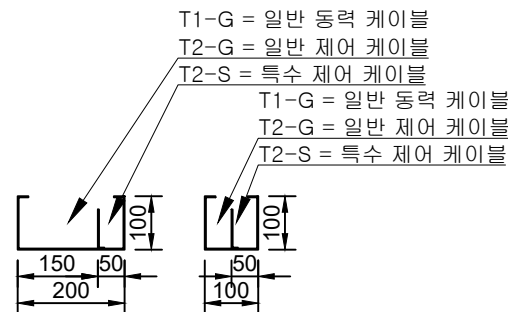


일반 덕트 단면도

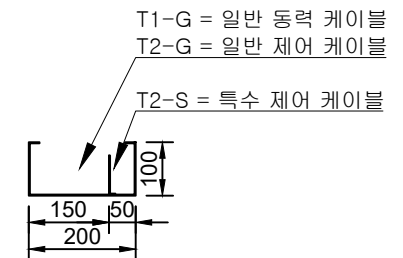

211/212/221/222/223 트레이 단면도

CUSTOMER	5		TITLE				PART DESCRIPTION TRAY & DUCT STRUCTURE DIAGRAM	INS CODE	SECTION	SUB-SECTION	D-PAGE
SEJIN METAL	4		Can-Decoating Equipment					CONDUIT	LAYING	3	
	3										
	2										
SUPPLIER	2			J.W.Lee	J.H.Kim			LOC CODE	DWG No.	TOTAL-PAGE	
youngone FA	1	24.11.11	first draft design					CANDC-CONS-E003-020	20/64		
	No.	DATE	REVISIONS	TRACED	DESIGNED	CHECKED	APPROVED				

ENTRY ZONE01

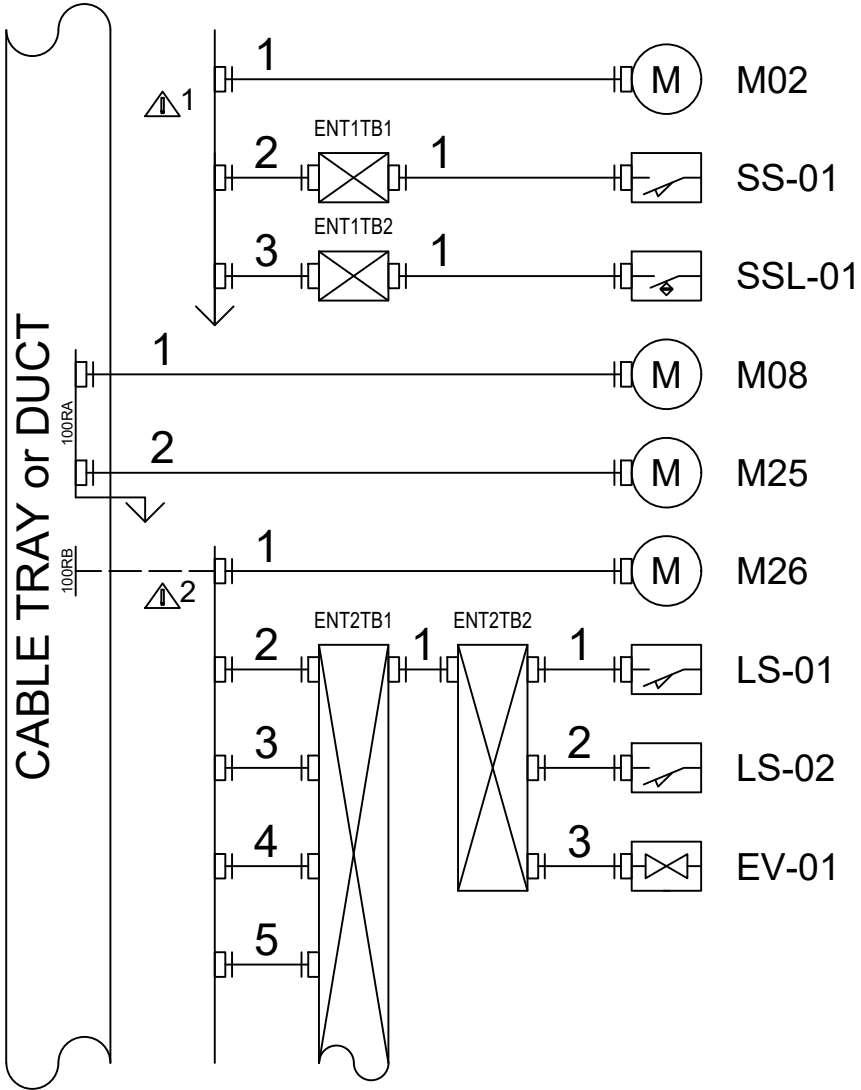 $\Delta 2$ = 100RB_D1 (Duct 100) $\Delta 1$ = Direct OPRoom

Cable Route	EMBEDDED CP		PULL BOX01	EXPOSED CP01		PULL BOX02	EXPOSED CP02		DEVICE No.		CABLE			
	No.	CONDUIT		No.	CONDUIT		No.	CONDUIT	LOC	TAG	No.	KIND	SI ZE	CO RE
Direct OPRoom	1	Pipe 22	M02						BC-01	M02	1_1=ENT+BC01-M02A	PVC-S	2.5	4
	2	Pipe 16	ENT1TB1						BC-01	ENT1TB1	3_1=ENT+BC01-ENT1TB1A	CVW	1.0	7
				1	Flexible 16	SS-01			BC-01	SS-01	3_18=ENT+BC01-SS01A	CVW	1.0	4
	3	Pipe 16	ENT1TB2						BC-01	ENT1TB2	3_2=ENT+BC01-ENT1TB2A	CVW	1.0	3
				1	Flexible 16	SSL-01			BC-01	SSL-01	3_19=ENT+BC01-SSL01A	CVW	1.0	2
100 RA	1	Pipe 22	M08						SC-12	M08	1_2=ENT+SC12-M08A	PVC-S	2.5	4
	2	Pipe 28	M25						FN-03	M25	1_3=ENT+FN03-M25A	PVC-S	25	4
100 RBD1	1	Pipe 22	M26						FN-06	M26	1_4=ENT+FN06-M26A	CV	1.5	4
	2	Pipe 22	ENT2TB1						CC-01	ENT2TB1	3_3=ENT+CC01-ENT2TB1A	CVW	1.0	25
									CC-01	ENT2TB1	3_30=ENT+CC01-ENT2TB1B	CVW	1.0	12
	3	Pipe 28	ENT2TB1						CC-01	ENT2TB1	3_4=ENT+CC01-ENT2TB1C	CVW	1.0	25
									CC-01	ENT2TB1	3_7=ENT+CC01-81RO04B	CVW	1.0	3
	4	Pipe 22	ENT2TB1						CC-01	ENT2TB1	Delete	Delete	0	0
									CC-01	ENT2TB1	Delete	Delete	0	0
	5	Pipe 28	ENT2TB1						CC-01	ENT2TB1	3_15=ENT+PV01-PB15A	CVW	1.0	5
									CC-01	ENT2TB1	3_16=ENT+PV04-PB16A	CVW	1.0	5
									CC-01	ENT2TB1	3_17=ENT+CC01-17HA1A	CVW	1.0	3
				1	Pipe 16	ENT2TB2			PV-01	ENT2TB2	3_8=ENT+PV01-ENT2TB2A	CVW	1.0	12
									PV-01	ENT2TB2	3_9=ENT+PV01-ENT2TB2B	CVW	1.0	3
							1	Flexible 16	PV-01	LS-01	3_20=ENT+PV01-LS01A	CVW	1.0	2
							2	Flexible 16	PV-01	LS-02	3_21=ENT+PV01-LS02A	CVW	1.0	2
							3	Flexible 16	PV-01	EV-01	3_24=ENT+PV01-EV01A	CVW	1.0	3

CUSTOMER
SEJIN METAL Ulsan Plant, HeadQuarters CO.,LTD.

SUPPLIER
youngone FA FA system creator CO.,LTD.

5		
4		
3		
2		
1	24.11.11	first draft design
No.	DATE	REVISIONS

TITLE Can-Decoating Equipment			
	J.W.Lee	J.H.Kim	
TRACED	DESIGNED	CHECKED	APPROVED

PART DESCRIPTION
ENTRY ROUTE
CONDUIT PIPING (1)

INS CODE

LOC CODE

SECTION
CONDUIT

DWG No.

CANDC-CONS-E004-021


SUB-SECTION
ENTRY


D-PAGE

4

TORAL-PAGE

21/64

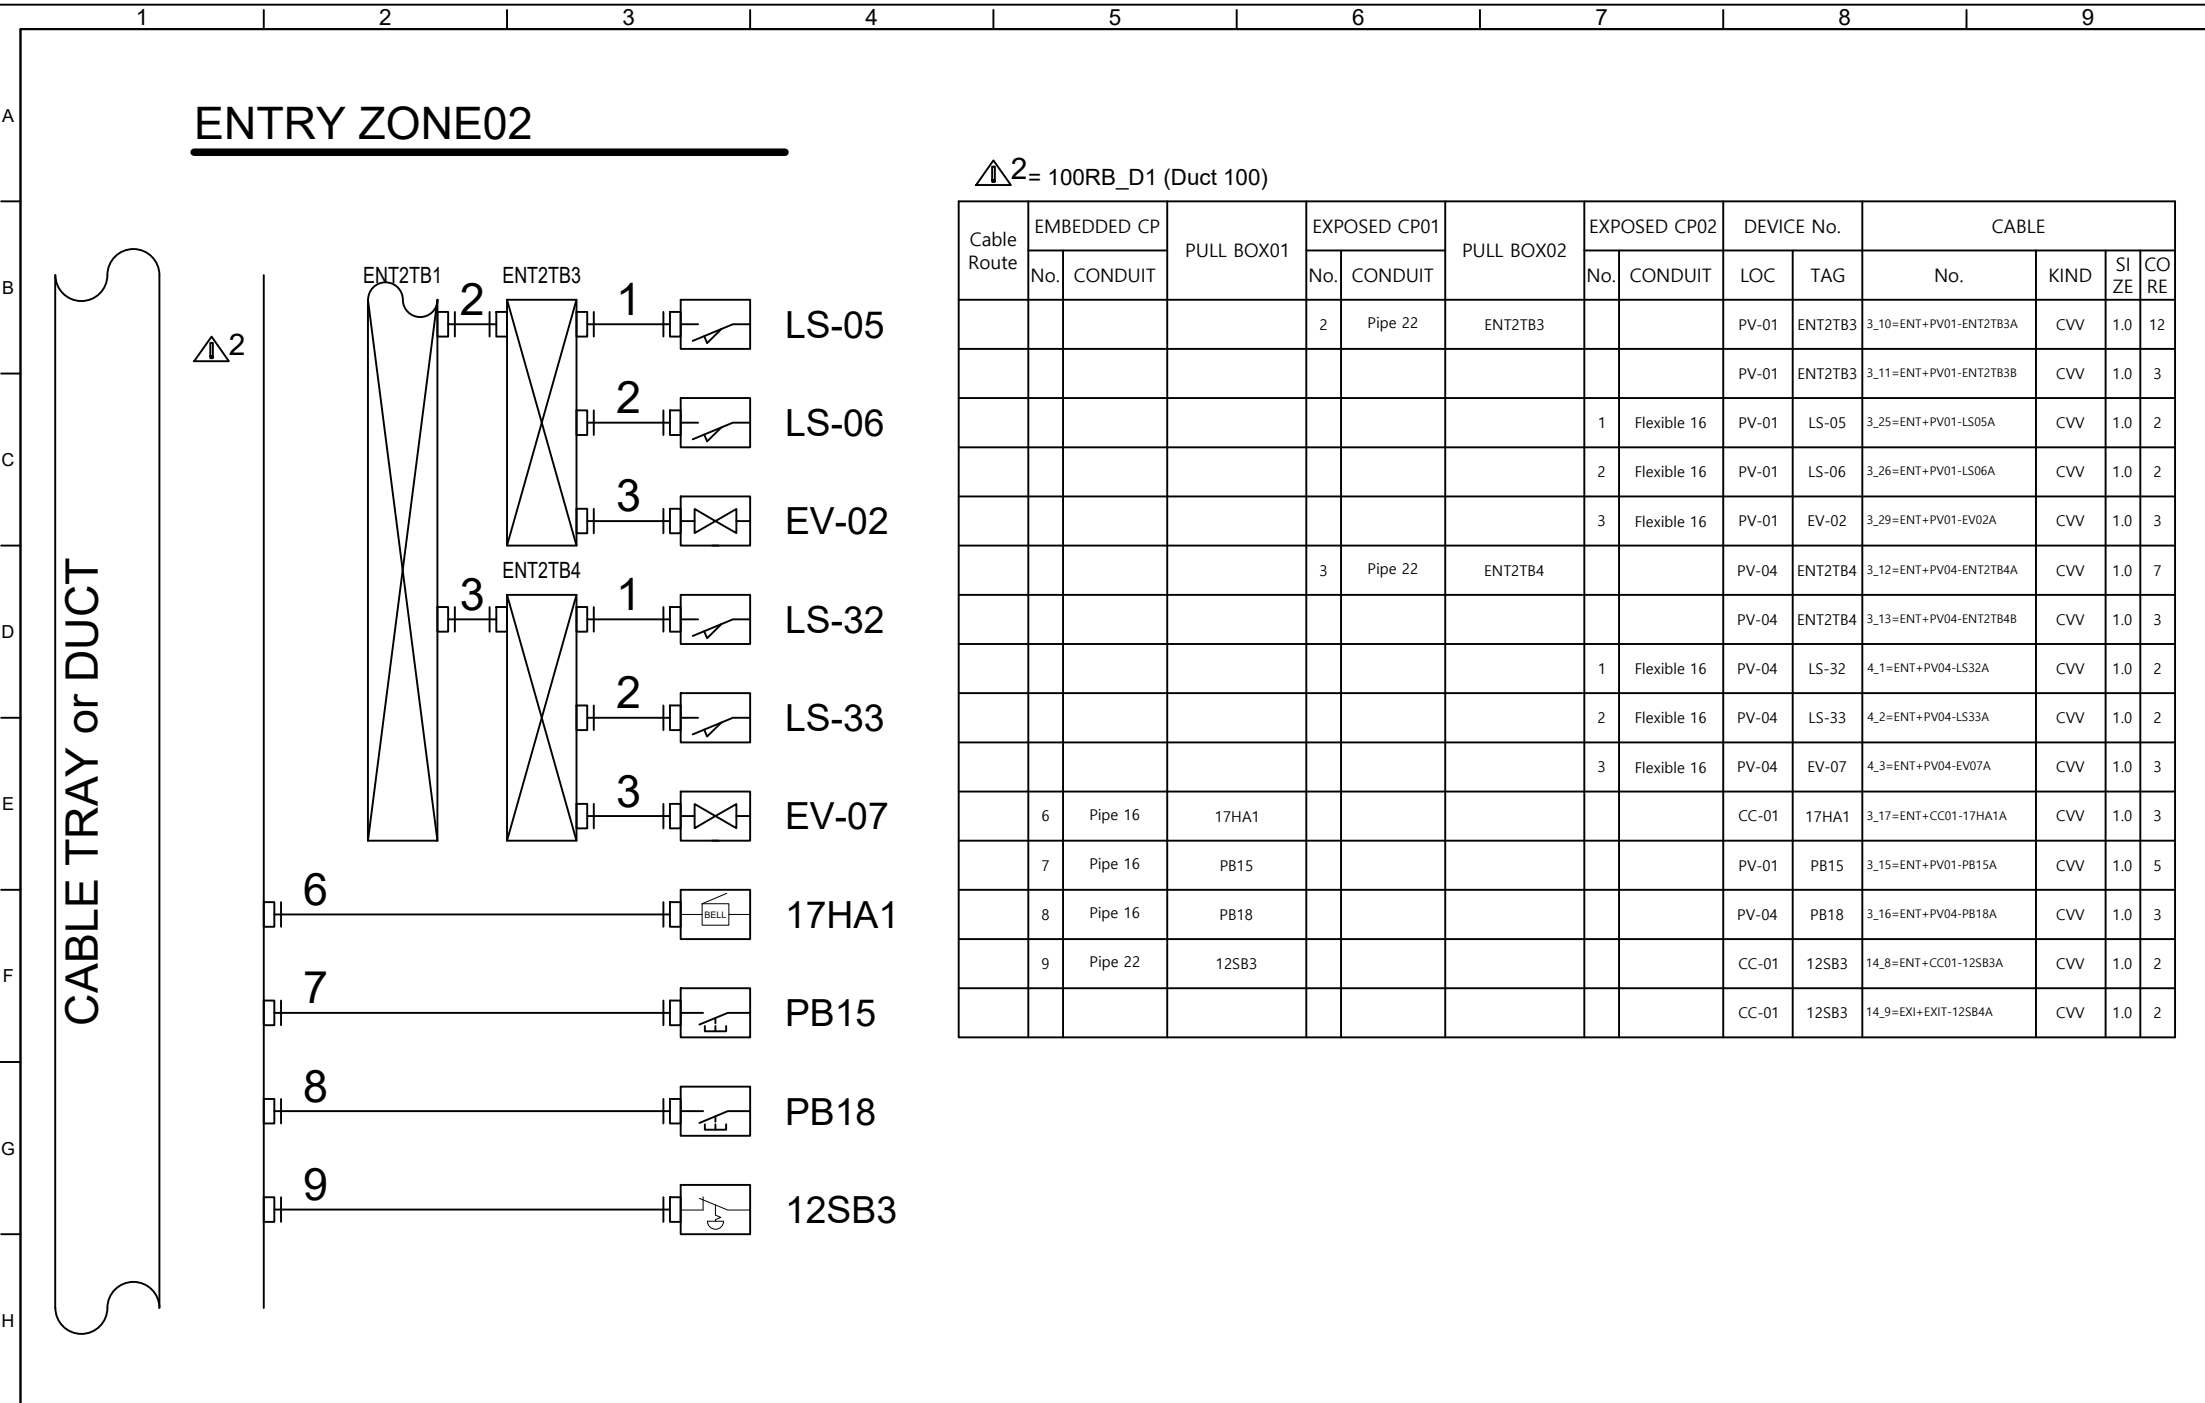


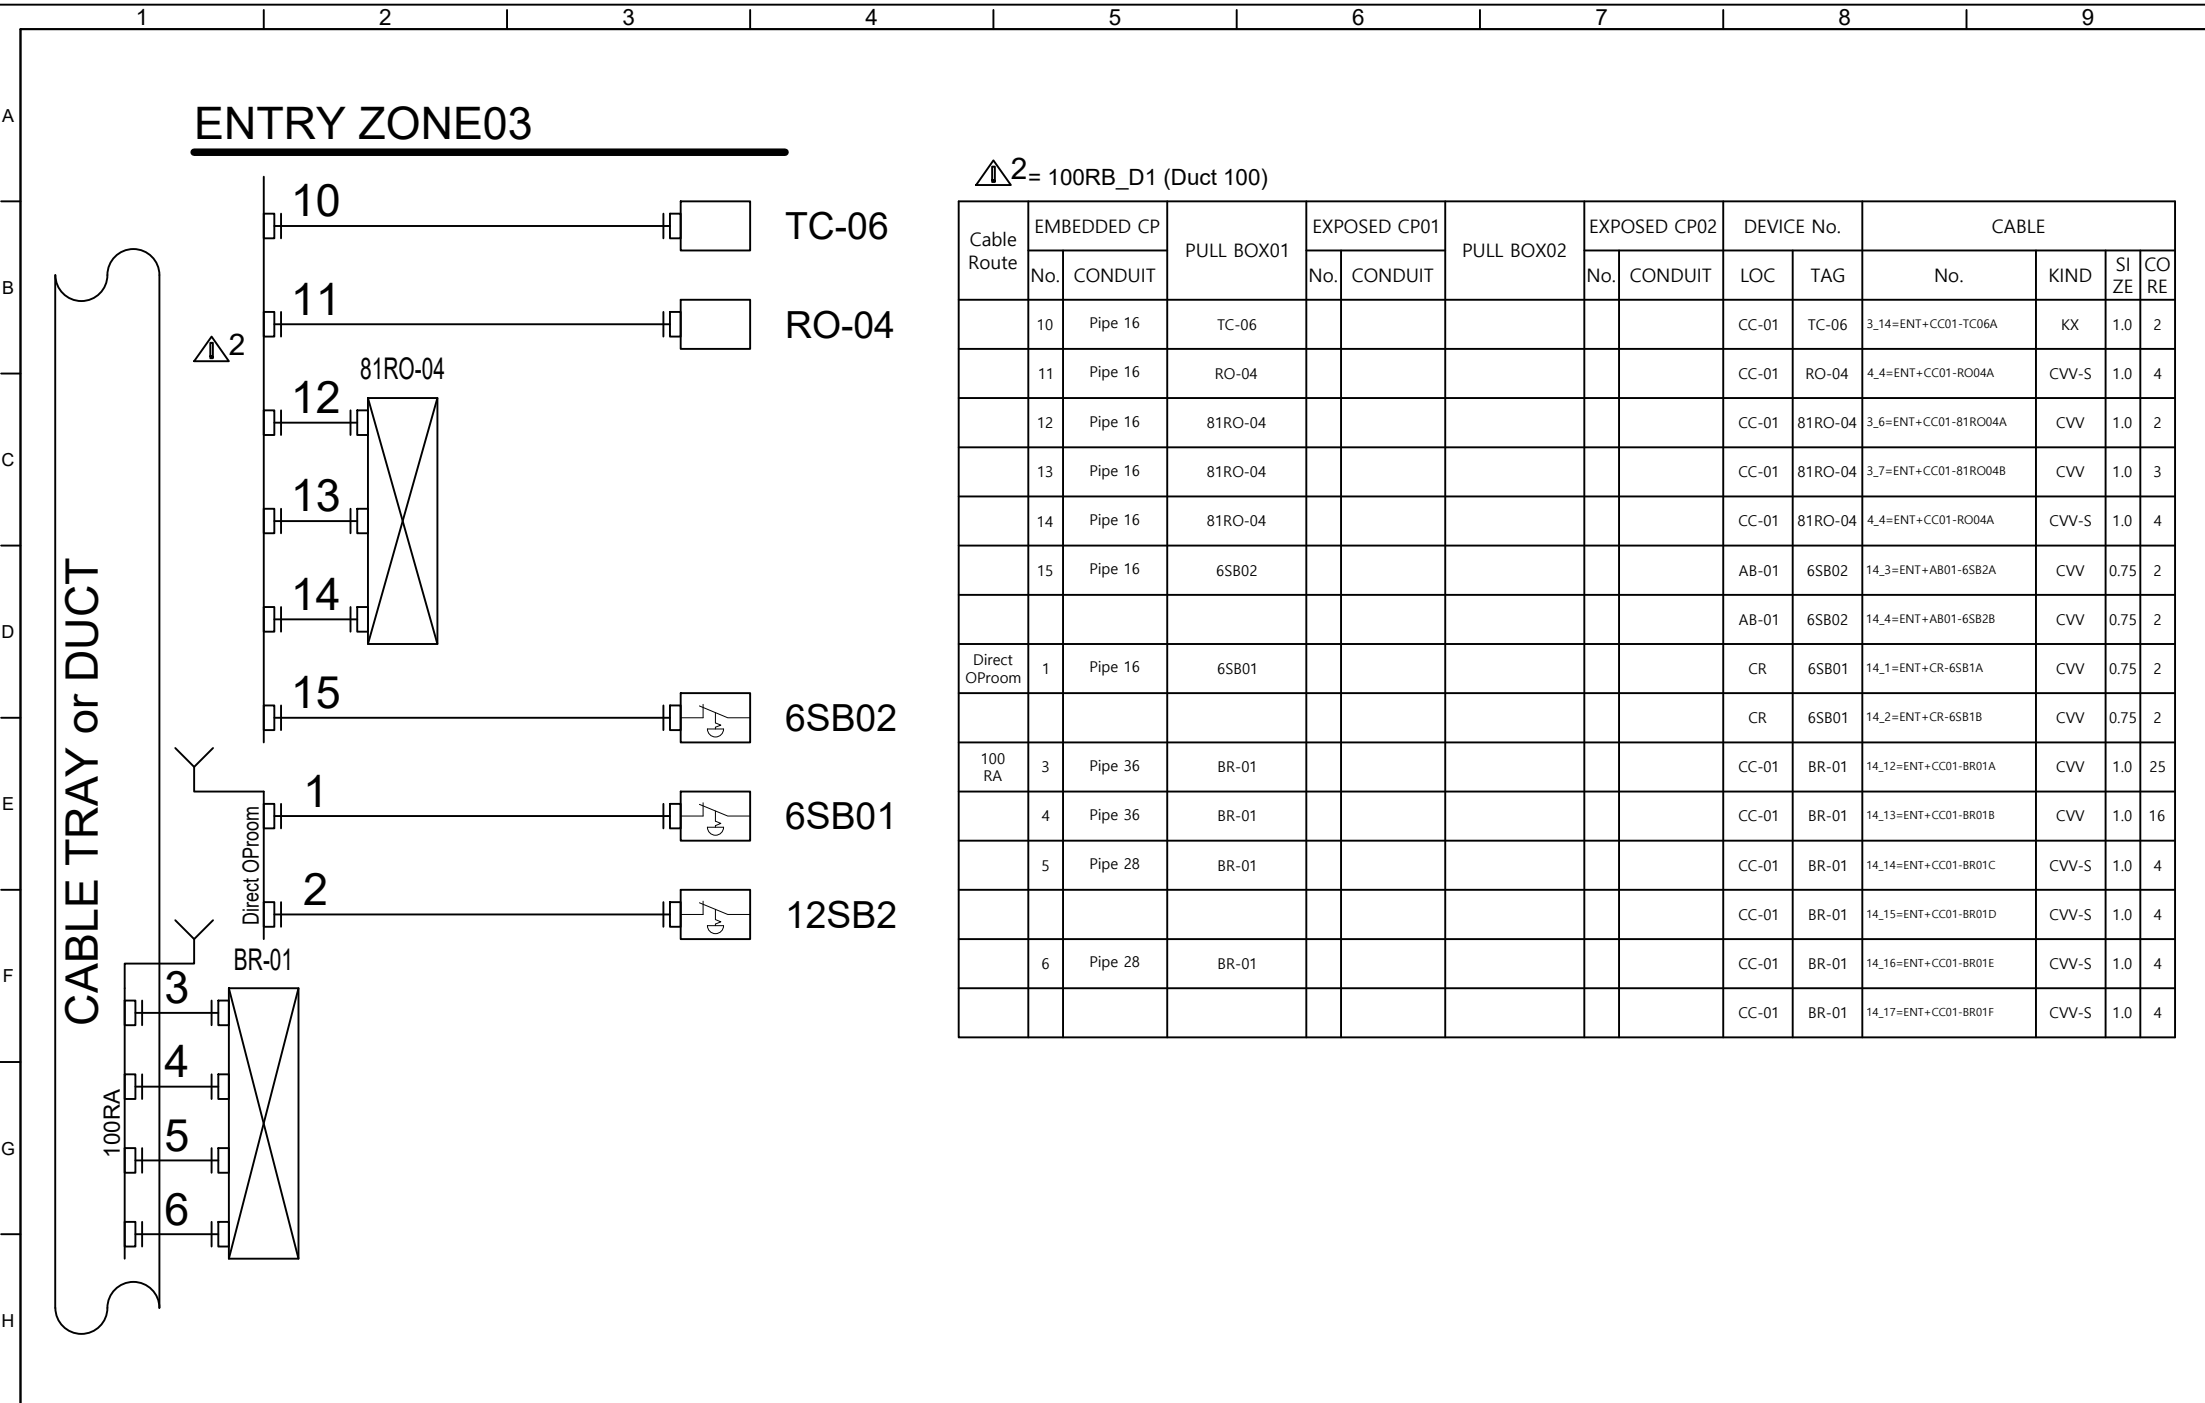

Cable Route	EMBEDDED CP		PULL BOX01	EXPOSED CP01		PULL BOX02	EXPOSED CP02		DEVICE No.		CABLE			
	No.	CONDUIT		No.	CONDUIT		No.	CONDUIT	LOC	TAG	No.	KIND	SIZE	CORE
	10	Pipe 16	TC-06						CC-01	TC-06	3_14=ENT+CC01-TC06A	KX	1.0	2
	11	Pipe 16	RO-04						CC-01	RO-04	4_4=ENT+CC01-RO04A	CVW-S	1.0	4
	12	Pipe 16	81RO-04						CC-01	81RO-04	3_6=ENT+CC01-81RO04A	CVW	1.0	2
	13	Pipe 16	81RO-04						CC-01	81RO-04	3_7=ENT+CC01-81RO04B	CVW	1.0	3
	14	Pipe 16	81RO-04						CC-01	81RO-04	4_4=ENT+CC01-RO04A	CVW-S	1.0	4
	15	Pipe 16	6SB02						AB-01	6SB02	14_3=ENT+AB01-6SB2A	CVW	0.75	2
									AB-01	6SB02	14_4=ENT+AB01-6SB2B	CVW	0.75	2
Direct OP room	1	Pipe 16	6SB01						CR	6SB01	14_1=ENT+CR-6SB1A	CVW	0.75	2
									CR	6SB01	14_2=ENT+CR-6SB1B	CVW	0.75	2
100 RA	3	Pipe 36	BR-01						CC-01	BR-01	14_12=ENT+CC01-BR01A	CVW	1.0	25
	4	Pipe 36	BR-01						CC-01	BR-01	14_13=ENT+CC01-BR01B	CVW	1.0	16
	5	Pipe 28	BR-01						CC-01	BR-01	14_14=ENT+CC01-BR01C	CVW-S	1.0	4
									CC-01	BR-01	14_15=ENT+CC01-BR01D	CVW-S	1.0	4
	6	Pipe 28	BR-01						CC-01	BR-01	14_16=ENT+CC01-BR01E	CVW-S	1.0	4
									CC-01	BR-01	14_17=ENT+CC01-BR01F	CVW-S	1.0	4

CUSTOMER SEJIN METAL Ulsan Plant, HeadQuarters CO.,LTD.			5		TITLE Can-Decoating Equipment				PART DESCRIPTION ENTRY ROUTE CONDUIT PIPING (3)	INS CODE	SECTION CONDUIT	SUB-SECTION ENTRY	D-PAGE 6
			4										
			3										
SUPPLIER youngone FA FA system creator CO.,LTD.			2			J.W.Lee	J.H.Kim		LOC CODE	DWG No. CANDC-CONS-E006-023	TORAL-PAGE 23/64		
			1	24.11.11	first draft design								
			No.	DATE	REVISIONS	TRACED	DESIGNED	CHECKED				APPROVED	


ROTARY SIDE01

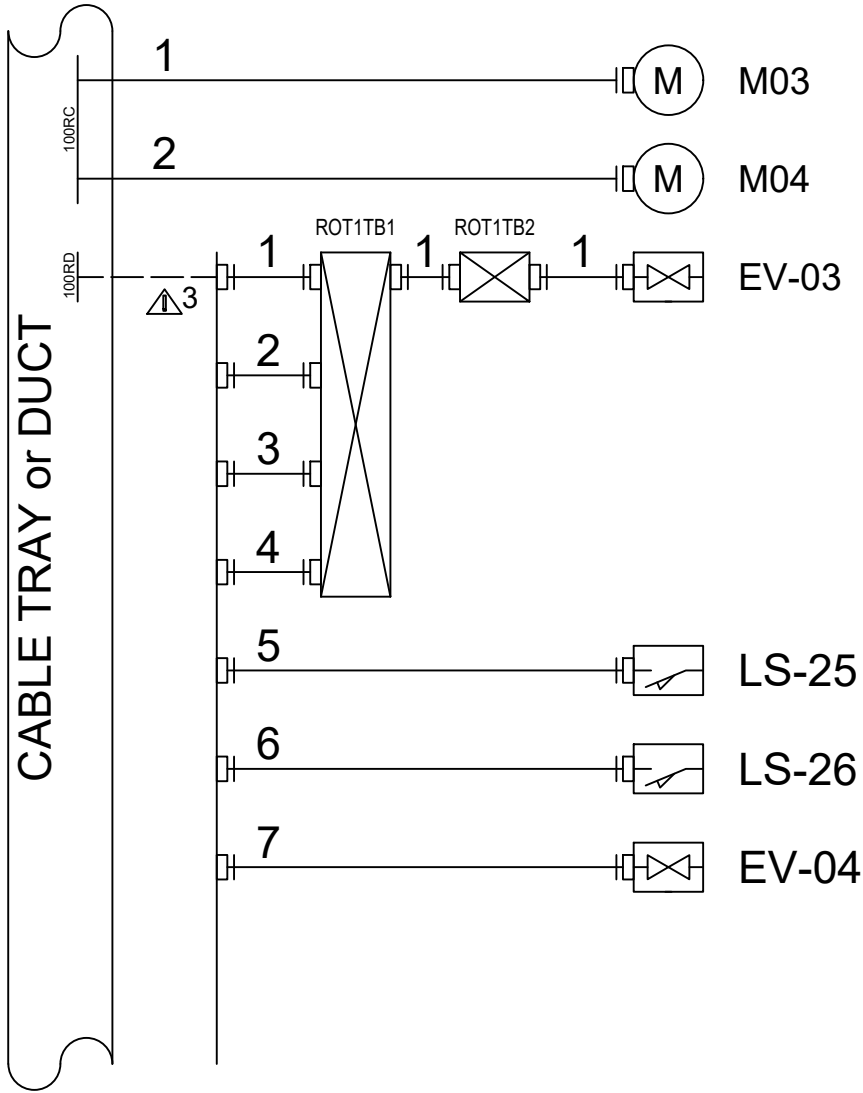


△3= 100RD_D1 (Duct 100)

Cable Route	EMBEDDED CP		PULL BOX01	EXPOSED CP01		PULL BOX02	EXPOSED CP02		DEVICE No.		CABLE			
	No.	CONDUIT		No.	CONDUIT		No.	CONDUIT	LOC	TAG	No.	KIND	SIZE	CORE
100 RC	1	Pipe 36	M03						RD-01	M03	1_5=ROT+RD01-M03A	PVC-S	16	4
	2	Pipe 16	M04						RD-01	M04	1_6=ROT+RD01-M04A	CV	1.5	4
100 RD	1	Pipe 22	ROT1TB1						PV-02	ROT1TB1	5_1=ROT+UC01-ROT1TB1A	CWV	1.0	26
	2	Pipe 16	ROT1TB1						PV-02	ROT1TB1	5_2=ROT+UC01-ROT1TB1B	CWV	1.0	12
	3	Pipe 22	ROT1TB1						PV-02	ROT1TB1	5_3=ROT+PV02-LS25A	CWV	1.0	2
									PV-02	ROT1TB1	5_4=ROT+PV02-LS26A	CWV	1.0	2
	4	Pipe 22	ROT1TB1						PV-02	ROT1TB1	5_9=ROT+PV02-LS29A	CWV	1.0	2
									PV-02	ROT1TB1	5_10=ROT+PV02-LS30A	CWV	1.0	2
									PV-02	ROT1TB1	5_14=ROT+PV02-PB16A	CWV	1.0	5
	4_1	Pipe 16	ROT1TB1						PV-02	ROT1TB1	5_8=ROT+PV02-EV04A	CWV	1.0	3
									PV-02	ROT1TB1	5_13=ROT+PV02-EV05A	CWV	1.0	3
				1	Pipe 16	ROT1TB2			PV-02	ROT1TB2	5_3=ROT+RD01-ROT1TB2A	CWV	1.0	3
							1	Flexible 16	RD-01	EV-03	5_15=ROT+RD01-EV03A	CWV	1.0	3
	5	Flexible 16	LS-25						PV-02	LS-25	5_3=ROT+PV02-LS25A	CWV	1.0	2
	6	Flexible 16	LS-26						PV-02	LS-26	5_4=ROT+PV02-LS26A	CWV	1.0	2
	7	Flexible 16	EV-04						PV-02	EV-04	5_8=ROT+PV02-EV04A	CWV	1.0	3

CUSTOMER SEJIN METAL Ulsan Plant, HeadQuarters CO.,LTD.		5		TITLE Can-Decoating Equipment				PART DESCRIPTION ROTARY ROUTE CONDUIT PIPING (1)	INS CODE	SECTION CONDUIT	SUB-SECTION ROTARY	D-PAGE 7	
		4							LOC CODE	DWG No.		TORAL-PAGE 24/64	
		3								CANDC-CONS-E007-024			
SUPPLIER youngone FA FA system creator CO.,LTD.		2			J.W.Lee	J.H.Kim							
		1	24.11.11	first draft design									
		No.	DATE	REVISIONS	TRACED	DESIGNED	CHECKED	APPROVED					

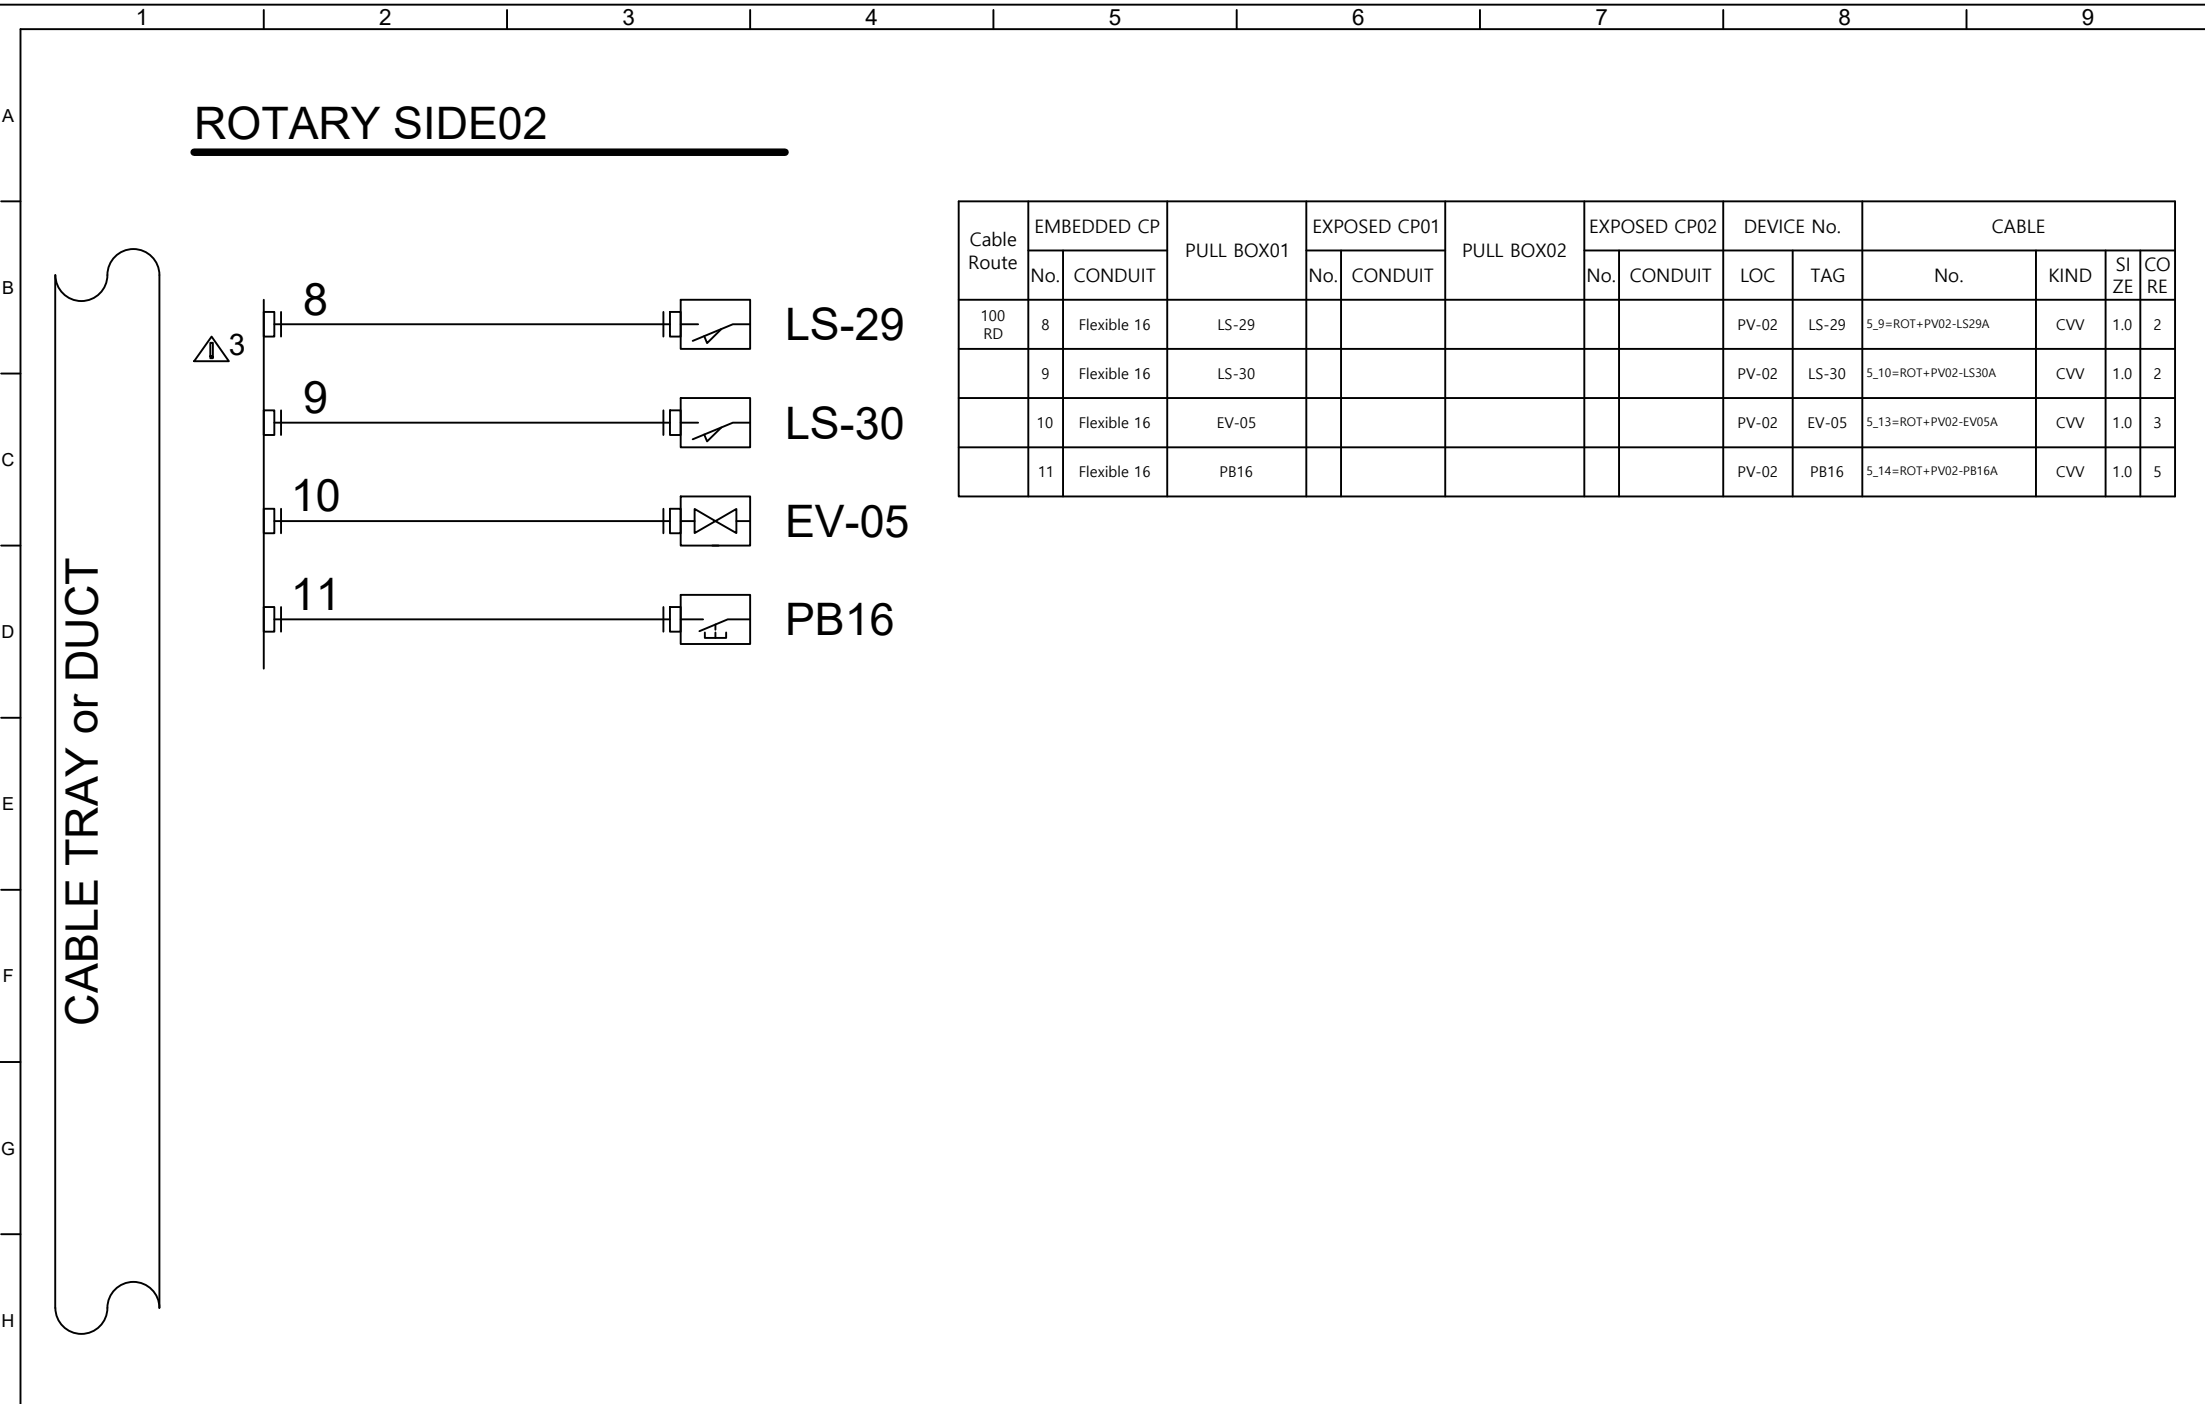


CUSTOMER SEJIN METAL Ulsan Plant, HeadQuarters CO.,LTD.		5		TITLE Can-Decoating Equipment				PART DESCRIPTION ROTARY ROUTE CONDUIT PIPING (2)	INS CODE	SECTION CONDUIT	SUB-SECTION ROTARY	D-PAGE 8
		4										
		3										
SUPPLIER youngone FA FA system creator CO.,LTD.		2			J.W.Lee	J.H.Kim			LOC CODE	DWG No. CANDC-CONS-E008-025	TORAL-PAGE 25/64	
		1	24.11.11	first draft design								
		No.	DATE	REVISIONS		TRACED	DESIGNED					CHECKED

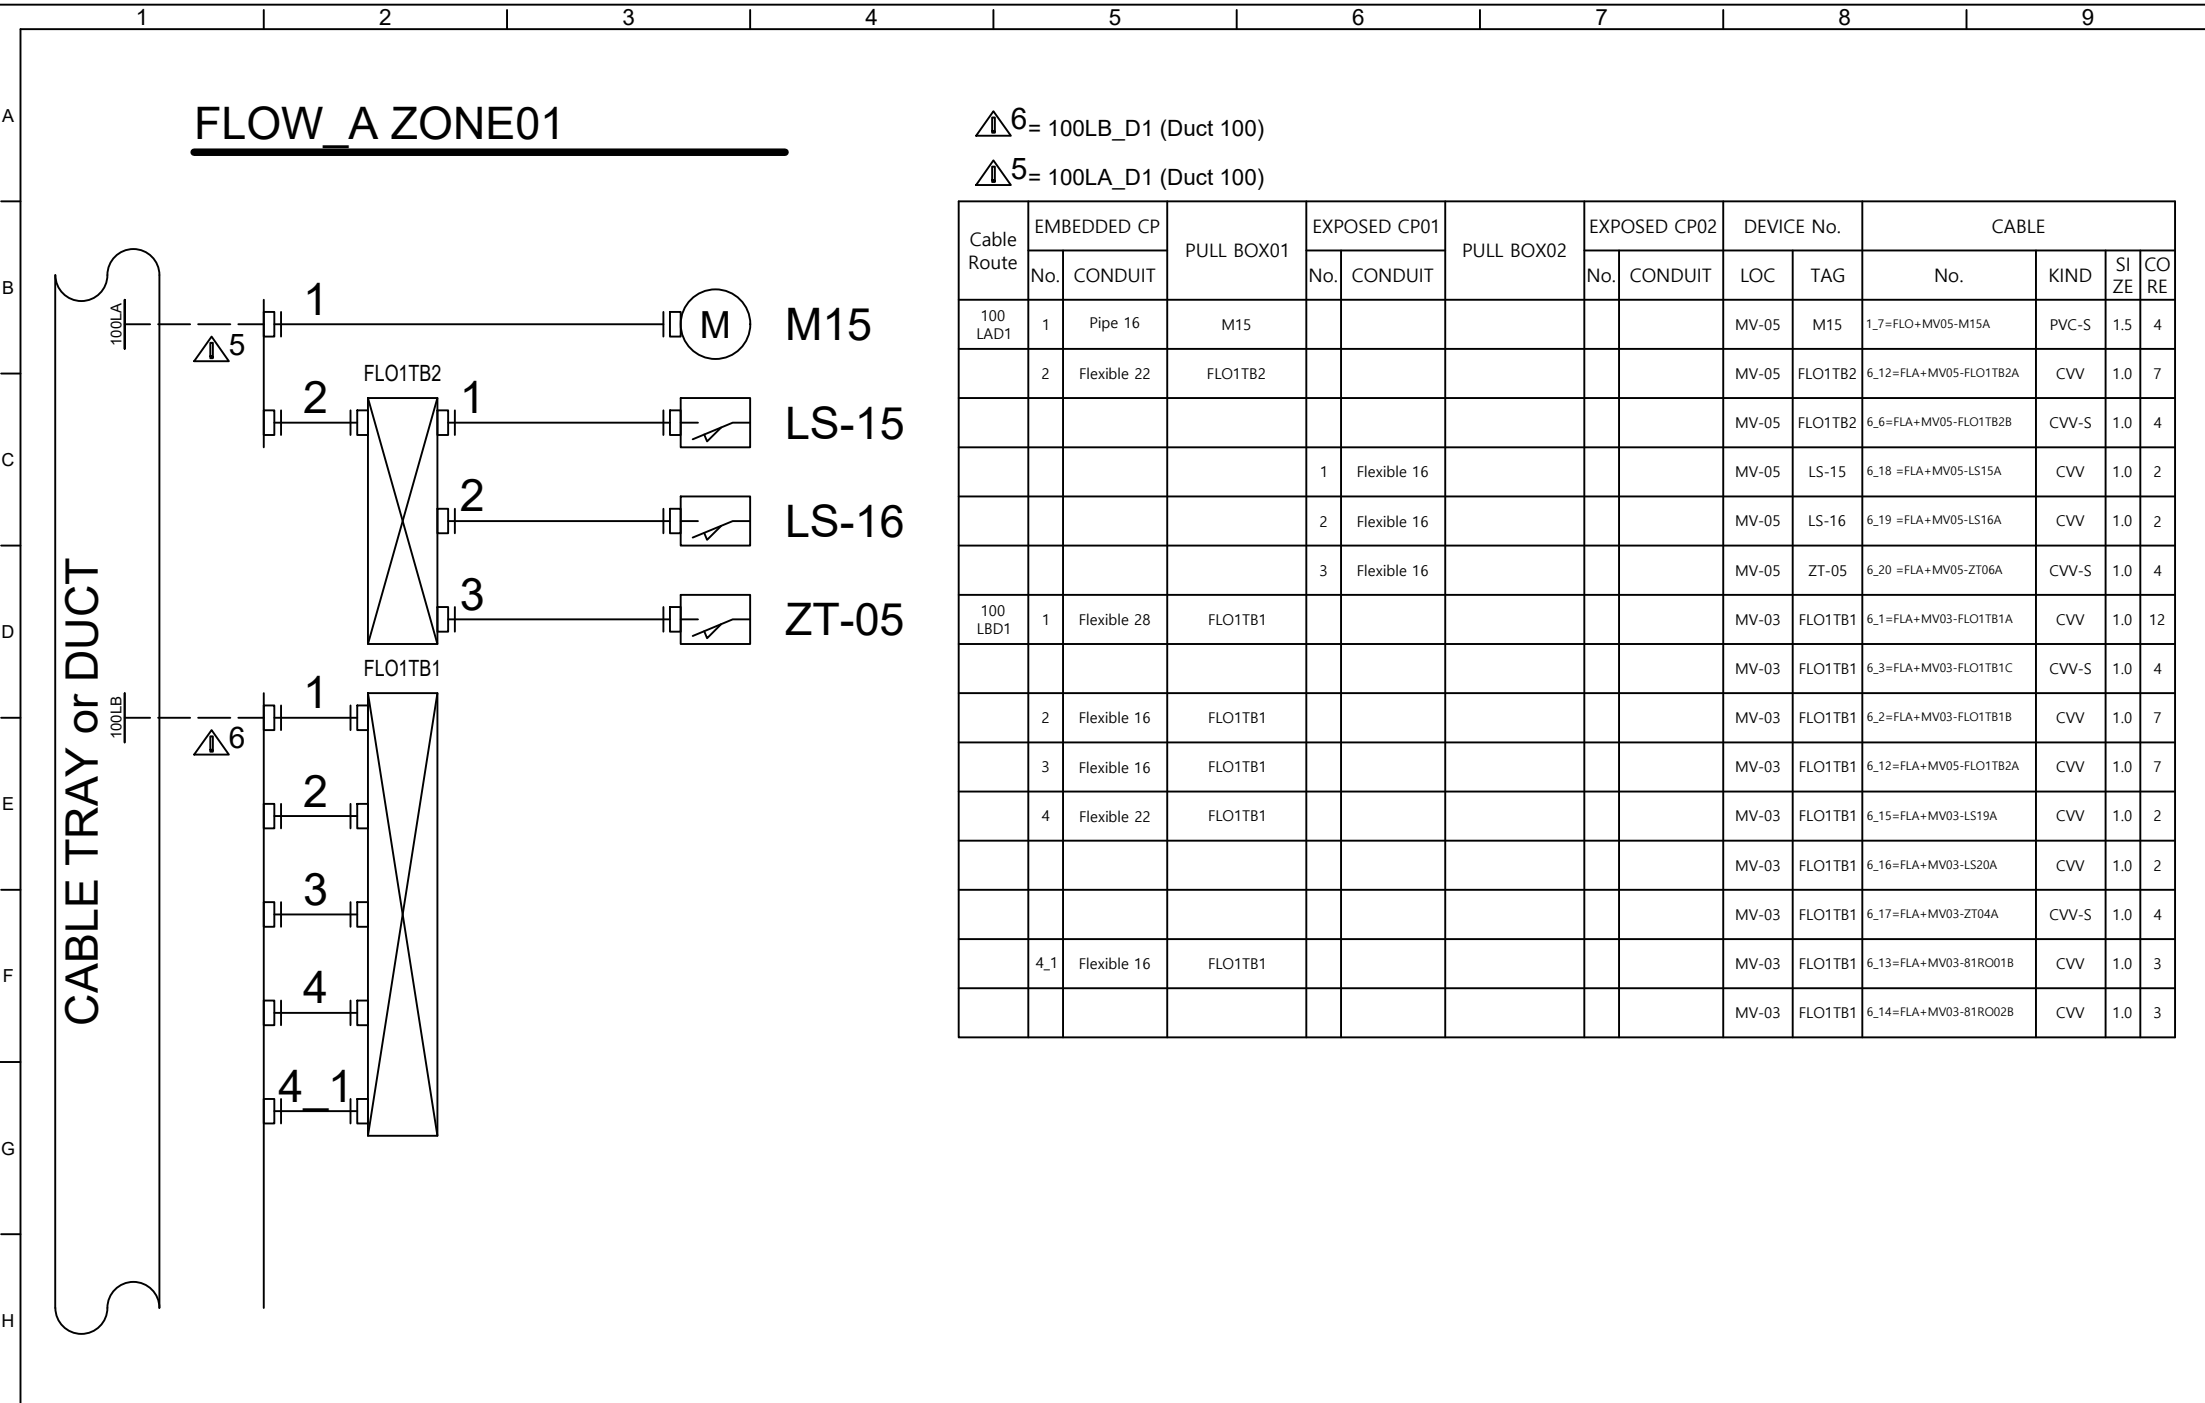


CUSTOMER SEJIN METAL Ulsan Plant, HeadQuarters CO.,LTD.		5		TITLE Can-Decoating Equipment				PART DESCRIPTION FLOW A ROUTE CONDUIT PIPING (1)	INS CODE	SECTION CONDUIT	SUB-SECTION FLOWA	D-PAGE 9
		4										
		3										
SUPPLIER youngone FA FA system creator CO.,LTD.		2			J.W.Lee	J.H.Kim			LOC CODE	DWG No. CANDC-CONS-E009-026	TORAL-PAGE 26/64	
		1	24.11.11	first draft design								
		No.	DATE	REVISIONS	TRACED	DESIGNED	CHECKED					APPROVED

CABLE TRAY or DUCT



Cable Route	EMBEDDED CP		PULL BOX01	EXPOSED CP01		PULL BOX02	EXPOSED CP02		DEVICE No.		CABLE			
	No.	CONDUIT		No.	CONDUIT		No.	CONDUIT	LOC	TAG	No.	KIND	SI ZE	CO R
	5	Flexible 16	81RO-01						MV-03	81RO-01	6_4=FLA+MV03-81RO01A	CWV-S	1.0	2
	6	Flexible 16	81RO-01						MV-03	81RO-01	6_13=FLA+MV03-81RO01B	CWV	1.0	3
	7	Flexible 16	81RO-01						MV-03	81RO-01	6_21=FLA+HE01-RO01A	CWV-S	1.0	4
	8	Flexible 16	81RO-02						MV-03	81RO-02	6_5=FLA+MV03-81RO02A	CWV-S	1.0	2
	9	Flexible 16	81RO-02						MV-03	81RO-02	6_14=FLA+MV03-81RO02B	CWV	1.0	3
	10	Flexible 16	81RO-02						MV-03	81RO-02	6_22=FLA+HE01-RO02A	CWV-S	1.0	4
	11	Flexible 16	M17						MV-05	M17	1_9=FLA+MV03-M17A	PVC-S	1.5	4
	12	Flexible 16	LS-19						MV-03	LS-19	6_15=FLA+MV03-LS19A	CWV	1.0	2
	13	Flexible 16	LS-20						MV-03	LS-20	6_16=FLA+MV03-LS20A	CWV	1.0	2
	14	Flexible 16	ZT-04						MV-03	ZT-04	6_17=FLA+MV03-ZT04A	CWV-S	1.0	4

CUSTOMER		5		TITLE				PART DESCRIPTION FLOW A ROUTE CONDUIT PIPING (2)	INS CODE	SECTION	SUB-SECTION	D-PAGE
SEJIN METAL Ulsan Plant, HeadQuarters CO.,LTD.		4		Can-Decoating						CONDUIT	FLOWA	10
		3		Equipment								
SUPPLIER		2			J.W.Lee	J.H.Kim		LOC CODE	DWG No.	TOTAL-PAGE		
youngone FA FA system creator CO.,LTD.		1	24.11.11	first draft design					CANDC-CONS-E010-027	27/64		
		No.	DATE	REVISIONS	TRACED	DESIGNED	CHECKED					APPROVED

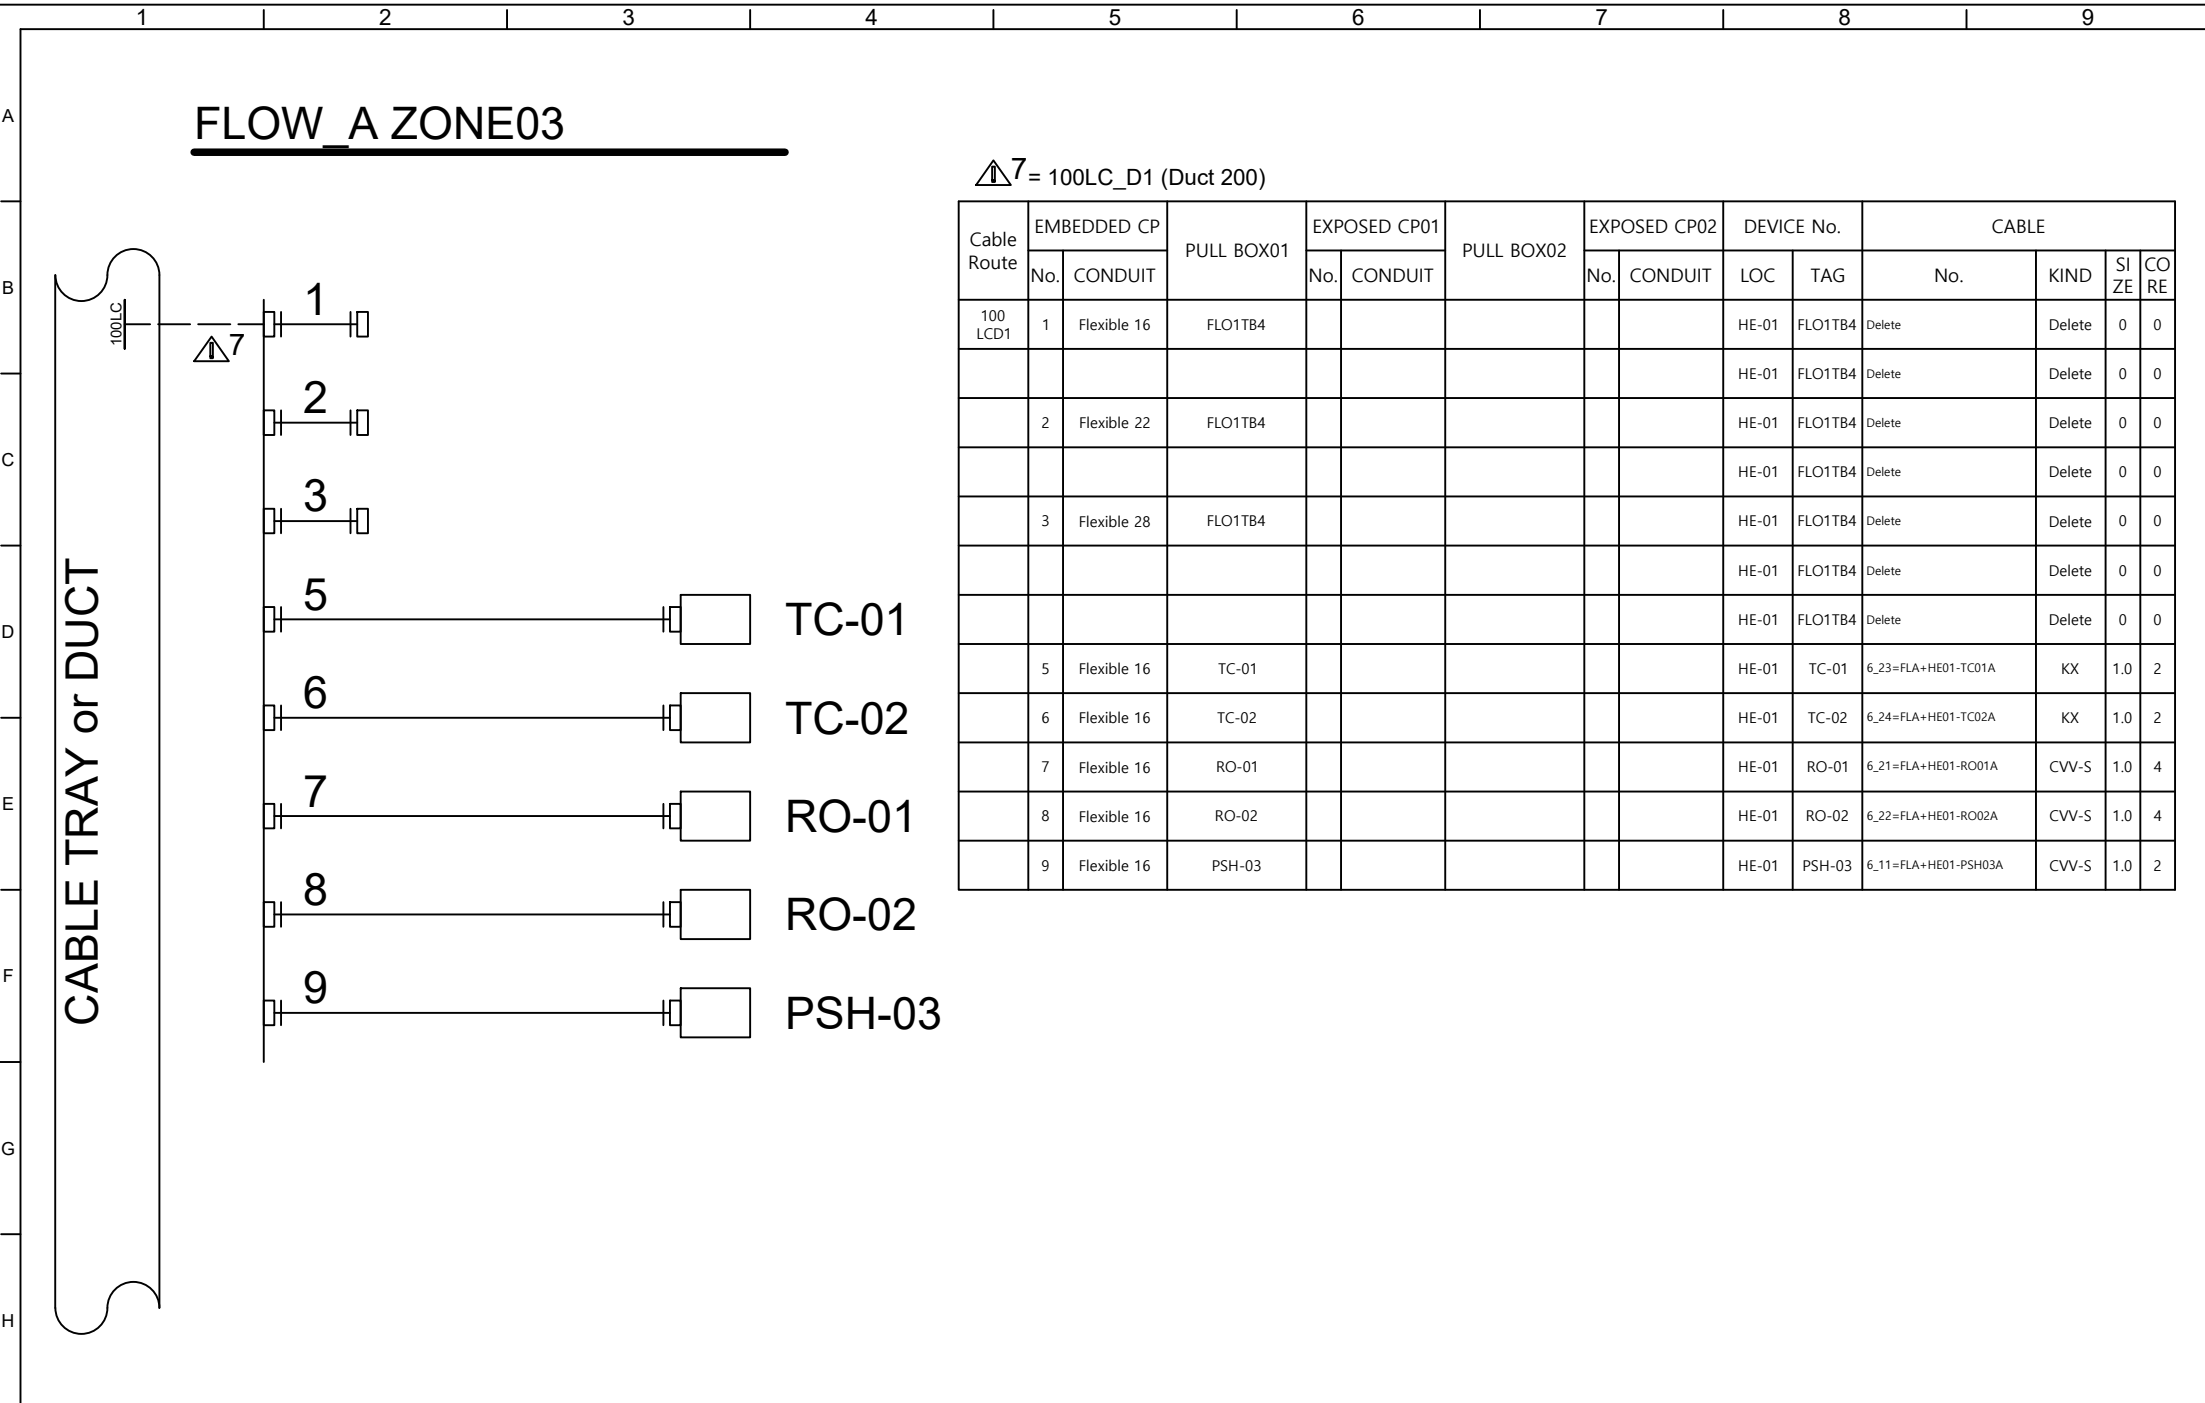

CUSTOMER SEJIN METAL Ulsan Plant, HeadQuarters CO.,LTD.		5		TITLE Can-Decoating Equipment				PART DESCRIPTION FLOW A ROUTE CONDUIT PIPING (3)	INS CODE	SECTION CONDUIT	SUB-SECTION FLOWA	D-PAGE 11
		4							LOC CODE	DWG No. CANDC-CONS-E011-028	TORAL-PAGE 28/64	
		3										
SUPPLIER youngone FA FA system creator CO.,LTD.		2			J.W.Lee	J.H.Kim						
		1	24.11.11	first draft design								
		No.	DATE	REVISIONS	TRACED	DESIGNED	CHECKED					APPROVED

A

B

C

D


E

F

G


H

FLOW A ZONE04

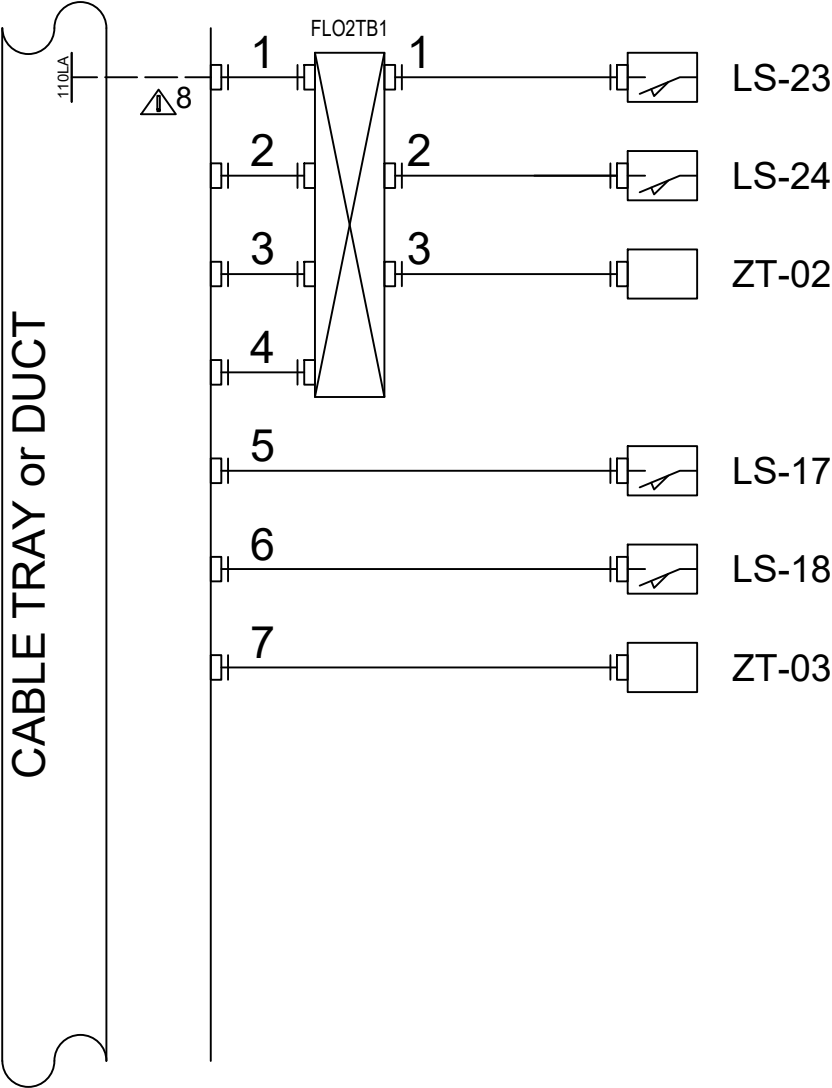

△8= 110LA_D1 (Duct 200)

Cable Route	EMBEDDED CP		PULL BOX01	EXPOSED CP01		PULL BOX02	EXPOSED CP02		DEVICE No.		CABLE			
	No.	CONDUIT		No.	CONDUIT		No.	CONDUIT	LOC	TAG	No.	KIND	SI ZE	CO RE
110 LAD1	1	Flexible 22	FLO2TB1						HE-01	FLO2TB1	7_1=FLA+HE01-FLO2TB1A	CWV	1.0	25
									HE-01	FLO2TB1	7_3=FLA+HE01-FLO2TB1C	CWV-S	1.0	2
	2	Flexible 28	FLO2TB1						HE-01	FLO2TB1	7_4=FLA+HE01-FLO2TB1D	CWV-S	1.0	2
									HE-01	FLO2TB1	7_5=FLA+HE01-FLO2TB1E	CWV-S	1.0	4
									HE-01	FLO2TB1	7_6=FLA+HE01-FLO2TB1F	CWV-S	1.0	4
									HE-01	FLO2TB1	7_2=FLA+HE01-FLO2TB1B	CWV	1.0	5
	3	Flexible 22	FLO2TB1						HE-01	FLO2TB1	7_18=FLA+MV04-AMP01A	CWV	1.0	5
									HE-01	FLO2TB1	7_11=FLA+MV02-LS17A	CWV	1.0	2
	4	Flexible 22	FLO2TB1						HE-01	FLO2TB1	7_12 =FLA+MV02-LS18A	CWV	1.0	2
									HE-01	FLO2TB1	7_14 =FLA+MV04-LS21AA	CWV	1.0	2
	4_1	Flexible 22	FLO2TB1						HE-01	FLO2TB1	7_15 =FLA+MV04-LS22AA	CWV	1.0	2
									HE-01	FLO2TB1	7_16 =FLA+MV04-LS21BA	CWV	1.0	2
									HE-01	FLO2TB1	7_17 =FLA+MV04-LS22BA	CWV	1.0	2
									HE-01	FLO2TB1	7_13 =FLA+MV02-ZT03A	CWV-S	1.0	4
	4_2	Flexible 28	FLO2TB1						HE-01	FLO2TB1	7_19=FLA+MV04-AMP01B	CWV-S	1.0	2
									HE-01	FLO2TB1	7_20=FLA+MV04-AMP01C	CWV-S	1.0	2
				1	Pipe 16	LS-23			MV-01	LS-23	7_8=FLA+MV01-LS23A	CWV	1.0	2
									MV-01	LS-24	7_9=FLA+MV01-LS24A	CWV	1.0	2
				2	Pipe 16	LS-24			MV-01	LS-24	7_10=FLA+MV01-ZT02A	CWV-S	1.0	4
									MV-01	ZT-02	7_11=FLA+MV02-LS17A	CWV	1.0	2
	5	Pipe 16	LS-17						MV-02	LS-17	7_12 =FLA+MV02-LS18A	CWV	1.0	2
									MV-02	LS-18	7_13 =FLA+MV02-ZT03A	CWV-S	1.0	4
	6	Pipe 16	LS-18						MV-02	ZT-03				
									MV-02	ZT-03				
	7	Pipe 16	ZT-03						MV-02	ZT-03				
									MV-02	ZT-03				

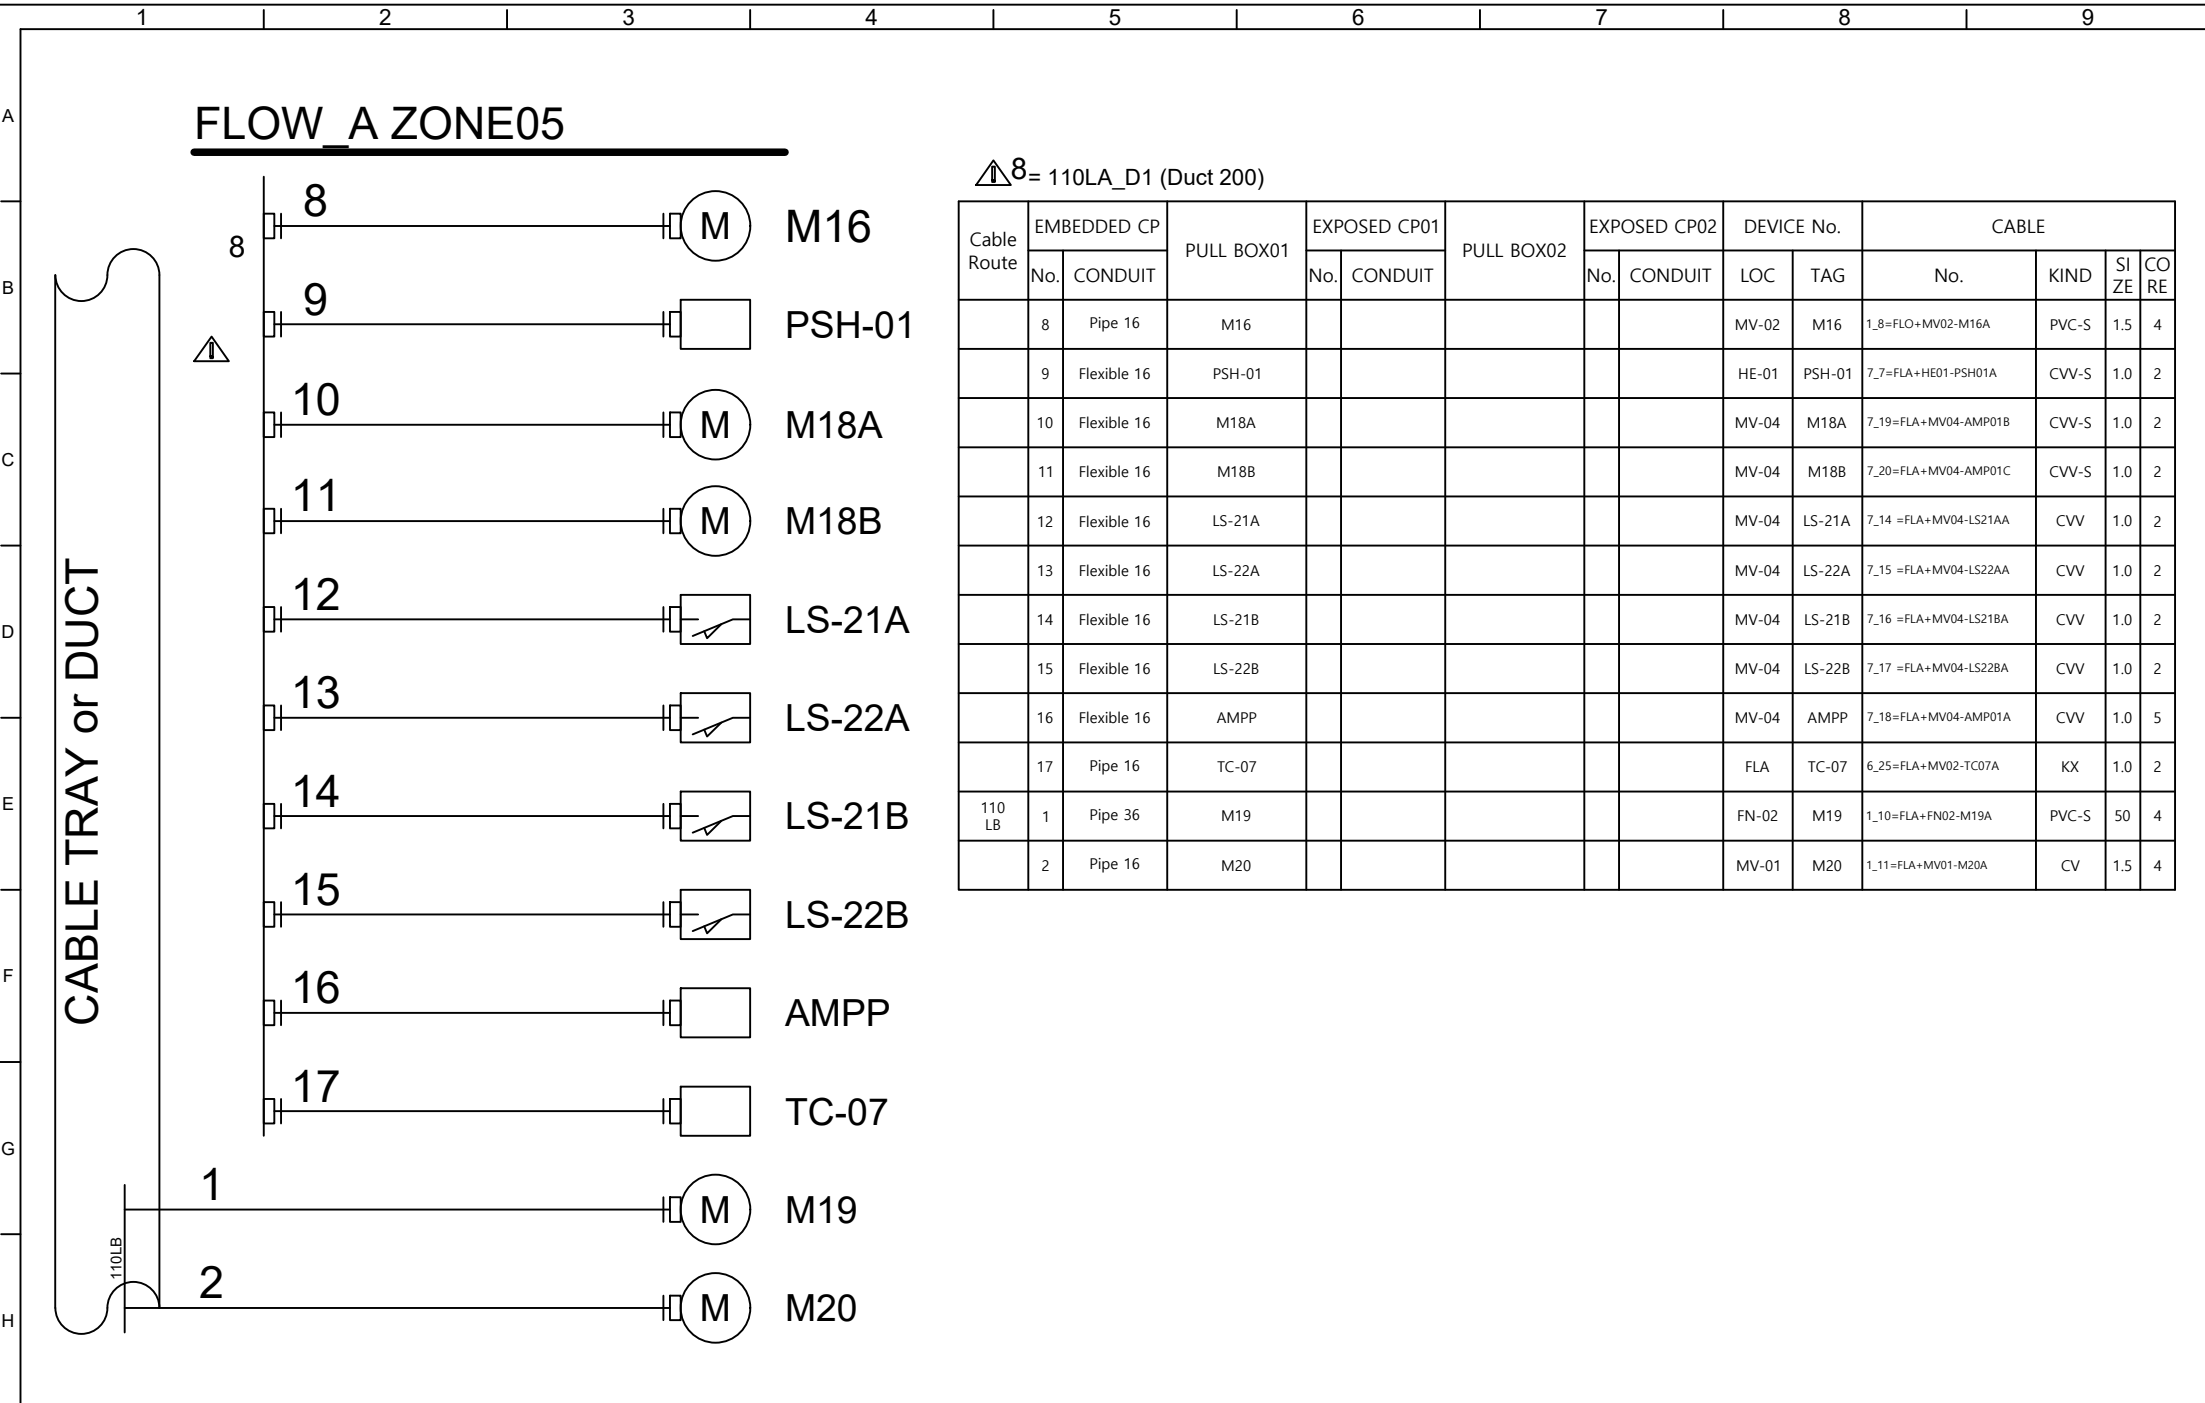

CUSTOMER

SEJIN METAL

Ulsan Plant, HeadQuarters CO.,LTD.

SUPPLIER

youngone FA

FA system creator CO.,LTD.

5

4

3

2

1

No.

DATE

REVISIONS

TITLE

Can-Decoating Equipment

TRACED

DESIGNED

CHECKED

APPROVED

J.W.Lee

J.H.Kim

PART DESCRIPTION

FLOW A ROUTE CONDUIT PIPING (5)

INS CODE

LOC CODE

SECTION

CONDUIT

SUB-SECTION

FLOWA


D-PAGE

13


TORAL-PAGE

30/64

CANDC-CONS-E013-030

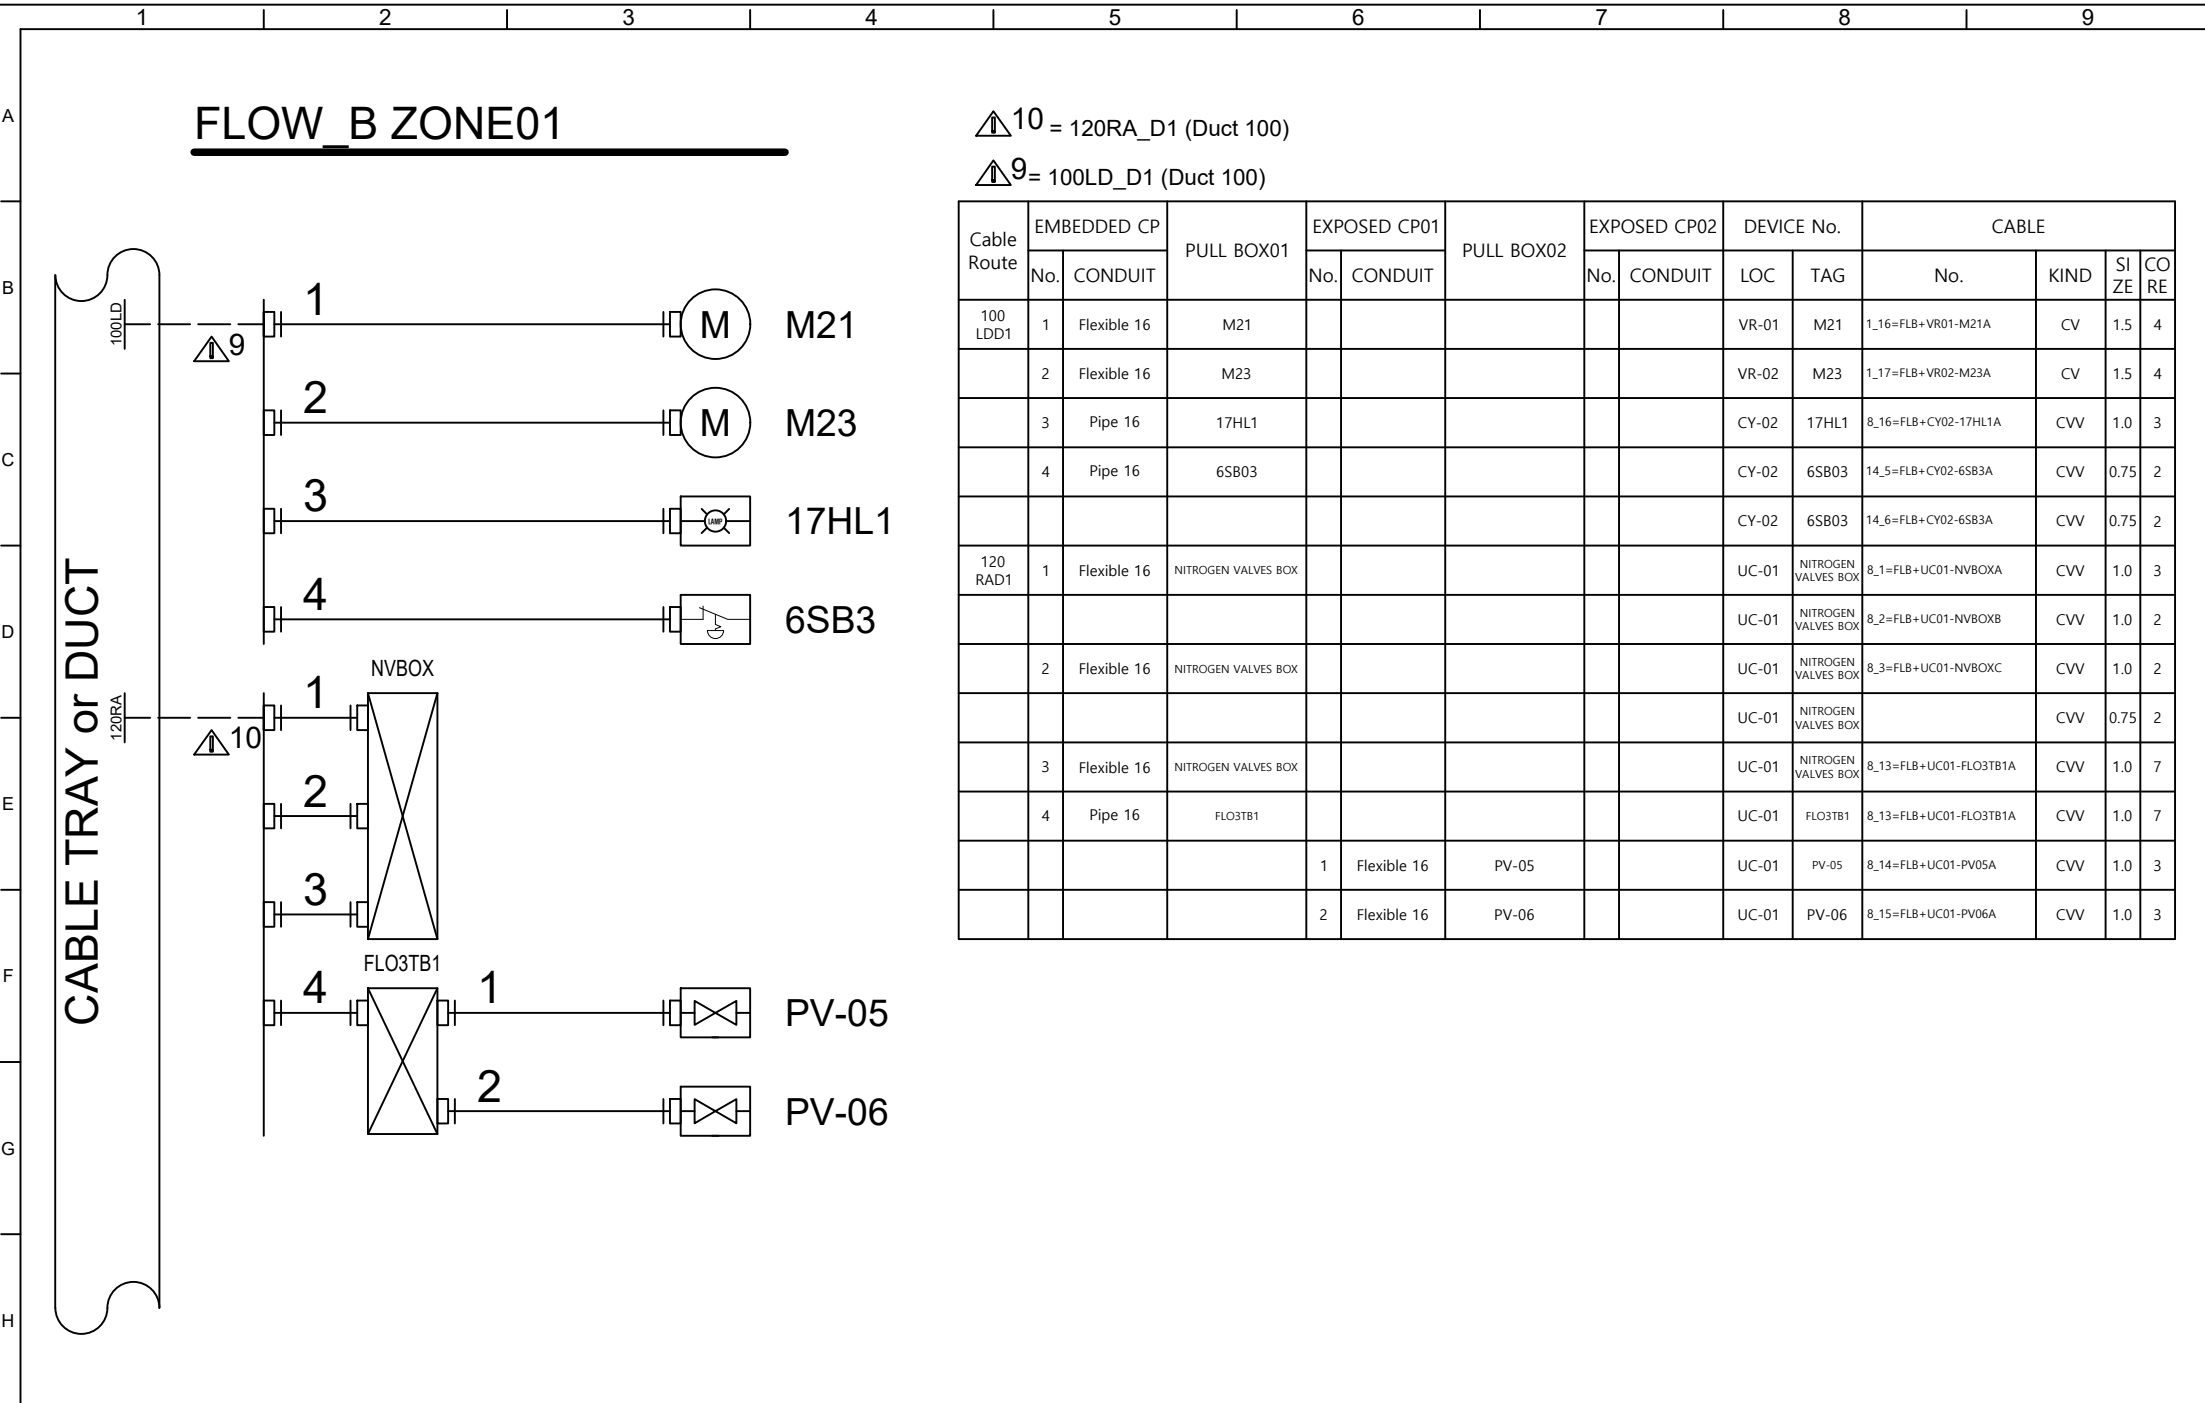

CUSTOMER SEJIN METAL Ulsan Plant, HeadQuarters CO.,LTD.		5		TITLE Can-Decoating Equipment				PART DESCRIPTION FLOW B ROUTE CONDUIT PIPING (1)	INS CODE	SECTION CONDUIT	SUB-SECTION FLOWB	D-PAGE 14
		4										
		3										
SUPPLIER youngone FA FA system creator CO.,LTD.		2			J.W.Lee	J.H.Kim		LOC CODE	DWG No. CANDC-CONS-E014-031	TORAL-PAGE 31/64		
		1	24.11.11	first draft design								
		No.	DATE	REVISIONS	TRACED	DESIGNED	CHECKED				APPROVED	

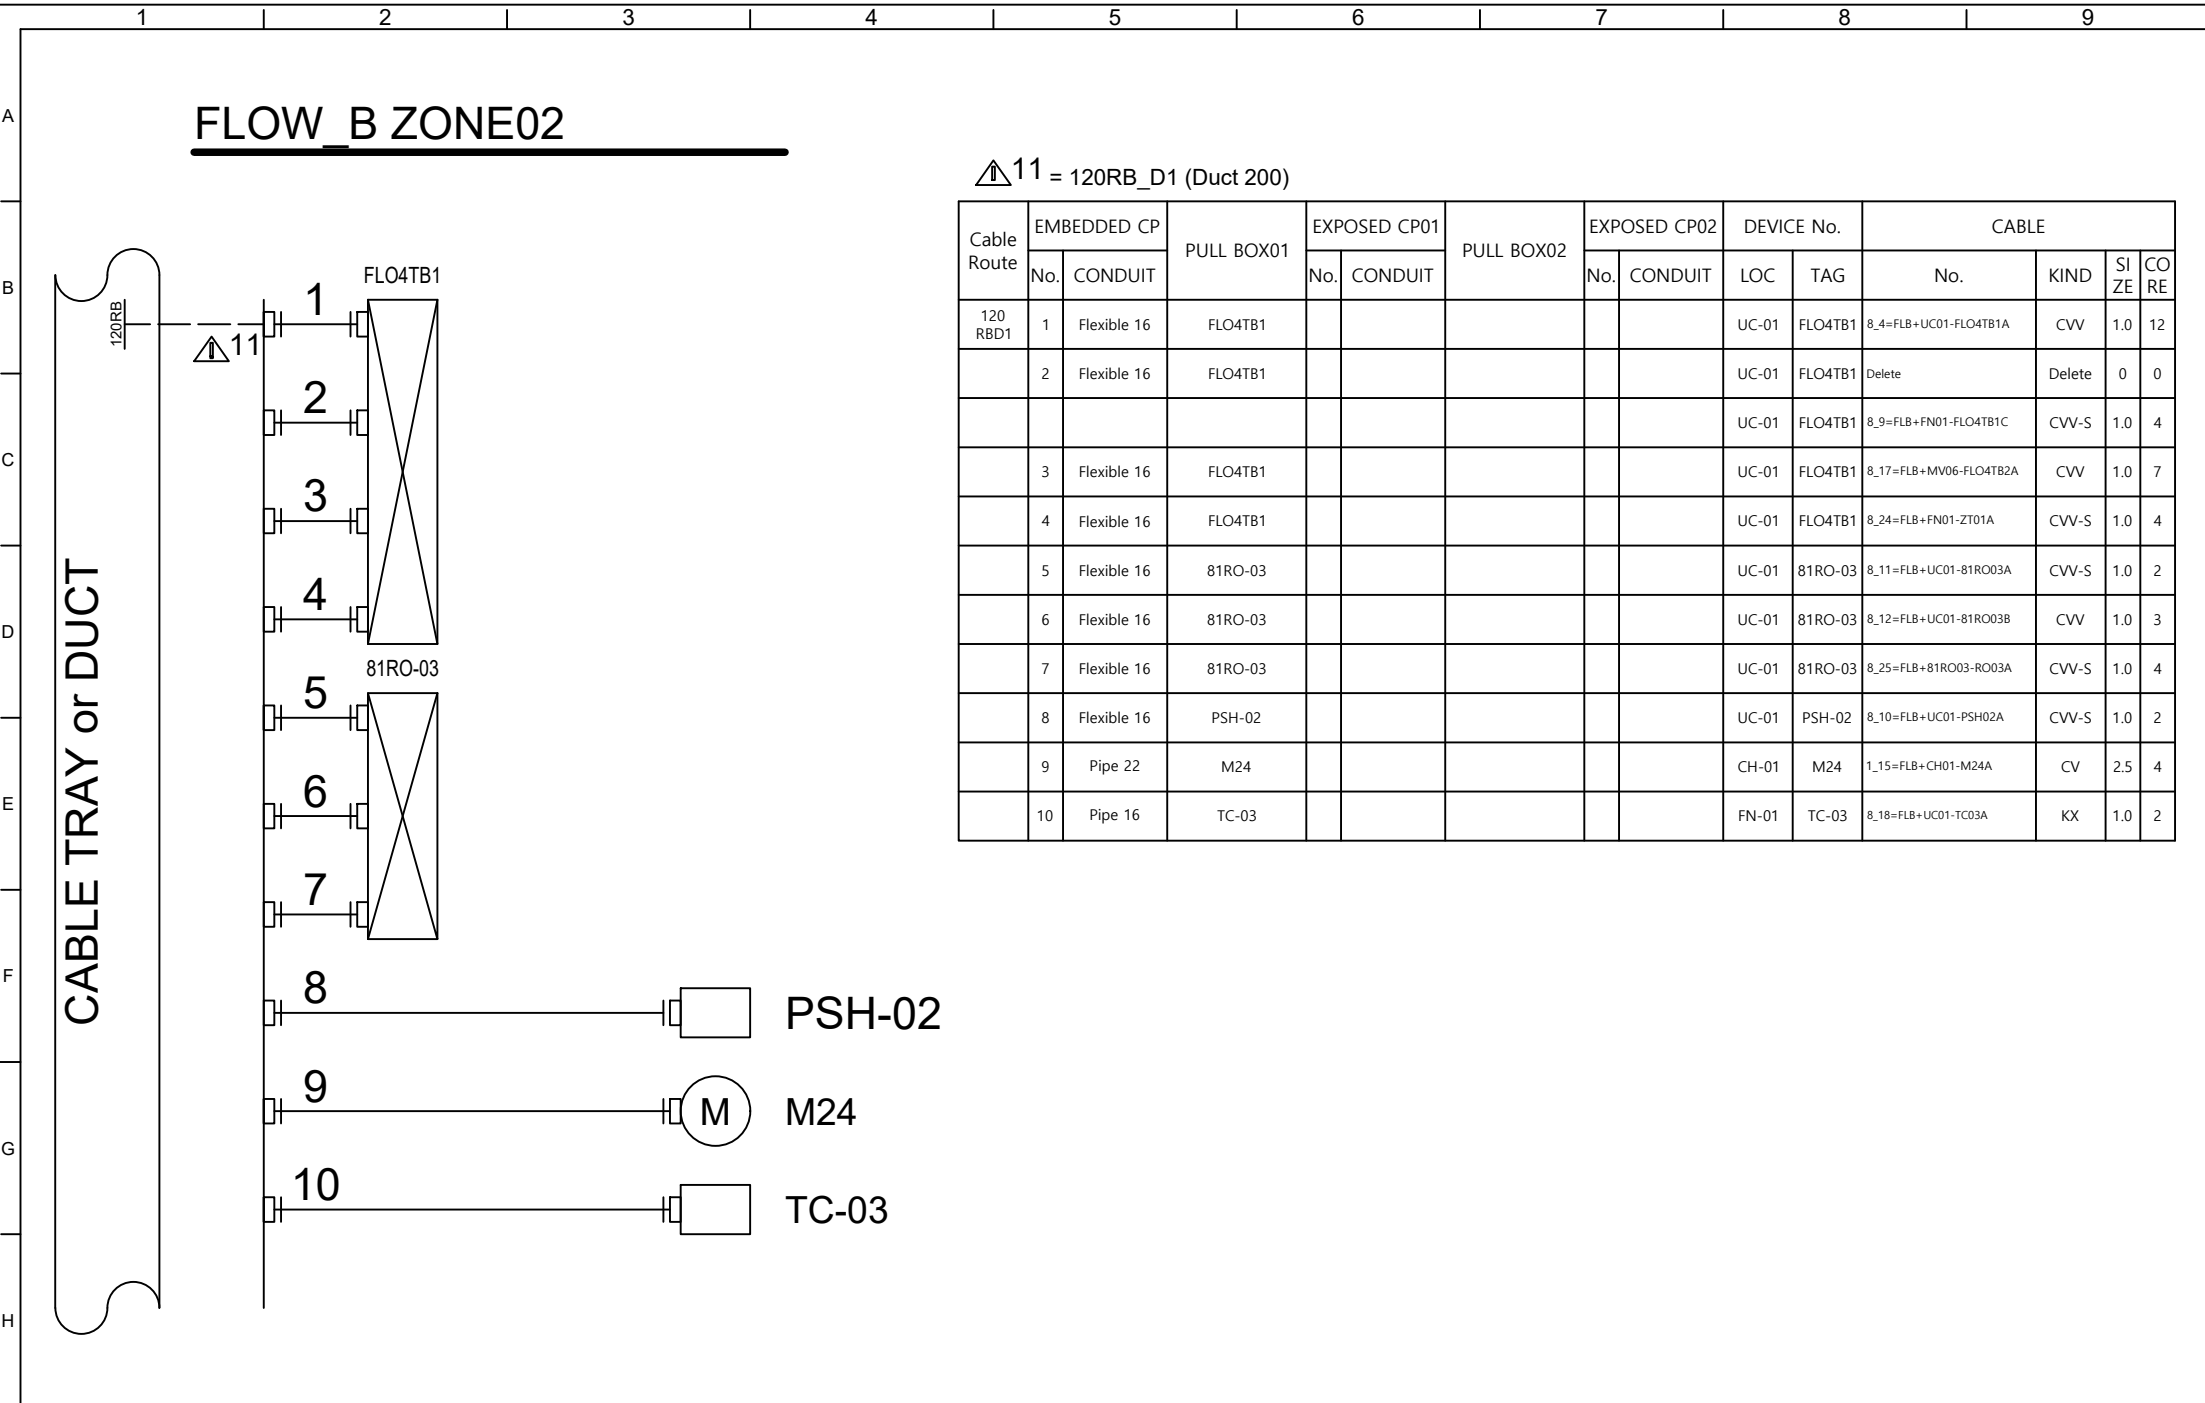

△11 = 120RB_D1 (Duct 200)

Cable Route	EMBEDDED CP		PULL BOX01	EXPOSED CP01		PULL BOX02	EXPOSED CP02		DEVICE No.		CABLE			
	No.	CONDUIT		No.	CONDUIT		No.	CONDUIT	LOC	TAG	No.	KIND	SIZE	CORE
120 RBD1	1	Flexible 16	FLO4TB1						UC-01	FLO4TB1	8_4=FLB+UC01-FLO4TB1A	CVW	1.0	12
	2	Flexible 16	FLO4TB1						UC-01	FLO4TB1	Delete	Delete	0	0
									UC-01	FLO4TB1	8_9=FLB+FN01-FLO4TB1C	CVW-S	1.0	4
	3	Flexible 16	FLO4TB1						UC-01	FLO4TB1	8_17=FLB+MV06-FLO4TB2A	CVW	1.0	7
	4	Flexible 16	FLO4TB1						UC-01	FLO4TB1	8_24=FLB+FN01-ZT01A	CVW-S	1.0	4
	5	Flexible 16	81RO-03						UC-01	81RO-03	8_11=FLB+UC01-81RO03A	CVW-S	1.0	2
	6	Flexible 16	81RO-03						UC-01	81RO-03	8_12=FLB+UC01-81RO03B	CVW	1.0	3
	7	Flexible 16	81RO-03						UC-01	81RO-03	8_25=FLB+81RO03-RO03A	CVW-S	1.0	4
	8	Flexible 16	PSH-02						UC-01	PSH-02	8_10=FLB+UC01-PSH02A	CVW-S	1.0	2
	9	Pipe 22	M24						CH-01	M24	1_15=FLB+CH01-M24A	CV	2.5	4
	10	Pipe 16	TC-03						FN-01	TC-03	8_18=FLB+UC01-TC03A	KX	1.0	2

CUSTOMER SEJIN METAL Ulsan Plant, HeadQuarters CO.,LTD.	5			TITLE Can-Decoating Equipment			PART DESCRIPTION FLOW B ROUTE CONDUIT PIPING (2)	INS CODE	SECTION CONDUIT	SUB-SECTION FLOWB	D-PAGE 15
	4							LOC CODE	DWG No.	TORAL-PAGE	
	3								CANDC-CONS-E015-032	32/64	
SUPPLIER youngone FA FA system creator CO.,LTD.	2				J.W.Lee	J.H.Kim					
	1	24.11.11	first draft design								
	No.	DATE	REVISIONS	TRACED	DESIGNED	CHECKED	APPROVED				

A

B

C

D

E


F

G

H

FLOW_B_ZONE03


CABLE TRAY or DUCT

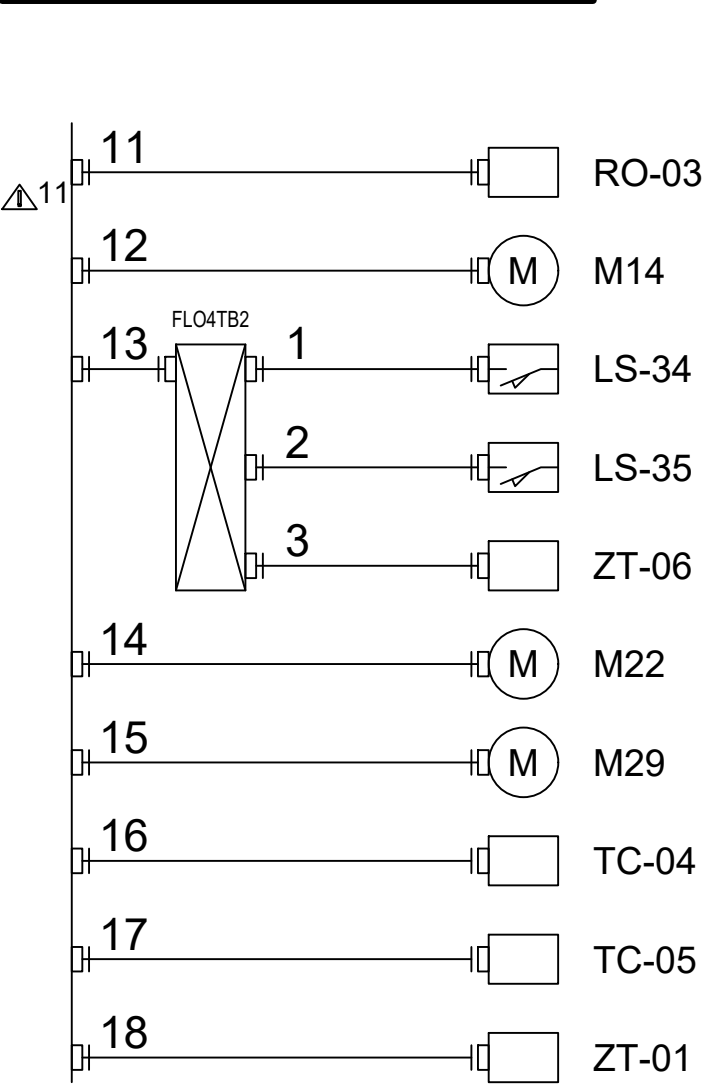

△11 = 120RB_D1 (Duct 200)


Cable Route	EMBEDDED CP		PULL BOX01	EXPOSED CP01		PULL BOX02	EXPOSED CP02		DEVICE No.		CABLE			
	No.	CONDUIT		No.	CONDUIT		No.	CONDUIT	LOC	TAG	No.	KIND	SI ZE	CO RE
	11	Pipe 16	RO-03						FN-01	RO-03	8_25=FLB+81RO03-RO03A	CVW-S	1.0	4
	12	Pipe 16	M14						MV-06	M14	1_14=FLB+MV06-M14A	PVC-S	1.5	4
	13	Pipe 22	FLO4TB2						UC-01	FLO4TB2	8_17=FLB+MV06-FLO4TB2A	CVW	1.0	7
			FLO4TB2						UC-01	FLO4TB2	8_6=FLB+MV06-FLO4TB2A	CVW-S	1.0	4
				1	Flexible 16	LS-34			MV-06	LS-34	8_19=FLB+MV06-LS34A	CVW	1.0	2
				2	Flexible 16	LS-35			MV-06	LS-35	8_20=FLB+MV06-LS35A	CVW	1.0	2
				3	Flexible 16	ZT-06			MV-06	ZT-06	8_21=FLB+MV06-ZT06A	CVW-S	1.0	4
	14	Pipe 42							FN-01	M22	1_12=FLB+FN01-M22A	PVC-S	95	4
	15	Pipe 16							FN-01	M29	1_13=FLB+FN01-M29A	CV	1.5	4
	16	Pipe 16	TC-04						FN-01	TC-04	8_22=FLB+FN01-TC04A	CVW-S	1.0	2
	17	Pipe 16	TC-05						FN-01	TC-05	8_23=FLB+FN01-TC05A	CVW-S	1.0	2
	18	Pipe 16	ZT-01						FN-01	ZT-01	8_24=FLB+FN01-ZT01A	CVW-S	1.0	4

EXIT ZONE01

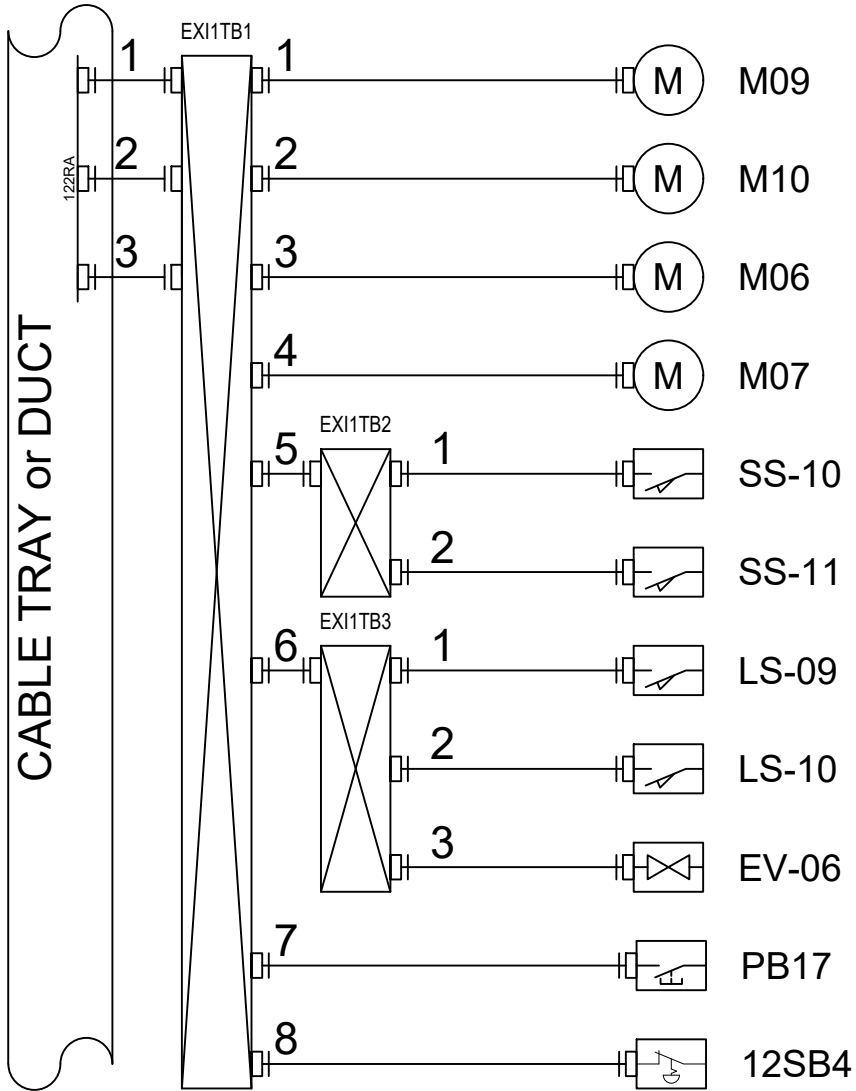

Cable Route	EMBEDDED CP		PULL BOX01	EXPOSED CP01		PULL BOX02	EXPOSED CP02		DEVICE No.		CABLE			
	No.	CONDUIT		No.	CONDUIT		No.	CONDUIT	LOC	TAG	No.	KIND	SI ZE	CO RE
122 RA	1	Pipe42	EXI1TB1	1	Pipe28	M09			MC-04	M09	1_18=EXI+MC04-M09A	CV	16	4
				2	Pipe22	M10			MC-05	M10	1_19=EXI+MC05-M10A	CV	1.5	4
122 RA	2	Pipe42	EXI1TB1	3	Pipe28	M06			VS-01	M06	1_20=EXI+VS01-M06A	CV	6	4
				4	Pipe28	M07			VS-01	M07	1_21=EXI+VS01-M07A	CV	6	4
122 RA	3	Pipe42	EXI1TB1						EXIT	EXI1TB1	9_1=EXI+EXIT-EXI1TB1A	CVW	1.0	25
									EXIT	EXI1TB1	9_2=EXI+EXIT-EXI1TB1B	CVW	1.0	5
				5	Pipe16	EX1TB2			MC-05	EX1TB2	9_3=EXI+MC05-EXI1TB2A	CVW	1.0	7
							1	Pipe16	MC-05	SS-10	9_7=EXI+MC04-SS10A	CVW	1.0	2
							2	Pipe16	MC-05	SS-11	9_8=EXI+MC04-SS11A	CVW	1.0	2
				6	Pipe22	EX1TB3			PV-03	EX1TB3	9_4=EXI+PV03-EXI1TB3A	CVW	1.0	12
									PV-03	EX1TB3	9_5=EXI+PV03-EXI1TB3B	CVW	1.0	3
							1	Pipe16	PV-03	LS-09	9_9=EXI+PV03-LS09A	CVW	1.0	2
							2	Pipe16	PV-03	LS-10	9_10=EXI+PV03-LS10A	CVW	1.0	2
							3	Pipe16	PV-03	EV-06	9_13=EXI+PV03-EV06A	CVW	1.0	3
				7	Pipe16	PB17			PV-03	PB17	9_6=EXI+PV03-PB17A	CVW	1.0	5

CUSTOMER SEJIN METAL Ulsan Plant, HeadQuarters CO.,LTD.		5		TITLE Can-Decoating Equipment			PART DESCRIPTION EXIT ROUTE CONDUIT PIPING (1)	INS CODE	SECTION CONDUIT	SUB-SECTION EXIT	D-PAGE 17	
		4						LOC CODE	DWG No.		TORAL-PAGE 34/64	
		3							CANDC-CONS-E017-034			
SUPPLIER youngone FA FA system creator CO.,LTD.		2			J.W.Lee	J.H.Kim						
		1	24.11.11	first draft design								
		No.	DATE	REVISIONS	TRACED	DESIGNED	CHECKED					APPROVED

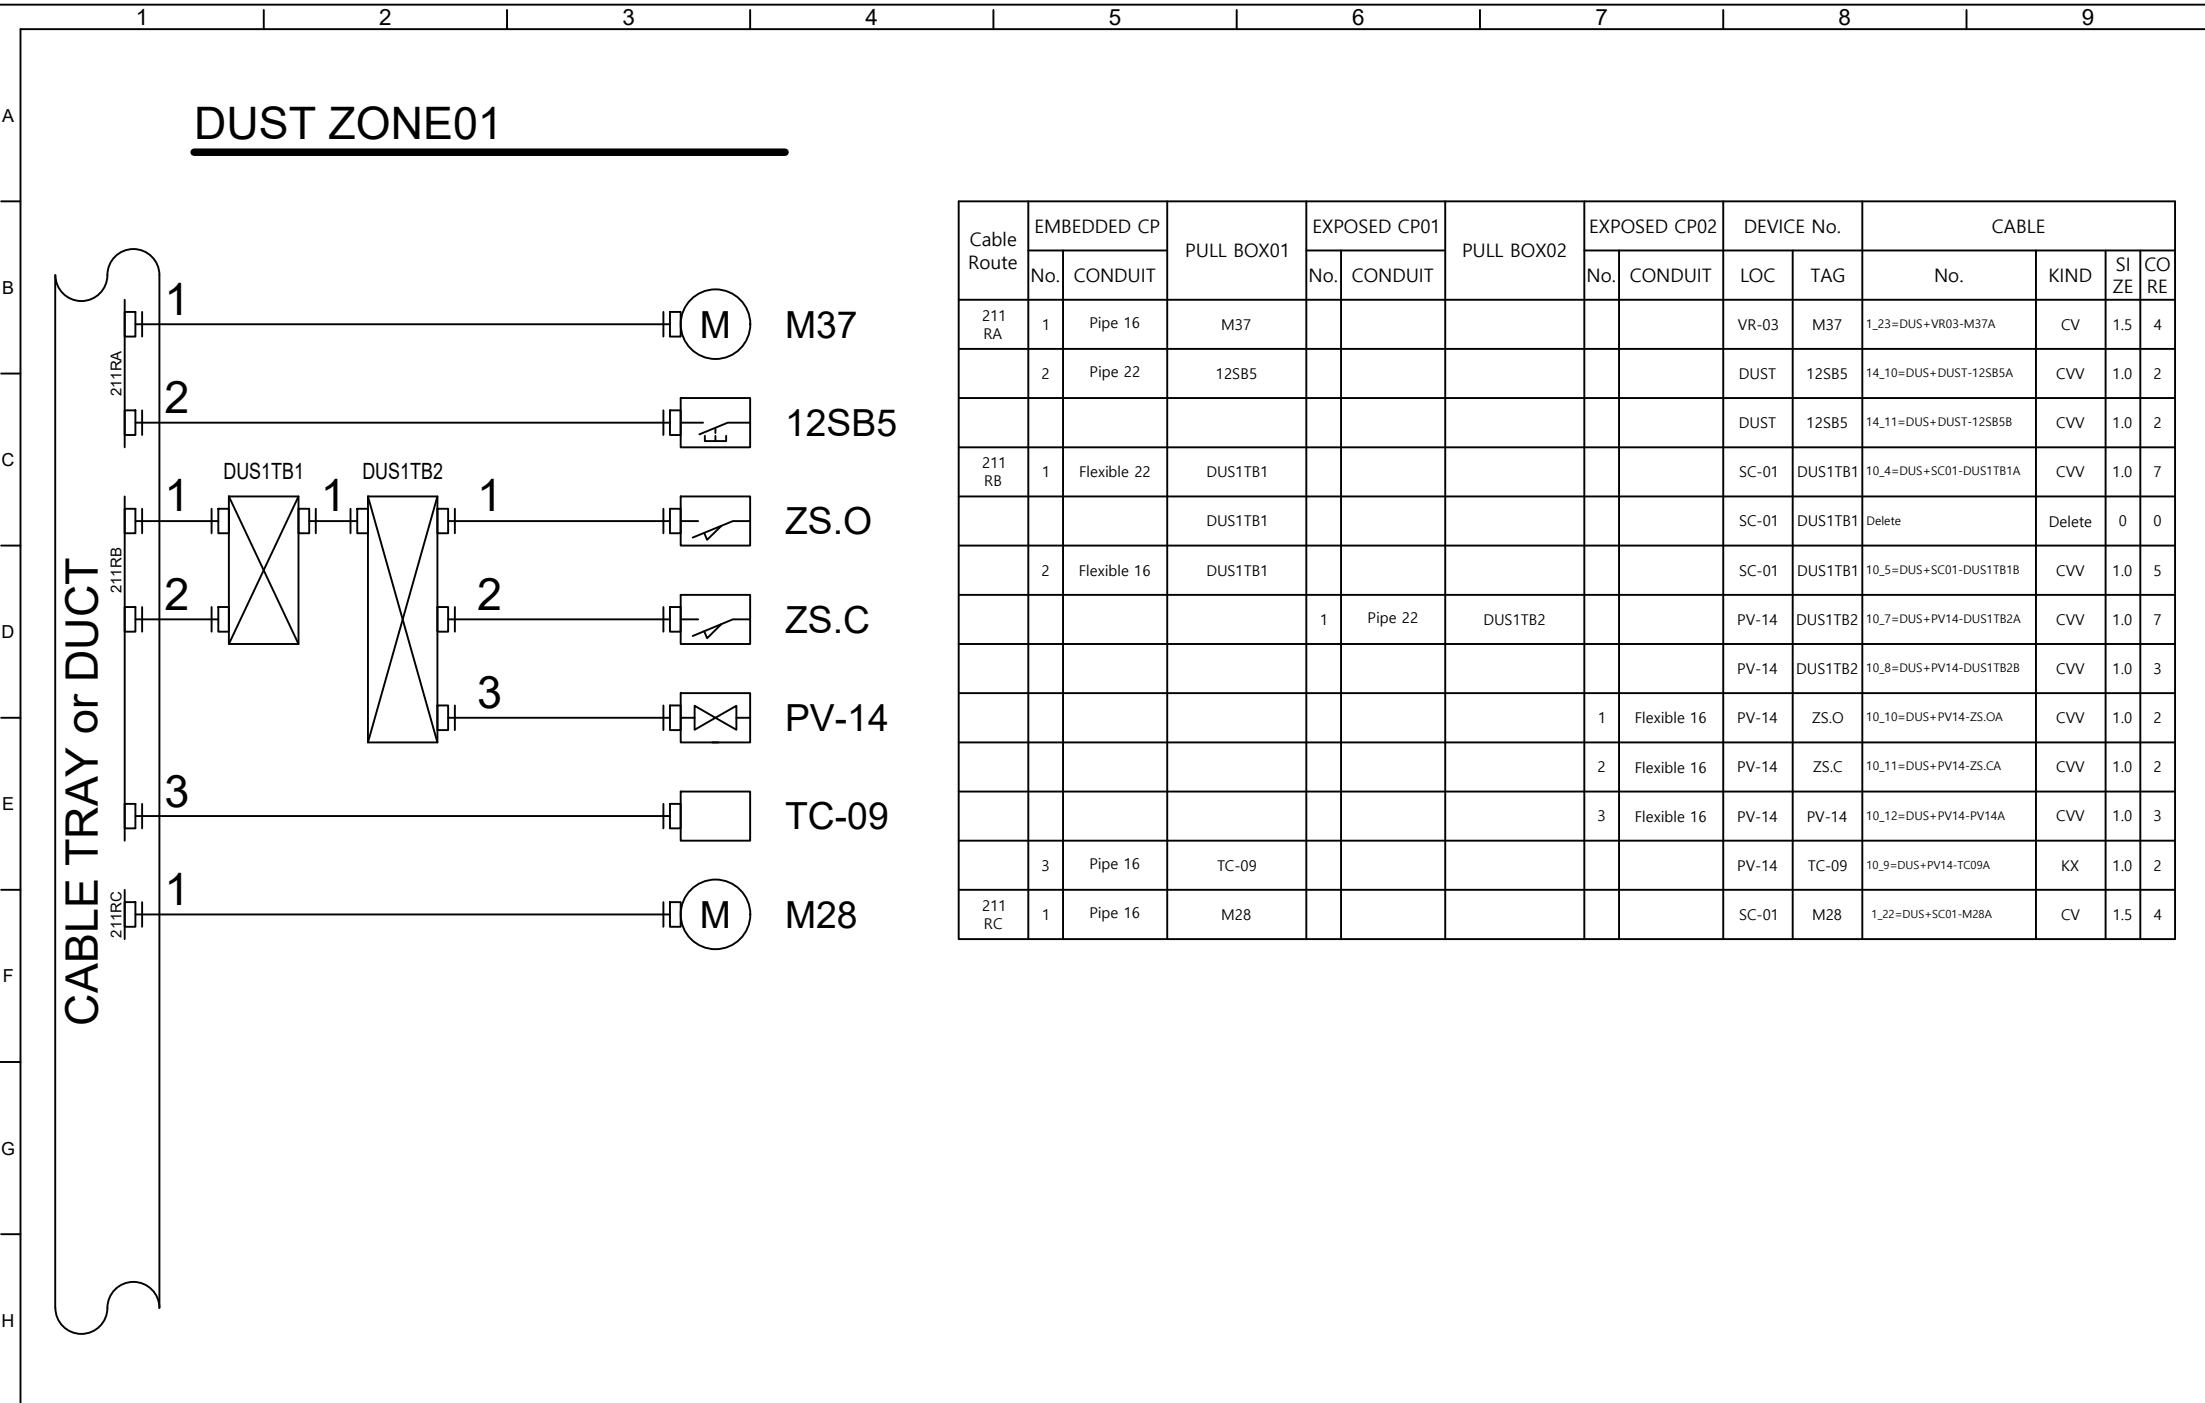

CUSTOMER SEJIN METAL Ulsan Plant, HeadQuarters CO.,LTD.		5		TITLE Can-Decoating Equipment				PART DESCRIPTION DUST ROUTE CONDUIT PIPING (1)	INS CODE	SECTION CONDUIT	SUB-SECTION DUST	D-PAGE 18
		4										
		3										
SUPPLIER youngone FA FA system creator CO.,LTD.		2			J.W.Lee	J.H.Kim		LOC CODE	DWG No. CANDC-CONS-E018-035	TORAL-PAGE 35/64		
		1	24.11.11	first draft design								
		No.	DATE	REVISIONS	TRACED	DESIGNED	CHECKED				APPROVED	

DUST_ZONE02


Cable Route	EMBEDDED CP		PULL BOX01	EXPOSED CP01		PULL BOX02	EXPOSED CP02		DEVICE No.		CABLE			
	No.	CONDUIT		No.	CONDUIT		No.	CONDUIT	LOC	TAG	No.	KIND	SIZ E	COR E
212 LAP1	1	Pipe 36												
212 LB	1	Pipe 28	FN-05					FN-05	M41	1_27=DUS+FN05-M41A	CV	2.5	4	
212 RAD1	1	Pipe 16	LD-01					LD-01	M32	1_24=DUS+LD01-M32A	CV	1.5	4	
	2	Pipe 16	LD-01					LD-01	M33	1_25=DUS+LD01-M33A	CV	1.5	4	
	3	Pipe 16	VR-06					VR-06	M40	1_26=DUS+VR06-M40A	CV	1.5	4	
	4	Pipe 16	ER01					FN-05	ER01	1_28=DUS+FN05-ER01	CV	4	4	
	5	Flexible 22	DUS2TB1					LD-01	DUS2TB1	10_1=DUS+LD01-DUS2TB1A	CWV	1.0	16	
	6	Flexible 22	DUS2TB1					LD-01	DUS2TB1	10_2=DUS+LD01-DUS2TB1B	CWV	1.0	5	
								LD-01	DUS2TB1	10_3=DUS+LD01-DUS2TB1C	CWV	4.0	4	
				1	Flexible 16			LD-01	LD-01	10_16=DUS+LD01-LD01A	CWV	1.0	3	
				2	Flexible 16			LD-01	LT-01	10_13=DUS+LD01-LT01A	CWV	1.0	2	
				3	Flexible 16			LD-01	68FC1	10_14=DUS+LD01-68FC1A	CWV	1.0	2	
				4	Flexible 16			LD-01	PB14	10_15=DUS+LD01-PB14A	CWV	1.0	5	

$\triangle^{12} = \text{FROM } 222\text{RCP1}$

Cable Route	EMBEDDED CP		PULL BOX01	EXPOSED CP01		PULL BOX02	EXPOSED CP02		DEVICE No.		CABLE			
	No.	CONDUIT		No.	CONDUIT		No.	CONDUIT	LOC	TAG	No.	KIND	SI ZE	CO RE
212 LAP1	1	Pipe 36												
212 LB	1	Pipe 28	FN-05						FN-05	M41	1_27=DUS+FN05-M41A	CV	2.5	4
212 RAD1	1	Pipe 16	LD-01						LD-01	M32	1_24=DUS+LD01-M32A	CV	1.5	4
	2	Pipe 16	LD-01						LD-01	M33	1_25=DUS+LD01-M33A	CV	1.5	4
	3	Pipe 16	VR-06						VR-06	M40	1_26=DUS+VR06-M40A	CV	1.5	4
	4	Pipe 16	ER01						FN-05	ER01	1_28=DUS+FN05-ER01	CV	4	4
	5	Flexible 22	DUS2TB1						LD-01	DUS2TB1	10_1=DUS+LD01-DUS2TB1A	CWV	1.0	16
	6	Flexible 22	DUS2TB1						LD-01	DUS2TB1	10_2=DUS+LD01-DUS2TB1B	CWV	1.0	5
									LD-01	DUS2TB1	10_3=DUS+LD01-DUS2TB1C	CWV	4.0	4
				1	Flexible 16				LD-01	LD-01	10_16=DUS+LD01-LD01A	CWV	1.0	3
				2	Flexible 16				LD-01	LT-01	10_13=DUS+LD01-LT01A	CWV	1.0	2
				3	Flexible 16				LD-01	68FC1	10_14=DUS+LD01-68FC1A	CWV	1.0	2
				4	Flexible 16				LD-01	PB14	10_15=DUS+LD01-PB14A	CWV	1.0	5

CUSTOMER		5		TITLE				PART DESCRIPTION DUST ROUTE CONDUIT PIPING (2)	INS CODE	SECTION	SUB-SECTION	D-PAGE
SEJIN METAL Ulsan Plant, HeadQuarters CO.,LTD.		4		Can-Decoating Equipment					CONDUIT	DUST	19	
		3										
SUPPLIER		2			J.W.Lee	J.H.Kim			LOC CODE	DWG No.	TORAL-PAGE	
youngone FA FA system creator CO.,LTD.		1	24.11.11	first draft design				CANDC-CONS-E019-036	36/64			
		No.	DATE	REVISIONS			TRACED			DESIGNED	CHECKED	APPROVED

DUST ZONE03

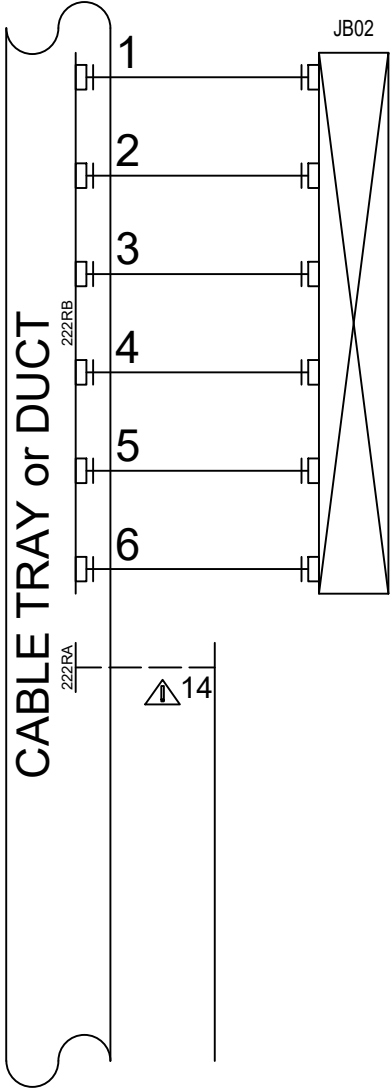

$\triangle^{14} = 222\text{RA_D1 (Duct 200)}$

Cable Route	EMBEDDED CP		PULL BOX01	EXPOSED CP01		PULL BOX02	EXPOSED CP02		DEVICE No.		CABLE			
	No.	CONDUIT		No.	CONDUIT		No.	CONDUIT	LOC	TAG	No.	KIND	SI ZE	CO RE
222 RB	1	Flexible 16	JB02						BF-02	JB02	10_16=DUS+BF02-JB02A	CVW	4	4
	2	Flexible 22	JB02						BF-02	JB02	10_17=DUS+BF02-JB02B	PROFINET		
									BF-02	JB02	10_18=DUS+BF01-JB01B	PROFINET		
	3	Flexible 22	JB02						BF-02	JB02	10_19=DUS+BF02-JB02TB1A	CVW	1.0	25
	4	Flexible 22	JB02						BF-02	JB02	10_20=DUS+BF02-JB02TB2A	CVW	1.0	25
	5	Flexible 22	JB02						BF-02	JB02	10_21=DUS+BF02-JB02TB3A	CVW	1.0	25
	6	Flexible 22	JB02						BF-02	JB02	10_22=DUS+BF02-JB02TB4A	CVW	1.0	25

CUSTOMER	5			TITLE				PART DESCRIPTION	INS CODE	SECTION	SUB-SECTION	D-PAGE
SEJIN METAL	Ulsan Plant, HeadQuarters CO.,LTD.	4		Can-Decoating				DUST ROUTE		CONDUIT	DUST	20
		3		Equipment				CONDUIT PIPING (3)				
SUPPLIER		2			J.W.Lee	J.H.Kim			LOC CODE	DWG No.		TORAL-PAGE
youngone FA	FA system creator CO.,LTD.	1	24.11.11 first draft design									
		No.	DATE	REVISIONS	TRACED	DESIGNED	CHECKED	APPROVED		CANDC-CONS-E020-037		37/64

A

B

C

D

E


F

G

H

DUST_ZONE04

CABLE TRAY or DUCT

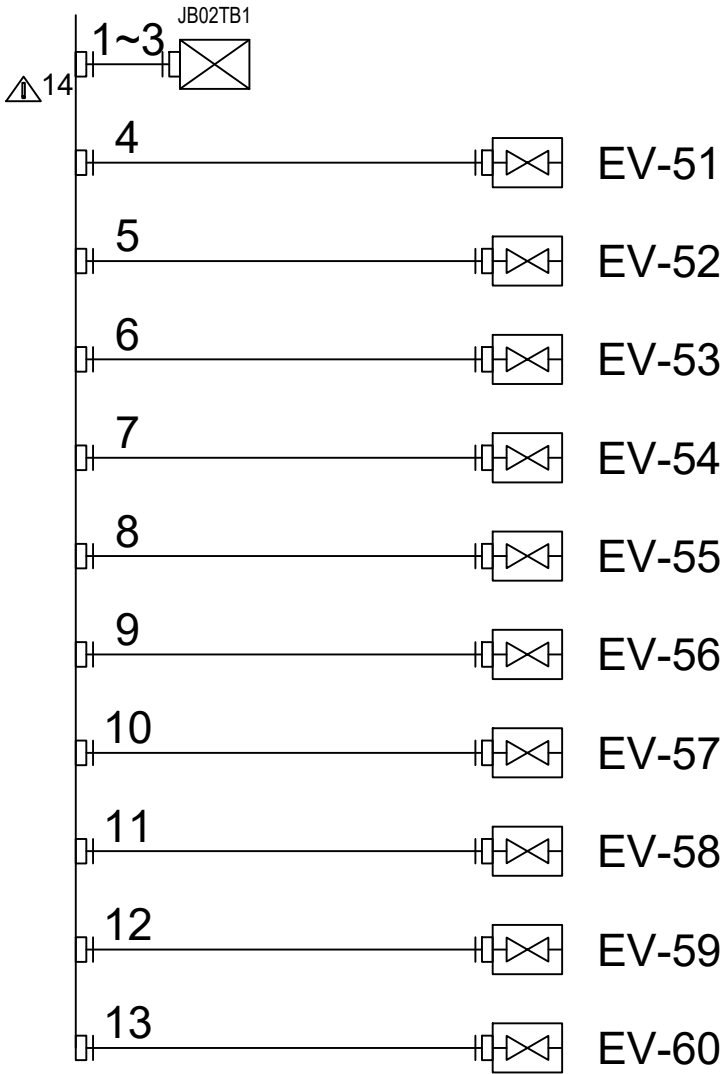

Cable Route	EMBEDDED CP		PULL BOX01	EXPOSED CP01		PULL BOX02	EXPOSED CP02		DEVICE No.		CABLE			
	No.	CONDUIT		No.	CONDUIT		No.	CONDUIT	LOC	TAG	No.	KIND	SIZE	CORE
222 RAD1	1	Flexible 22	JB02TB1						BF-02	JB02TB1	10_19=DUS+BF02-JB02TB1A	CWV	1.0	25
	2	Flexible 36	JB02TB1						BF-02	JB02TB1	11_5=DUS+BF02-EV51A	CWV	1.0	3
									BF-02	JB02TB1	11_6=DUS+BF02-EV52A	CWV	1.0	3
									BF-02	JB02TB1	11_7=DUS+BF02-EV53A	CWV	1.0	3
									BF-02	JB02TB1	11_8=DUS+BF02-EV54A	CWV	1.0	3
									BF-02	JB02TB1	11_9=DUS+BF02-EV55A	CWV	1.0	3
	3	Flexible 36	JB02TB1						BF-02	JB02TB1	11_10=DUS+BF02-EV56A	CWV	1.0	3
									BF-02	JB02TB1	11_11=DUS+BF02-EV57A	CWV	1.0	3
									BF-02	JB02TB1	11_12=DUS+BF02-EV58A	CWV	1.0	3
									BF-02	JB02TB1	11_13=DUS+BF02-EV59A	CWV	1.0	3
									BF-02	JB02TB1	11_14=DUS+BF02-EV60A	CWV	1.0	3
	4	Flexible 16	EV-51						BF-02	EV-51	11_5=DUS+BF02-EV51A	CWV	1.0	3
	5	Flexible 16	EV-52						BF-02	EV-52	11_6=DUS+BF02-EV52A	CWV	1.0	3
	6	Flexible 16	EV-53						BF-02	EV-53	11_7=DUS+BF02-EV53A	CWV	1.0	3
	7	Flexible 16	EV-54						BF-02	EV-54	11_8=DUS+BF02-EV54A	CWV	1.0	3
	8	Flexible 16	EV-55						BF-02	EV-55	11_9=DUS+BF02-EV55A	CWV	1.0	3
	9	Flexible 16	EV-56						BF-02	EV-56	11_10=DUS+BF02-EV56A	CWV	1.0	3
	10	Flexible 16	EV-57						BF-02	EV-57	11_11=DUS+BF02-EV57A	CWV	1.0	3
	11	Flexible 16	EV-58						BF-02	EV-58	11_12=DUS+BF02-EV58A	CWV	1.0	3
	12	Flexible 16	EV-59						BF-02	EV-59	11_13=DUS+BF02-EV59A	CWV	1.0	3
	13	Flexible 16	EV-60						BF-02	EV-60	11_14=DUS+BF02-EV60A	CWV	1.0	3

A

B

C

D

E


F

G

H

DUST_ZONE05

CABLE TRAY or DUCT

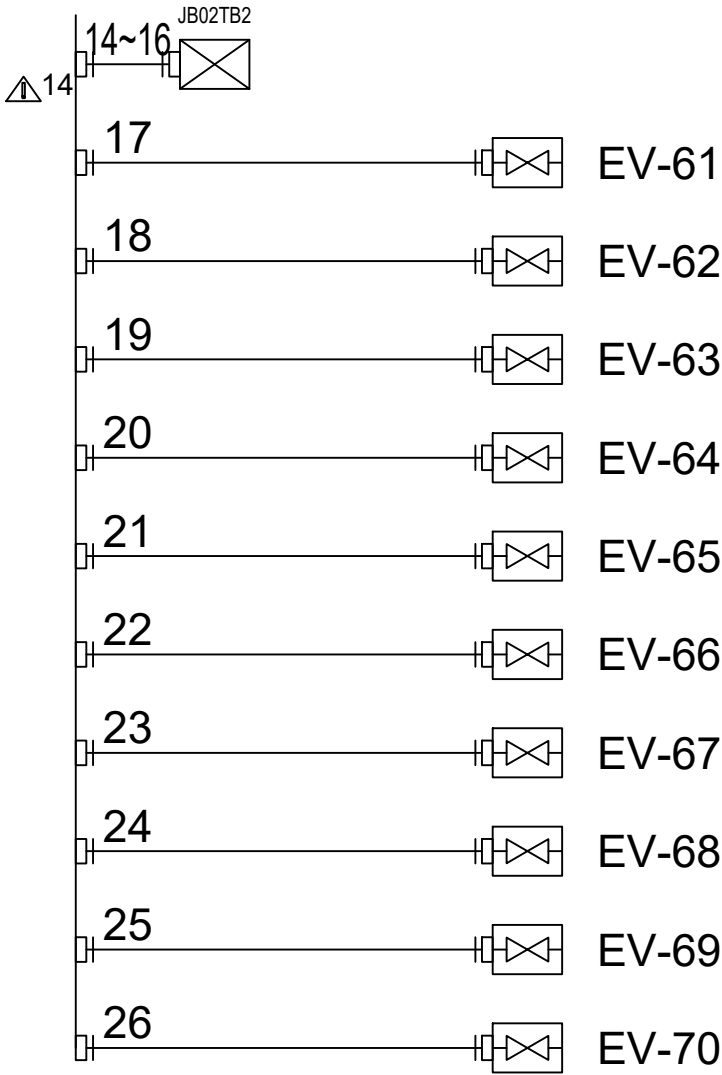

△14 = 222RA_D1 (Duct 200)

Cable Route	EMBEDDED CP		PULL BOX01	EXPOSED CP01		PULL BOX02	EXPOSED CP02		DEVICE No.		CABLE			
	No.	CONDUIT		No.	CONDUIT		No.	CONDUIT	LOC	TAG	No.	KIND	SIZE	CORE
	14	Flexible 22	JB02TB2						BF-02	JB02TB2	10_20=DUS+BF02-JB02TB2A	CWV	1.0	25
	15	Flexible 36	JB02TB2						BF-02	JB02TB2	11_15=DUS+BF02-EV61A	CWV	1.0	3
									BF-02	JB02TB2	11_16=DUS+BF02-EV62A	CWV	1.0	3
									BF-02	JB02TB2	11_17=DUS+BF02-EV63A	CWV	1.0	3
									BF-02	JB02TB2	11_18=DUS+BF02-EV64A	CWV	1.0	3
									BF-02	JB02TB2	11_19=DUS+BF02-EV65A	CWV	1.0	3
	16	Flexible 36	JB02TB2						BF-02	JB02TB2	11_20=DUS+BF02-EV66A	CWV	1.0	3
									BF-02	JB02TB2	11_21=DUS+BF02-EV67A	CWV	1.0	3
									BF-02	JB02TB2	11_22=DUS+BF02-EV68A	CWV	1.0	3
									BF-02	JB02TB2	11_23=DUS+BF02-EV69A	CWV	1.0	3
									BF-02	JB02TB2	11_24=DUS+BF02-EV70A	CWV	1.0	3
	17	Flexible 16	EV-61						BF-02	EV-61	11_15=DUS+BF02-EV61A	CWV	1.0	3
	18	Flexible 16	EV-62						BF-02	EV-62	11_16=DUS+BF02-EV62A	CWV	1.0	3
	19	Flexible 16	EV-63						BF-02	EV-63	11_17=DUS+BF02-EV63A	CWV	1.0	3
	20	Flexible 16	EV-64						BF-02	EV-64	11_18=DUS+BF02-EV64A	CWV	1.0	3
	21	Flexible 16	EV-65						BF-02	EV-65	11_19=DUS+BF02-EV65A	CWV	1.0	3
	22	Flexible 16	EV-66						BF-02	EV-66	11_20=DUS+BF02-EV66A	CWV	1.0	3
	23	Flexible 16	EV-67						BF-02	EV-67	11_21=DUS+BF02-EV67A	CWV	1.0	3
	24	Flexible 16	EV-68						BF-02	EV-68	11_22=DUS+BF02-EV68A	CWV	1.0	3
	25	Flexible 16	EV-69						BF-02	EV-69	11_23=DUS+BF02-EV69A	CWV	1.0	3
	26	Flexible 16	EV-70						BF-02	EV-70	11_24=DUS+BF02-EV70A	CWV	1.0	3

A

B

C

D

E


F

G

H

DUST_ZONE06


CABLE TRAY or DUCT

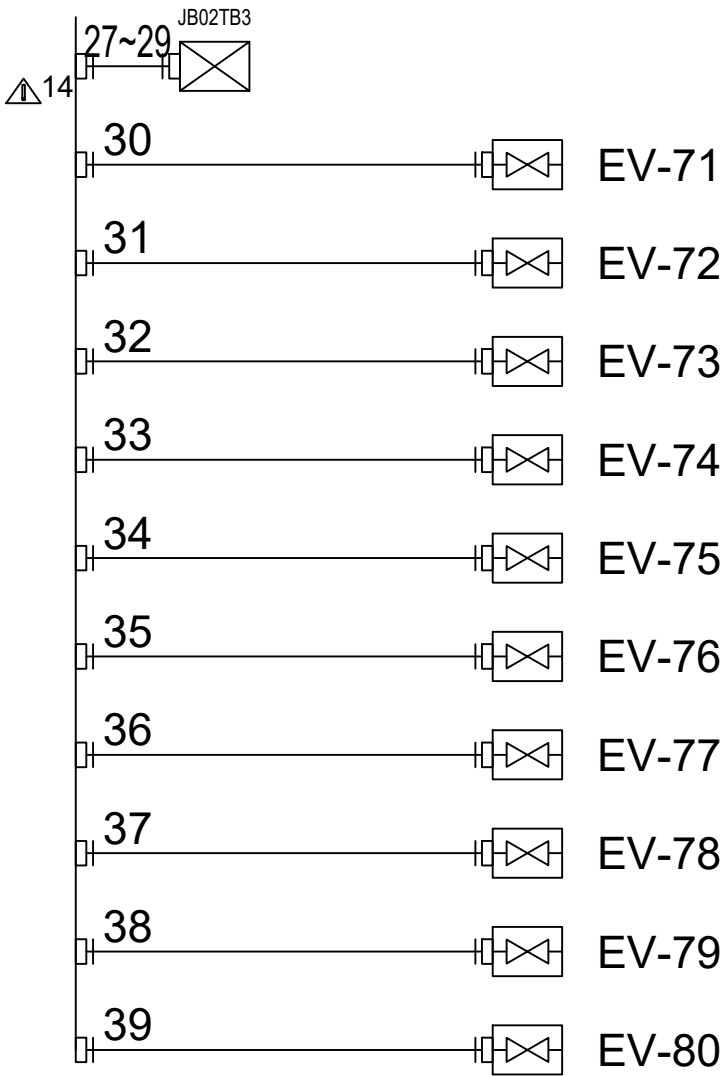


Δ14 = 222RA_D1 (Duct 200)

Cable Route	EMBEDDED CP		PULL BOX01	EXPOSED CP01		PULL BOX02	EXPOSED CP02		DEVICE No.		CABLE			
	No.	CONDUIT		No.	CONDUIT		No.	CONDUIT	LOC	TAG	No.	KIND	SIZE	CORE
	27	Flexible 22	JB02TB3						BF-02	JB02TB3	10_21=DUS+BF02-JB02TB3A	CWV	1.0	25
	28	Flexible 36	JB02TB3						BF-02	JB02TB3	12_1=DUS+BF02-EV71A	CWV	1.0	3
									BF-02	JB02TB3	12_2=DUS+BF02-EV72A	CWV	1.0	3
									BF-02	JB02TB3	12_3=DUS+BF02-EV73A	CWV	1.0	3
									BF-02	JB02TB3	12_4=DUS+BF02-EV74A	CWV	1.0	3
									BF-02	JB02TB3	12_5=DUS+BF02-EV75A	CWV	1.0	3
	29	Flexible 36	JB02TB3						BF-02	JB02TB3	12_6=DUS+BF02-EV76A	CWV	1.0	3
									BF-02	JB02TB3	12_7=DUS+BF02-EV77A	CWV	1.0	3
									BF-02	JB02TB3	12_8=DUS+BF02-EV78A	CWV	1.0	3
									BF-02	JB02TB3	12_9=DUS+BF02-EV79A	CWV	1.0	3
									BF-02	JB02TB3	12_10=DUS+BF02-EV80A	CWV	1.0	3
	30	Flexible 16	EV-71						BF-02	EV-71	12_1=DUS+BF02-EV71A	CWV	1.0	3
	31	Flexible 16	EV-72						BF-02	EV-72	12_2=DUS+BF02-EV72A	CWV	1.0	3
	32	Flexible 16	EV-73						BF-02	EV-73	12_3=DUS+BF02-EV73A	CWV	1.0	3
	33	Flexible 16	EV-74						BF-02	EV-74	12_4=DUS+BF02-EV74A	CWV	1.0	3
	34	Flexible 16	EV-75						BF-02	EV-75	12_5=DUS+BF02-EV75A	CWV	1.0	3
	35	Flexible 16	EV-76						BF-02	EV-76	12_6=DUS+BF02-EV76A	CWV	1.0	3
	36	Flexible 16	EV-77						BF-02	EV-77	12_7=DUS+BF02-EV77A	CWV	1.0	3
	37	Flexible 16	EV-78						BF-02	EV-78	12_8=DUS+BF02-EV78A	CWV	1.0	3
	38	Flexible 16	EV-79						BF-02	EV-79	12_9=DUS+BF02-EV79A	CWV	1.0	3
	39	Flexible 16	EV-80						BF-02	EV-80	12_10=DUS+BF02-EV80A	CWV	1.0	3

CABLE TRAY or DUCT

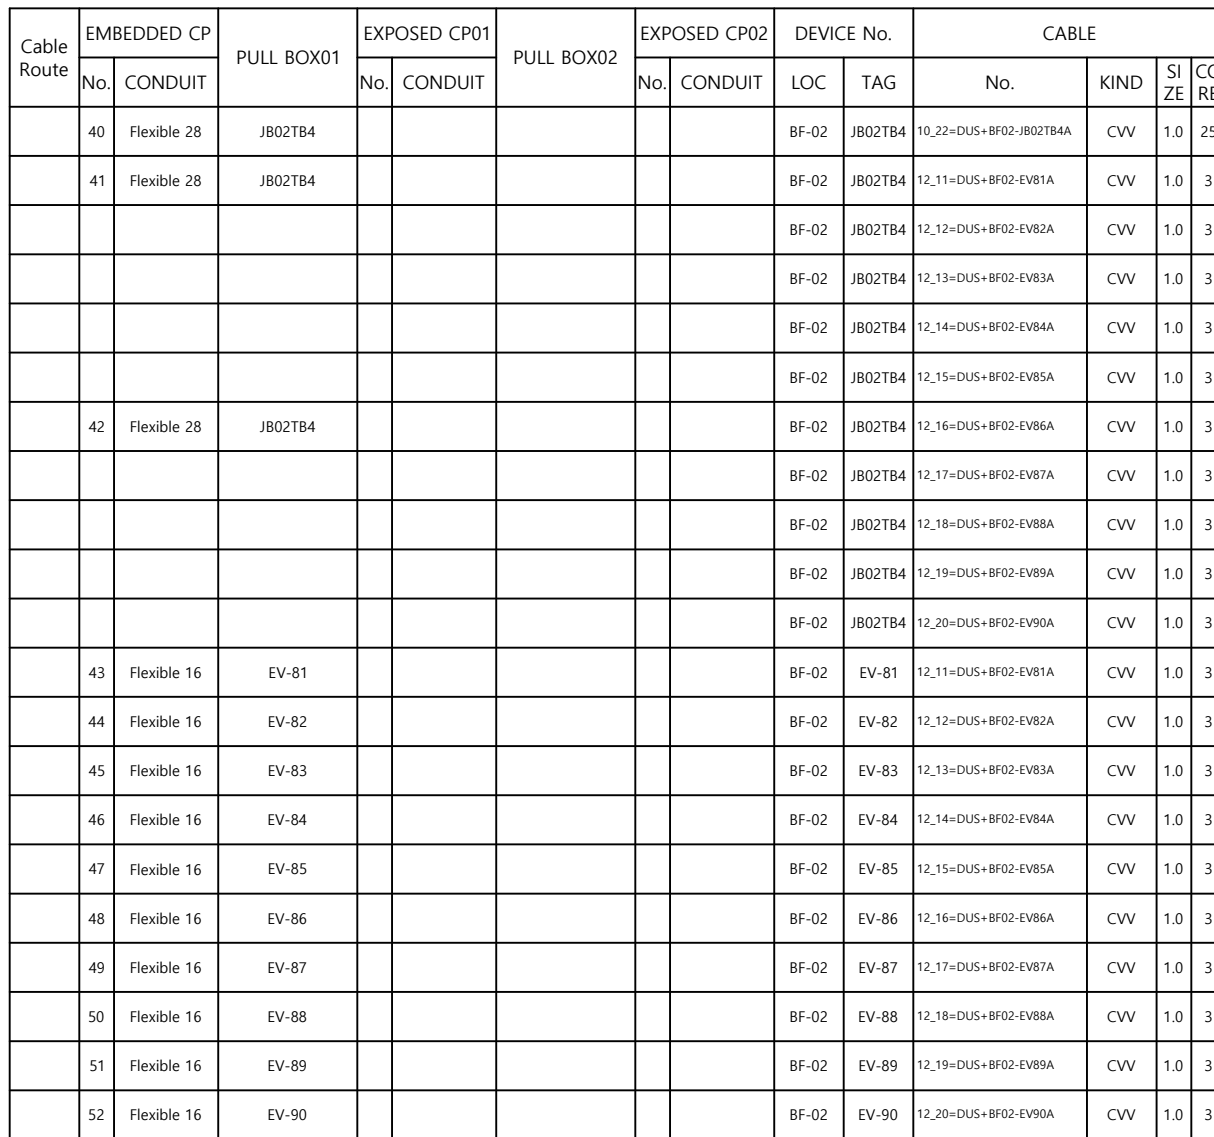


CUSTOMER SEJIN METAL Ulsan Plant, HeadQuarters CO.,LTD.		5		TITLE Can-Decoating Equipment				PART DESCRIPTION DUST ROUTE CONDUIT PIPING (7)	INS CODE	SECTION CONDUIT	SUB-SECTION DUST	D-PAGE 24
		4										
		3										
SUPPLIER youngone FA FA system creator CO.,LTD.		2			J.W.Lee	J.H.Kim			LOC CODE	DWG No. CANDC-CONS-E024-041		TORAL-PAGE 41/64
		1	24.11.11	first draft design								
		No.	DATE	REVISIONS	TRACED	DESIGNED	CHECKED	APPROVED				

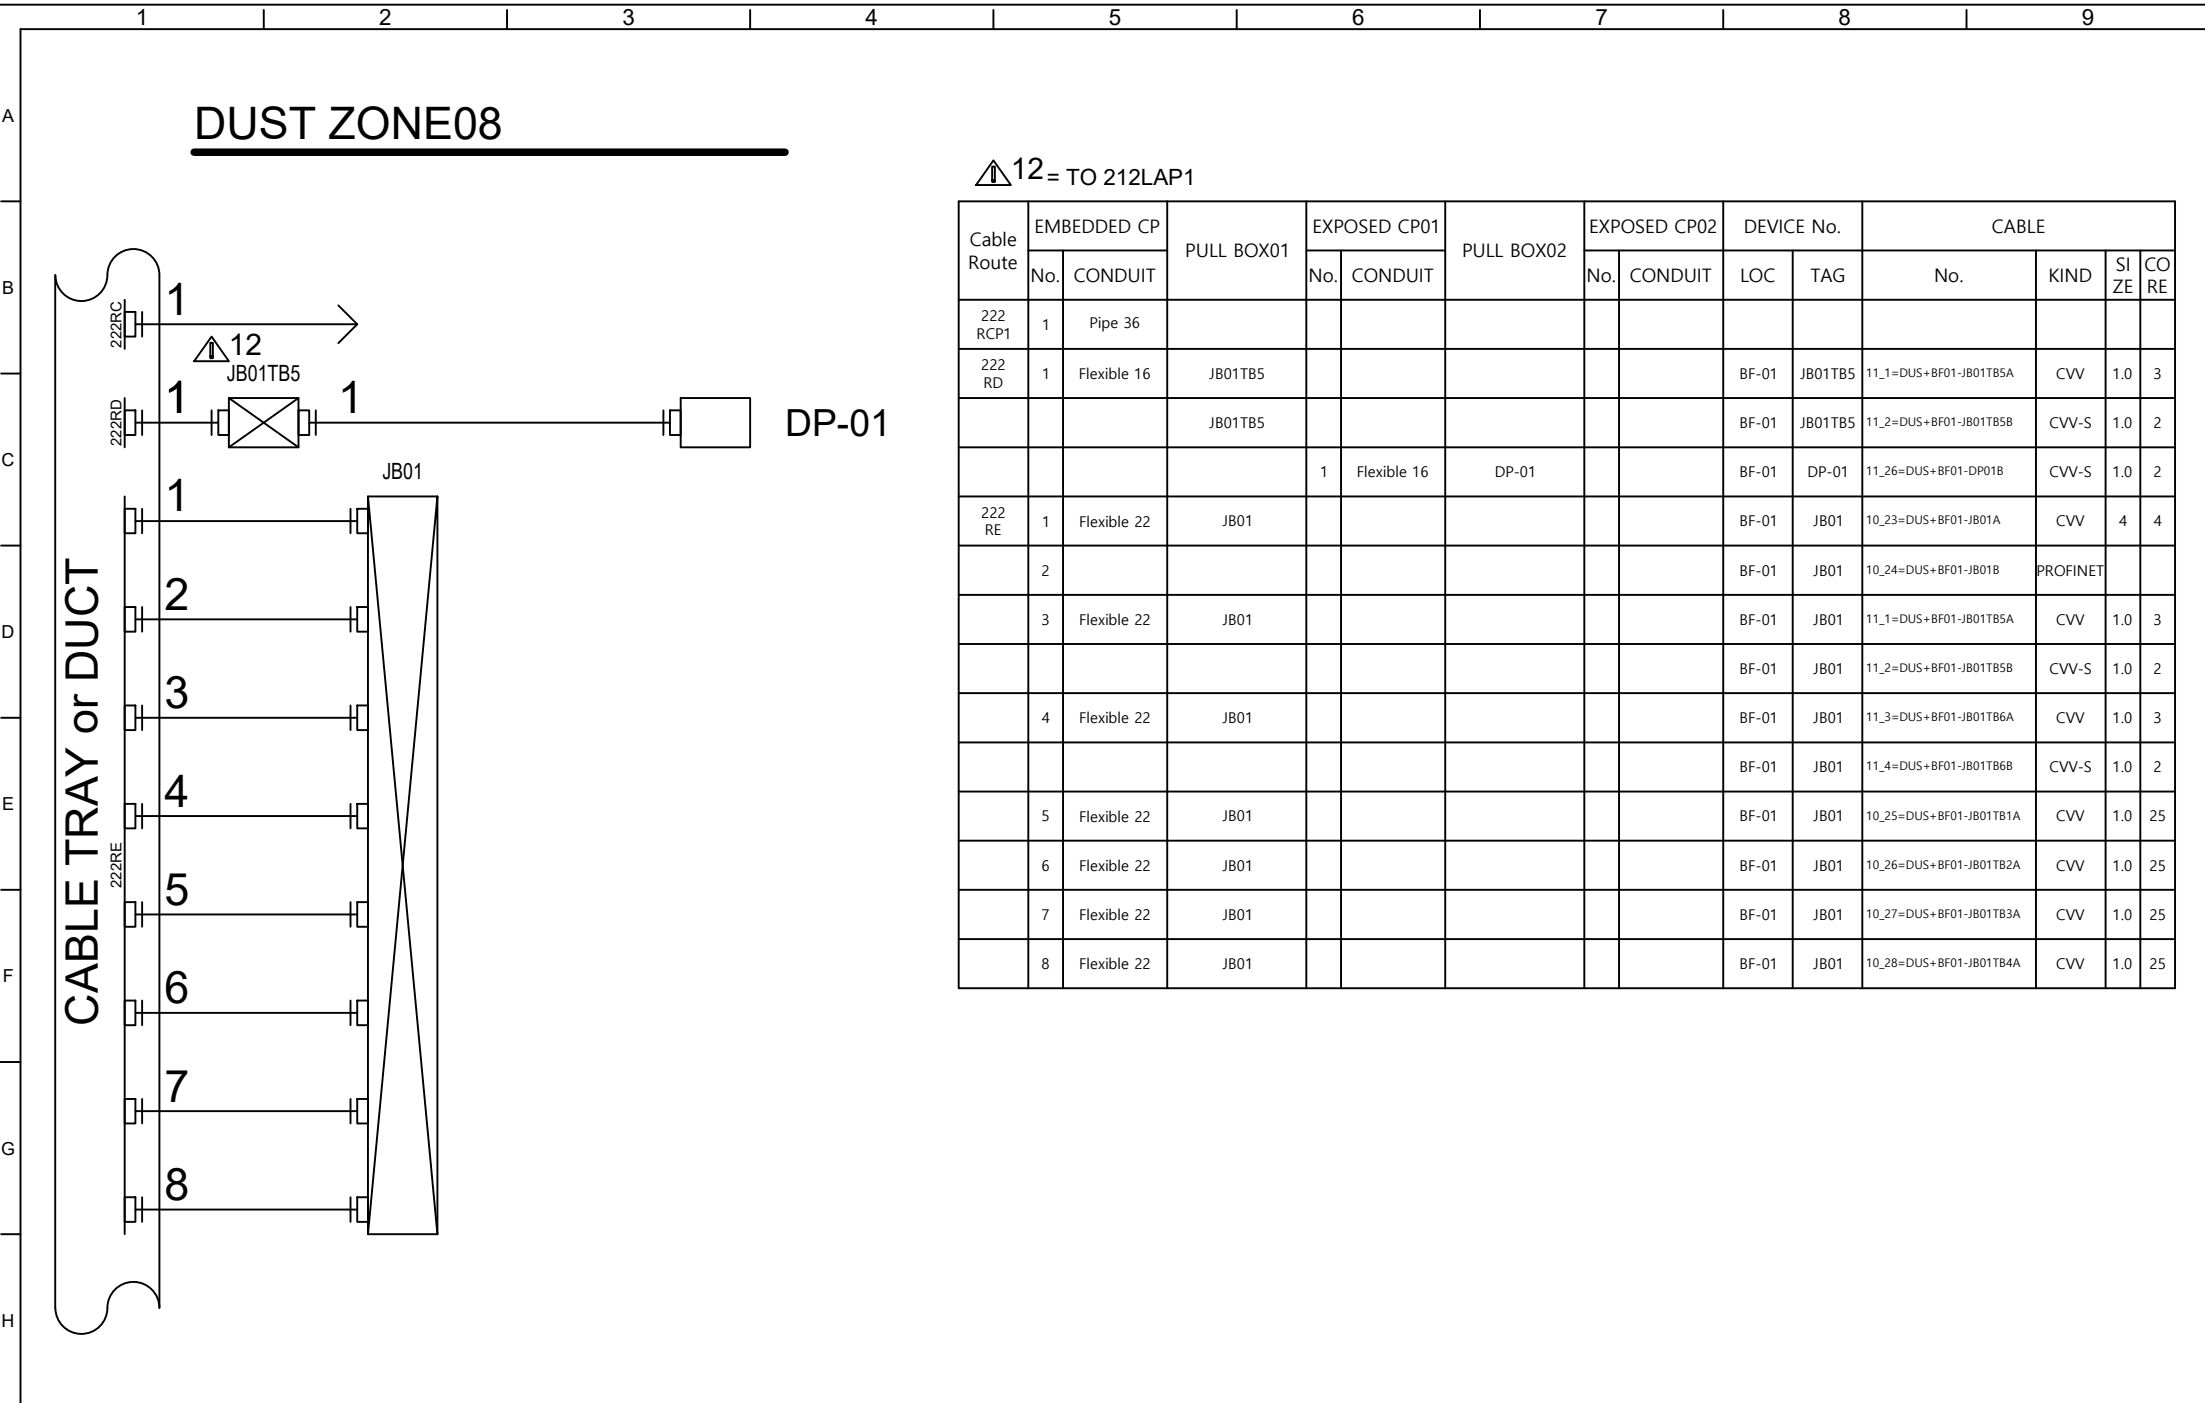

Cable Route	EMBEDDED CP		PULL BOX01	EXPOSED CP01		PULL BOX02	EXPOSED CP02		DEVICE No.		CABLE			
	No.	CONDUIT		No.	CONDUIT		No.	CONDUIT	LOC	TAG	No.	KIND	SI ZE	CO RE
222 RCP1	1	Pipe 36												
222 RD	1	Flexible 16	JB01TB5						BF-01	JB01TB5	11_1=DUS+BF01-JB01TB5A	CVW	1.0	3
			JB01TB5						BF-01	JB01TB5	11_2=DUS+BF01-JB01TB5B	CVW-S	1.0	2
				1	Flexible 16	DP-01			BF-01	DP-01	11_26=DUS+BF01-DP01B	CVW-S	1.0	2
222 RE	1	Flexible 22	JB01						BF-01	JB01	10_23=DUS+BF01-JB01A	CVW	4	4
	2								BF-01	JB01	10_24=DUS+BF01-JB01B	PROFINET		
	3	Flexible 22	JB01						BF-01	JB01	11_1=DUS+BF01-JB01TB5A	CVW	1.0	3
									BF-01	JB01	11_2=DUS+BF01-JB01TB5B	CVW-S	1.0	2
	4	Flexible 22	JB01						BF-01	JB01	11_3=DUS+BF01-JB01TB6A	CVW	1.0	3
									BF-01	JB01	11_4=DUS+BF01-JB01TB6B	CVW-S	1.0	2
	5	Flexible 22	JB01						BF-01	JB01	10_25=DUS+BF01-JB01TB1A	CVW	1.0	25
	6	Flexible 22	JB01						BF-01	JB01	10_26=DUS+BF01-JB01TB2A	CVW	1.0	25
	7	Flexible 22	JB01						BF-01	JB01	10_27=DUS+BF01-JB01TB3A	CVW	1.0	25
	8	Flexible 22	JB01						BF-01	JB01	10_28=DUS+BF01-JB01TB4A	CVW	1.0	25

CUSTOMER SEJIN METAL Ulsan Plant, HeadQuarters CO.,LTD.	5		TITLE Can-Decoating Equipment				PART DESCRIPTION DUST ROUTE CONDUIT PIPING (8)	INS CODE	SECTION CONDUIT	SUB-SECTION DUST	D-PAGE 25
	4							LOC CODE	DWG No.		TORAL-PAGE
	3							CANDC-CONS-E025-042		42/64	
SUPPLIER youngone FA FA system creator CO.,LTD.	2		J.W.Lee J.H.Kim								
	1	24.11.11									
	No.	DATE									REVISIONS

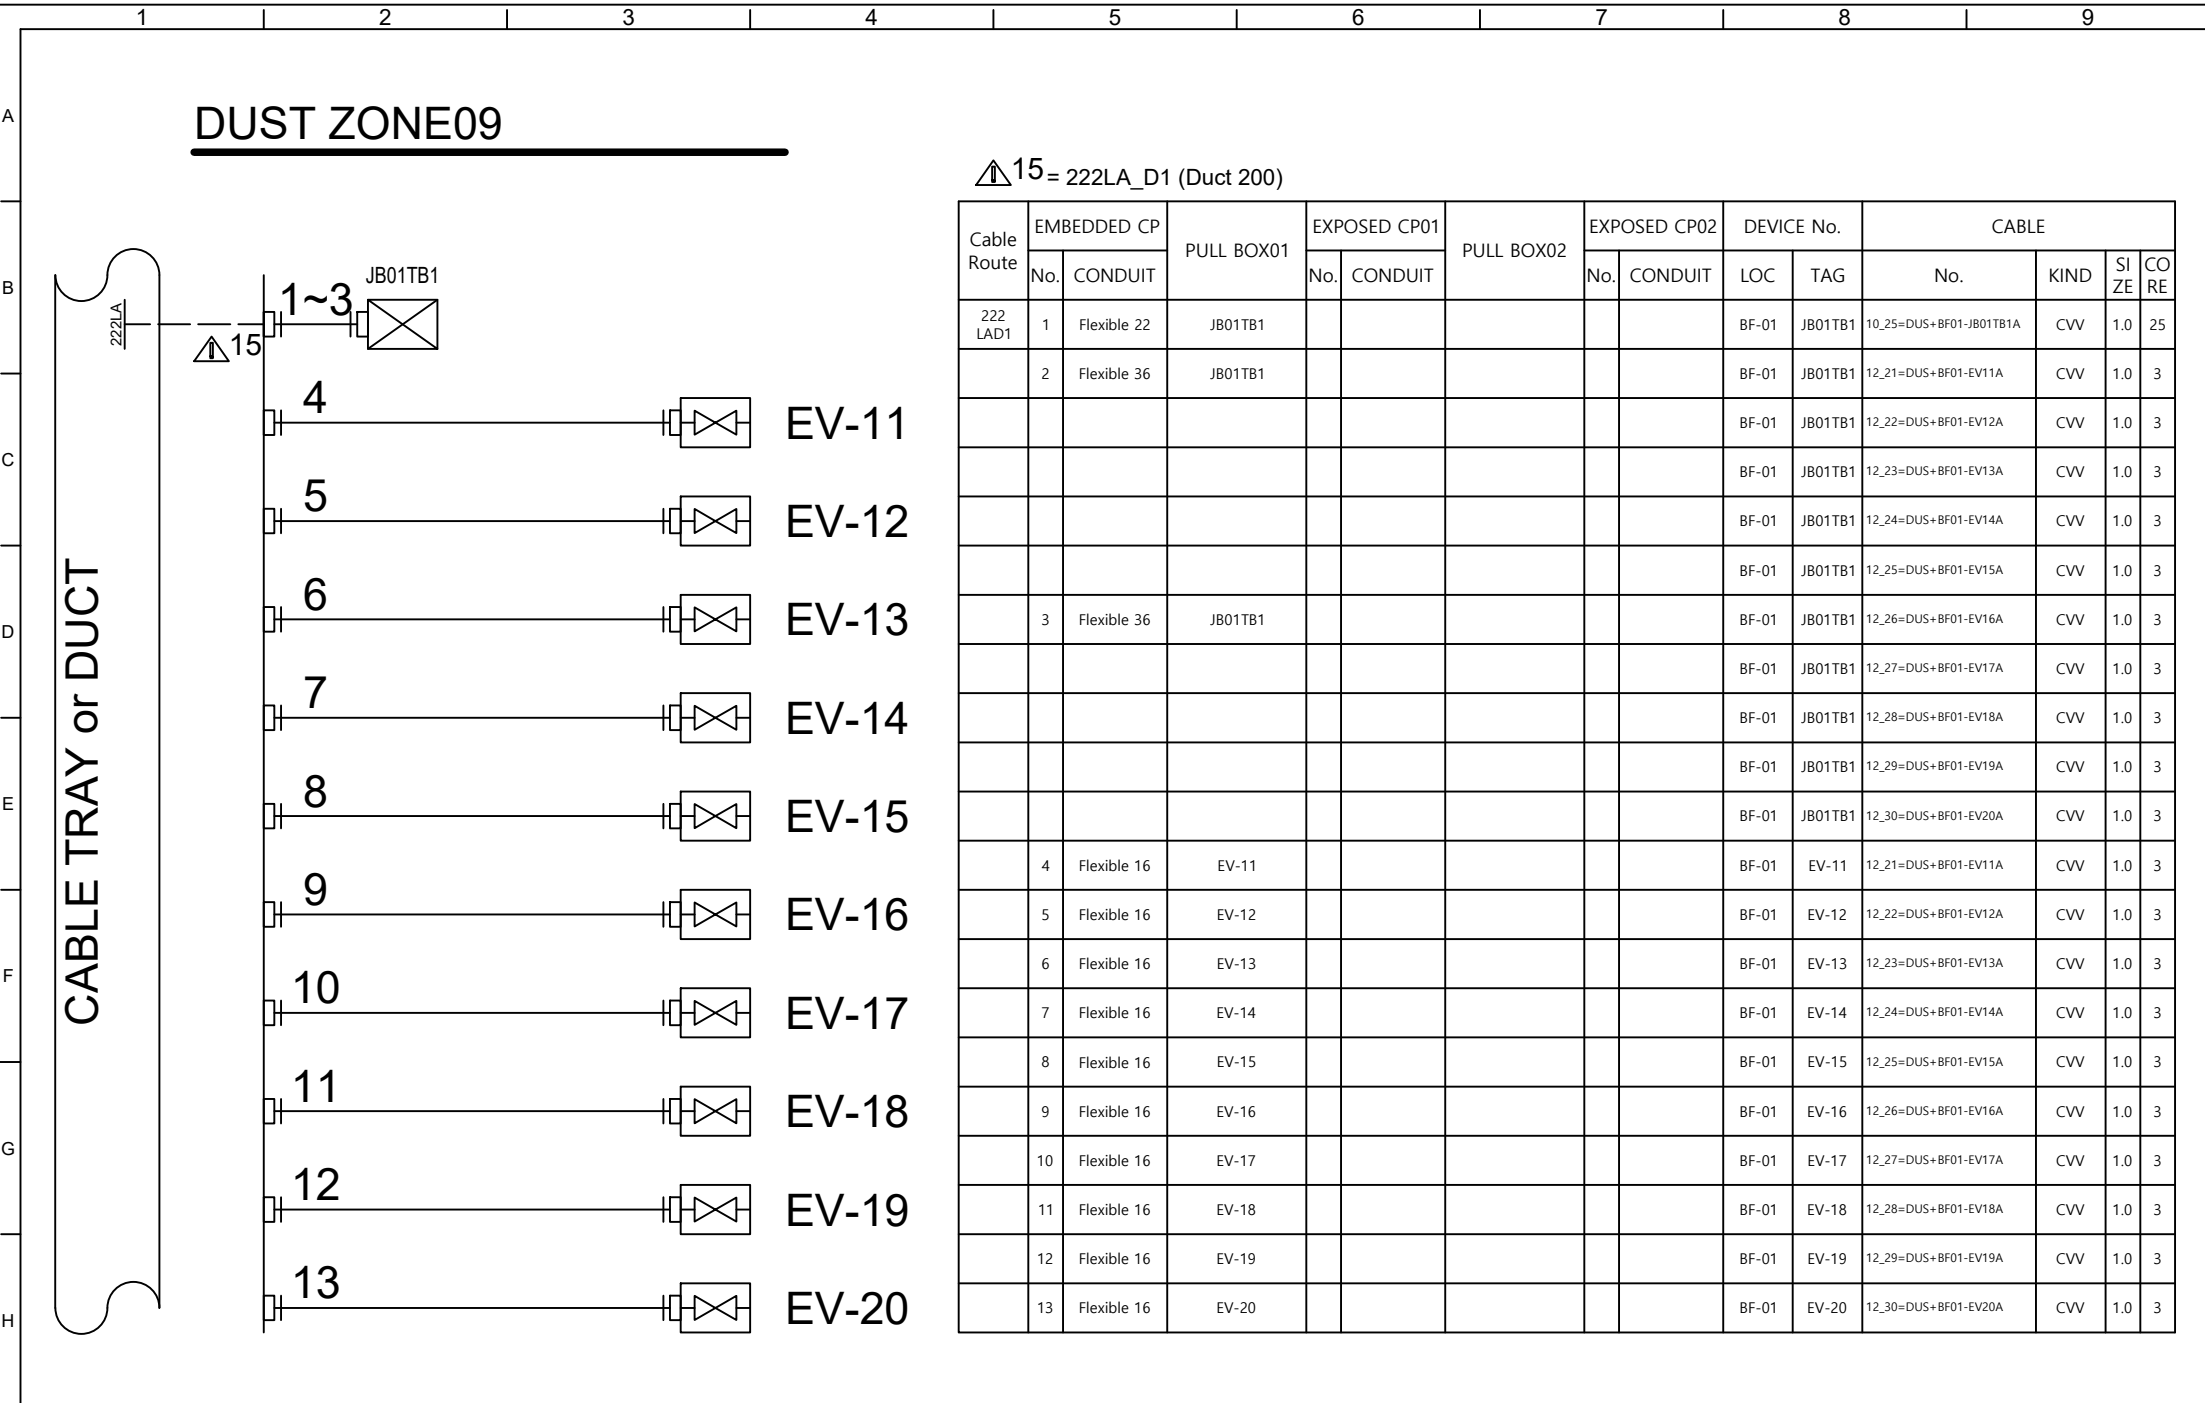

A

B

C

D

E


F

G

H

DUST_ZONE10

CABLE TRAY or DUCT

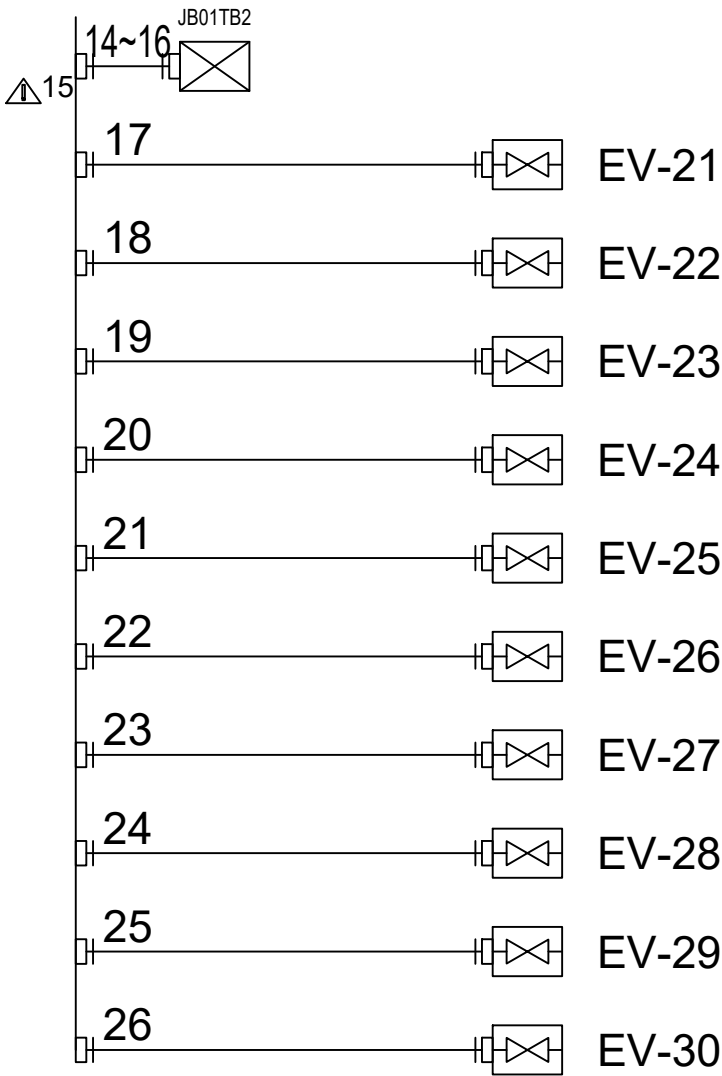

▲15= 222RA_D1 (Duct 200)

Cable Route	EMBEDDED CP		PULL BOX01	EXPOSED CP01		PULL BOX02	EXPOSED CP02		DEVICE No.		CABLE			
	No.	CONDUIT		No.	CONDUIT		No.	CONDUIT	LOC	TAG	No.	KIND	SIZE	CORE
222 LAD1	14	Flexible 22	JB01TB2						BF-01	JB01TB2	10_26=DUS+BF01-JB01TB2A	CWV	1.0	25
	15	Flexible 36	JB01TB2						BF-01	JB01TB2	13_1=DUS+BF01-EV21A	CWV	1.0	3
									BF-01	JB01TB2	13_2=DUS+BF01-EV22A	CWV	1.0	3
									BF-01	JB01TB2	13_3=DUS+BF01-EV23A	CWV	1.0	3
									BF-01	JB01TB2	13_4=DUS+BF01-EV24A	CWV	1.0	3
									BF-01	JB01TB2	13_5=DUS+BF01-EV25A	CWV	1.0	3
	16	Flexible 36	JB01TB2						BF-01	JB01TB2	13_6=DUS+BF01-EV26A	CWV	1.0	3
									BF-01	JB01TB2	13_7=DUS+BF01-EV27A	CWV	1.0	3
									BF-01	JB01TB2	13_8=DUS+BF01-EV28A	CWV	1.0	3
									BF-01	JB01TB2	13_9=DUS+BF01-EV29A	CWV	1.0	3
									BF-01	JB01TB2	13_10=DUS+BF01-EV30A	CWV	1.0	3
	17	Flexible 16	EV-21						BF-01	EV-21	13_1=DUS+BF01-EV21A	CWV	1.0	3
	18	Flexible 16	EV-22						BF-01	EV-22	13_2=DUS+BF01-EV22A	CWV	1.0	3
	19	Flexible 16	EV-23						BF-01	EV-23	13_3=DUS+BF01-EV23A	CWV	1.0	3
	20	Flexible 16	EV-24						BF-01	EV-24	13_4=DUS+BF01-EV24A	CWV	1.0	3
	21	Flexible 16	EV-25						BF-01	EV-25	13_5=DUS+BF01-EV25A	CWV	1.0	3
	22	Flexible 16	EV-26						BF-01	EV-26	13_6=DUS+BF01-EV26A	CWV	1.0	3
	23	Flexible 16	EV-27						BF-01	EV-27	13_7=DUS+BF01-EV27A	CWV	1.0	3
	24	Flexible 16	EV-28						BF-01	EV-28	13_8=DUS+BF01-EV28A	CWV	1.0	3
	25	Flexible 16	EV-29						BF-01	EV-29	13_9=DUS+BF01-EV29A	CWV	1.0	3
	26	Flexible 16	EV-30						BF-01	EV-30	13_10=DUS+BF01-EV30A	CWV	1.0	3

A

B

C

D

E


F

G

H


DUST_ZONE12


CABLE TRAY or DUCT

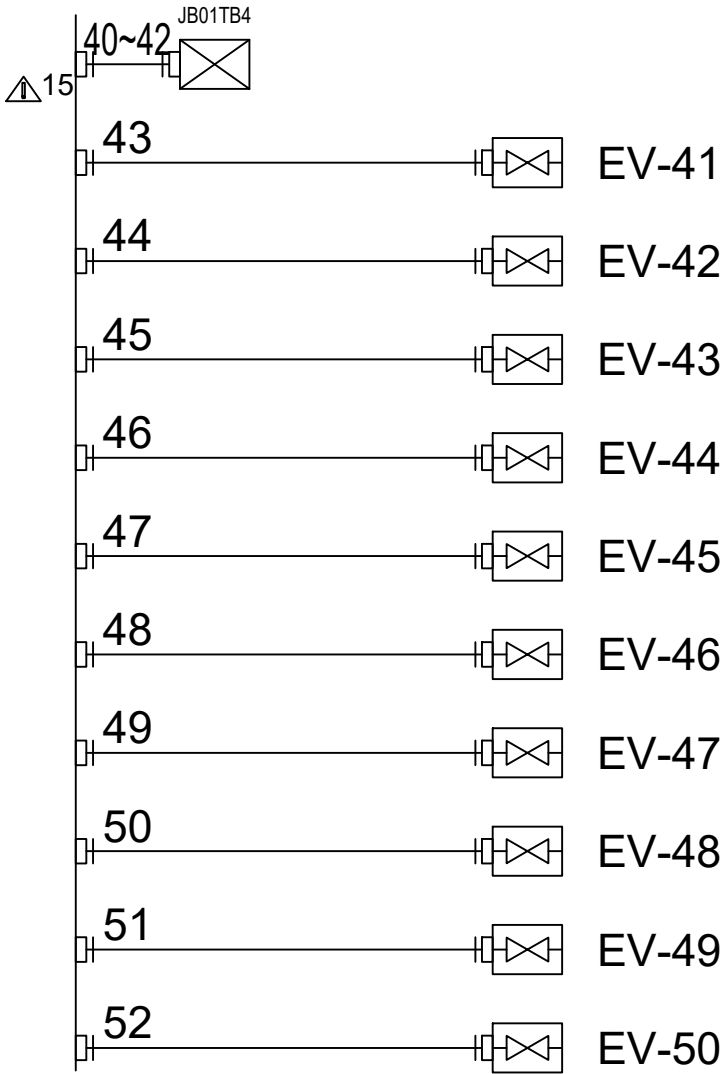


▲15= 222RA_D1 (Duct 200)

Cable Route	EMBEDDED CP		PULL BOX01	EXPOSED CP01		PULL BOX02	EXPOSED CP02		DEVICE No.		CABLE			
	No.	CONDUIT		No.	CONDUIT		No.	CONDUIT	LOC	TAG	No.	KIND	SIZE	CORE
222 LAD1	40	Flexible 22	JB01TB4						BF-01	JB01TB4	10_28=DUS+BF01-JB01TB4A	CWV	1.0	25
	41	Flexible 36	JB01TB4						BF-01	JB01TB4	13_21=DUS+BF01-EV41A	CWV	1.0	3
									BF-01	JB01TB4	13_22=DUS+BF01-EV42A	CWV	1.0	3
									BF-01	JB01TB4	13_23=DUS+BF01-EV43A	CWV	1.0	3
									BF-01	JB01TB4	13_24=DUS+BF01-EV44A	CWV	1.0	3
									BF-01	JB01TB4	13_25=DUS+BF01-EV45A	CWV	1.0	3
	42	Flexible 36	JB01TB4						BF-01	JB01TB4	13_26=DUS+BF01-EV46A	CWV	1.0	3
									BF-01	JB01TB4	13_27=DUS+BF01-EV47A	CWV	1.0	3
									BF-01	JB01TB4	13_28=DUS+BF01-EV48A	CWV	1.0	3
									BF-01	JB01TB4	13_29=DUS+BF01-EV49A	CWV	1.0	3
									BF-01	JB01TB4	13_30=DUS+BF01-EV50A	CWV	1.0	3
	43	Flexible 16	EV-41						BF-01	EV-41	13_21=DUS+BF01-EV41A	CWV	1.0	3
	44	Flexible 16	EV-42						BF-01	EV-42	13_22=DUS+BF01-EV42A	CWV	1.0	3
	45	Flexible 16	EV-43						BF-01	EV-43	13_23=DUS+BF01-EV43A	CWV	1.0	3
	46	Flexible 16	EV-44						BF-01	EV-44	13_24=DUS+BF01-EV44A	CWV	1.0	3
	47	Flexible 16	EV-45						BF-01	EV-45	13_25=DUS+BF01-EV45A	CWV	1.0	3
	48	Flexible 16	EV-46						BF-01	EV-46	13_26=DUS+BF01-EV46A	CWV	1.0	3
	49	Flexible 16	EV-47						BF-01	EV-47	13_27=DUS+BF01-EV47A	CWV	1.0	3
	50	Flexible 16	EV-48						BF-01	EV-48	13_28=DUS+BF01-EV48A	CWV	1.0	3
	51	Flexible 16	EV-49						BF-01	EV-49	13_29=DUS+BF01-EV49A	CWV	1.0	3
	52	Flexible 16	EV-50						BF-01	EV-50	13_30=DUS+BF01-EV50A	CWV	1.0	3

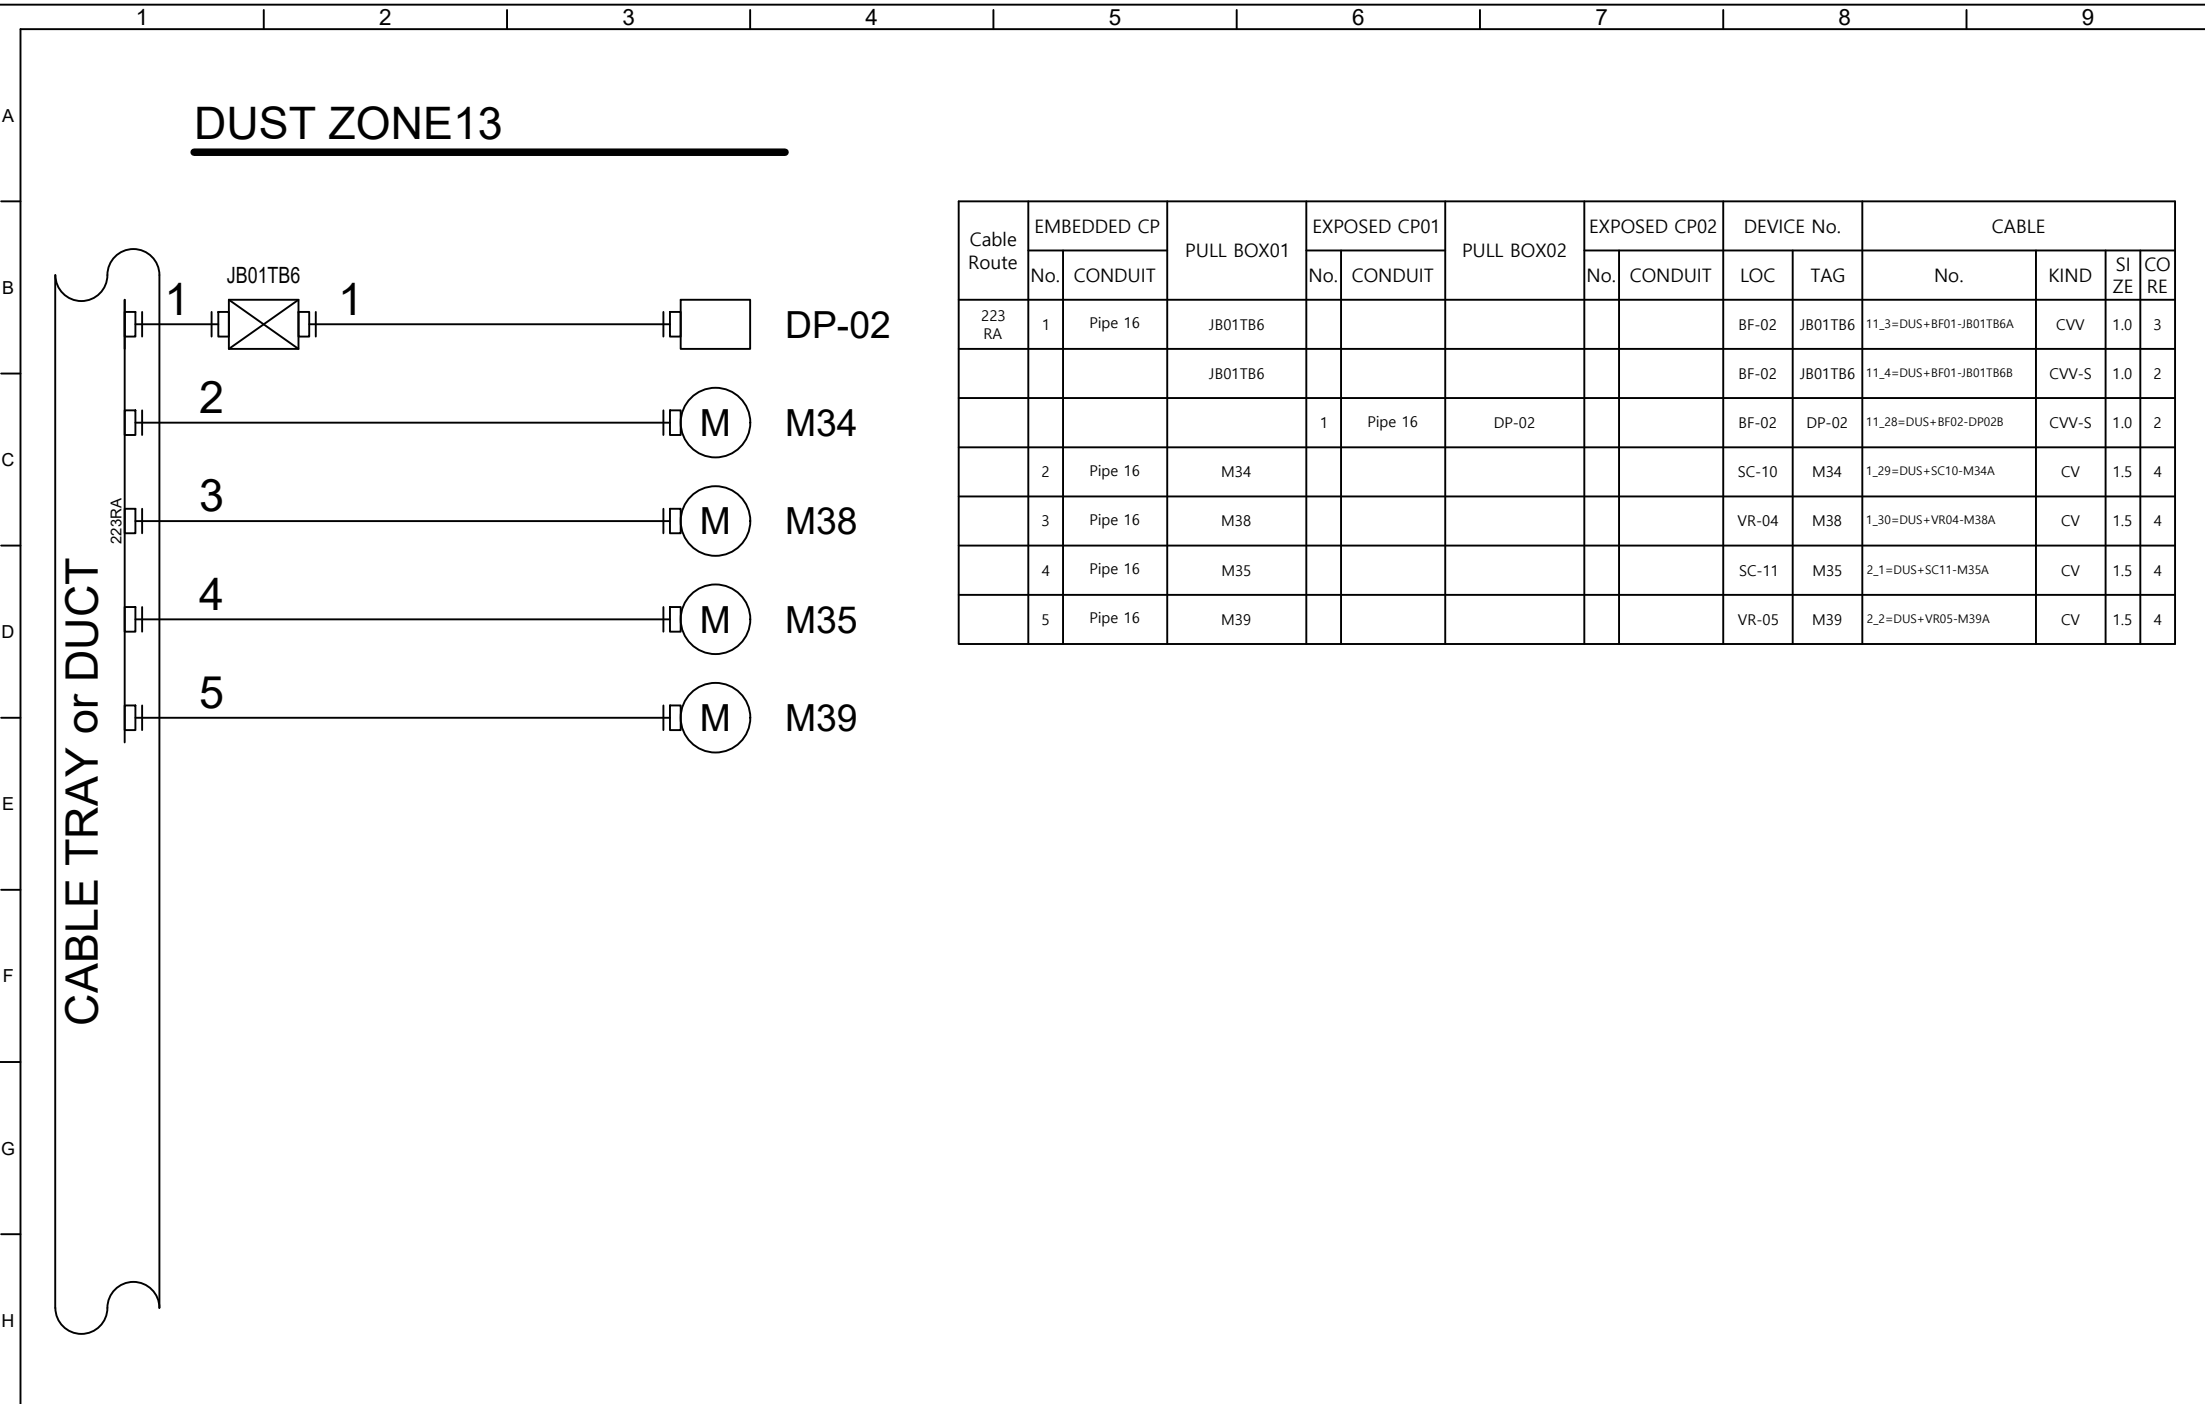

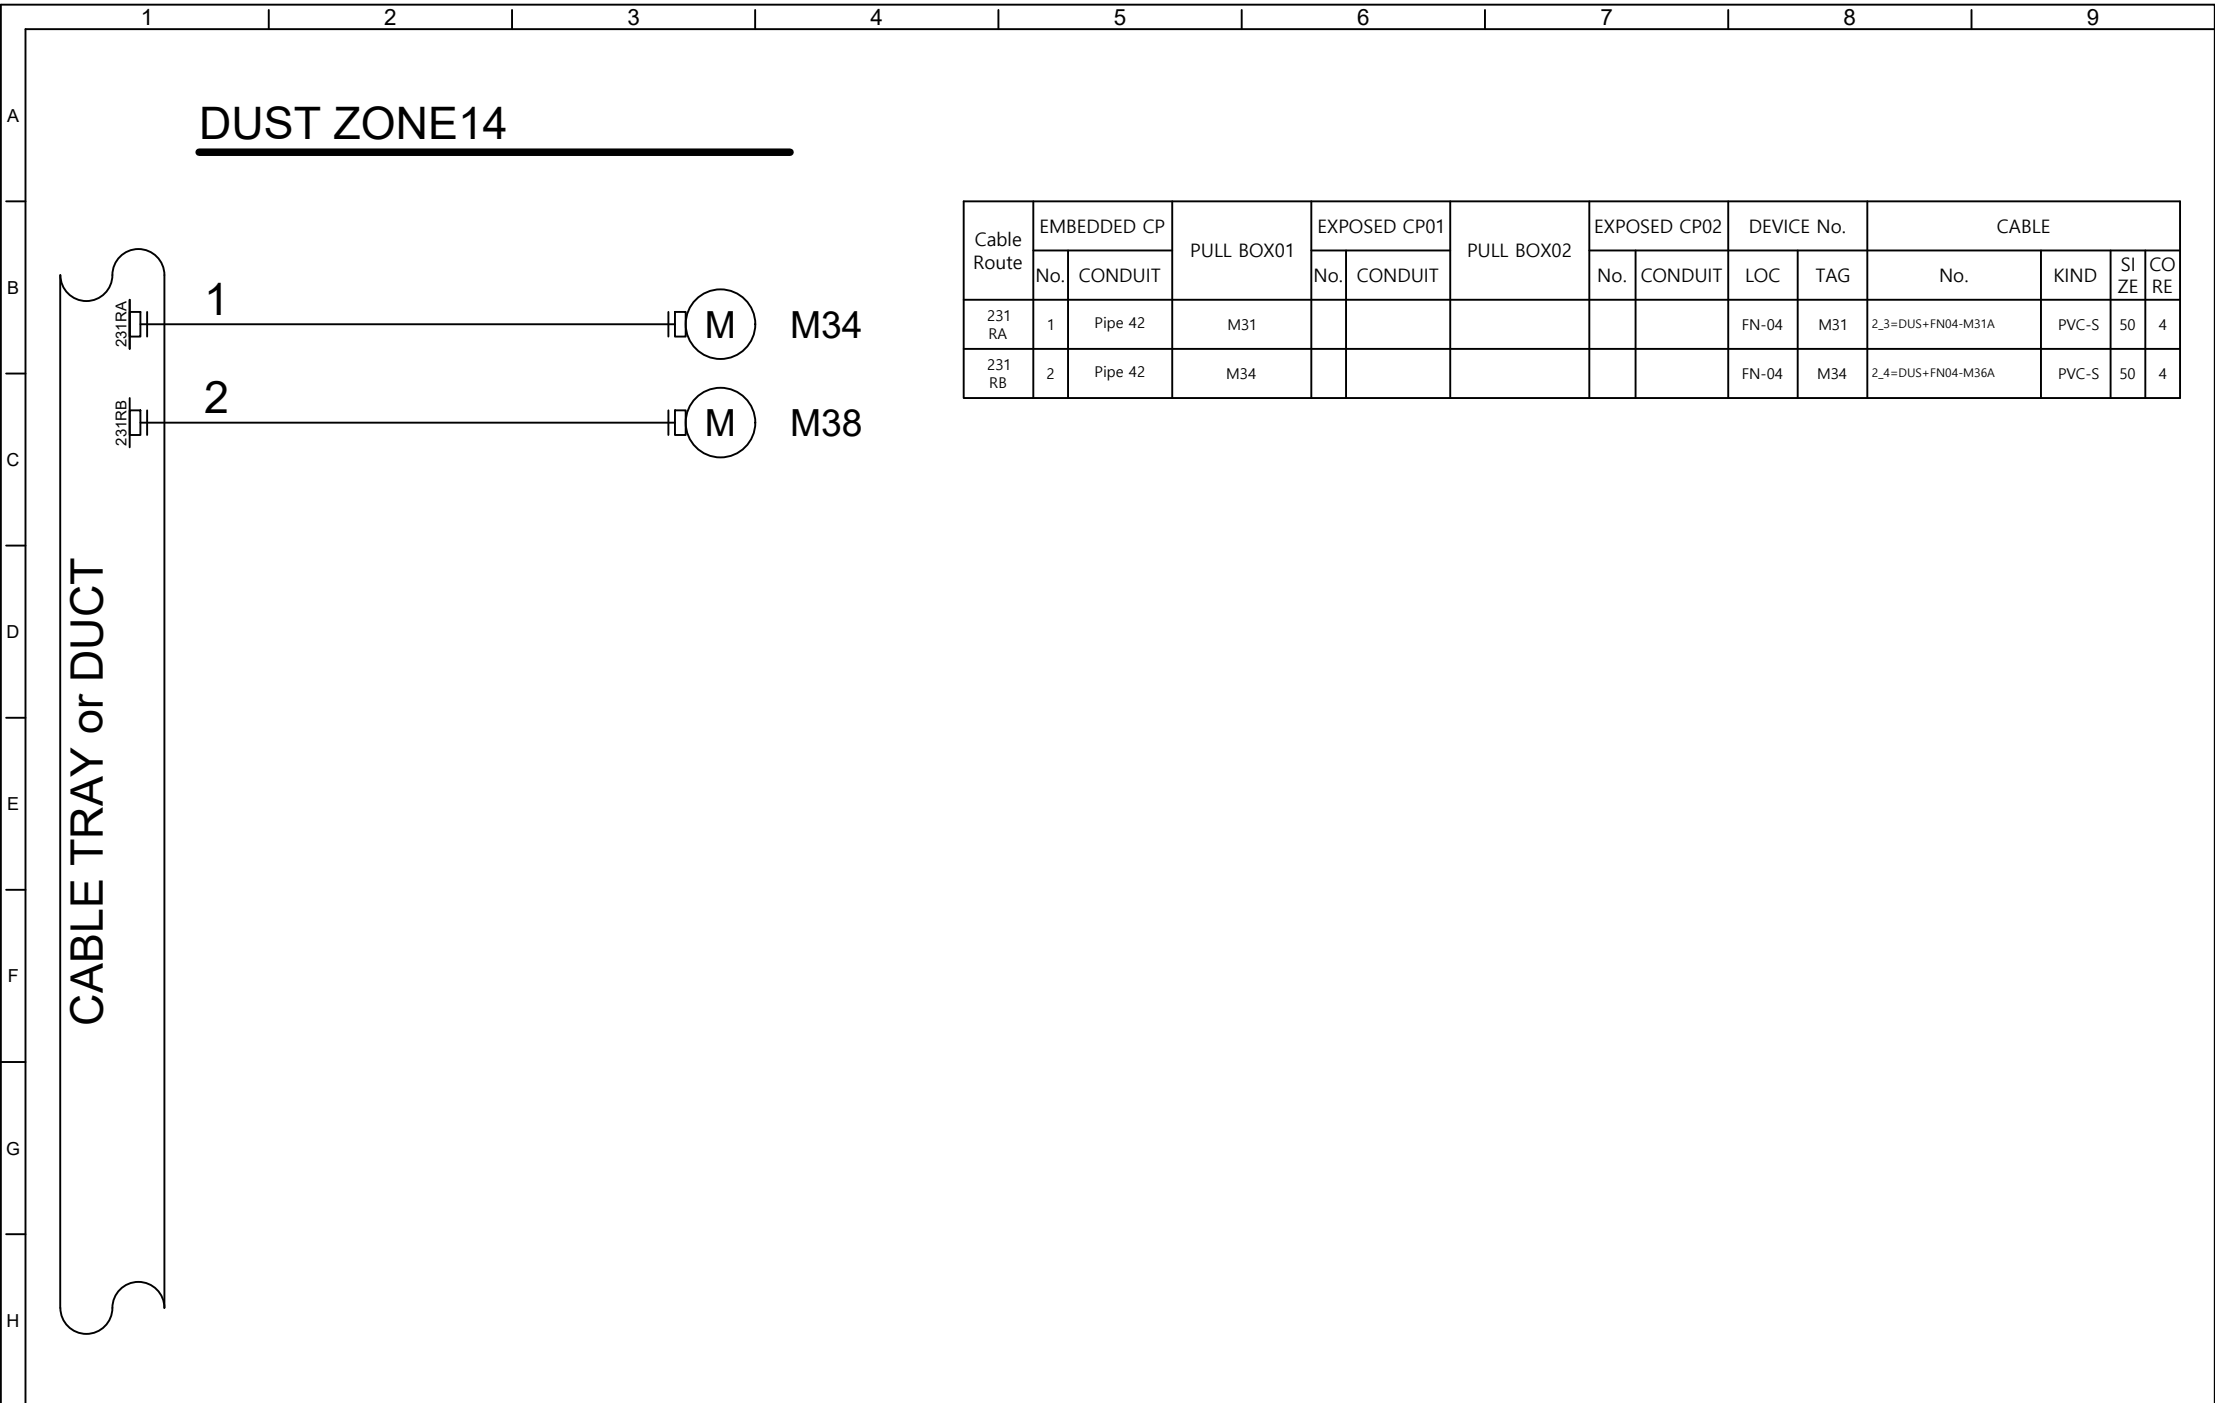

CUSTOMER SEJIN METAL Ulsan Plant, HeadQuarters CO.,LTD.			5		TITLE Can-Decoating Equipment				PART DESCRIPTION DUST ROUTE CONDUIT PIPING (14)	INS CODE	SECTION CONDUIT	SUB-SECTION DUST	D-PAGE 31
			4										
			3										
SUPPLIER youngone FA FA system creator CO.,LTD.			2						LOC CODE	DWG No. CANDC-CONS-E031-048	TORAL-PAGE 48/64		
			1	24.11.11	first draft design		J.W.Lee	J.H.Kim					
			No.	DATE	REVISIONS	TRACED	DESIGNED	CHECKED				APPROVED	

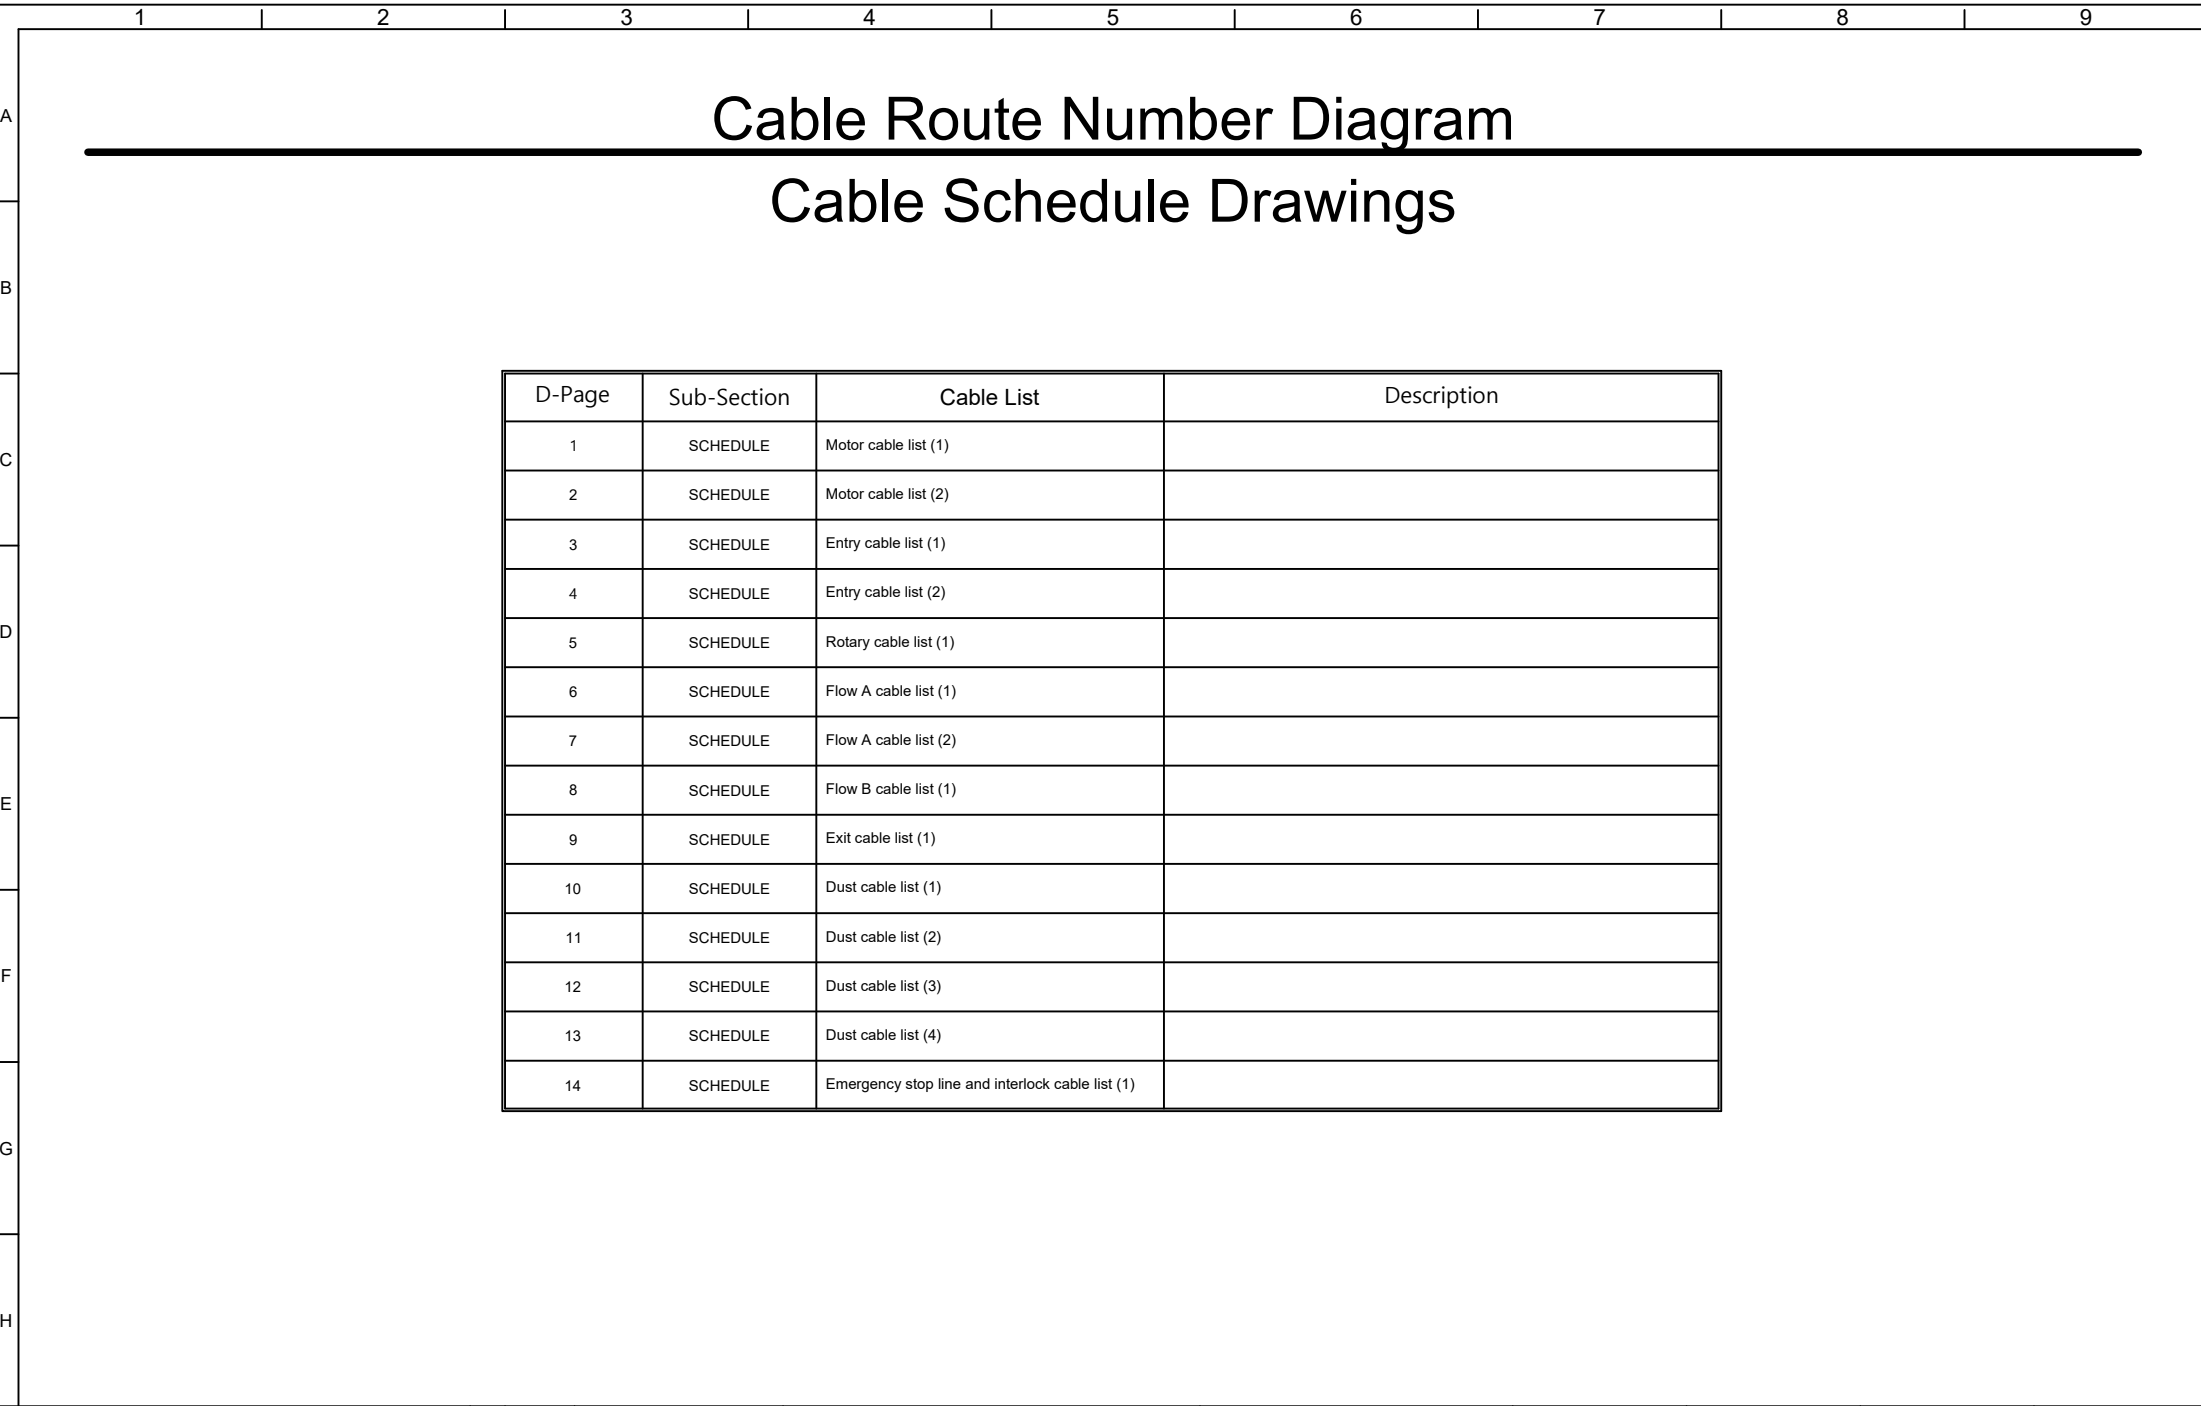

D-Page	Sub-Section	Cable List	Description
1	SCHEDULE	Motor cable list (1)	
2	SCHEDULE	Motor cable list (2)	
3	SCHEDULE	Entry cable list (1)	
4	SCHEDULE	Entry cable list (2)	
5	SCHEDULE	Rotary cable list (1)	
6	SCHEDULE	Flow A cable list (1)	
7	SCHEDULE	Flow A cable list (2)	
8	SCHEDULE	Flow B cable list (1)	
9	SCHEDULE	Exit cable list (1)	
10	SCHEDULE	Dust cable list (1)	
11	SCHEDULE	Dust cable list (2)	
12	SCHEDULE	Dust cable list (3)	
13	SCHEDULE	Dust cable list (4)	
14	SCHEDULE	Emergency stop line and interlock cable list (1)	

CUSTOMER SEJIN METAL Ulsan Plant, HeadQuarters CO.,LTD.			5			TITLE Can-Decoating Equipment		PART DESCRIPTION COVER CABLE SCHEDULE DRAWING	INS CODE	SECTION C_GUIDE	SUB-SECTION C_COVER	D-PAGE 1
			4							LOC CODE	DWG No. CANDC-CONS-G001-049	TORAL-PAGE 49/64
			3									
SUPPLIER youngone FA FA system creator CO.,LTD.			2			J.W.Lee	J.H.Kim					
			1	24.11.11	first draft design							
			No.	DATE	REVISIONS							TRACED

A

B

C

D

E

F

G

U

해당 케이블 총 포설 길이

ABCDEFG

U

CUSTOMER		5		TITLE				PART DESCRIPTION HOW TO READ CABLE DRAWINGS GUIDE	INS CODE	SECTION	SUB-SECTION	D-PAGE
SEJIN METAL Ulsan Plant, HeadQuarters CO.,LTD.		4		Can-Decoating						C_GUIDE	C_GUIDE	2
		3		Equipment								
SUPPLIER		2							LOC CODE	DWG No.		TORAL-PAGE
youngone FA FA system creator CO.,LTD.		1	24.11.11	first draft design		J.W.Lee	J.H.Kim					
		No.	DATE	REVISIONS	TRACED	DESIGNED	CHECKED	APPROVED		CANDC-CONS-G002-050		50/64

		1		2		3		4		5		6		7		8		9				
A	No.	CABLE No.	FROM			TO			Current Type	CABLE				CABLE ROUTE No.							Adjustme nt	LEN
			LOC TAG	DESCRIPTION		LOC TAG	DESCRIPTION			SPEC	CORE	SIZE	SPARE	1	2	3	4	5	6	7		
B	1_1	=ENT+BC01-M02A	CR			BC-01	M02	FEEDING ROTATION DRUM CONVEYON	DAC	PVC-S	4	2.5SB	0	CR	E100					20	22	
	1_2	=ENT+SC12-M08A	CR			SC-12	M08	ROT.DRUM DISCHARGE CHAMB.SCREW	GAC	CV	4	1.5	0	100 RA	E100					7	36	
	1_3	=ENT+FN03-M25A	CR			FN-03	M25	BLOWER FAN	DAC	PVC-S	4	25SB	0	100 RA	E200					7	36	
	1_4	=ENT+FN06-M26A	CR			FN-06	M26	BLOWER FAN	GAC	CV	4	1.5	0	100 RB	E100					13	43	
	1_5	=ROT+RD01-M03A	CR			RD-01	M03	ROTATING DRUM	DAC	PVC-S	4	25SB	0	100 RC	E100					7	39	
C	1_6	=ROT+RD01-M04A	CR			RD-01	M04	COOLINGFAN ROTATION DRUM MOTOR	GAC	CV	4	1.5	0	100 RC	E200					7	39	
	1_7	=FLO+MV05-M15A	CR			MV-05	M15	MOTORIZED VALVE	DAC	PVC-S	4	1.5SB	0	100 LA	E100					7.5	41	
	1_8	=FLO+MV02-M16A	CR			MV-02	M16	MOTORIZED VALVE	DAC	PVC-S	4	1.5SB	0	100	110 LAD1	E800					8.5	55
	1_9	=FLA+MV03-M17A	CR			MV-03	M17	MOTORIZED VALVE	GAC	CV	4	1.5	0	100 LCD1	E100					5	46	
	1_10	=FLA+FN02-M19A	CR			FN-02	M19	BLOWER FAN	DAC	PVC-S	4	50SB	0	100	110 LAD1	E100					4	50
D	1_11	=FLA+MV01-M20A	CR			MV-01	M20	MOTORIZED VALVE	GAC	CV	4	1.5	0	100	110 LAD1	E200					3	49
	1_12	=FLB+FN01-M22A	CR			FN-01	M22	BLOWER FAN	DAC	PVC-S	4	95SB	0	100	120 RB	E1200					15	65
	1_13	=FLB+FN01-M29A	CR			FN-01	M29	COOLING FAN BLOWER FAN	GAC	CV	4	1.5	0	100	120 RB	E1300					15	65
	1_14	=FLB+MV06-M14A	CR			MV-06	M14	MOTORIZED VALVE	DAC	PVC-S	4	1.5SB	0	100	120 RB	E900					9	59
	1_15	=FLB+CH01-M24A	CR			CH-01	M24	CHILLER	GAC	CV	4	2.5	0	100	120 RB	E600					10	60
E	1_16	=FLB+VR01-M21A	CR			VR-01	M21	ROTARY VALVE	GAC	CV	4	1.5	0	100 LDD1	E100					5	52	
	1_17	=FLB+VR02-M23A	CR			VR-02	M23	ROTARY VALVE	GAC	CV	4	1.5	0	100 LDD1	E200					12	59	
	1_18	=EXI+MC04-M09A	CR			MC-04	M09	METALLIC CONVEYOR	DAC	PVC-S	4	16SB	0	100	120	121	122	EXI1TB1	E100	15	87	
	1_19	=EXI+MC05-M10A	CR			MC-05	M10	METALLIC CONVEYOR	GAC	CV	4	1.5	0	100	120	121	122	EXI1TB1	E200	15	87	
	1_20	=EXI+VS01-M06A	CR			VS-01	M06	VIBRATING SCREEN	DAC	PVC-S	4	6SB	0	100	120	121	122	EXI1TB1	E300	16	88	
F	1_21	=EXI+VS01-M07A	CR			VS-01	M07	VIBRATING SCREEN	DAC	PVC-S	4	6SB	0	100	120	121	122	EXI1TB1	E400	16	88	
	1_22	=DUS+SC01-M28A	CR			SC-01	M28	DUST SCREW	GAC	CV	4	1.5	0	100	200	210	211 RC	E100		3	110	
	1_23	=DUS+VR03-M37A	CR			VR-03	M37	ROTARY VALVE	GAC	CV	4	1.5	0	100	200	210	211 RA	E100		3	101	
	1_24	=DUS+LD01-M32A	CR			LD-01	M32	MICROFEEDER	GAC	CV	4	1.5	0	100	200	210	211	212 RAD1	E100	6	118	
	1_25	=DUS+LD01-M33A	CR			LD-01	M33	SILO VIBRATOR	GAC	CV	4	1.5	0	100	200	210	211	212 RAD1	E200	6	118	
G	1_26	=DUS+VR06-M40A	CR			VR-06	M40	ROTARY VALVE	GAC	CV	4	1.5	0	100	200	210	211	212 RAD1	E300	6	118	
	1_27	=DUS+FN05-M41A	CR			FN-05	M41	BLOWER FAN	GAC	CV	4	2.5	0	100	200	210	211	212 LB	E100	3	115	
	1_28	=DUS+FN05-ER01	CR			FN-05	ER01	ELECTRICAL RESISTANCE	GAC	CV	4	4	0	100	200	210	211	212 LB		3	115	
	1_29	=DUS+SC10-M34A	CR			SC-10	M34	FILTER DUST SCREW	GAC	CV	4	1.5	0	100	200	220	221	223 RA	E200	8	99	
	1_30	=DUS+VR04-M38A	CR			VR-04	M38	ROTARY VALVE	GAC	CV	4	1.5	0	100	200	220	221	223 RA	E300	8	99	
CUSTOMER			5			TITLE				PART DESCRIPTION CABLE SCHEDULE (1)				INS CODE		SECTION		SUB-SECTION		D-PAGE		
SEJIN METAL			4			Can-Decoating										SCHEDULE		SCHEDULE		1		
Ulsan Plant, HeadQuarters CO.,LTD.			3			Equipment																
SUPPLIER			2											LOC CODE		DWG No.		TOTAL-PAGE				
youngone FA			1	24.11.11	first draft design																	
FA system creator CO.,LTD.			No.	DATE	REVISIONS	TRACED	DESIGNED	CHECKED	APPROVED									CANDC-CONS-C001-051		51/64		

[illegible]

CUSTOMER SEJIN METAL Ulsan Plant, HeadQuarters CO.,LTD.		5		TITLE Can-Decoating Equipment				PART DESCRIPTION CABLE SCHEDULE (2)	INS CODE	SECTION SCHEDULE	SUB-SECTION SCHEDULE	D-PAGE 2			
		4													
		3													
SUPPLIER youngone FA FA system creator CO.,LTD.		2											LOC CODE	DWG No. CANDC-CONS-C002-052	TOTAL-PAGE 52/64
		1	24.11.11												
		No.	DATE	REVISIONS	TRACED	DESIGNED	CHECKED	APPROVED							

	1	2	3	4	5	6	7	8	9																			
A	No.	CABLE No.	FROM		TO		Current Type	CABLE				CABLE ROUTE No.							Adjustment	LEN								
			LOC TAG	DESCRIPTION	LOC TAG	DESCRIPTION		SPEC	CORE	SIZE	SPARE	1	2	3	4	5	6	7										
B	3_1	=ENT+BC01-ENT1TB1A	CR			BC-01	ENT1TB1	SS01	DC	CVW	7G	1.0	2	CR	E200						15	16						
	3_2	=ENT+BC01-ENT1TB2A	CR			BC-01	ENT1TB2	SSL01	DC	CVW	3G	1.0	0	CR	E300						15	16						
	3_3	=ENT+CC01-ENT2TB1A	CR			CC-01	ENT2TB1	LS01-08 LS32/33 PB15/18	DC	CVW	25G	1.0	0	100 RBD1	E200						7	37						
	3_4	=ENT+CC01-ENT2TB1C	CR			CC-01	ENT2TB1	EV01/02/07 17HA1 AC X2	AC	CVW	25G	1.0	12	100 RBD1	E300						7	37						
C	3_6	=ENT+CC01-81RO04A	CR			CC-01	81RO-04	PEW358	AI	CVW-S	2S	1.0	0	100 RBD1	E1200						5	35						
	3_7	=ENT+CC01-81RO04B	CC-01	ENT2TB1	ENTRY joint box	CC-01	81RO-04	AC 110V	AC	CVW	3G	1.0	0	RBD1 E300	100 RBD1	E1300					7	17						
	3_8	=ENT+PV01-ENT2TB2A	CC-01	ENT2TB1	ENTRY joint box	PV-01	ENT2TB2	LS01/02/03/04	DC	CVW	12G	1.0	3	RBD1 E210							10	11						
	3_9	=ENT+PV01-ENT2TB2B	CC-01	ENT2TB1	ENTRY joint box	PV-01	ENT2TB2	EV01	AC	CVW	3G	1.0	0	RBD1 E310							10	11						
D	3_10	=ENT+PV01-ENT2TB3A	CC-01	ENT2TB1	ENTRY joint box	PV-01	ENT2TB3	LS05/06/07/08	DC	CVW	12G	1.0	3	RBD1 E220							9	10						
	3_11	=ENT+PV01-ENT2TB3B	CC-01	ENT2TB1	ENTRY joint box	PV-01	ENT2TB3	EV02	AC	CVW	3G	1.0	0	RBD1 E320							9	10						
	3_12	=ENT+PV04-ENT2TB4A	CC-01	ENT2TB1	ENTRY joint box	PV-04	ENT2TB4	LS32/33	DC	CVW	7G	1.0	2	RBD1 E230							6	7						
	3_13	=ENT+PV04-ENT2TB4B	CC-01	ENT2TB1	ENTRY joint box	PV-04	ENT2TB4	EV07	AC	CVW	3G	1.0	0	RBD1 E330							6	7						
E	3_14	=ENT+CC01-TC06A	CR			CC-01	TC-06		TC	KX	2S	1.0	0	100 RBD1	E1000						11	41						
	3_15	=ENT+PV01-PB15A	CC-01	ENT2TB1	ENTRY joint box	PV-01	PB15		DC	CVW	5G	1.0	1	RBD1 E500	E700						10	11						
	3_16	=ENT+PV04-PB18A	CC-01	ENT2TB1	ENTRY joint box	PV-04	PB18		DC	CVW	5G	1.0	2	RBD1 E500	E800						10	11						
	3_17	=ENT+CC01-17HA1A	CC-01	ENT2TB1	ENTRY joint box	CC-01	17HA1	Siren	DC	CVW	3G	1.0	0	RBD1 E500	E600						14	15						
F	3_18	=ENT+BC01-SS01A	BC-01	ENT1TB1	ENTRY joint box	BC-01	SS-01		DC	CVW	5G	1.0	0	E100							3	3						
	3_19	=ENT+BC01-SSL01A	BC-01	ENT1TB2	PV-01 A GATE	BC-01	SSL-01		DC	CVW	2C	1.0	0	E100							3	3						
	3_20	=ENT+PV01-LS01A	PV-01	ENT2TB2	PV-01 A GATE	PV-01	LS-01		DC	CVW	2C	1.0	0	E211							3	3						
	3_21	=ENT+PV01-LS02A	PV-01	ENT2TB2	PV-01 A GATE	PV-01	LS-02		DC	CVW	2C	1.0	0	E212							3	3						
G	3_22	=ENT+PV01-LS03A	PV-01	ENT2TB2	PV-01 A GATE	PV-01	LS-03		DC	CVW	2C	1.0	0								5	5						
	3_23	=ENT+PV01-LS04A	PV-01	ENT2TB2	PV-01 A GATE	PV-01	LS-04		DC	CVW	2C	1.0	0								5	5						
	3_24	=ENT+PV01-EV01A	PV-01	ENT2TB2	PV-01 A GATE	PV-01	EV-01		AC	CVW	3G	1.0	0	E313							3	3						
	3_25	=ENT+PV01-LS05A	PV-01	ENT2TB3	PV-01 A GATE	PV-01	LS-05		DC	CVW	2C	1.0	0	E221							3	3						
H	3_26	=ENT+PV01-LS06A	PV-01	ENT2TB3	PV-01 A GATE	PV-01	LS-06		DC	CVW	2C	1.0	0	E222							3	3						
	3_27	=ENT+PV01-LS07A	PV-01	ENT2TB3	PV-01 A GATE	PV-01	LS-07		DC	CVW	2C	1.0	0								5	5						
	3_28	=ENT+PV01-LS08A	PV-01	ENT2TB3	PV-01 A GATE	PV-01	LS-08		DC	CVW	2C	1.0	0								5	5						
	3_29	=ENT+PV01-EV02A	PV-01	ENT2TB3	PV-01 A GATE	PV-01	EV-02		AC	CVW	3G	1.0	0	E323							3	3						
	3_30	=ENT+CC01-ENT2TB1B	CR			CC-01	ENT2TB1	LS01-08 LS32/33 PB15/18	DC	CVW	12G	1.0	0	100 RBD1	E200						7	37						
CUSTOMER			5		TITLE			PART DESCRIPTION CABLE SCHEDULE (2)				INS CODE		SECTION SCHEDULE		SUB-SECTION SCHEDULE		D-PAGE										
SEJIN METAL			4		Can-Decoating Equipment																							
Ulsan Plant, HeadQuarters CO.,LTD.			3																									
SUPPLIER			2									LOC CODE		DWG No.		TORAL-PAGE												
youngone FA			1	24.11.11	first draft design																							
FA system creator CO.,LTD.			No.	DATE	REVISIONS																							
					TRACED	DESIGNED	CHECKED	APPROVED						CANDC-CONS-C003-053		53/64												

[illegible]

CUSTOMER		5		TITLE				PART DESCRIPTION CABLE SCHEDULE (3)	INS CODE	SECTION	SUB-SECTION	D-PAGE
SEJIN METAL Ulsan Plant, HeadQuarters CO.,LTD.		4		Can-Decoating						SCHEDULE	SCHEDULE	4
		3		Equipment								
SUPPLIER		2										
youngone FA FA system creator CO.,LTD.		1	DATE	first draft design				J.W.Lee	J.H.Kim			
		No.	DATE	REVISIONS	TRACED	DESIGNED	CHECKED	APPROVED	LOC CODE	DWG No.		TORAL-PAGE
										CANDC-CONS-C004-054		54/64

		1		2		3		4		5		6		7		8		9				
A	No.	CABLE No.	FROM			TO			Current Type	CABLE				CABLE ROUTE No.							Adjustment	LEN
			LOC TAG	DESCRIPTION		LOC TAG	DESCRIPTION			SPEC	CORE	SIZE	SPARE	1	2	3	4	5	6	7		
B	7_1	=FLA+HE01-FLO2TB1A	CR			HE-01	FLO2TB1	LS17/18/23/24/21A/22A/21B/22B	DC	CVW	25G	1.0	8	100	110 LAD1	E100					5	50
	7_2	=FLA+HE01-FLO2TB1B	CR			HE-01	FLO2TB1	ACTUATORS (MV04)	AC	CVW	5G	1.0	1	100	110 LAD1	E200					5	50
	7_3	=FLA+HE01-FLO2TB1C	CR			HE-01	FLO2TB1	M18A	AO	CVW-S	2S	1.0	0	100	110 LAD1	E100					5	50
	7_4	=FLA+HE01-FLO2TB1D	CR			HE-01	FLO2TB1	M18B	AO	CVW-S	2S	1.0	0	100	110 LAD1	E100					5	50
	7_5	=FLA+HE01-FLO2TB1E	CR			HE-01	FLO2TB1	ZT02	AI	CVW-S	4S	1.0	0	100	110 LAD1	E100					5	50
C	7_6	=FLA+HE01-FLO2TB1F	CR			HE-01	FLO2TB1	ZT03	AI	CVW-S	4S	1.0	0	100	110 LAD1	E100					5	50
	7_7	=FLA+HE01-PSH01A	CR			HE-01	PSH-01		AI	CVW-S	4S	1.0	1	100	110 LAD1	E900					7	52
	7_8	=FLA+MV01-LS23A	HE-01	FLO2TB1		MV-01	LS-23		DC	CVW	2C	1.0	0	E110							5	5
	7_9	=FLA+MV01-LS24A	HE-01	FLO2TB1		MV-01	LS-24		DC	CVW	2C	1.0	0	E120							5	5
	7_10	=FLA+MV01-ZT02A	HE-01	FLO2TB1		MV-01	ZT-02		AI	CVW-S	4S	1.0	0	E330							5	6
D	7_11	=FLA+MV02-LS17A	HE-01	FLO2TB1		MV-02	LS-17		DC	CVW	2C	1.0	0	LAD1 E300	LAD1	E500					12	12
	7_12	=FLA+MV02-LS18A	HE-01	FLO2TB1		MV-02	LS-18		DC	CVW	2C	1.0	0	LAD1 E300	LAD1	E600					12	12
	7_13	=FLA+MV02-ZT03A	HE-01	FLO2TB1		MV-02	ZT-03		AI	CVW-S	4S	1.0	0	LAD1 E400	LAD1	E700					12	12
	7_14	=FLA+MV04-LS21AA	HE-01	FLO2TB1		MV-04	LS-21A		DC	CVW	2C	1.0	0	LAD1 E300	LAD1	E1200					15	15
	7_15	=FLA+MV04-LS22AA	HE-01	FLO2TB1		MV-04	LS-22A		DC	CVW	2C	1.0	0	LAD1 E300	LAD1	E1300					15	15
E	7_16	=FLA+MV04-LS21BA	HE-01	FLO2TB1		MV-04	LS-21B		DC	CVW	2C	1.0	0	LAD1 E300	LAD1	E1400					15	15
	7_17	=FLA+MV04-LS22BA	HE-01	FLO2TB1		MV-04	LS-22B		DC	CVW	2C	1.0	0	LAD1 E300	LAD1	E1500					15	15
	7_18	=FLA+MV04-AMP01A	HE-01	FLO2TB1		MV-04	AMPP		AC	CVW	5G	1.0	1	LAD1 E200	LAD1	E1600					15	16
	7_19	=FLA+MV04-AMP01B	HE-01	FLO2TB1		MV-04	M18A		AO	CVW-S	2S	1.0	0	LAD1 E400	LAD1	E1700					15	16
	7_20	=FLA+MV04-AMP01C	HE-01	FLO2TB1		MV-04	M18B		AO	CVW-S	2S	1.0	0	LAD1 E400	LAD1	E1800					15	16
F	7_21																					
	7_22																					
	7_23																					
	7_24																					
	7_25																					
G	7_26																					
	7_27																					
	7_28																					
	7_29																					
	7_30																					
H																						

CUSTOMER			5					TITLE				PART DESCRIPTION CABLE SCHEDULE (6)				INS CODE		SECTION SCHEDULE		SUB-SECTION SCHEDULE		D-PAGE 7					
SEJIN METAL Ulsan Plant, HeadQuarters CO.,LTD.			4		Can-Decoating Equipment																						
			3																								
SUPPLIER			2					J.W.Lee		J.H.Kim				LOC CODE		DWG No.		CANDC-CONS-C007-057		TOTAL-PAGE 57/64							
			1	24.11.11																		first draft design					
			No.	DATE																		REVISIONS		TRACED	DESIGNED	CHECKED	APPROVED
			youngone FA FA system creator CO.,LTD.																								

[illegible]

CUSTOMER		5		TITLE				PART DESCRIPTION CABLE SCHEDULE (7)	INS CODE	SECTION	SUB-SECTION	D-PAGE
SEJIN METAL Ulsan Plant, HeadQuarters CO.,LTD.		4		Can-Decoating						SCHEDULE	SCHEDULE	8
		3		Equipment								
SUPPLIER		2			J.W.Lee	J.H.Kim		LOC CODE	DWG No.	TOTAL-PAGE		
youngone FA FA system creator CO.,LTD.		1	DATE	first draft design					CANDC-CONS-C008-058	58/64		
		No.	DATE	REVISIONS	TRACED	DESIGNED	CHECKED				APPROVED	

	1	2	3	4	5	6	7	8	9													
A	No.	CABLE No.	FROM		TO		Current Type	CABLE				CABLE ROUTE No.							Adjustment	LEN		
			LOC TAG	DESCRIPTION	LOC TAG	DESCRIPTION		SPEC	CORE	SIZE	SPARE	1	2	3	4	5	6	7				
B	10_1	=DUS+LD01-DUS2TB1A	CR			LD-01	DUS2TB1	LT01 68FC1 PB14	DC	CVW	16G	1.0	7	100	200	210	211	212 RAD1	E500		5	113
	10_2	=DUS+LD01-DUS2TB1B	CR			LD-01	DUS2TB1	LD01	AC	CVW	5G	1.0	2	100	200	210	211	212 RAD1	E600		5	113
	10_3	=DUS+LD01-DUS2TB1C	CR			LD-01	DUS2TB1	AC(220V)	AC	CVW	4G	4.0	1	100	200	210	211	212 RAD1	E600		5	113
	10_4	=DUS+SC01-DUS1TB1A	BF-01	JB01		SC-01	DUS1TB1	ZS.O/C	DC	CVW	7G	1.0	2	E500	222 RE	222 LAP1	212 LAP1	211 RB	E100		15	16
	10_5	=DUS+SC01-DUS1TB1B	BF-01	JB01		SC-01	DUS1TB1	PV14	AC	CVW	5G	1.0	2	E500	222 RE	222 LAP1	212 LAP1	211 RB	E200		15	16
C																						
	10_7	=DUS+PV14-DUS1TB2A	SC-01	DUS1TB1		PV-14	DUS1TB2	ZS.O/C	DC	CWV	7G	1.0	2	E110							10	11
	10_8	=DUS+PV14-DUS1TB2B	SC-01	DUS1TB1		PV-14	DUS1TB2	PV14	AC	CVW	3G	1.0	0	E110							10	11
	10_9	=DUS+PV14-TC09A	BF-01	JB01		PV-14	TC-09		TC	KX	2S	1.0	0	E500	222 RE	222 LAP1	212 LAP1	211 RB	E300		25	27
	10_10	=DUS+PV14-ZS.OA	PV-14	DUS1TB2		PV-14	ZS.O		DC	CWV	2C	1.0	0	E121							3	3
D	10_11	=DUS+PV14-ZS.CA	PV-14	DUS1TB2		PV-14	ZS.C		DC	CVW	2C	1.0	0	E122							3	3
	10_12	=DUS+PV14-PV14A	PV-14	DUS1TB2		PV-14	PV-14		AC	CVW	3G	1.0	0	E123							3	3
	10_13	=DUS+LD01-LT01A	LD-01	DUS2TB1		LD-01	LT-01		DC	CVW	2C	1.0	0	E420							3	3
	10_14	=DUS+LD01-68FC1A	LD-01	DUS2TB1		LD-01	68FC1		DC	CVW	2C	1.0	0	E430							3	3
	10_15	=DUS+LD01-PB14A	LD-01	DUS2TB1		LD-01	PB14		DC	CVW	5G	1.0	2	E440							3	4
E	10_16	=DUS+LD01-LD01A	LD-01	DUS2TB1		LD-01	LD-01		AC	CVW	3G	1.0	0	E410							3	4
	10_17	=DUS+BF02-JB02A	CR			BF-02	JB02	POWER (110V 110V 0V)	AC	CVW	4G	4.0	0	100	200	220	221	222 RB	E100		2	98
	10_18	=DUS+BF02-JB02B	CR			BF-02	JB02	JB02 IM	COMM	Profinet				100	200	220	221	222 RB	E200		2	98
	10_19	=DUS+BF02-JB02TB1A	BF-02	JB02		BF-02	JB02TB1	EV51-EV60	AC	CVW	25G	1.0	4	RB E300	222 RAD1	E100					16	24
	10_20	=DUS+BF02-JB02TB2A	BF-02	JB02		BF-02	JB02TB2	EV61-EV70	AC	CVW	25G	1.0	4	RB E400	222 RAD1	E1400					14	22
F	10_21	=DUS+BF02-JB02TB3A	BF-02	JB02		BF-02	JB02TB3	EV71-EV80	AC	CVW	25G	1.0	4	RB E500	222 RAD1	E2700					12	19
	10_22	=DUS+BF02-JB02TB4A	BF-02	JB02		BF-02	JB02TB4	EV81-EV90	AC	CVW	25G	1.0	4	RB E600	222 RAD1	E4000					10	17
	10_23	=DUS+BF01-JB01A	CR			BF-01	JB01	POWER (110V 110V 0V)	AC	CVW	4G	4.0	0	100	200	220	221	222 RE	E200		4	104
	10_24	=DUS+BF01-JB01B	BF-02	JB02		BF-01	JB01	JB01 IM	COMM	Profinet				RB E200	222	RE E200					2	11
	10_25	=DUS+BF01-JB01TB1A	BF-01	JB01		BF-01	JB01TB1	EV11-EV20	AC	CVW	25G	1.0	4	RB E300	222 LAD1	E100					16	24
G	10_26	=DUS+BF01-JB01TB2A	BF-01	JB01		BF-01	JB01TB2	EV21-EV30	AC	CVW	25G	1.0	4	RB E400	222 LAD1	E1400					14	22
	10_27	=DUS+BF01-JB01TB3A	BF-01	JB01		BF-01	JB01TB3	EV31-EV40	AC	CVW	25G	1.0	4	RB E500	222 LAD1	E2700					12	19
	10_28	=DUS+BF01-JB01TB4A	BF-01	JB01		BF-01	JB01TB4	EV41-EV50	AC	CVW	25G	1.0	4	RB E600	222 LAD1	E4000					10	17
	10_29	=DUS+BF01-JB01C	CR			BF-01	JB01	POWER (SPARE)	AC	CVW	4G	4.0	1	100	200	220	221	222 RE	E200		4	104
	10_30																					
CUSTOMER			5		TITLE			PART DESCRIPTION				INS CODE		SECTION		SUB-SECTION		D-PAGE				
SEJIN METAL Ulsan Plant, HeadQuarters CO.,LTD.			4		Can-Decoating Equipment			CABLE SCHEDULE (9)						SCHEDULE		SCHEDULE		10				
SUPPLIER			3																			
youngone FA FA system creator CO.,LTD.			2									LOC CODE		DWG No.				TORAL-PAGE				
			1	24.11.11	first draft design									CANDC-CONS-C010-060				60/64				
			No.	DATE	REVISIONS			TRACED DESIGNED CHECKED APPROVED														

No.	CABLE No.	FROM		TO		Current Type	CABLE				CABLE ROUTE No.							Adjustment	LEN		
		LOC TAG	DESCRIPTION	LOC TAG	DESCRIPTION		SPEC	CORE	SIZE	SPARE	1	2	3	4	5	6	7				
11_1	=DUS+BF01-JB01TB5A	BF-01	JB01		BF-01	JB01TB5	DP-01 (POWER)	AC	CVV	3G	1.0	0	E300	222 RD	E100					5	6
11_2	=DUS+BF01-JB01TB5B	BF-01	JB01		BF-01	JB01TB5	DP-01 AI	AI	CVV-S	2S	1.0	0	E300	222 RD	E100					5	6
11_3	=DUS+BF01-JB01TB6A	BF-01	JB01		BF-02	JB01TB6	DP-02 (POWER)	AC	CVV	3G	1.0	0	E300	222	223 RD	E100				2	23
11_4	=DUS+BF01-JB01TB6B	BF-01	JB01		BF-02	JB01TB6	DP-02 AI	AI	CVV-S	2S	1.0	0	E300	222	223 RD	E100				2	23
11_5	=DUS+BF02-EV51A	BF-02	JB02TB1		BF-02	EV-51		AC	CVV	3G	1.0	0	RAD1 E200	E400						6	6
11_6	=DUS+BF02-EV52A	BF-02	JB02TB1		BF-02	EV-52		AC	CVV	3G	1.0	0	RAD1 E200	E500						6	6
11_7	=DUS+BF02-EV53A	BF-02	JB02TB1		BF-02	EV-53		AC	CVV	3G	1.0	0	RAD1 E200	E600						5	5
11_8	=DUS+BF02-EV54A	BF-02	JB02TB1		BF-02	EV-54		AC	CVV	3G	1.0	0	RAD1 E200	E700						5	5
11_9	=DUS+BF02-EV55A	BF-02	JB02TB1		BF-02	EV-55		AC	CVV	3G	1.0	0	RAD1 E200	E800						4	4
11_10	=DUS+BF02-EV56A	BF-02	JB02TB1		BF-02	EV-56		AC	CVV	3G	1.0	0	RAD1 E300	E900						4	4
11_11	=DUS+BF02-EV57A	BF-02	JB02TB1		BF-02	EV-57		AC	CVV	3G	1.0	0	RAD1 E300	E1000						3	3
11_12	=DUS+BF02-EV58A	BF-02	JB02TB1		BF-02	EV-58		AC	CVV	3G	1.0	0	RAD1 E300	E1100						3	3
11_13	=DUS+BF02-EV59A	BF-02	JB02TB1		BF-02	EV-59		AC	CVV	3G	1.0	0	RAD1 E300	E1200						2	2
11_14	=DUS+BF02-EV60A	BF-02	JB02TB1		BF-02	EV-60		AC	CVV	3G	1.0	0	RAD1 E300	E1300						2	2
11_15	=DUS+BF02-EV61A	BF-02	JB02TB2		BF-02	EV-61		AC	CVV	3G	1.0	0	RAD1 E1500	E1700						6	6
11_16	=DUS+BF02-EV62A	BF-02	JB02TB2		BF-02	EV-62		AC	CVV	3G	1.0	0	RAD1 E1500	E1800						6	6
11_17	=DUS+BF02-EV63A	BF-02	JB02TB2		BF-02	EV-63		AC	CVV	3G	1.0	0	RAD1 E1500	E1900						5	5
11_18	=DUS+BF02-EV64A	BF-02	JB02TB2		BF-02	EV-64		AC	CVV	3G	1.0	0	RAD1 E1500	E2000						5	5
11_19	=DUS+BF02-EV65A	BF-02	JB02TB2		BF-02	EV-65		AC	CVV	3G	1.0	0	RAD1 E1500	E2100						4	4
11_20	=DUS+BF02-EV66A	BF-02	JB02TB2		BF-02	EV-66		AC	CVV	3G	1.0	0	RAD1 E1600	E2200						4	4
11_21	=DUS+BF02-EV67A	BF-02	JB02TB2		BF-02	EV-67		AC	CVV	3G	1.0	0	RAD1 E1600	E2300						3	3
11_22	=DUS+BF02-EV68A	BF-02	JB02TB2		BF-02	EV-68		AC	CVV	3G	1.0	0	RAD1 E1600	E2400						3	3
11_23	=DUS+BF02-EV69A	BF-02	JB02TB2		BF-02	EV-69		AC	CVV	3G	1.0	0	RAD1 E1600	E2500						2	2
11_24	=DUS+BF02-EV70A	BF-02	JB02TB2		BF-02	EV-70		AC	CVV	3G	1.0	0	RAD1 E1600	E2600						2	2
11_25	=DUS+BF01-DP01A	BF-01	JB01TB5		BF-01	DP-01	IN POWER	AC	CVV	3G	1.0	0	E100							1	2
11_26	=DUS+BF01-DP01B	BF-01	JB01TB5		BF-01	DP-01	OUTPUT	AI	CVV-S	2S	1.0	0	E100							1	2
11_27	=DUS+BF02-DP02A	BF-02	JB01TB6		BF-02	DP-02	IN POWER	AC	CVV	3G	1.0	0	E100							1	2
11_28	=DUS+BF02-DP02B	BF-02	JB01TB6		BF-02	DP-02	OUTPUT	AI	CVV-S	2S	1.0	0	E100							1	2
11_29																					
11_30																					

CUSTOMER	5		TITLE				PART DESCRIPTION CABLE SCHEDULE (10)	INS CODE	SECTION	SUB-SECTION	D-PAGE
SEJIN METAL Ulsan Plant, Headquarters CO.,LTD.	4		Can-Decoating						LOC CODE	SCHEDULE	SCHEDULE
	3		Equipment								
SUPPLIER	2			J.W.Lee	J.H.Kim				DWG No.		TORAL-PAGE
youngone FA FA system creator CO.,LTD.	1	24.11.11	first draft design					CANDC-CONS-C011-061		61/64	
	No.	DATE	REVISIONS	TRACED	DESIGNED	CHECKED	APPROVED				

No.	CABLE No.	FROM		TO		Current Type	CABLE				CABLE ROUTE No.							Adjustment	LEN		
		LOC TAG	DESCRIPTION	LOC TAG	DESCRIPTION		SPEC	CORE	SIZE	SPARE	1	2	3	4	5	6	7				
12_1	=DUS+BF02-EV71A	BF-02	JB02TB3		BF-02	EV-71		AC	CVV	3G	1.0	0	RAD1 E2800	E3000						6	6
12_2	=DUS+BF02-EV72A	BF-02	JB02TB3		BF-02	EV-72		AC	CVV	3G	1.0	0	RAD1 E2800	E3100						6	6
12_3	=DUS+BF02-EV73A	BF-02	JB02TB3		BF-02	EV-73		AC	CVV	3G	1.0	0	RAD1 E2800	E3200						5	5
12_4	=DUS+BF02-EV74A	BF-02	JB02TB3		BF-02	EV-74		AC	CVV	3G	1.0	0	RAD1 E2800	E3300						5	5
12_5	=DUS+BF02-EV75A	BF-02	JB02TB3		BF-02	EV-75		AC	CVV	3G	1.0	0	RAD1 E2800	E3400						4	4
12_6	=DUS+BF02-EV76A	BF-02	JB02TB3		BF-02	EV-76		AC	CVV	3G	1.0	0	RAD1 E2900	E3500						4	4
12_7	=DUS+BF02-EV77A	BF-02	JB02TB3		BF-02	EV-77		AC	CVV	3G	1.0	0	RAD1 E2900	E3600						3	3
12_8	=DUS+BF02-EV78A	BF-02	JB02TB3		BF-02	EV-78		AC	CVV	3G	1.0	0	RAD1 E2900	E3700						3	3
12_9	=DUS+BF02-EV79A	BF-02	JB02TB3		BF-02	EV-79		AC	CVV	3G	1.0	0	RAD1 E2900	E3800						2	2
12_10	=DUS+BF02-EV80A	BF-02	JB02TB3		BF-02	EV-80		AC	CVV	3G	1.0	0	RAD1 E2900	E3900						2	2
12_11	=DUS+BF02-EV81A	BF-02	JB02TB4		BF-02	EV-81		AC	CVV	3G	1.0	0	RAD1 E4100	E4300						6	6
12_12	=DUS+BF02-EV82A	BF-02	JB02TB4		BF-02	EV-82		AC	CVV	3G	1.0	0	RAD1 E4100	E4400						6	6
12_13	=DUS+BF02-EV83A	BF-02	JB02TB4		BF-02	EV-83		AC	CVV	3G	1.0	0	RAD1 E4100	E4500						5	5
12_14	=DUS+BF02-EV84A	BF-02	JB02TB4		BF-02	EV-84		AC	CVV	3G	1.0	0	RAD1 E4100	E4600						5	5
12_15	=DUS+BF02-EV85A	BF-02	JB02TB4		BF-02	EV-85		AC	CVV	3G	1.0	0	RAD1 E4100	E4700						4	4
12_16	=DUS+BF02-EV86A	BF-02	JB02TB4		BF-02	EV-86		AC	CVV	3G	1.0	0	RAD1 E4200	E4800						4	4
12_17	=DUS+BF02-EV87A	BF-02	JB02TB4		BF-02	EV-87		AC	CVV	3G	1.0	0	RAD1 E4200	E4900						3	3
12_18	=DUS+BF02-EV88A	BF-02	JB02TB4		BF-02	EV-88		AC	CVV	3G	1.0	0	RAD1 E4200	E5000						3	3
12_19	=DUS+BF02-EV89A	BF-02	JB02TB4		BF-02	EV-89		AC	CVV	3G	1.0	0	RAD1 E4200	E5100						2	2
12_20	=DUS+BF02-EV90A	BF-02	JB02TB4		BF-02	EV-90		AC	CVV	3G	1.0	0	RAD1 E4200	E5200						2	2
12_21	=DUS+BF01-EV11A	BF-01	JB01TB1		BF-01	EV-11		AC	CVV	3G	1.0	0	LAD1 E200	E400						6	6
12_22	=DUS+BF01-EV12A	BF-01	JB01TB1		BF-01	EV-12		AC	CVV	3G	1.0	0	LAD1 E200	E500						6	6
12_23	=DUS+BF01-EV13A	BF-01	JB01TB1		BF-01	EV-13		AC	CVV	3G	1.0	0	LAD1 E200	E600						5	5
12_24	=DUS+BF01-EV14A	BF-01	JB01TB1		BF-01	EV-14		AC	CVV	3G	1.0	0	LAD1 E200	E700						5	5
12_25	=DUS+BF01-EV15A	BF-01	JB01TB1		BF-01	EV-15		AC	CVV	3G	1.0	0	LAD1 E200	E800						4	4
12_26	=DUS+BF01-EV16A	BF-01	JB01TB1		BF-01	EV-16		AC	CVV	3G	1.0	0	LAD1 E300	E900						4	4
12_27	=DUS+BF01-EV17A	BF-01	JB01TB1		BF-01	EV-17		AC	CVV	3G	1.0	0	LAD1 E300	E1000						3	3
12_28	=DUS+BF01-EV18A	BF-01	JB01TB1		BF-01	EV-18		AC	CVV	3G	1.0	0	LAD1 E300	E1100						3	3
12_29	=DUS+BF01-EV19A	BF-01	JB01TB1		BF-01	EV-19		AC	CVV	3G	1.0	0	LAD1 E300	E1200						2	2
12_30	=DUS+BF01-EV20A	BF-01	JB01TB1		BF-01	EV-20		AC	CVV	3G	1.0	0	LAD1 E300	E1300						2	2

CUSTOMER		5		TITLE				PART DESCRIPTION CABLE SCHEDULE (11)	INS CODE	SECTION	SUB-SECTION	D-PAGE
SEJIN METAL Ulsan Plant, HeadQuarters CO.,LTD.		4		Can-Decoating						SCHEDULE	SCHEDULE	12
		3		Equipment								
SUPPLIER		2							LOC CODE	DWG No.		TOTAL-PAGE
youngone FA FA system creator CO.,LTD.		1	24.11.11	first draft design								
		No.	DATE	REVISIONS	TRACED	DESIGNED	CHECKED	APPROVED	CANDC-CONS-C012-062		62/64	

No.	CABLE No.	FROM		TO		Current Type	CABLE				CABLE ROUTE No.							Adjustment	LEN		
		LOC TAG	DESCRIPTION	LOC TAG	DESCRIPTION		SPEC	CORE	SIZE	SPARE	1	2	3	4	5	6	7				
13_1	=DUS+BF01-EV21A	BF-01	JB01TB2		BF-01	EV-21		AC	CVV	3G	1.0	0	LAD1 E1500	E1700						6	6
13_2	=DUS+BF01-EV22A	BF-01	JB01TB2		BF-01	EV-22		AC	CVV	3G	1.0	0	LAD1 E1500	E1800						6	6
13_3	=DUS+BF01-EV23A	BF-01	JB01TB2		BF-01	EV-23		AC	CVV	3G	1.0	0	LAD1 E1500	E1900						5	5
13_4	=DUS+BF01-EV24A	BF-01	JB01TB2		BF-01	EV-24		AC	CVV	3G	1.0	0	LAD1 E1500	E2000						5	5
13_5	=DUS+BF01-EV25A	BF-01	JB01TB2		BF-01	EV-25		AC	CVV	3G	1.0	0	LAD1 E1500	E2100						4	4
13_6	=DUS+BF01-EV26A	BF-01	JB01TB2		BF-01	EV-26		AC	CVV	3G	1.0	0	LAD1 E1600	E2200						4	4
13_7	=DUS+BF01-EV27A	BF-01	JB01TB2		BF-01	EV-27		AC	CVV	3G	1.0	0	LAD1 E1600	E2300						3	3
13_8	=DUS+BF01-EV28A	BF-01	JB01TB2		BF-01	EV-28		AC	CVV	3G	1.0	0	LAD1 E1600	E2400						3	3
13_9	=DUS+BF01-EV29A	BF-01	JB01TB2		BF-01	EV-29		AC	CVV	3G	1.0	0	LAD1 E1600	E2500						2	2
13_10	=DUS+BF01-EV30A	BF-01	JB01TB2		BF-01	EV-30		AC	CVV	3G	1.0	0	LAD1 E1600	E2600						2	2
13_11	=DUS+BF01-EV31A	BF-01	JB01TB3		BF-01	EV-31		AC	CVV	3G	1.0	0	LAD1 E2800	E3000						6	6
13_12	=DUS+BF01-EV32A	BF-01	JB01TB3		BF-01	EV-32		AC	CVV	3G	1.0	0	LAD1 E2800	E3100						6	6
13_13	=DUS+BF01-EV33A	BF-01	JB01TB3		BF-01	EV-33		AC	CVV	3G	1.0	0	LAD1 E2800	E3200						5	5
13_14	=DUS+BF01-EV34A	BF-01	JB01TB3		BF-01	EV-34		AC	CVV	3G	1.0	0	LAD1 E2800	E3300						5	5
13_15	=DUS+BF01-EV35A	BF-01	JB01TB3		BF-01	EV-35		AC	CVV	3G	1.0	0	LAD1 E2800	E3400						4	4
13_16	=DUS+BF01-EV36A	BF-01	JB01TB3		BF-01	EV-36		AC	CVV	3G	1.0	0	LAD1 E2900	E3500						4	4
13_17	=DUS+BF01-EV37A	BF-01	JB01TB3		BF-01	EV-37		AC	CVV	3G	1.0	0	LAD1 E2900	E3600						3	3
13_18	=DUS+BF01-EV38A	BF-01	JB01TB3		BF-01	EV-38		AC	CVV	3G	1.0	0	LAD1 E2900	E3700						3	3
13_19	=DUS+BF01-EV39A	BF-01	JB01TB3		BF-01	EV-39		AC	CVV	3G	1.0	0	LAD1 E2900	E3800						2	2
13_20	=DUS+BF01-EV40A	BF-01	JB01TB3		BF-01	EV-40		AC	CVV	3G	1.0	0	LAD1 E2900	E3900						2	2
13_21	=DUS+BF01-EV41A	BF-01	JB01TB3		BF-01	EV-41		AC	CVV	3G	1.0	0	LAD1 E4100	E4300						6	6
13_22	=DUS+BF01-EV42A	BF-01	JB01TB3		BF-01	EV-42		AC	CVV	3G	1.0	0	LAD1 E4100	E4400						6	6
13_23	=DUS+BF01-EV43A	BF-01	JB01TB3		BF-01	EV-43		AC	CVV	3G	1.0	0	LAD1 E4100	E4500						5	5
13_24	=DUS+BF01-EV44A	BF-01	JB01TB3		BF-01	EV-44		AC	CVV	3G	1.0	0	LAD1 E4100	E4600						5	5
13_25	=DUS+BF01-EV45A	BF-01	JB01TB3		BF-01	EV-45		AC	CVV	3G	1.0	0	LAD1 E4100	E4700						4	4
13_26	=DUS+BF01-EV46A	BF-01	JB01TB3		BF-01	EV-46		AC	CVV	3G	1.0	0	LAD1 E4200	E4800						4	4
13_27	=DUS+BF01-EV47A	BF-01	JB01TB3		BF-01	EV-47		AC	CVV	3G	1.0	0	LAD1 E4200	E4900						3	3
13_28	=DUS+BF01-EV48A	BF-01	JB01TB3		BF-01	EV-48		AC	CVV	3G	1.0	0	LAD1 E4200	E5000						3	3
13_29	=DUS+BF01-EV49A	BF-01	JB01TB3		BF-01	EV-49		AC	CVV	3G	1.0	0	LAD1 E4200	E5100						2	2
13_30	=DUS+BF01-EV50A	BF-01	JB01TB3		BF-01	EV-50		AC	CVV	3G	1.0	0	LAD1 E4200	E5200						2	2

CUSTOMER	5		TITLE				PART DESCRIPTION CABLE SCHEDULE (12)	INS CODE	SECTION	SUB-SECTION	D-PAGE
SEJIN METAL	4		Can-Decoating						SCHEDULE	SCHEDULE	13
Ulsan Plant, Headquarters CO.,LTD.	3		Equipment								
SUPPLIER	2										
youngone FA	1	24.11.11	first draft design		J.W.Lee	J.H.Kim		LOC CODE	DWG No.		TORAL-PAGE
FA system creator CO.,LTD.	No.	DATE	REVISIONS	TRACED	DESIGNED	CHECKED	APPROVED		CANDC-CONS-C013-063		63/64

No.	CABLE No.	FROM		TO		Current Type	CABLE				CABLE ROUTE No.							Adjustment	LEN		
		LOC TAG	DESCRIPTION	LOC TAG	DESCRIPTION		SPEC	CORE	SIZE	SPARE	1	2	3	4	5	6	7				
14_1	=ENT+CR-6SB1A	UC-01	NVBOX		CR	6SB1		DC	CVV	2C	0.75	0	E400	120 RAD1	100	CR				15	64
14_2	=ENT+CR-6SB1B	CR			CR	6SB1		DC	CVV	2C	0.75	0	CR							10	11
14_3	=ENT+AB01-6SB2A	UC-01	NVBOX		AB-01	6SB2		DC	CVV	2C	0.75	0	E400	120 RAD1	100	100 RBD1				10	50
14_4	=ENT+AB01-6SB2B	CR			AB-01	6SB2		DC	CVV	2C	0.75	0	CR	100 RBD1						10	40
14_5	=FLB+CY02-6SB3A	UC-01	NVBOX		CY-02	6SB3		DC	CVV	2C	0.75	0	E400	120 RAD1	100 LDD1	E400				15	29
14_6	=FLB+CY02-6SB3B	CR			CY-02	6SB3		DC	CVV	2C	0.75	0	CR	100	100 LDD1	E400				10	66
14_7	=ENT+CR-12SB2A	CR			CR	12SB2		DC	CVV	2C	1.0	0	CR							15	16
14_8	=ENT+CC01-12SB3A	CR	12SB2		CC-01	12SB3		DC	CVV	2C	1.0	0	CR	100 RBD1	E900					11	41
14_9	=EXI+EXIT-12SB4A	CC-01	12SB3		EXIT	12SB4		DC	CVV	2C	1.0	0	E900	100 RBD1	120	121	122	EXI1TB1 E800		10	62
14_10	=DUS+DUST-12SB5A	EXIT	12SB4		DUST	12SB5		DC	CVV	2C	1.0	0	EXI1TB1 E800	122	121	120	200	210	211 RA	10	88
14_11	=DUS+DUST-12SB5B	DUST	12SB5		CR			DC	CVV	2C	1.0	0	211 RA	210	200	100	CR			10	109
14_12	=ENT+CC01-BR01A	CR			CC-01	BR-01		DC	CVV	25G	1.0	8	100 RA							7	36
14_13	=ENT+CC01-BR01B	CR			CC-01	BR-01		AC	CVV	4G	4.0	3	100 RA	E400						7	36
14_14	=ENT+CC01-BR01C	CR			CC-01	BR-01		AC	CVV	16G	1.0	15	100 RA	E400						7	36
14_15	=ENT+CC01-BR01D	CR			CC-01	BR-01		AIO	CVV-S	4S	1.0	3	100 RA	E500						7	36
14_16	=ENT+CC01-BR01E	CR			CC-01	BR-01		AIO	CVV-S	4S	1.0	3	100 RA	E500						7	36
14_17	=ENT+CC01-BR01F	CR			CC-01	BR-01		AI	CVV-S	4S	1.0	3	100 RA	E600						7	36
14_18	=ENT+CC01-BR01F	CR			CC-01	BR-01		AI	CVV-S	4S	1.0	3	100 RA	E600						7	36
14_19																					
14_20																					
14_21																					
14_22																					
14_23																					
14_24																					
14_25																					
14_26																					
14_27																					
14_28																					
14_29																					
14_30																					

CUSTOMER SEJIN METAL Ulsan Plant, Headquarters CO.,LTD.	5		TITLE Can-Decoating Equipment				PART DESCRIPTION CABLE SCHEDULE (13)	INS CODE	SECTION	SUB-SECTION	D-PAGE
	4								SCHEDULE	SCHEDULE	14
	3										
SUPPLIER youngone FA FA system creator CO.,LTD.	2							LOC CODE	DWG No.	TOTAL-PAGE	
	1	24.11.11	first draft design		J.W.Lee	J.H.Kim				CANDC-CONS-C014-064	64/64
	No.	DATE	REVISIONS	TRACED	DESIGNED	CHECKED	APPROVED				