
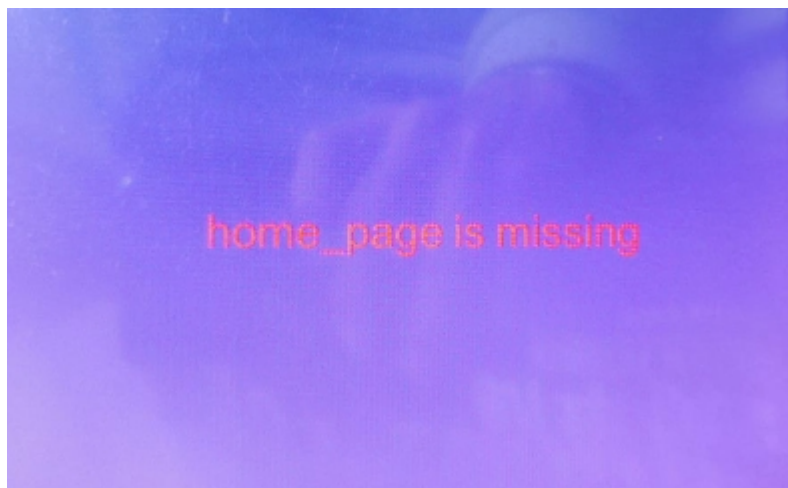
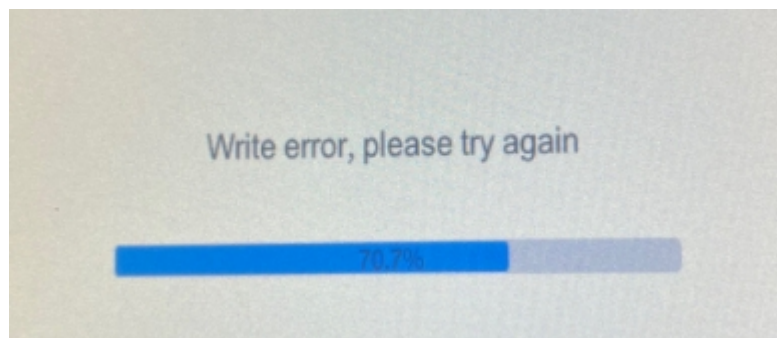


Common Issues and Solutions

1. If you are encountering the issues including having error message “File write error/Write error” from the display once updated project by pen-drive, or “purple color screen” pop up(sometimes with “home_page is missing” error message).

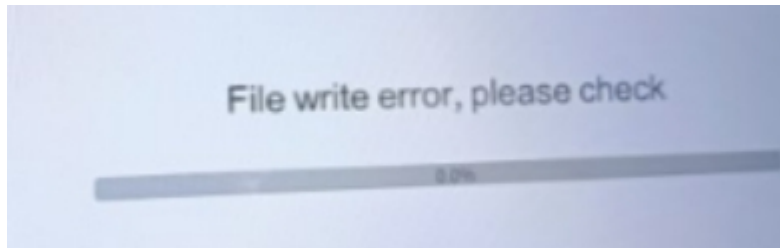


Solutions:

- 1) Please switch your display to PC mode and connect it to your computer, then format your display




- 2) Copy and paste your “default” UI project folder into display, click Eject storage of the display and reboot it.

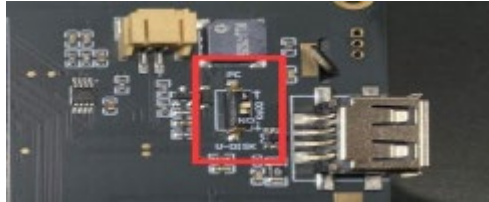

3) After reboot your display successfully, you may try again for updating your UI project by pen-drive.


2. If you have tried once with Solution No.1 but still encountering error message as “File write error/Write error”

- 1) Please try with another pen-drive. FAT32 format without hidden drive.
- 2) If you are still fail to update your project, please check if any files inside of your project been entitled incorrectly. (only allowing for applying lowercase english letters, numbers and underline)
- 3) If you find error message as below

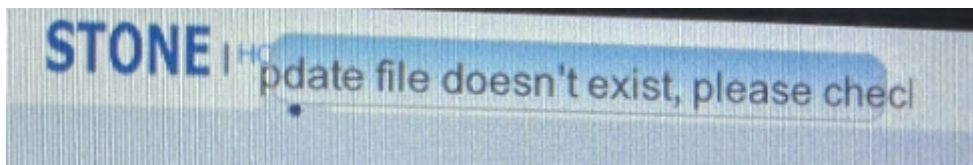


Please check the correctness of your folder path, it must be as **STONE\project\default**. Please pay attention to the correctness of capital and lower-case of letters, Please don't generate hidden or encrypted files or folders of your pen drive.

4) If you find error message as below

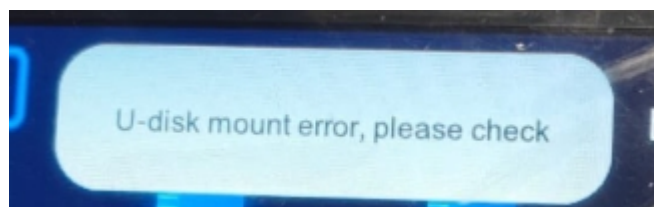

Which means your pen-drive has hidden drive or the pen-drive hardware itself is damaged. Please use relevant software for merging hidden drive or use another pen-drive instead.

5) If you find error message as below

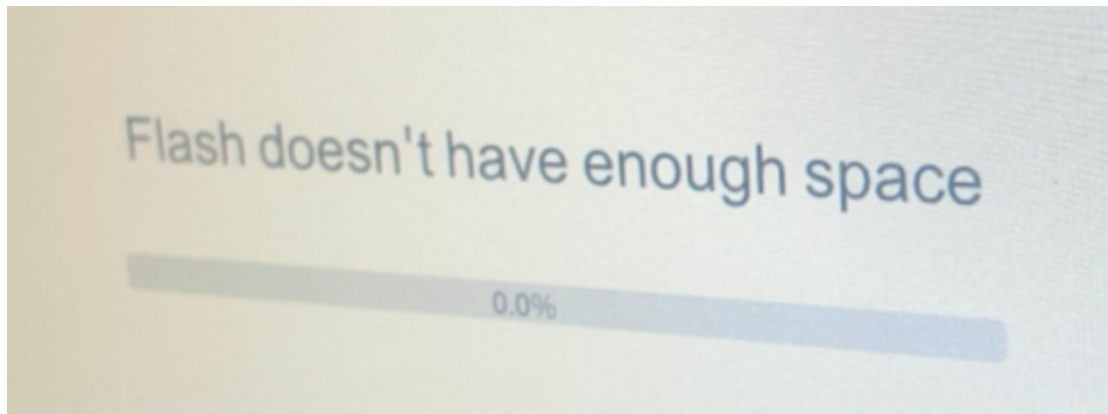

Which means your project folder is too big size to upload to your display. Please delete part of your resources files from your project folder and try again. Please keep at least 2MB storage space left for your display after uploading the project folder to ensure your project may run smoothly.