
Comment	Description	Designator	DK PN	Footprint	MFG PN	Quantity
0.1UF/TH	0.1 µF ±10% 50V Ceramic Capacitor X7R Radial	C1, C3, C4, C5, C6, C7, C8, C9, C10, C11, C13, C15	BC2665CT-ND	CAPH5	K104K10X7RF5UH5	12
1M/5%	1 MOhms ±5% 0.125W, 1/8W Through Hole Resistor Axial Flame Retardant Coating, Safety Carbon Film	R1	CF18JT1M00CT-ND	CF18	CF18JT1M00	1
2k2/5%	2.2 kOhms ±5% 0.125W, 1/8W Through Hole Resistor Axial Flame Retardant Coating, Safety Carbon Film	R11	CF18JT2K20CT-ND	CF18	CF18JT2K20	1
2K7/5%	RES 2.7K OHM 5% 1/8W AXIAL	R3	CF18JT2K70CT-ND	CF18	CF18JT2K70	1
2N3904	TRANS NPN 40V 0.2A TO92	Q1	2368-2N3904-ND	TO92	2N3904	1
4K7/5%	RES 4.7K OHM 5% 1/8W AXIAL	R2, R4, R6, R7, R8, R9, R10	CF18JT4K70CT-ND	CF18	CF18JT4K70	7
10UF	CAP ALUM 10UF 20% 16V RADIAL	C2, C12, C16	P807-ND	CAP10EL	ECE-A1CKA100	3
220k/5%	RES 220K OHM 5% 1/8W AXIAL	R5	CF18JT220KCT-ND	CF18	CF18JT220K	1
AS6C4008-55PCN	SRAM - Asynchronous Memory IC 4Mb (512K x 8) Parallel 55 ns 32-DIP	U13	1450-1027-ND	DIP32	AS6C4008-55PCN	1
HDR2		JP1, JP2, JP3, JP5, P10		HDR2		5
JTP1230A	Tactile Switch SPST-NO Top Actuated Through Hole	SW1, SW2, SW3	679-2429-ND	TACSW_6.5x4.5	JTP1230A	3
OPENHW_PCB		OH0		OpenHW		1
OPENHW_SCH		OH1				1
RPI_PICO	RASPBERRY PI PICO RP2040 BOARD	U2	2648-SC0915CT-ND	RPIPICO	SC0915	1
SB260_R2_00001	DIODE SCHOTTKY 60V 2A DO15	D2	3757-SB260_R2_00001CT-ND	DO-15	SB260_R2_00001	1
SDCARD_2	Micro SD card module	U3	A101492CT-ND	SDMODULE1_FLIPPED	2041021-4	1
SIP3		JP4		SIP3		1
SN74LS04N	Inverter IC 6 Channel 14-PDIP	U1	296-1629-5-ND	dip14	SN74LS04N	1
SN74LS09N	AND Gate IC 4 Channel Open Collector 14-PDIP	U9	296-3631-5-ND	dip14	SN74LS09N	1
SN74LS27N	NOR Gate IC 3 Channel 14-PDIP	U5	296-14890-5-ND	dip14	SN74LS27N	1
SN74LS32N	IC GATE OR 4CH 2-INP 14DIP	U4	296-1658-5-ND	dip14	SN74LS32N	1
SN74LS157N	IC MULTIPLEXER 4 X 2:1 16DIP	U8	296-1645-5-ND	DIP16	SN74LS157N	1
SN74LVC245AN	Transceiver, Non-Inverting 1 Element 8 Bit per Element 3-State Output 20-PDIP	U6, U7	296-8503-5-ND	DIP20	SN74LVC245AN	2
SST39SF040-70	FLASH Memory IC 4Mbit Parallel 70 ns 32-PDIP	U10	SST39SF040-70-4C-PHE-ND	DIP32	SST39SF040-70-4C-PHE	1
TLC555IP	555 Type, Timer/Oscillator (Single) IC 2.1MHz 8-PDIP	U11	296-1858-5-ND	DIP8	TLC555IP	1
TS2068		P1		TS2068A		1


U_Logic
Logic.schdoc




U_Pico
Pico.SchDoc



U_Memory
Memory.SchDoc



U_ts2068Interface
ts2068Interface.SchDoc



PCB Icons




OH1





OH0


Title	Top Level		
Size: A	Number:		Revision:
Date:	9/11/2023	Sheet 1of 5	
File:	E:\GitRepositories\..\tsPicoTop.SchDoc	Drawn By:	

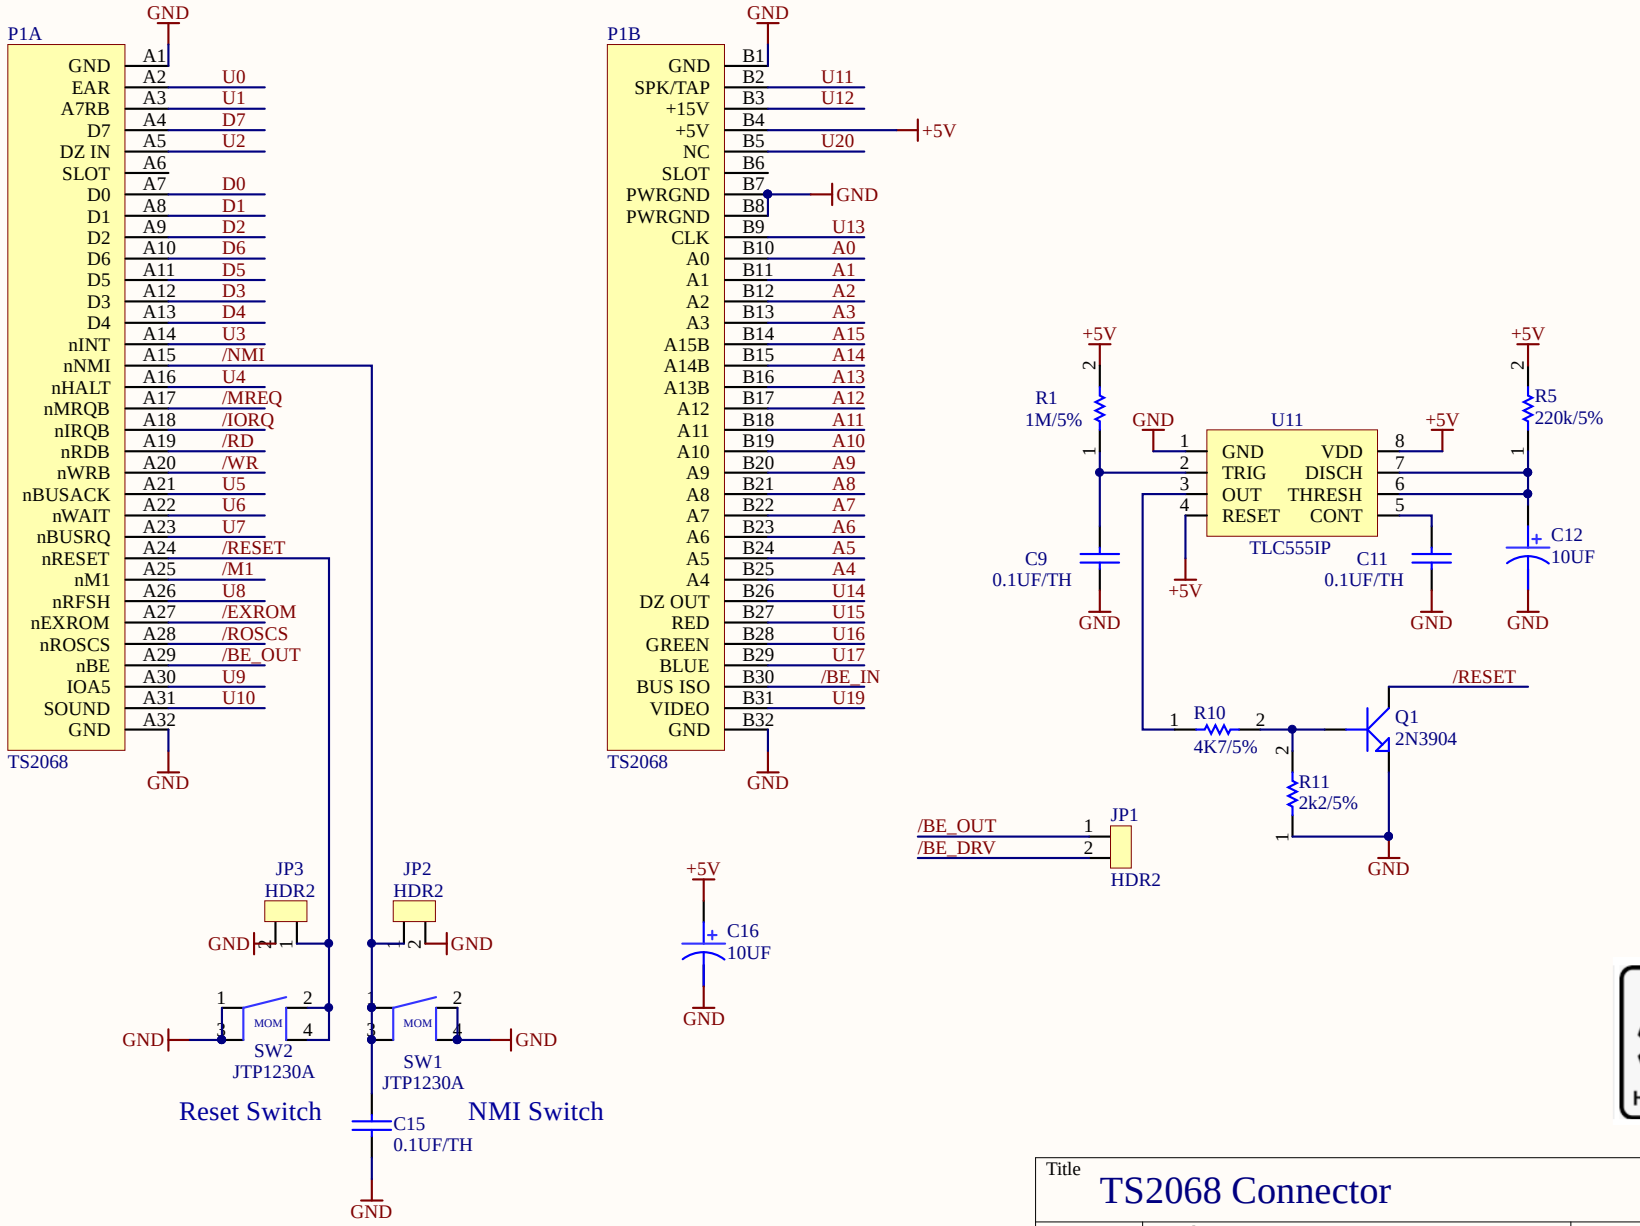



Title	TS2068 Connector	
Size: A	Number:	Revision:
Date: 9/11/2023	Sheet 2 of 5	
File: E:\GitRepositories\..\ts2068Interface.SchDoc	Drawn By:	

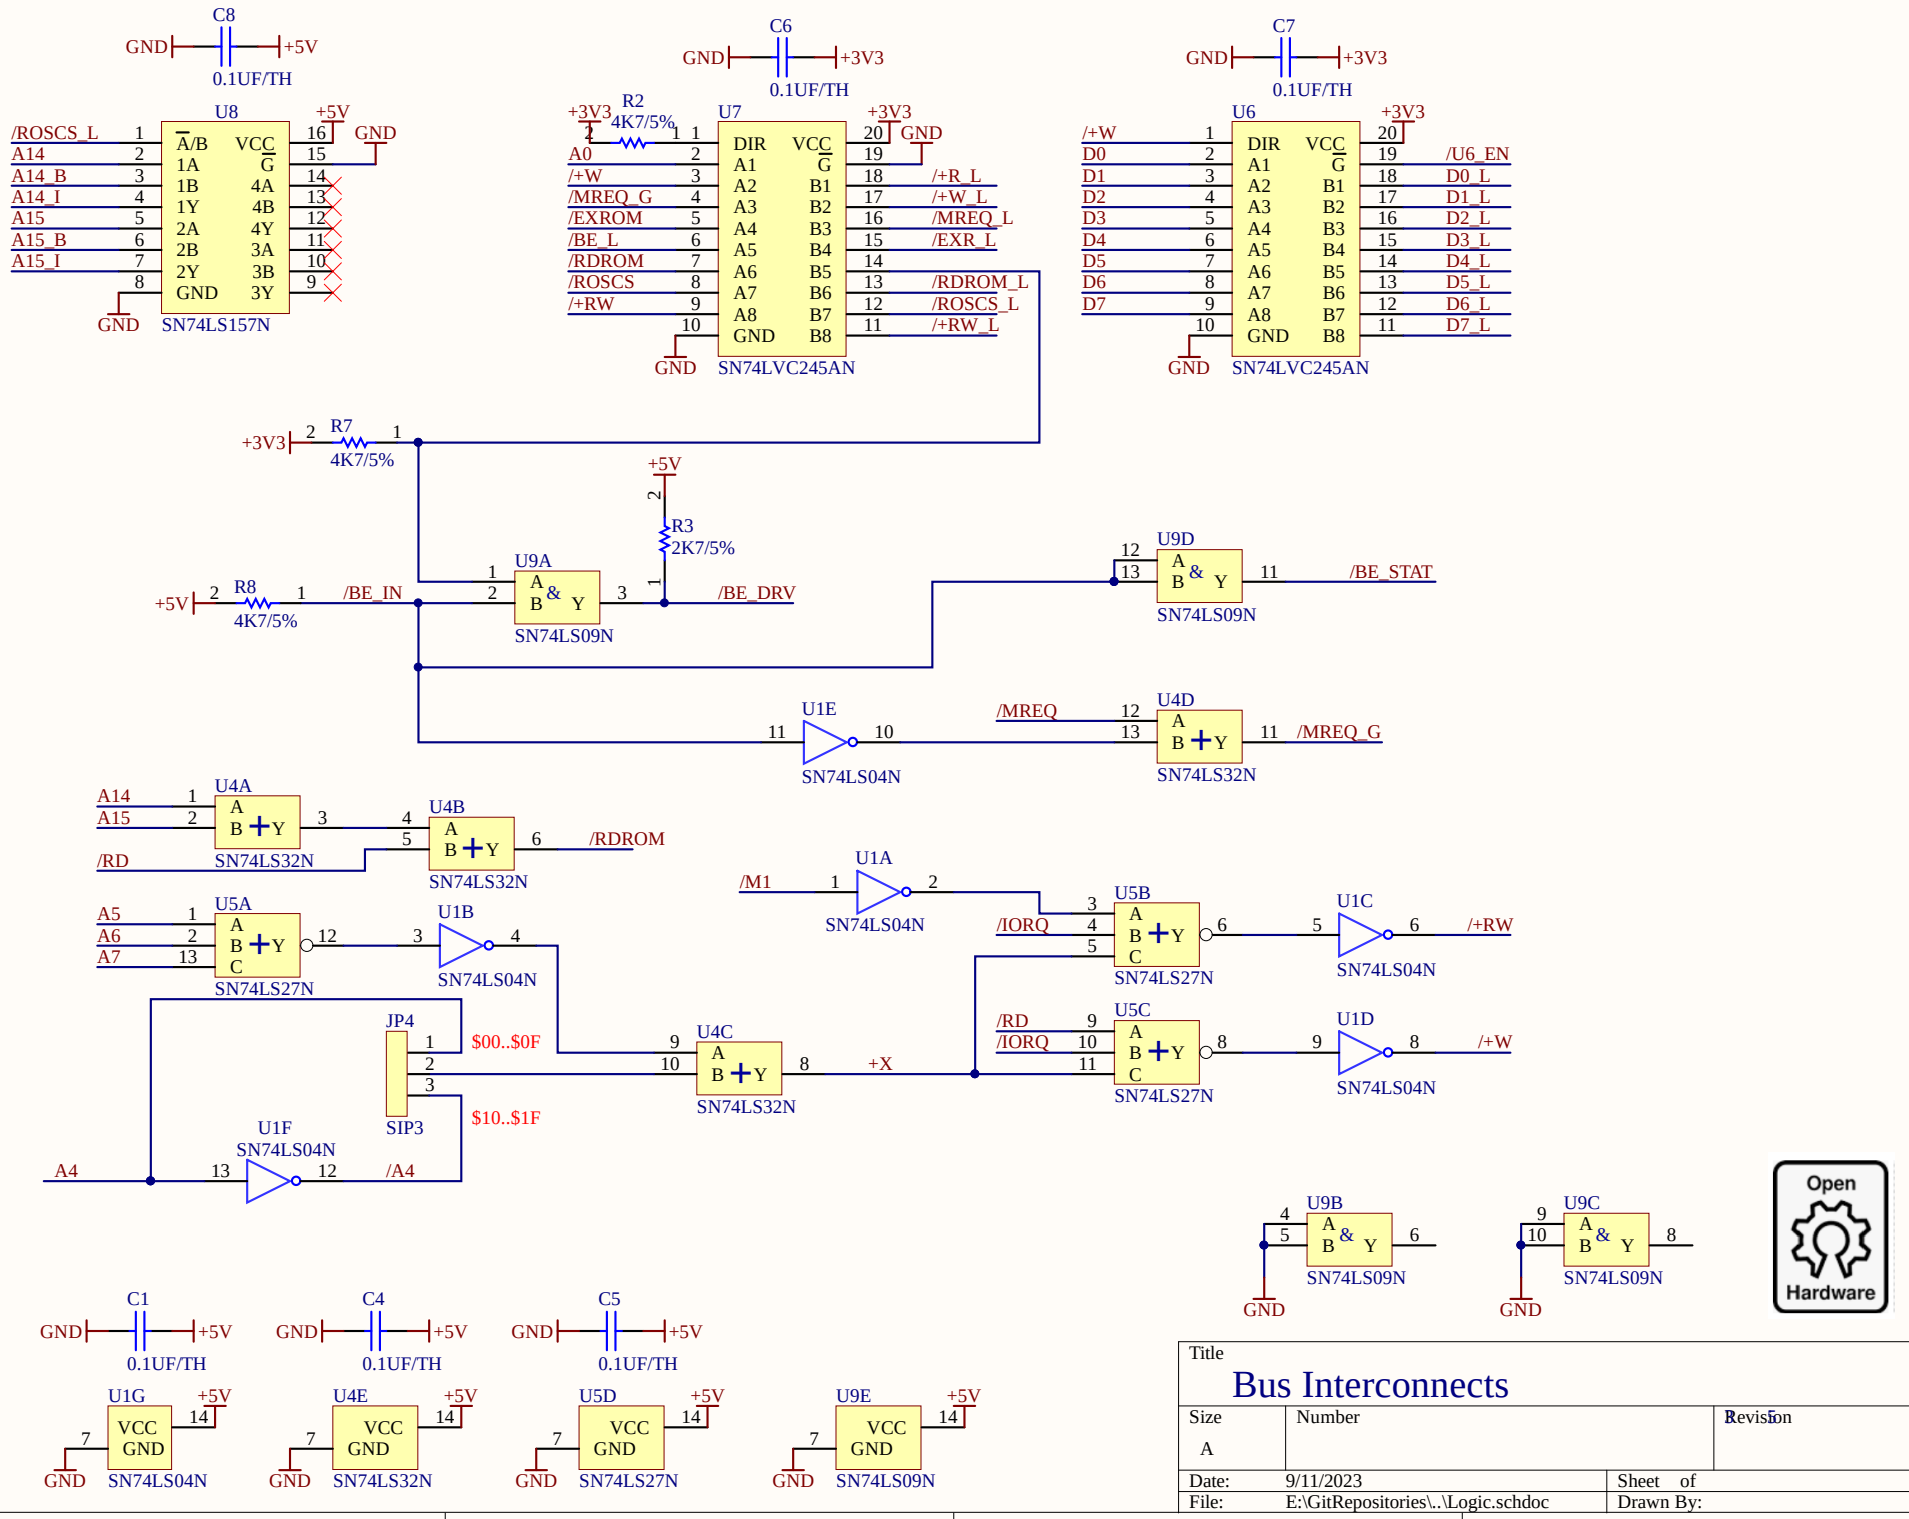
C8
GND
+5V
0.1UF/TH
U8
/ROSCS_L
A14
A14_B
A14_I
A15
A15_B
A15_I
A/B
1A
1B
1Y
2A
2B
2Y
GND
VCC
G
4A
4B
4Y
3A
3B
3Y
SN74LS157N
C6
+3V3
R2
4K7/5%
U7
A0
/+W
/MREQ_G
/EXROM
/BE_L
/RDROM
/ROSCS
/+RW
DIR
A1
A2
A3
A4
A5
A6
A7
A8
B1
B2
B3
B4
B5
B6
B7
B8
/+R_L
/+W_L
/MREQ_L
/EXR_L
/RDROM_L
/ROSCS_L
/+RW_L
SN74LVC245AN
C7
U6
/+W
D0
D1
D2
D3
D4
D5
D6
D7
/U6_EN
D0_L
D1_L
D2_L
D3_L
D4_L
D5_L
D6_L
D7_L
R7
R3
2K7/5%
R8
/BE_IN
/BE_DRV
U9A
SN74LS09N
U9D
/BE_STAT
U1E
SN74LS04N
/MREQ
U4D
SN74LS32N
/MREQ_G
U4A
A14
A15
/RD
U4B
/RDROM
U5A
A5
A6
A7
SN74LS27N
U1B
U1A
/M1
U5B
/IORQ
U1C
/+RW
JP4
SIP3
$00..$0F
$10..$1F
U4C
+X
U5C
U1D
/+W
U1F
A4
/A4
U9B
U9C
Open
Hardware
C1
C4
C5
U1G
U4E
U5D
U9E
VCC
GND
Title
Bus Interconnects
Size
A
Number
Revision
Date:
9/11/2023
File:
E:\GitRepositories\..\Logic.schdoc
Sheet of
Drawn By:

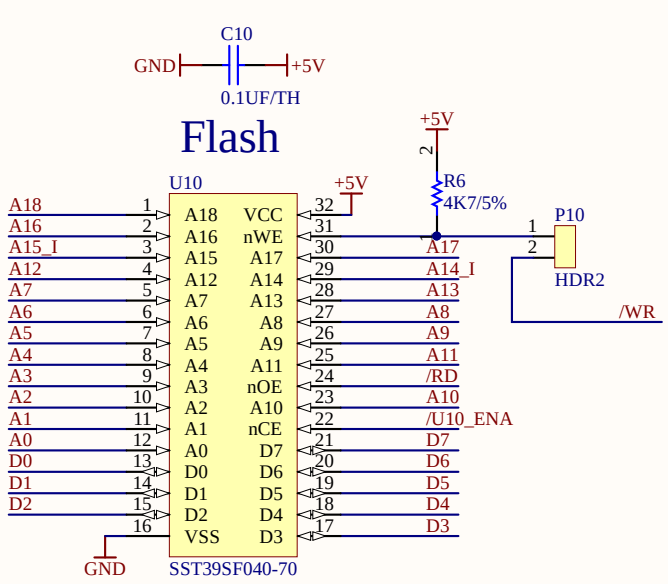

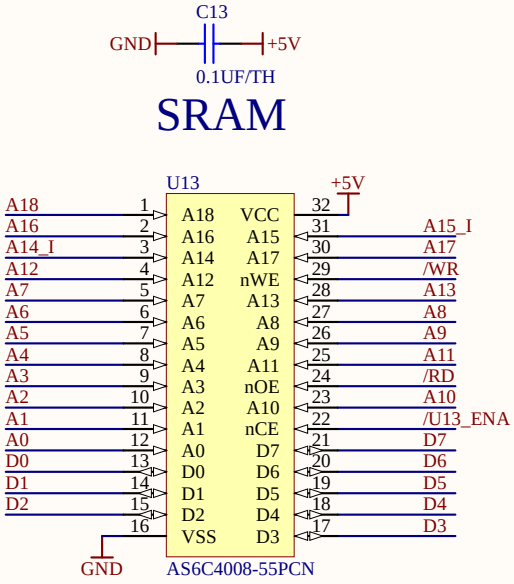







Open Hardware

Title: Memory		
Size: A	Number:	Revision:
Date: 9/11/2023		Sheet 4of 5
File: E:\GitRepositories\..\Memory.SchDoc		Drawn By:


RPi Pico

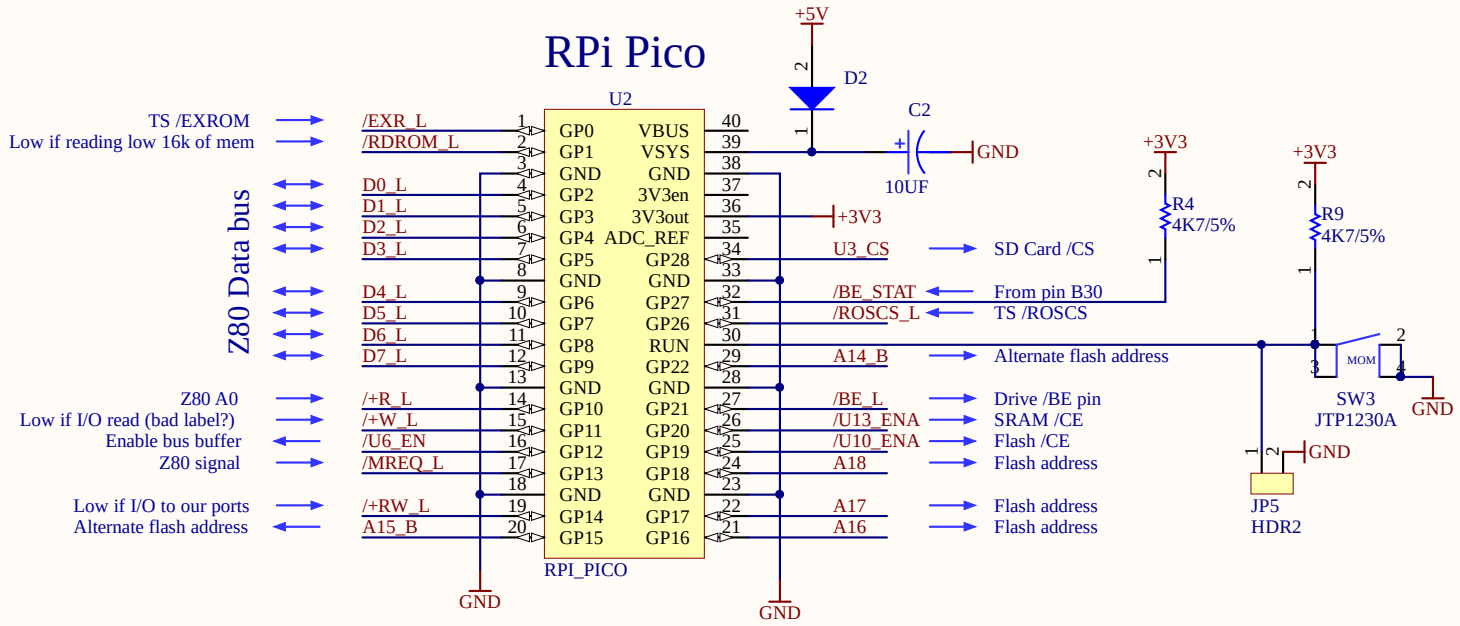


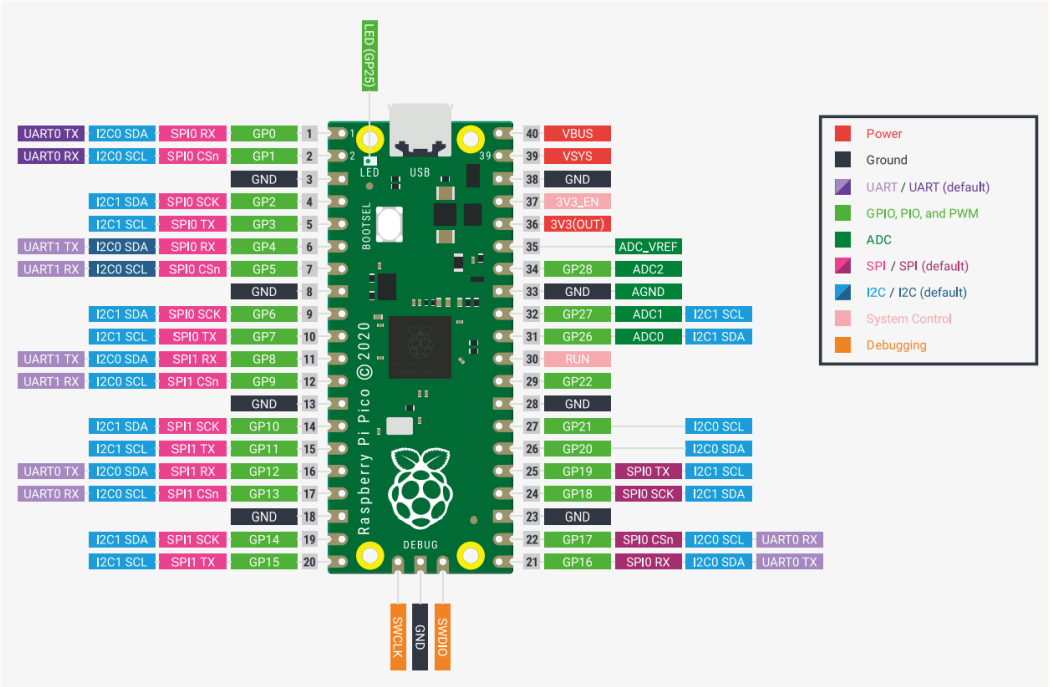



Open Hardware

Title: Raspberry Pi		
Size: A	Number:	Revision:
Date: 9/11/2023		Sheet 4of 7
File: E:\GitRepositories\..\Pico.SchDoc		Drawn By:

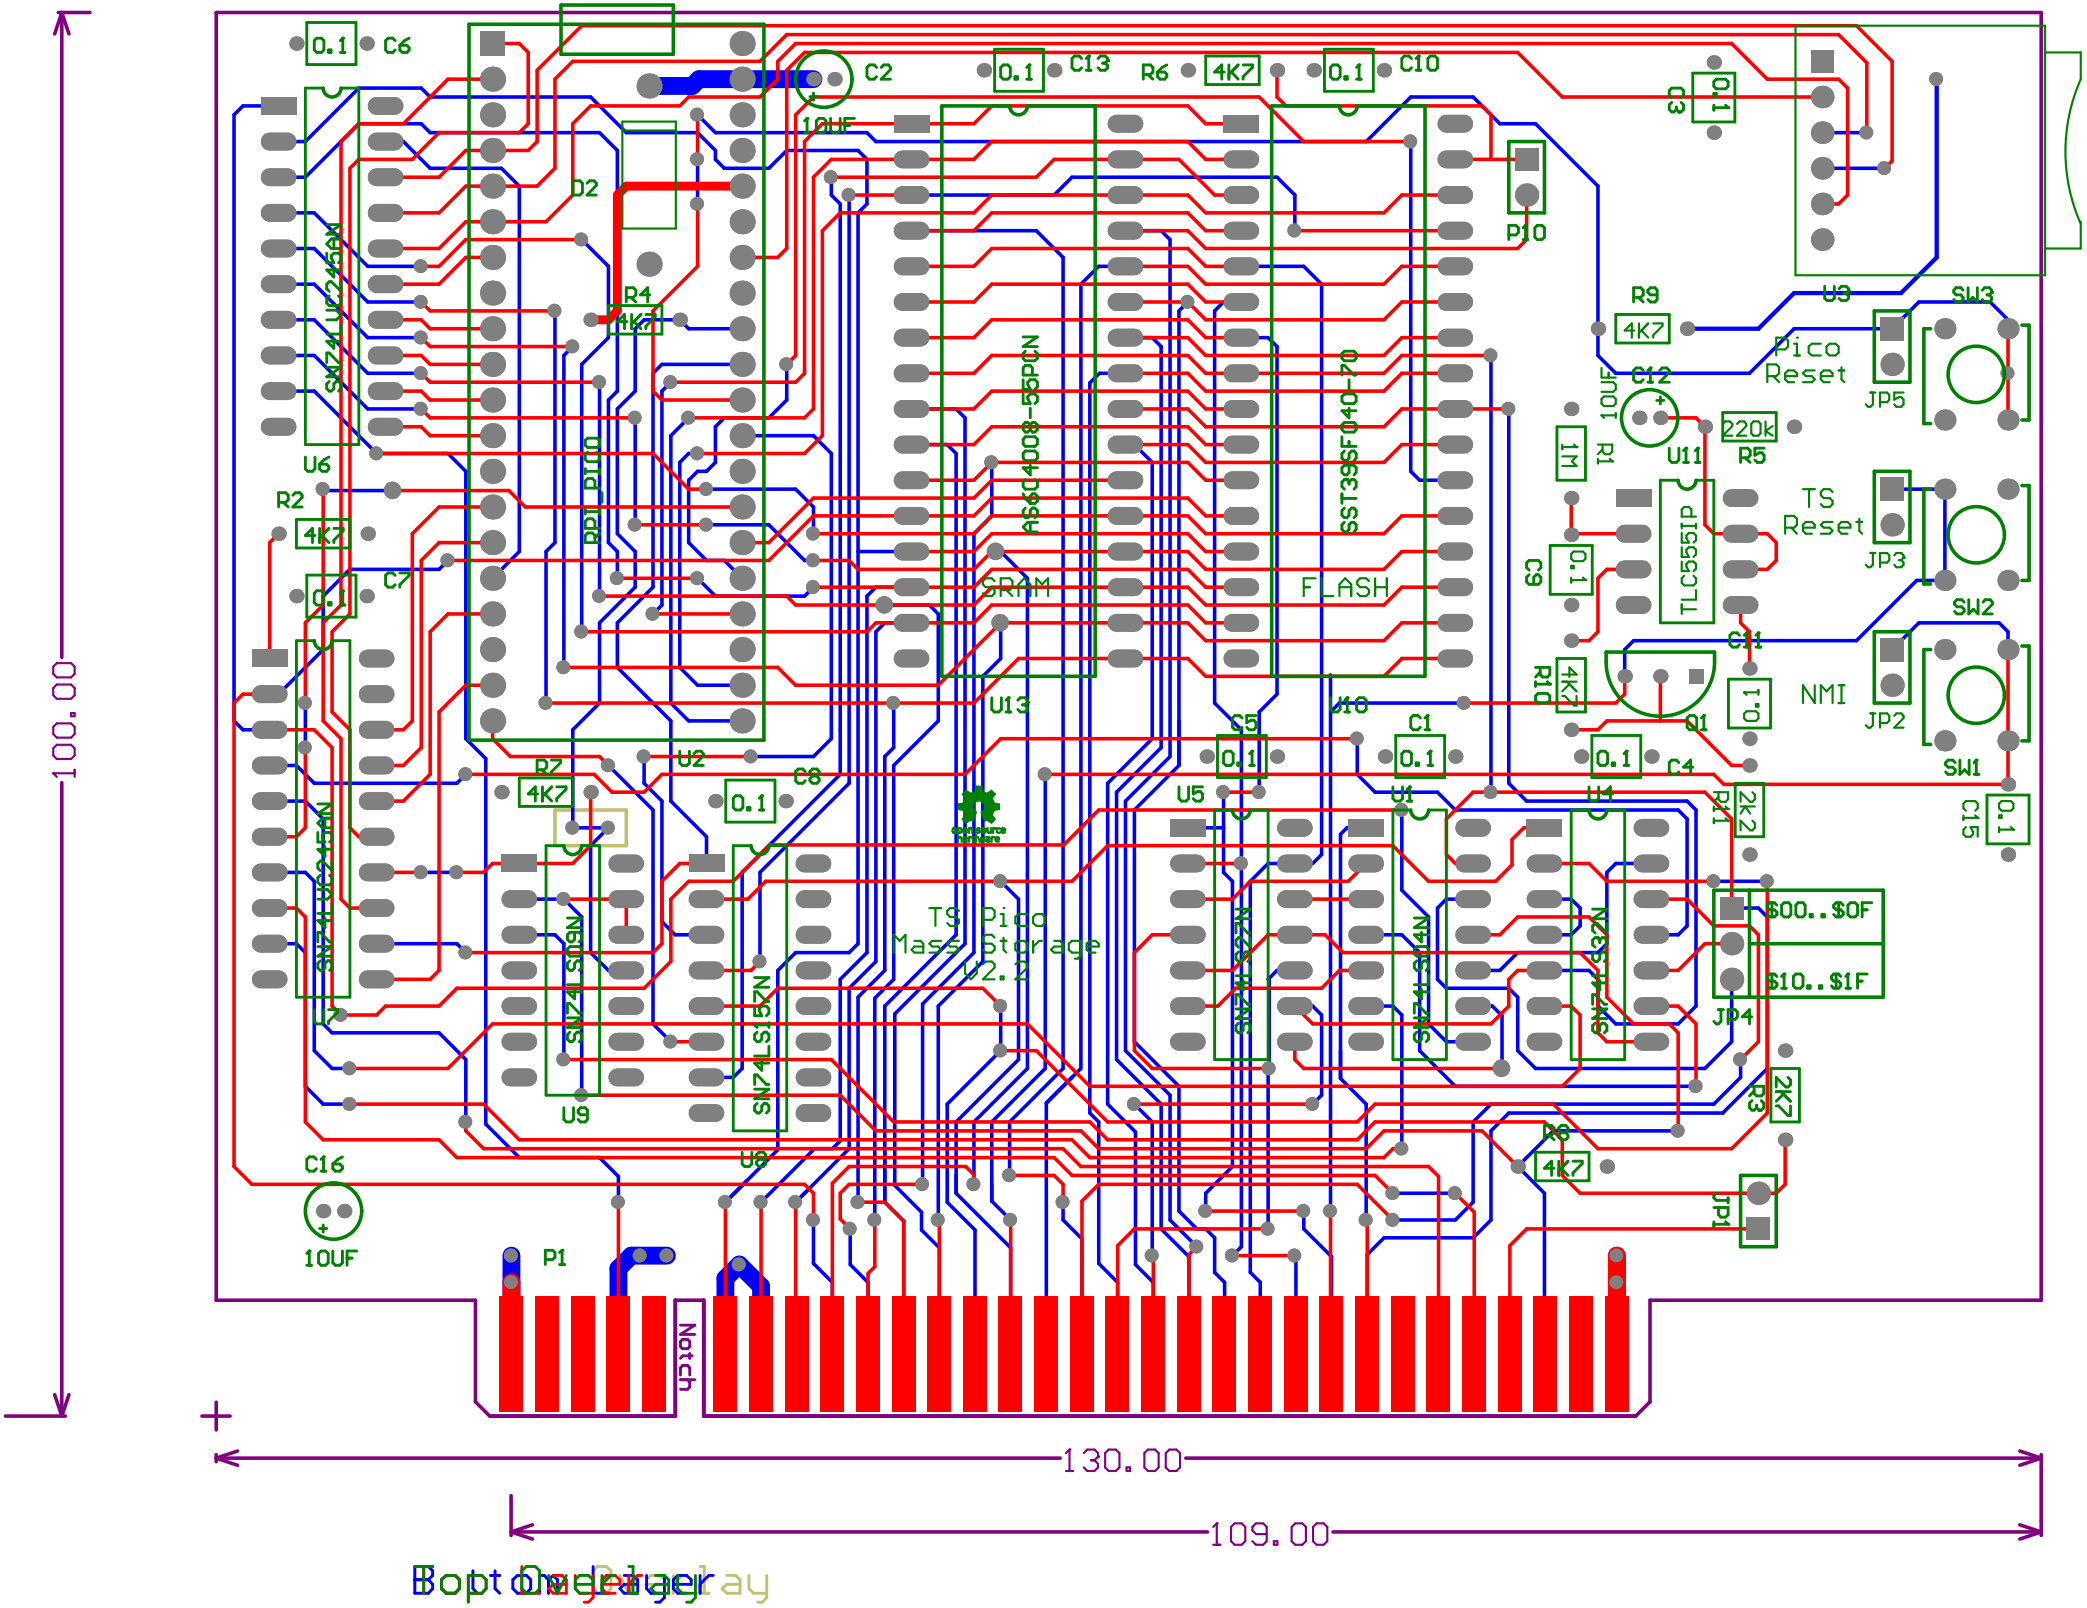
100.00
130.00
109.00
C6
C2
10UF
C13
R6
4K7
C10
C3
D2
R4
P10
R9
U3
SW3
Pico
Reset
JP5
C12
10UF
220k
R5
U11
R1
1M
TS
Reset
JP3
SW2
NMI
JP2
SW1
C11
Q1
C4
2k2
R11
C15
R2
C7
C9
C5
C1
C8
U13
U10
U2
U5
U1
U4
RZ
U6
U9
U8
SST39SF040-70
AS6C4008-55PCN
SRAM
FLASH
TLC555IP
SN74LVC245AN
SN74LS157N
SN74LS32N
SN74LS04N
SN74LS245N
TS Pico
Mass Storage
U2.2
$00..$0F
$10..$1F
JP4
R3
2K7
R8
JP1
C16
10UF
P1
Notch
Bottom Overlay

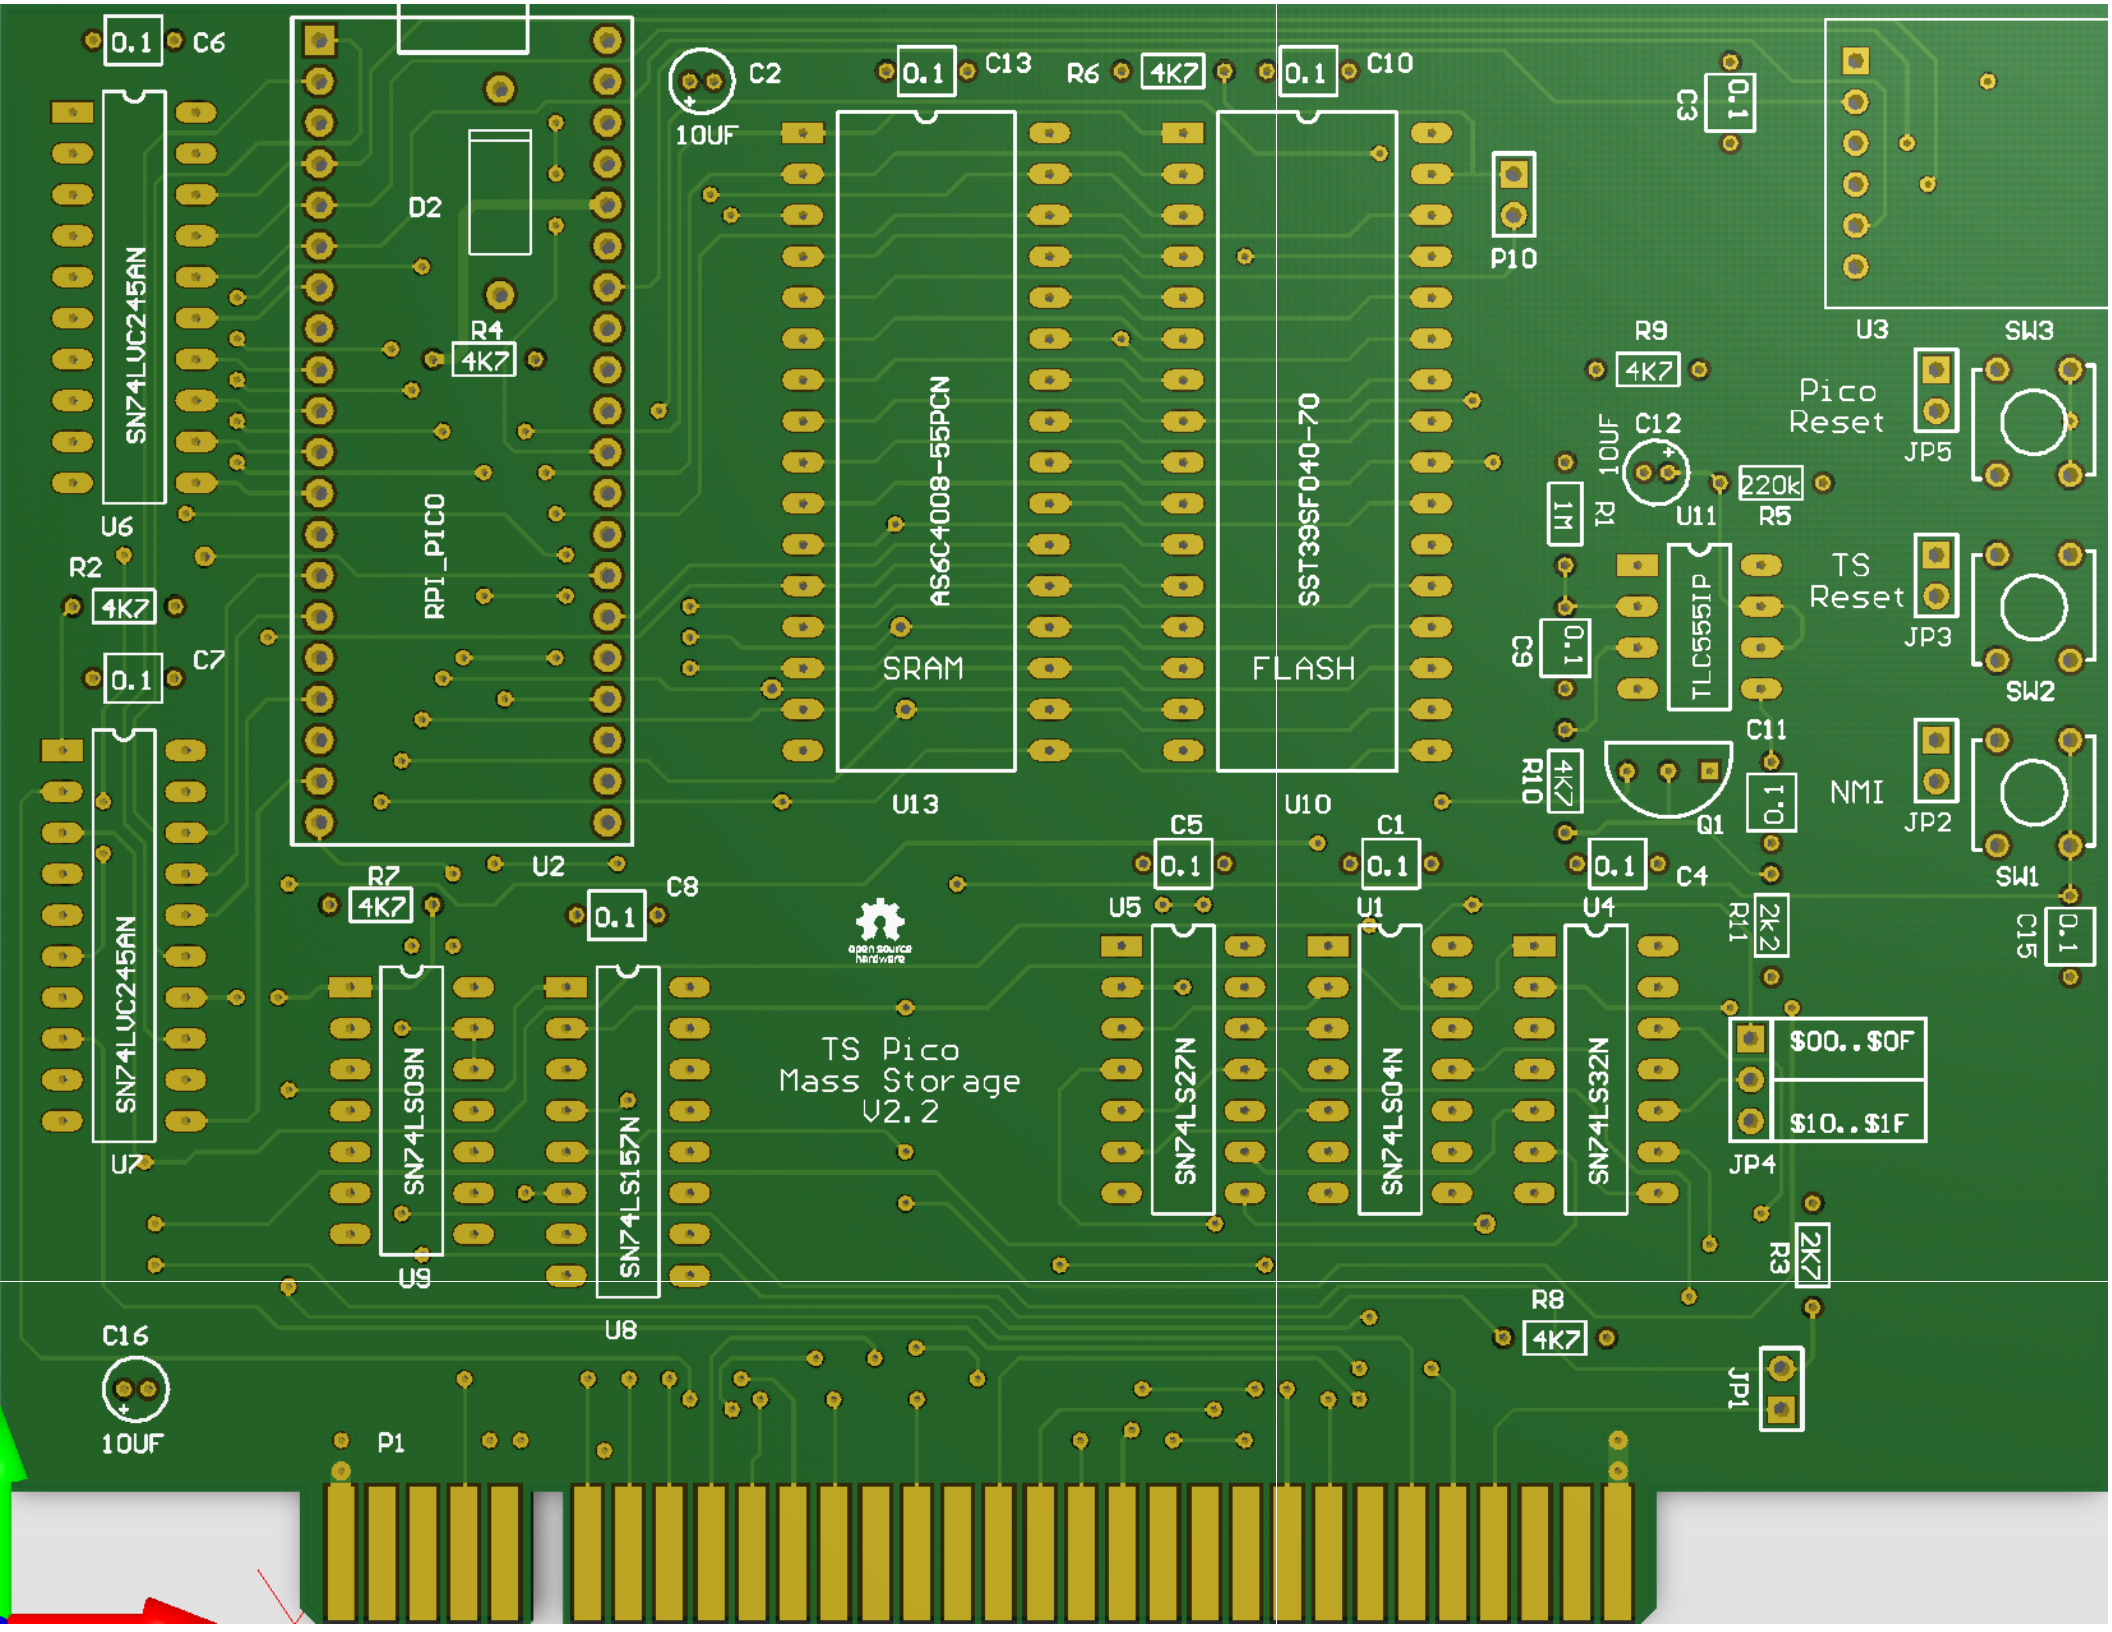
TS Pico
Mass Storage
V2.2
RPI_PICO
SRAM
AS6C4008-55PCN
FLASH
SST39SF040-70
SN74LVC245AN
SN74LS09N
SN74LS157N
SN74LS27N
SN74LS04N
SN74LS32N
TLC555IP
Pico
Reset
TS
Reset
NMI
$00..$0F
$10..$1F
P1
P10
JP1
JP2
JP3
JP4
JP5
SW1
SW2
SW3
U1
U2
U3
U4
U5
U6
U7
U8
U9
U10
U11
U13
Q1
R1
R2
R3
R4
R5
R6
R7
R8
R9
R10
R11
C1
C2
C3
C4
C5
C6
C7
C8
C9
C10
C11
C12
C13
C15
C16
0.1
10UF
1M
220k
4K7
2k2
2K7

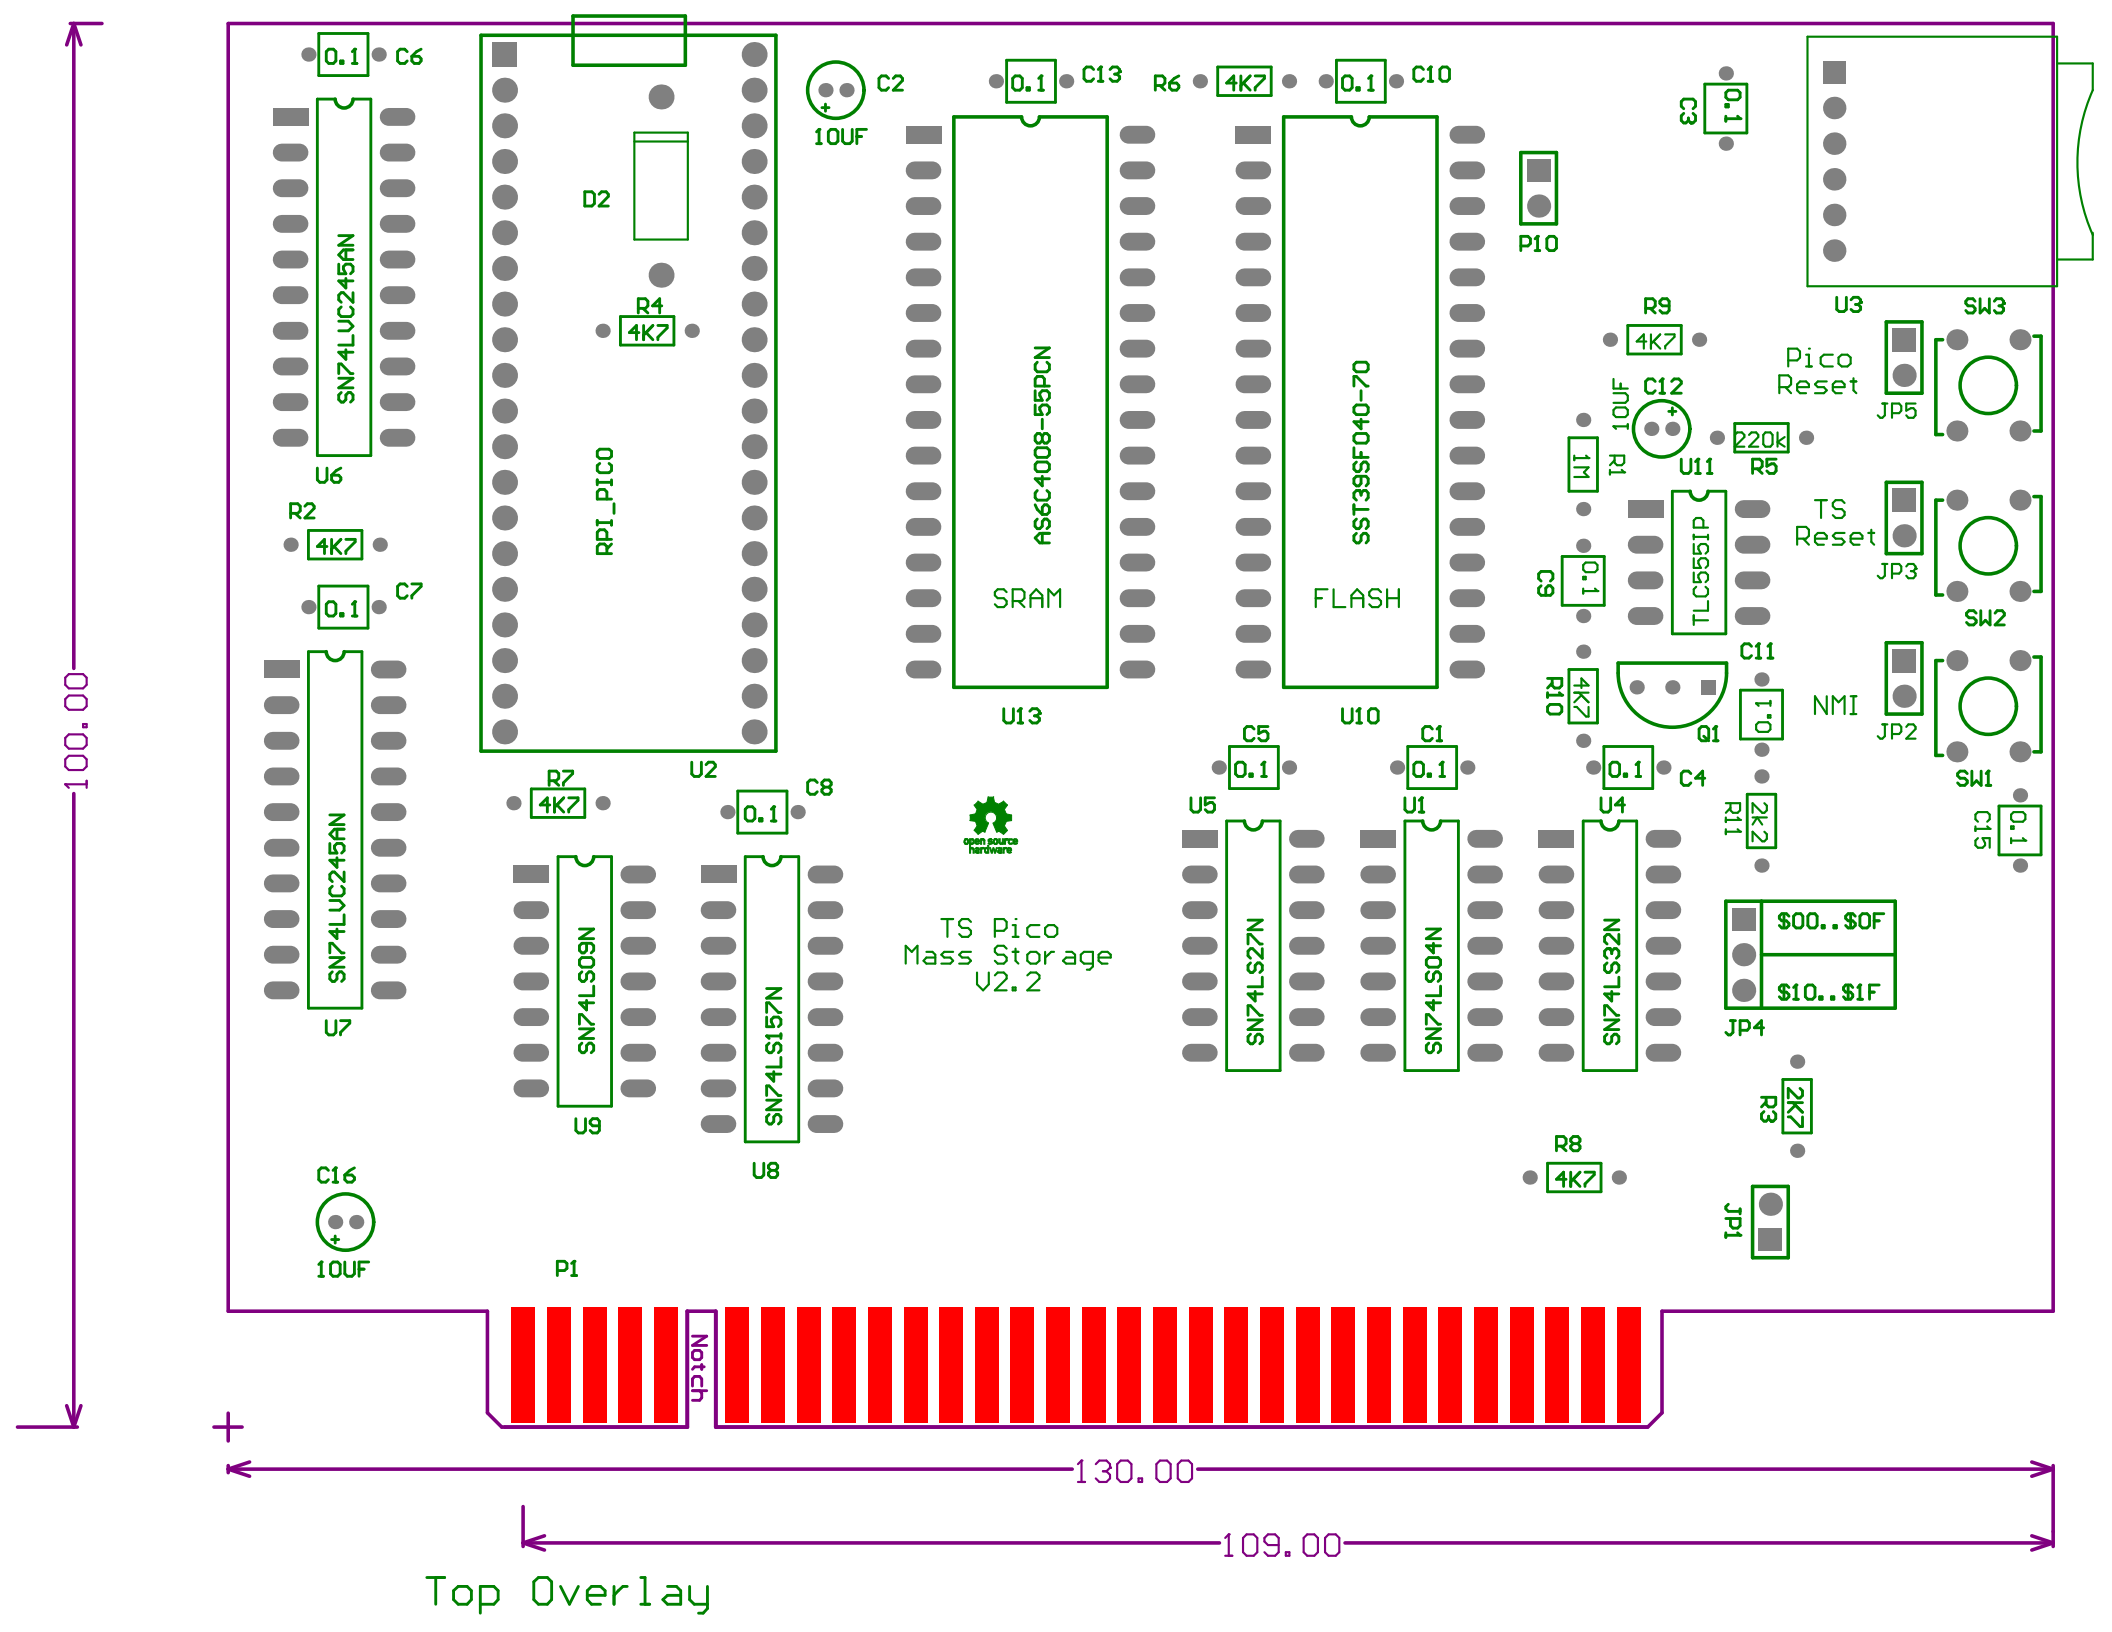
100.00
130.00
109.00
Top Overlay
TS Pico
Mass Storage
V2.2
RPI_PICO
SRAM
AS6C4008-55PCN
FLASH
SST39SF040-70
SN74LVC245AN
SN74LS09N
SN74LS157N
SN74LS27N
SN74LS04N
SN74LS32N
TLC555IP
Pico
Reset
TS
Reset
NMI
Notch
$00..$0F
$10..$1F
U1
U2
U3
U4
U5
U6
U7
U8
U9
U10
U11
U13
P1
P10
JP1
JP2
JP3
JP4
JP5
SW1
SW2
SW3
Q1
C1
C2
C3
C4
C5
C6
C7
C8
C9
C10
C11
C12
C13
C15
C16
R1
R2
R3
R4
R5
R6
R7
R8
R9
R10
R11
D2
0.1
4K7
1M
220k
2k2
2K7
10UF

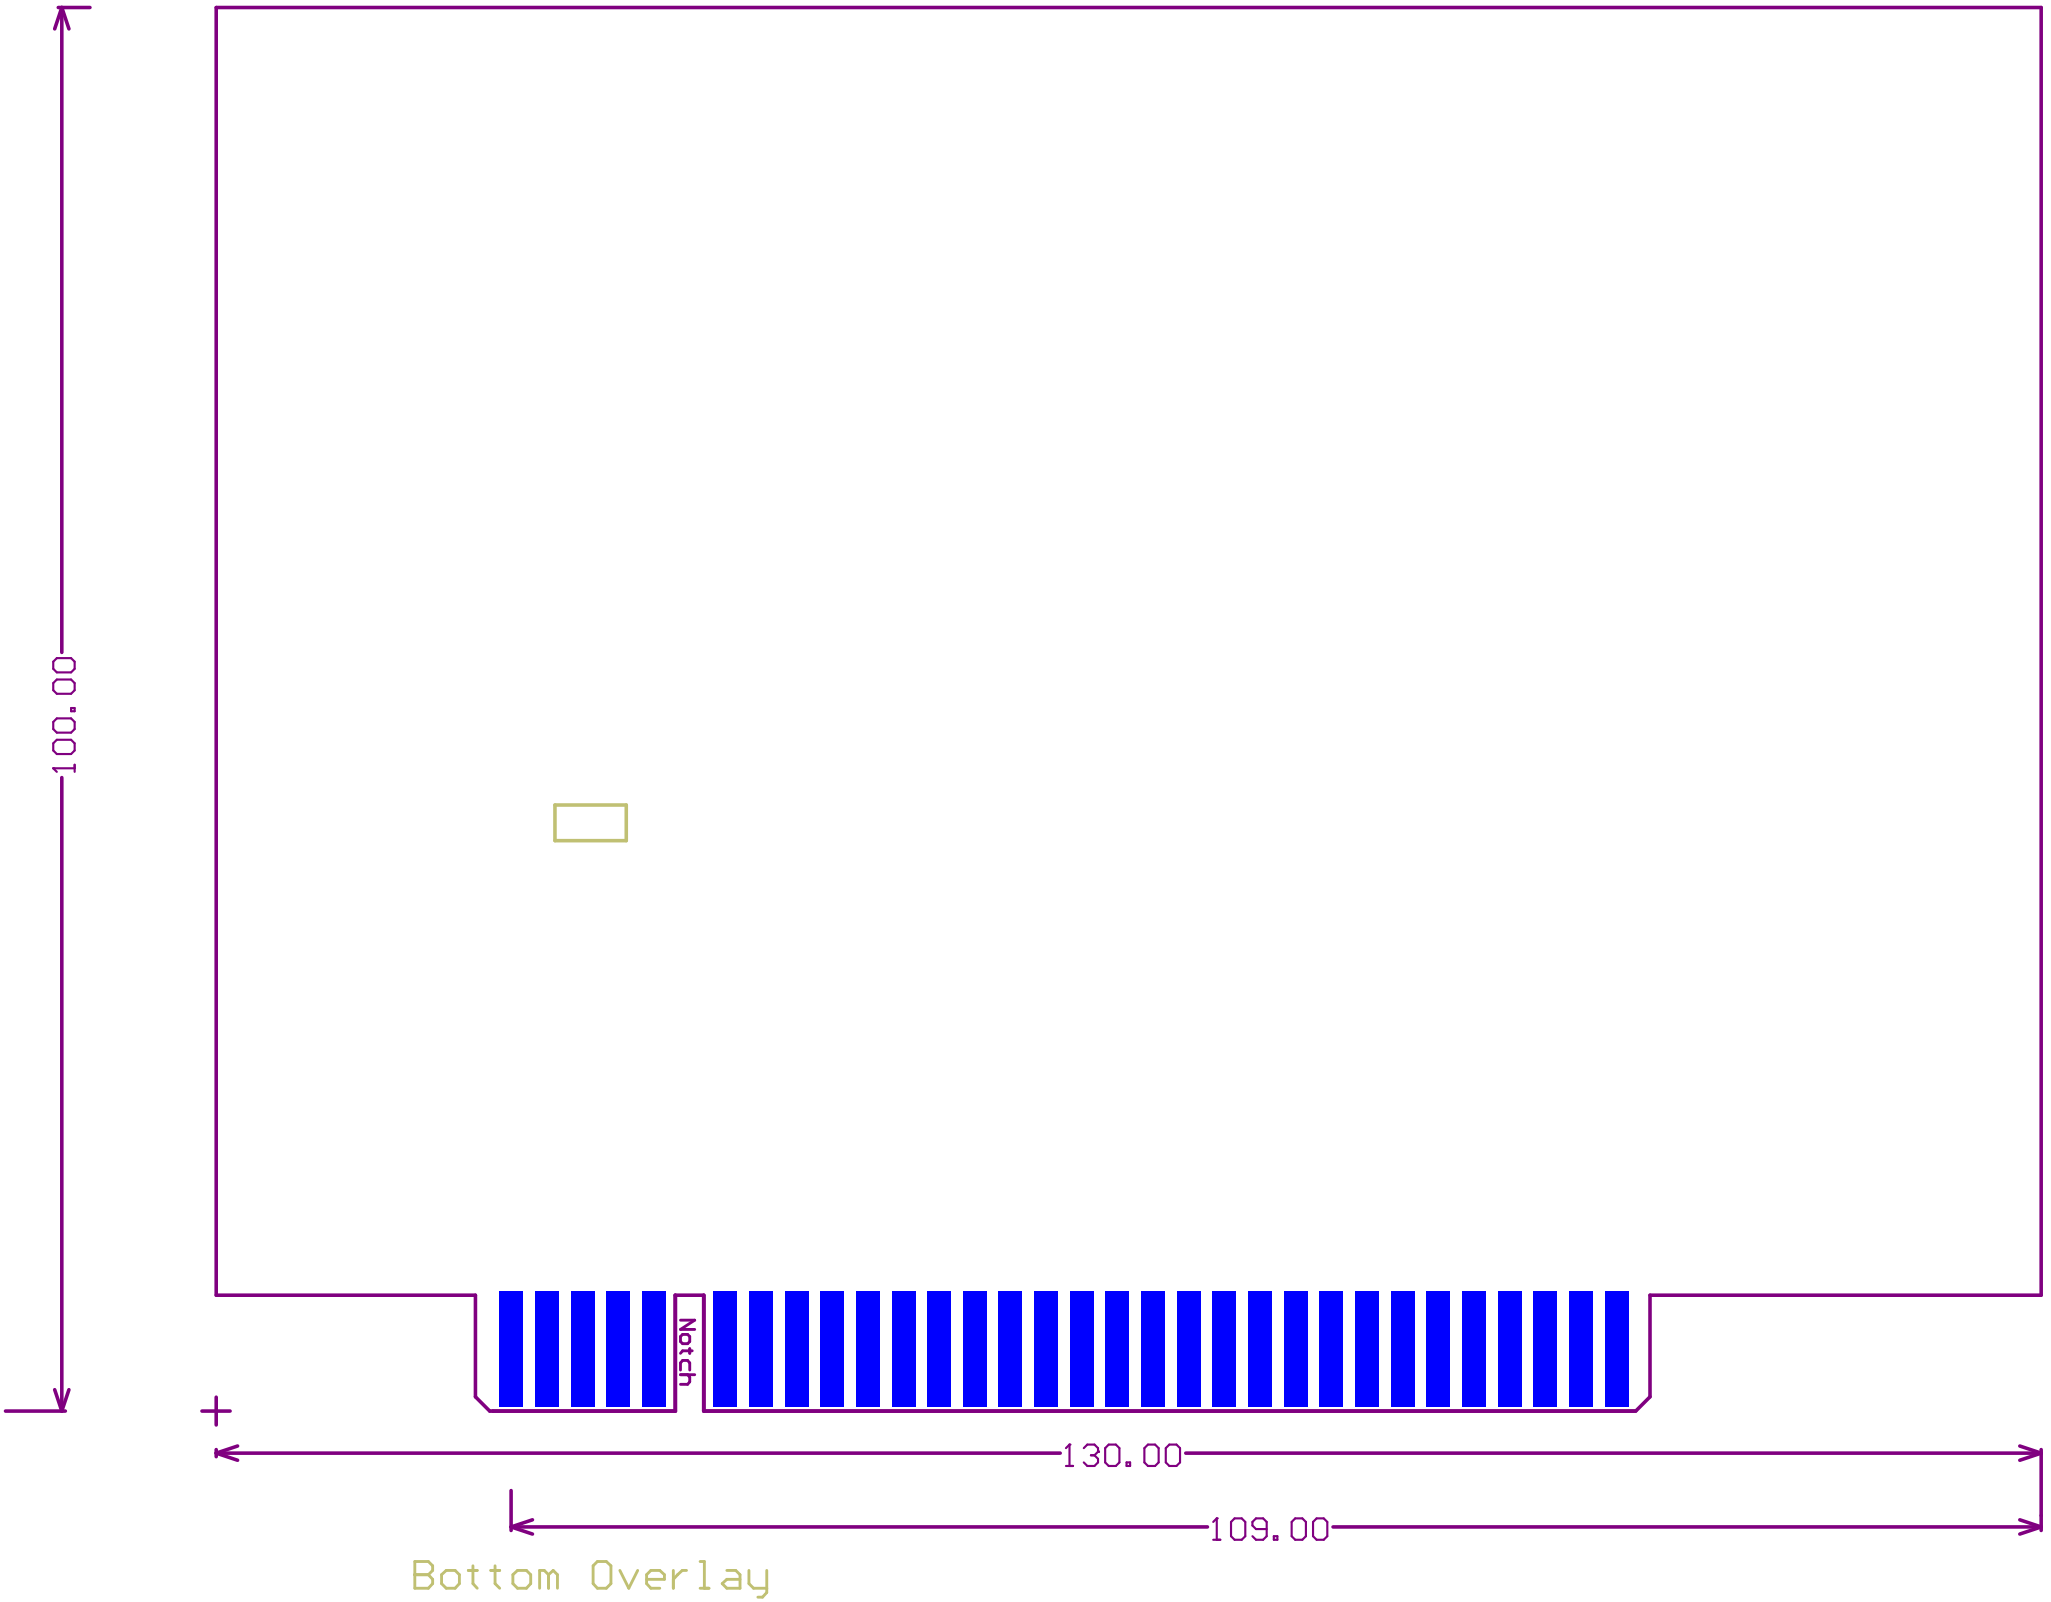
100.00
Notch
130.00
109.00
Bottom Overlay