Dummy ServiceBroker Database

[DummyServiceBrokerDatabase.htm - uqlpayne 26 Jul 2013]

The following procedure requires that:

- PostgreSQL 9.2 is installed and running.
- The UQ-iLab-BatchLabServer-Java GitHub repository has been downloaded as a ZIP file from:

https://github.com/uqlpayne/UQ-iLab-BatchLabServer-Java

• Run the PostgreSQL pgAdmin III program.


In the *Object browser* panel, right-click *PostgeSQL 9.2 (localhost:5432)* and select *Connect* from the popup menu to display the *Connect to Server* window.




Enter the password for the user *postgres* and click the *OK* button.



• In the Object browser panel, right-click Group Roles and select New Group Role... from the popup menu to display the New Group Role... window.




For Role name, enter ServiceBrokerGroup.

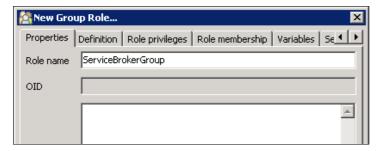


Click the OK button to close the New Group Role... window.


• In the Object browser panel, right-click Login Roles and select New Login Role... from the popup menu to display the New Login Role... window.



Select the *Properties* tab. For *Role name*, enter ServiceBroker.

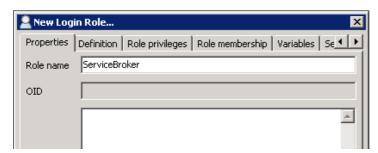

Select the Definition tab. For Password and Password (again), enter ilab.

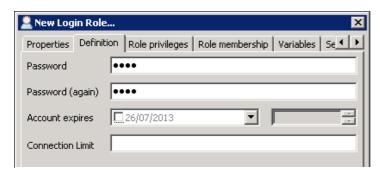


Select the *Role membership* tab. In the left panel under *Not Member*, select *ServiceBrokerGroup* and click the >> button.



Click the OK button to save the changes and close the New Login Role... window.

• In the Object browser panel, right-click Databases and select New Database... from the popup menu to display the New Database... window.




Select the Properties tab. For Name, enter $Dummy_ServiceBroker$.




Click the OK button to save the changes and close the New Database... window.

• In the *Object browser* panel, under *Databases*, click *Dummy_ServiceBroker* and then click the *Execute arbitrary SQL queries* toolbar button to open a *Query* window.



Check that the <code>Dummy_ServiceBroker</code> database is selected in the dropdown list. If not, tables and functions will be created or overwritten in the selected database.

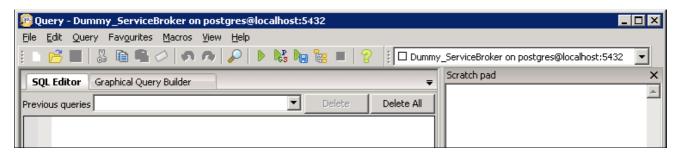


For each of the following SQL scripts in the *UQ-iLab-BatchLabServer-Java/Dummy/Database/PostgreSQL* folder, in the order shown, execute the query by selecting *Query->Execute* from the menu.

- 1. ServiceBroker_Tables.sql
- 2. ServiceBroker_Procedures.sql


All queries should complete successfully producing various results in the Output pane. Close the Query window.

• In the Object browser panel, expand the Dummy_ServiceBroker node and then expand the Schemas node. Finally, expand the public node so that Functions, Sequences and Tables are visible.

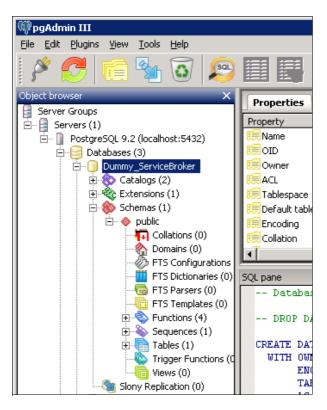

Right-click *Functions* and select *Grant Wizard...* from the popup menu to display the *Privileges for functions* window.

Select the Selection tab and click the Check all button.

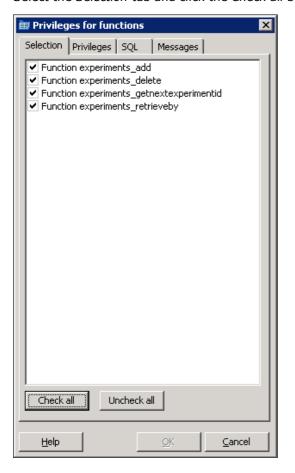


Select the *Privileges* tab. In the *Privileges* field, select *group ServiceBrokerGroup* from the dropdown list and check *EXECUTE*.

Click the Add/Change button.




Click the OK button to save the changes.



Click the *Done* button to close the *Privileges for functions* window.


• In the *Object browser* panel, right-click *Sequences* and select *Grant Wizard...* from the popup menu to display the *Privileges for sequences* window.

Select the Selection tab and click the Check all button.

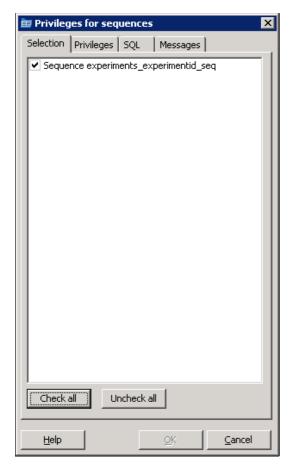


Select the *Privileges* tab. In the *Privileges* field, select *group ServiceBrokerGroup* from the dropdown list and check *ALL*.

Click the Add/Change button.




Click the OK button to save the changes.



Click the *Done* button to close the *Privileges for sequences* window.


• In the *Object browser* panel, right-click *Tables* and select *Grant Wizard...* from the popup menu to display the *Privileges for tables* window.

Select the Selection tab and click the Check all button.

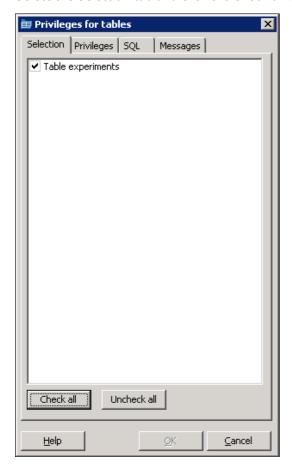

Select the *Privileges* tab. In the *Privileges* field, select *group ServiceBrokerGroup* from the dropdown list and check *ALL*.

Click the Add/Change button.



Click the ${\it OK}$ button to save the changes.



Click the *Done* button to close the *Privileges for tables* window.

That completes the creation and configuration of the *Dummy ServiceBroker* database.