

# **Bluetooth Speaker Headset**

# BT-955 User Manual



# **INDEX**

Features	P3
Specification	P3
Function control	P4
Play music	P6
Hands Free Function	P7
Battery Recharging	P7
Accessories	P8

## **FEATURES**

- Data Rate (EDR).
- Support Bluetooth Profiles: HSP, HFP, A2DP, AVRCP, PBAP
- Listen to music from your Bluetooth cell phones or other Audio device
- Stereo sound performance with great listening experience
- Single click operation for pick up / hang up the phone
- Available range is 10 meters in an unblocked region
- Widely compatible with all Bluetooth cell phones

## **Specification**

- Opriver D40 x 5 mm, 32 Ohm, 15mW
- Resonate Frequency 150 Hz  $\pm$  20%
- ☐ Frequency Response 50~ 10K Hz
- THD % at 1 KHz 0.1%
- S/N Ratio >75dB
- RMS Power output 0.01W X 2
- Recharge power DC 5V (from USB port)
- Rechargeable Battery Li-polymer battery (3.7V, 235mAH)
- Work voltage 3.3 4.2 V
- Power consumption work (Bluetooth) < 35 mA, Stand-by <1mA
- Audio in: Bluetooth or AUX
- ☑ Bluetooth Spec. Bluetooth 3.0+EDR compliant(compatible with V2.1, V2.0, V1.1 and V1.2 standard)
- Operation scope ≤ 10 meters
- DBluetooth protocol support HSP, HFP, A2DP, AVRCP, PBAP
- © Frequency range 2.402 2 .480 GHz (2.4GHz ISM Segment)
- Microphone d4 x 1.5 mm, omni-directional type (housing 5 x 5 x 3 mm)
- Q LED Indicator

Bluetooth or AUX-in mode: Blue color Blinking

Bluetooth / AUX-in + recharging: Blue mixed with Red color

Battery in recharging: Red color

USB cable Length 80cm


Od3.5 audio cable Length 80cm


Weight: 132g

ODimension: 160 x 184.5 x 67.2 mm

## **Function Control**

All the functions be controlled by three buttons, such as (Power on / off), (Pick up / Hang up the phone), (Bluetooth Pairing), (Volume up / Volume down), (Backward / Forward ).

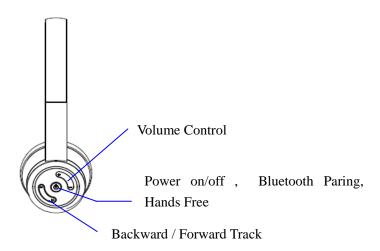

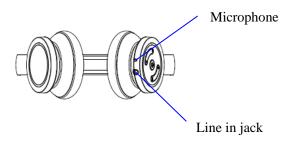



 Power on/off, Bluetooth pairing and Pick up / Hang up

## 1.Power on / off

Press for 3 seconds for Power on Press for 3 seconds for Power off

## 2.Bluetooth Pairing mode

Turn power on and Double Click.

Note: It is necessarily only for the first time of connection.

## 3. Pick up / Hang up the phone

One click: Pick up the phone
One click: Hang up the phone



Volume up / Volume down
 Press for more than 2 seconds to
 Increase volume or reduced volume



## Forward / Backward

One click forward Track or backward track

## **Play Music**

## Bluetooth mode

Step 1. Press Power on button for 3 seconds

Note: User no need to run the step 2 again, if the Bluetooth pairing had been done before.

- Step 2. Double click the button and enter Bluetooth Pairing mode
- Step 3: Turn on the Bluetooth function of mobile phone or other Bluetooth device and start to search for a new Bluetooth device.

## Note:

- 1. Pairing mode will turn to the sleeping mode after 90 seconds, you have to operate double click again if it is necessary to run the pairing once more.
- 2. Suitable for iPhone, Android Smartphone and iPad, Tablet PC and other Bluetooth device
- Step 4: Select device "BT-955" And enter the password 0000 if it is required.
- Step 5: Bluetooth mobile phone will show the sign that it is connected to a Bluetooth audio device.
- Step 6: For playing music please refer to the manual of your Bluetooth mobile phone.

## AUX in Mode



Step 1. Connect Headset via audio cable
Step 2. Connect the audio cable to your
media player, such as MP3 / MP4 player,
mobile phone, etc.

Note: Bluetooth mode and AUX in Mode can not work at the same time.

## **Hands Free Function**

One click "Power on/off" button to Pick up the phone and another click to hang up the phone.

Note: This function only work on Bluetooth mode.

## **Battery Recharging**



- Step 1. Plug 3.5mm connector (4pin) to the Headset
- Step 2. Plug USB connector to USB female slot
- Step 3. LED indicators will show red light when charging power,

and go off after fully charged.

Step 3. It will take around 1 to 2 hours for recharging battery.

Step 4. Please remove the power cable when completed.

## **Accessories**

USB power input Cable (3.5mm to USB): 100 cm  $\pm$  5 cm AUX in Cable (3.5mm to 3.5mm) : 100 cm  $\pm$  5 cm

User manual

The contents are subject to change without prior notice due to product improvement and specification changes.

#### FCC statement:

" This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation."

#### FCC Caution:

"Changes or modifications not expressly approved by the part responsible for compliance could void the user's authority to operate the equipment."

#### FCC Statement:

"This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- -Reorient or relocate the receiving antenna.
- —Increase the separation between the equipment and receiver.
- —Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- —Consult the dealer or an experienced radio/TV technician for help."