

C-3701, Simin-daero 365-401, Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr Test report No.: KES-RF-14T0036 Page (1) of (16)

# RF EXPOSURE REPORT

Equipment under test Wireless Charger

Model name KWH-210

FCC ID 2ACCCKWS-210

Applicant KOMATECH Co., Ltd.

Manufacturer KOMATECH Co.,Ltd.

**Date of test(s)** 2014.07.01

**Date of issue** 2014.07.07

Issued to

KOMATECH Co.,Ltd.

62-16 19<sup>th</sup> st. Gamjeong-ro, Gimpo-si, Gyeonggi-do, Korea Tel: +82-31-999-3940 / Fax: +82-31-997-7900

Issued by

KES Co., Ltd.

C-3701, Simin-daero 365-40, Dongan-gu, Anyang-si, Gyeonggi-do,431-716, Korea 473-29, Gayeo-ro, Yeoju-si, Gyeonggi-do, Korea

Tel: +82-31-425-6200 / Fax: +82-31-424-0450

| Test and report completed by: | Report approval by: |
|-------------------------------|---------------------|
| 37 th                         | Leffy               |
| Byeong-geol Chu               | Jeff Do             |
| Test engineer                 | Technical manager   |



C-3701, Simin-daero 365-401, Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr Test report No.: KES-RF-14T0036 Page (2) of (16)

## **Revision history**

| Revision | Date of issue | Test report No. | Description |
|----------|---------------|-----------------|-------------|
| -        | 2014.07.07    | KES-RF-14T0036  | Initial     |



**KES Co., Ltd.**C-3701, Simin-daero 365-401,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr

Test report No.: KES-RF-14T0036 Page (3) of (16)

### TABLE OF CONTENTS

| 1.0 General information description   | 4 |
|---|---|
| 1.1 Test frequency  | 4 |
| 1.1 Test frequency  | 4 |
| 1.3 Device modifications  |   |
| 1.4 Device information  | 4 |
| 1.5. Test facility  | 5 |
| 1.6. Laboratory accreditations and listings   |   |
| 2. 0 Environmental evaluation and exposure limit according to FCC CFR 47 Part 1.1307(b), 1.1310 |   |
| 2. 1 Test mode  |   |
| 2. 2 Battery status during charging   | 6 |
| 2. 3 Test Setup   | 7 |
| 3.0 Test results  | 8 |
| 3.1. E-Field Strength at 10 cm from each edges the EUT  | 8 |
| 3.2. H-Field Strength at 10 cm from each edges the EUT  |   |
| Appendix A. Measurement equipment   |   |
| Appendix B. Test setup photo  |   |



C-3701, Simin-daero 365-401, Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr Test report No.: KES-RF-14T0036 Page (4) of (16)

1.0 General information description

|                             | words wonds 17 vion         |
|-----------------------------|-----------------------------|
| <b>Equipment under test</b> | Wireless Charger            |
| Model name                  | KWH-210                     |
| Serial number               | N/A                         |
| Frequency Range             | 112 kHz ~205 kHz            |
| Antenna type                | Internal type(Coil antenna) |
| Power source                | AC 110 V Adapter            |

1.1 Test frequency

|                 | Frequency Range  |
|-----------------|------------------|
| Frequency (klz) | 112 kHz ~205 kHz |

### 1.2 Information about variant model

N/A

### 1.3 Device modifications

N/A

### 1.4 Device information

KWH-210 can be used Pad type and Stand Type.



C-3701, Simin-daero 365-401, Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr Test report No.: KES-RF-14T0036 Page (5 ) of (16)

### 1.5. Test facility

C-3701, Simin-daero 365-40, Dongan-gu, Anyang-si, Gyeonggi-do,431-716, Korea 473-29, Gayeo-ro, Yeoju-si, Gyeonggi-do, Korea

The open area test site is constructed in conformance with the requirements ANSI C63.4-2003/2009.

### 1.6. Laboratory accreditations and listings

| Country | Agency | Scope of accreditation  | Certificate No. |
|---------|--------|---|-----------------|
| USA     | FCC    | 3 & 10 meter Open Area Test Sites and one conducted site to perform FCC Part 15/18 measurements.                            | 343818          |
| KOREA   | KC     | EMI (10 meter Open Area Test Site and two conducted sites) Radio (3 & 10 meter Open Area Test Sites and one conducted site) | KR0100          |
| CANADA  | IC     | 3 & 10 meter Open Area Test Sites and one conducted site  | 4769B-1         |



C-3701, Simin-daero 365-401, Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr Test report No.: KES-RF-14T0036 Page (6) of (16)

# 2. 0 Environmental evaluation and exposure limit according to FCC CFR 47 Part 1.1307(b), 1.1310

Limits for Maximum Permissible Exposure (MPE)

| Frequency Range   | Electric Field | Magnetic Field | Power Density | Average Time |  |  |  |
|---|----------------|----------------|---------------|--------------|--|--|--|
| (MHz)   | Strength (V/m) | Strength (A/m) | $(mW/cm^2)$   | (minutes)    |  |  |  |
| (A) Limits for Occupational / Control Exposures         |                |                |               |              |  |  |  |
| 0.3-3.0   | 614            | 1.63           | *(100)        | 6            |  |  |  |
| (B) Limits for General Population/Uncontrolled Exposure |                |                |               |              |  |  |  |
| 0.3-1.34  | <u>614</u>     | <u>1.63</u>    | *(100)        | 30           |  |  |  |

<sup>1. &</sup>quot;\*" means Plane-wave equivalent power density

#### 2. 1 Test mode

| Mode                            | Description            |  |  |
|---------------------------------|------------------------|--|--|
| Charaina mada                   | Using Max load         |  |  |
| Charging mode With load         | Using Med load         |  |  |
| with load                       | Using Min load         |  |  |
| Charging mode With Mobile Phone | < 1% of Battery status |  |  |
| for connecting with Call tester | 50% of Battery status  |  |  |

<sup>-</sup>The level of call connecting of WCDMA mode was more than airplane mode, charging with Mobile Phone in standby mode and charging with Mobile Phone turned off mode. So WCDMA mode was selected.


### 2. 2 Battery status during charging

< 1% of Battery, 50 % of Battery



C-3701, Simin-daero 365-401, Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr Test report No.: KES-RF-14T0036 Page (7) of (16)

### 2. 3 Test Setup

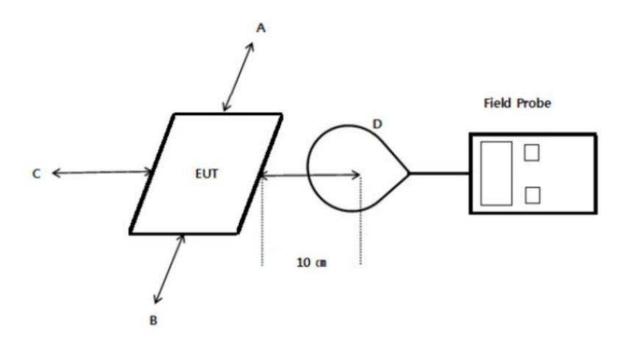

- 1. The test was performed on 360° turn table in anechoic chamber.
- 2. The probe was placed at distance 10 cm which is between the edge of the charger and the geometric center of the probe.
- 3. The highest emission level was recorded and compared with limit as soon as measurement of each point; A, B, C, D were completed.
- 4. The EUT was measured according to the KDB 680106 D01v02.



C-3701, Simin-daero 365-401, Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr Test report No.: KES-RF-14T0036 Page (8) of (16)

#### 3.0 Test results

### 3.1. E-Field Strength at 10 cm from each edges the EUT (Pad type)

| Test Mode  | Frequency<br>Range(KHz) | Position A (V/m) | Position B (V/m) | Position C<br>(V/m) | Position D<br>(V/m) | Limits (V/m) |
|--|-------------------------|------------------|------------------|---------------------|---------------------|--------------|
| Charging mode<br>With load (Max)                   | 112 kHz ~205 kHz        | 0.36             | 0.30             | 0.25                | 0.22                | 614          |
| Charging mode<br>With load (Mid)                   | 112 kHz ~205 kHz        | 0.41             | 0.43             | 0.40                | 0.37                | 614          |
| Charging mode<br>With load (Min)                   | 112 kHz ~205 kHz        | 0.56             | 0.42             | 0.51                | 0.40                | 614          |
| Charging mode With Mobile Phone (< 1 % of Battery) | 112 kHz ~205 kHz        | 0.62             | 0.50             | 0.48                | 0.61                | 614          |
| Charging mode With Mobile Phone (50 % of Battery   | 112 kHz ~205 kHz        | 0.58             | 0.60             | 0.57                | 0.59                | 614          |
| Standby mode (Not charging)                        | 112 kHz ~205 kHz        | 0.24             | 0.17             | 0.20                | 0.23                | 614          |

### 3.2. H-Field Strength at 10 cm from each edges the EUT (Pad type)

| Test Mode  | Frequency<br>Range(KHz) | Position A (A/m) | Position B<br>(A/m) | Position C<br>(A/m) | Position D<br>(A/m) | Limits (A/m) |
|--|-------------------------|------------------|---------------------|---------------------|---------------------|--------------|
| Charging mode<br>With load (Max)                   | 112 kHz ~205 kHz        | 0.221 4          | 0.228 6             | 0.223 0             | 0.224 6             | 1.63         |
| Charging mode<br>With load (Mid)                   | 112 kHz ~205 kHz        | 0.221 4          | 0.230 2             | 0.223 0             | 0.232 5             | 1.63         |
| Charging mode<br>With load (Min)                   | 112 kHz ~205 kHz        | 0.227 0          | 0.241 3             | 0.227 8             | 0.226 2             | 1.63         |
| Charging mode With Mobile Phone (< 1 % of Battery) | 112 kHz ~205 kHz        | 0.215 1          | 0.216 7             | 0.214 3             | 0.215 1             | 1.63         |
| Charging mode With Mobile Phone (50 % of Battery   | 112 kHz ~205 kHz        | 0.219 0          | 0.215 9             | 0.216 7             | 0.215 9             | 1.63         |
| Standby mode (Not charging)                        | 112 kHz ~205 kHz        | 0.209 5          | 0.209 5             | 0.211 1             | 0.210 3             | 1.63         |



C-3701, Simin-daero 365-401, Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr Test report No.: KES-RF-14T0036 Page (9) of (16)

### 3.3. E-Field Strength at 10 cm from each edges the EUT (Stand type)

| Test Mode  | Frequency<br>Range(KHz) | Position A (V/m) | Position B (V/m) | Position C (V/m) | Position D (V/m) | Limits (V/m) |
|--|-------------------------|------------------|------------------|------------------|------------------|--------------|
| Charging mode<br>With load (Max)                   | 112 kHz ~205 kHz        | 0.42             | 0.33             | 0.31             | 0.38             | 614          |
| Charging mode<br>With load (Max)                   | 112 kHz ~205 kHz        | 0.45             | 0.42             | 0.39             | 0.52             | 614          |
| Charging mode<br>With load (Max)                   | 112 kHz ~205 kHz        | 0.65             | 0.48             | 0.45             | 0.68             | 614          |
| Charging mode With Mobile Phone (< 1 % of Battery) | 112 kHz ~205 kHz        | 0.67             | 0.72             | 0.71             | 0.76             | 614          |
| Charging mode With Mobile Phone (50 % of Battery   | 112 kHz ~205 kHz        | 0.64             | 0.61             | 0.50             | 0.67             | 614          |
| Standby mode (Not charging)                        | 112 kHz ~205 kHz        | 0.24             | 0.21             | 0.24             | 0.20             | 614          |

### 3.4. H-Field Strength at 10 cm from each edges the EUT (Stand type)

| Test Mode  | Frequency<br>Range(KHz) | Position A (A/m) | Position B (A/m) | Position C<br>(A/m) | Position D<br>(A/m) | Limits (A/m) |
|--|-------------------------|------------------|------------------|---------------------|---------------------|--------------|
| Charging mode<br>With load (Max)                   | 112 kHz ~205 kHz        | 0.214 3          | 0.220 6          | 0.222 2             | 0.217 5             | 1.63         |
| Charging mode<br>With load (Max)                   | 112 kHz ~205 kHz        | 0.218 3          | 0.224 6          | 0.235 7             | 0.213 5             | 1.63         |
| Charging mode<br>With load (Max)                   | 112 kHz ~205 kHz        | 0.242 1          | 0.225 4          | 0.250 0             | 0.221 4             | 1.63         |
| Charging mode With Mobile Phone (< 1 % of Battery) | 112 kHz ~205 kHz        | 0.215 1          | 0.218 3          | 0.212 7             | 0.211 1             | 1.63         |
| Charging mode With Mobile Phone (50 % of Battery   | 112 kHz ~205 kHz        | 0.215 9          | 0.217 5          | 0.210 3             | 0.213 5             | 1.63         |
| Standby mode<br>(Not charging)                     | 112 kHz ~205 kHz        | 0.207 9          | 0.207 1          | 0.210 3             | 0.208 7             | 1.63         |



C-3701, Simin-daero 365-401, Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr Test report No.: KES-RF-14T0036 Page (10) of (16)

### Appendix A. Measurement equipment

| Equipment                         | Manufacturer      | Model      | Serial number | Cal<br>Interval | Calibration due. |
|-----------------------------------|-------------------|------------|---------------|-----------------|------------------|
| Isotropic Electric<br>Field Probe | Amplifer research | FP7003     | 311520        | 1 year          | 2015.03.25       |
| B-Field Probe                     | Narda             | 2300/90.10 | M-0644        | 1 year          | 2014.09.16       |
| Exposure Level<br>Meter           | Narda             | ELT-400    | N-0201        | 1 year          | 2014.09.16       |
| Radio<br>Communication<br>Tester  | R&S               | CMU200     | 107627        | 1 year          | 2014.12.27       |

### Peripheral device

| Device                             | Manufacturer          | Model No.              | Note |
|------------------------------------|-----------------------|------------------------|------|
| Wireless Charging Cover(with load) | KOMATECH Co.,Ltd.     | N/A                    | -    |
| Mobile Phone                       | SAMSUNG               | SHV-E210S              |      |
| iviodile Phone                     | ELECTRONICS CO., LTD. | (FCC ID : A3LSHVE210S) | -    |


<sup>-</sup>The above devices were supported by manufacturer.




C-3701, Simin-daero 365-401,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.: KES-RF-14T0036 Page (11) of (16)

### Appendix B. Test setup photo

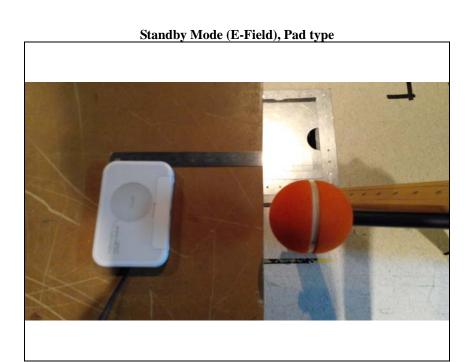

Charging Mode with load (E-Field), Pad type

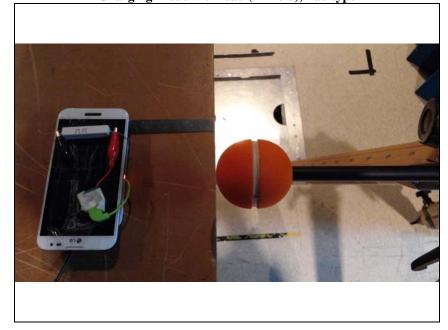





C-3701, Simin-daero 365-401,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.: KES-RF-14T0036 Page (12) of (16)

Charging Mode with Mobile Phone (E-Field), Pad type

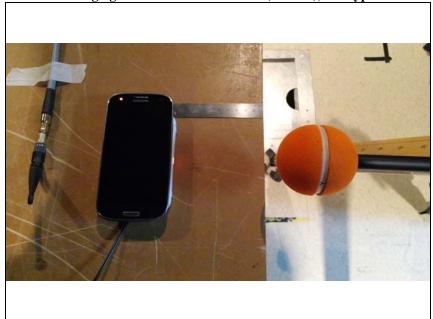

Standby Mode (H-Field), Pad type

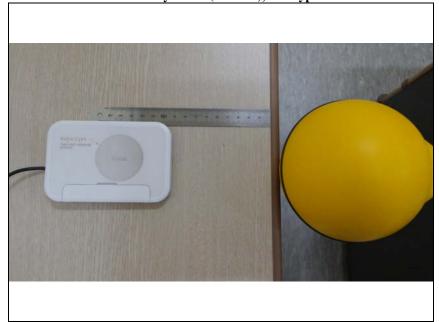



C-3701, Simin-daero 365-401,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.: KES-RF-14T0036 Page (13) of (16)

Charging Mode with load (H-Field), Pad type




Charging Mode with Mobile Phone (H-Field), Pad type






C-3701, Simin-daero 365-401, Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr Test report No.: KES-RF-14T0036 Page (14) of (16)

#### Standby Mode (E-Field), Stand type

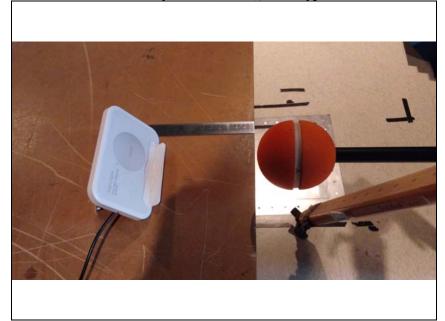

### Charging Mode with load (E-Field), Stand type

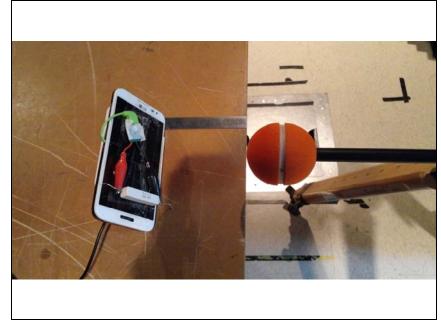



C-3701, Simin-daero 365-401,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.: KES-RF-14T0036 Page (15 ) of (16)

### Charging Mode with Mobile Phone (E-Field), Stand type



### Standby Mode (H-Field), Stand type





C-3701, Simin-daero 365-401,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.: KES-RF-14T0036 Page (16) of (16)

### Charging Mode with load (H-Field), Stand type



Charging Mode with Mobile Phone (H-Field), Stand type

