

# FCC TEST REPORT

For

Shenzhen Shiling Digital Technology Co., Ltd

Wireless PowerBank

Model No.: stm-931-217Z-01, SL-1821

Prepared For : Shenzhen Shiling Digital Technology Co., Ltd

Address No.2 Building, KaiJie Industrial Zone, Longhua, Dalang Street, Baoan

District, Shenzhen, China

Prepared By : Shenzhen Anbotek Compliance Laboratory Limited

Address : 1/F, Building D, Sogood Science and Technology Park, Sanwei

community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong,

China.518102

Tel: (86) 755-26066440 Fax: (86) 755-26014772

Report Number : SZAWW190122009-02

Date of Test : Jan. 22, 2019

Date of Test : Jan. 22~Mar. 08, 2019

Date of Report : Mar. 08, 2019



# **Contents**

1. General Information	tek Anbore			Anbo		4
1.1. Client Information	<sup>1</sup> 0d <sub>173</sub>	Anbo		otek sato.	Yo.	4
1.2. Description of Device (EUT).	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	0.01e <sup>N</sup>	born Wu		"hotek	4
1.3. Auxiliary Equipment Used Do	uring Test		Kiboten.	Anbo	Hetek	4
1.4. Description Of Test Setup	- Rupo <sub>fer</sub>	Anb.	gotek	Anbore	An Jok	5
1.5. Test Equipment List	a otek	Anbor	br. Yek	Moter	Anbo	6
1.6. Measurement Uncertainty	P., Stek	Haporer.	Anbo	,, , , , , , , , , , , , , , , , , , ,	Mpor	6
1.7. Description of Test Facility	ter. Yun	المهريب أستنسب	e <sub>K</sub> Vupor		/ <sub>0.3</sub>	6
2. Measurement and Result	potek Anbor		10,1 10,1	oter And		7
2.1. Requirements		lo <sub>fer</sub> , Yu		potek A	/pore	7
2.2. Test Setup	Vur.	"Potek	Yupo,	arek	unboter.	8
2.3. Test Procedure	Anbo		Pupo <sub>ter</sub>	Anb	otek	8
2.4. Test Result	- popote	Yur Yek	otek	Anbor		8
2.4.1. Equipment Approval Consideration	derations item 5.b	of KDB 680	106 D01 v03	k hopoter	Anv	8
2.4.2. Environmental evaluation a	16 VUD	according to	FCC CFR 47	part 1, 1.1307(	b), 1.1310	9



# **TEST REPORT**

Applicant : Shenzhen Shiling Digital Technology Co., Ltd

Manufacturer : Shenzhen Shiling Digital Technology Co., Ltd

Product Name : Wireless PowerBank

Model No. : stm-931-217Z-01, SL-1821

Trade Mark : N.A.

Type-C input: DC 5V, 3A; output: DC 5V, 2.4A

Micro input: DC 5V, 2A

Rating(s) : Output USB1 USB 2 Total: DC 5V, 2.1A

Wireless charger output: DC 5V, 1.2A (with DC 3.7V, 10000 mAh Battery inside)

Test Standard(s) : FCC Part 1.1310, 1.1307(b)

Test Method(s) : KDB680106 D01 RF Exposure Wireless Charging Apps v03

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 1.1307 & KDB680106 D01 requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Test	Jan. 22~Mar. 08, 2019
Compliance Las	Anbo Arek are And ak hotek
Date of Test  Compliance  Anbotek	olivay Gra
Prepared By  Anbotek Product Safety	Thek Anbotek Anbotek Anbotek Anbotek
Prepared By	Tek happy by K note, Vul
Annoused &	(Engineer / Oliay Yang)
nboten Anbo K ore	C Maga
	( N)ena
	Snavy Mery
. 10.33	
	(Supervisor / Snowy Meng)
	(Supervisor / Showy Weng)
	A TOO AT THE MENT OF THE MENT
Anbotek Anbote Anbote	allul Thomas
	And the Sally Zhang
Anbotek Anbote And	(Manager / Sally Zhang)



## 1. General Information

### 1.1. Client Information

Applicant	:	Shenzhen Shiling Digital Technology Co., Ltd
Address	:	No.2 Building, KaiJie Industrial Zone, Longhua, Dalang Street, Baoan District, Shenzhen, China
Manufacturer	:	Shenzhen Shiling Digital Technology Co., Ltd
Address	:	No.2 Building, KaiJie Industrial Zone, Longhua, Dalang Street, Baoan District, Shenzhen, China
Factory	:	Shenzhen Shiling Digital Technology Co., Ltd
Address	:	No.2 Building, KaiJie Industrial Zone, Longhua, Dalang Street, Baoan District, Shenzhen, China

### 1.2. Description of Device (EUT)

	Product Name	:	Wireless PowerBank	
, C	Model No.	:	stm-931-217Z-01, SL-1821 (Note: All samples are the same except the name, so we prepare "stm-931-217Z-01" for test only.)	
1	Trade Mark	:	N.A. Anbotek Anbotek Anbotek Anbotek Anbotek	
	Test Power Supply	:	AC 120V, 60Hz for adapter	
K	Test Sample No.	:	S1(Normal Sample), S2(Engineering Sample)	
0			Operation Frequency: 110.1~205KHz	
1	Product			Modulation Type: MSK
	Description		Antenna Type: Inductive loop coil Antenna	
N. Carlot			Antenna Gain(Peak): 0 dBi	


**Remark:** 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

### 1.3. Auxiliary Equipment Used During Test

Adapter	:	Manufacturer: Samsung
		M/N: ETA-U90CBC
		S/N: RT6FB17ZS/B-E
ų.		Input: 100-240V~ 50-60Hz, 0.35A
		Output: DC 5V, 2A
		Anbotek Anbotek Anbotek Anbotek Anbotek Anbotek Anbotek
Mobile Phone	e :	iPhone 8



### 1.4. Description Of Test Setup

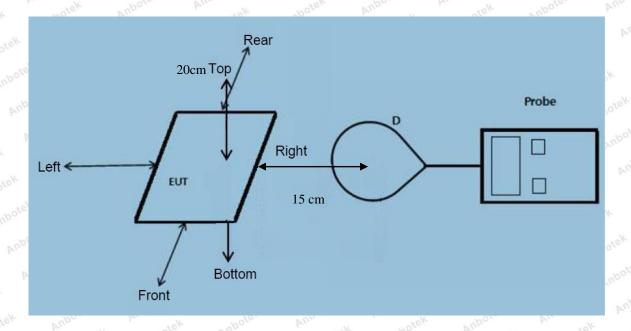

Note: Measurements should be made at 15 cm surrounding the EUT and 20cm above the top surface of the EUT.



#### 1.5. Test Equipment List

	Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
	1	Magnetic field meter	NARDA	ELT-400	423623	Dec. 24, 2018	1 Year
e	2	E-Field Probe	Narda	EF0391	Q15221	Dec. 24, 2018	1 Year
10	te/3	H-Field Probe	Narda	HF3061	Q15835	Dec. 24, 2018	1 Year

#### 1.6. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 3.9 dB (Horizontal)
		Ur = 3.8 dB (Vertical)
		Anbotek Anbotek Ant Notek Anbotek Anbot An
Conduction Uncertainty	:	Uc = 3.4 dB

#### 1.7. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registed and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, July 31, 2017.

#### ISED-Registration No.: 8058A-1

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A-1, June 13, 2016.

#### **Test Location**

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102



### 2. Measurement and Result

### 2.1. Requirements

According to the item 5.b) of KDB 680106 D01v03:

Inductive wireless power transfer applications that meet all of the following requirements are excluded from submitting an RF exposure evaluation.

- 1) Power transfer frequency is less that 1 MHz
- 2) Output power from each primary coil is less than or equal to 15 watts.
- 3) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils
- 4) Client device is inserted in or placed directly in contact with the transmitter
- 5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion)
- 6) The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

Limits For Maximum Permissible Exposure (MPE)

Frequency range Electric field strength (MHz) (V/m)		Magnetic field strength (A/m)	Power density (mW/cm²)	Averaging time (minutes)						
	(A) Limits for Occ	cupational/Controlled Ex	posures							
0.3-3.0 614 1.63 *(100) 6										
3.0-30	1842/f	4.89/f	*(900/f <sup>2</sup> )	6						
30-300	61.4	0.163	1.0	6						
300-1500 /		1	f/300	6						
1500-100,000	1	1	5	6						
	(B) Limits for Genera	l Population/Uncontrolle	ed Exposure							
0.3-1.34	614	1.63	*(100)	30						
1.34-30	824/f	2.19/f	*(180/f <sup>2</sup> )	30						
30-300 27.5		0.073	0.2	30						
300-1500	1	1	f/1500	30						
1500-100,000	/	/	1.0	30						


F=frequency in MHz

RF exposure compliance will need to be determined with respect to 1.1307(c) and (d) of the FCC rules. The emissions should be within the limits at 300kHz in Table 1 of 1.1310(use the 300kHz limits for 150kHz:614V/m,1.63A/m).

<sup>=</sup>Plane-wave equivalent power density



#### 2.2. Test Setup

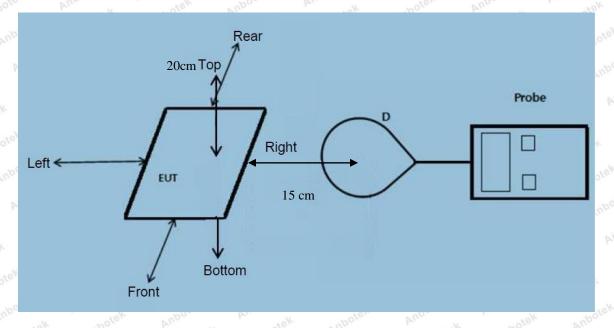

Note: Measurements should be made at 15 cm surrounding the EUT and 20cm above the top surface of the EUT.

#### 2.3. Test Procedure

- 1) The RF exposure test was performed in anechoic chamber.
- 2) The measurement probe was placed at required test distance which is between the edge of the charger and the geometric center of probe.
- 3) The highest emission level was recorded and compared with limit as soon as measurement of each points
- (A, B, C, D, E) were completed. (A is the right, B is the back, C is the left, D is the front, and E is the top.)
- 4) The EUT was measured according to the dictates of KDB 680106 D01 v03.

#### Remark;

The EUT's test position A, B, C, D and E is valid for the E and H field measurements.

#### 2.4. Test Result

- 2.4.1. Equipment Approval Considerations item 5.b of KDB 680106 D01 v03.
- 1) Power transfer frequency is less that 1 MHz
  - The device operate in the frequency range 110.1~205KHz
  - 2) Output power from each primary coil is less than 15 watts
    - The maximum output power of the primary coil is 5W.
- 3) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils
  - The transfer system including a charging system with only single primary coils is to detect and allow only



between individual pairs of coils.

- 4) Client device is inserted in or placed directly in contact with the transmitter
- Client device is placed directly in contact with the transmitter.
- 5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion)
  - The EUT is a Mobile Power Pack with Wireless Charger
- 6) The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.
  - Conducted the measurement with the required distance and the test results please refer to the section 2.4.2

# 2.4.2. Environmental evaluation and exposure limit according to FCC CFR 47 part 1, 1.1307(b), 1.1310

Temperature:	23.6° C	Relative Humidity:	53 %
Pressure:	1012 hPa	Test Voltage:	AC 120V, 60Hz for adapter

#### E-Field Strength at 15 cm surrounding the EUT and 15cm above the top surface of the EUT

Battery power	Frequency Range (KHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Reference Limit (V/m)	Limits Test (V/m)
1%	110.1~205	0.33	0.21	0.22	0.55	0.42	307	614
Notek And	lootek Ar	Potek V	Anbotek	Anbotek	Anbote.	ek Pupo	ien Aube	rek N
50%	110.1~205	1.83	1.23	1.31	1.53 N	1.63	307	614
Anbotek	-K Anbotek	ek Anbore	otek An	potek I	Anbotek K	Anbotek	Anbotek	Anbote.
99%	110.1~205	2.12	2.34	2.37	2.67	2.15	307	614
Anbotek	Anbotek	Anbotek	Anbotek	Anbote	otek Anbo	potek An	ootek Ar	boten botek
Stand-by	110.1~205	0.23	0.73	0.51	0.73	0.53	307	614



### H-Field Strength at 15 cm surrounding the EUT and 20cm above the top surface of the EUT

160	W. S.	N.	1-0	WW		10%	0. 9.	
Dottak	Frequency	Test	Test	Test	Test	Test	Reference	Limits
Battery	Range	Position	Position	Position	Position	Position	Limit	Test
power	(KHz)	A	ek B Ant	C	D	$\mathbf{E}^{gk}$	(A/m)	(A/m)
K Anbote	K Amb	otek Ar	botek	Yuporg ***	Andotek	Anbotek	Aupo	k 20/2
1%	110.1~205	0.043	0.054	0.044	0.042	0.051	0.815	1.63
abotek	inpoter b	inbo otek	Anbotek.	Anbote.	ak Anu	otek Anb	otek Anb	or sek
Anbotek	Aupoten	Anb	Anbote	k Anbo	P.II.	mbotek p	'upotek b	inpo otek
50%	110.1~205	0.34	0.33	0.43	0.34	0.44	0.815	1.63
Air	k Anbote	Anbor	otek k	nbotek	Br.	Ann	Anbotek	Aupor
tek bi.	otek Anb	yen An	potek ,	Anbotek	Aupore	k An-	Anbote	Ant
99%	110.1~205	0.46	0.57	0.54	0.33	0.41	0.815	1.63
upore b	hotek	Anbotek	Anbo	, whot	Ant	otek Anbr	hotek A	nbotek
Anboth	Ansabotek	Anbotek	Anbo	4.0	otek p	upole A	no botek	Anbotek
Stand-by	110.1~205	0.47	0.48	0.33	0.42	0.31	0.815	1.63
Anbore	X Ant	tek ant	otek P	upor	a botek	Anboten	Ampo	day

Remark: All the conditions have been tested. It is found that 5W is the worst mode, and the data in the report only reflects the worst mode.



### APPENDIX I -- TEST SETUP PHOTOGRAPH

















Shenzhen Anbotek Compliance Laboratory Limited

---- End of Report ----