

## GRANDBand



Brand name: ZTE

Model no.: GRANDBand I  
FCC ID: 2ADJRGRANDBAND I  
Smart Activity and Sleep Tracker

### PACKAGE CONTENTS

- 1 x Smart Activity and Sleep Tracker
- 1 x Cable for charging the Tracker

### FEATURES

Water resistant – in pool or shower IPX6 (not support diving)  
2-3 hours charge, play time up to 3-5 days  
Smarter activity and sleep tracker;  
Monitor your sleep quality and wake up silently with a vibration alarm  
24 hours to track user's activity and workouts  
Remind you to move when you've been inactive for a long time  
Motivate you to get your desired goal


### TECHNICAL SPECIFICATION

#### -Compatibility

- BT 4.0 compatible with iOS 7.0 and Android 4.3 version and above
- iOS Version  
iPhone 4S and newer  
iPod touch 5th Gen and newer  
iPad Mini, iPad Mini with Retina display, iPad Air, and news
- Android Phones (Android 4.3 Version and above)  
Samsung S3/S4/S5, Samsung Note 2, Note 3 or selected smartphone

- 3.5mm USB input : 5 V/0.5A
- Battery Capacity : 3.7V/35 mAh
- Charging time : ~ 3 hours 45 minutes
- Product dimensions : 80 (L) \* 68 (W) \* 13 (H) mm

### Product Overview




1. LED display
2. Operation button:
3. The charge contact
4. Metal button


### INSTALLATION AND MAINTENANCE

#### Operation Instruction

#### Charging your Band



1. USB charge couple
2. Charging cradle



Put the USB port to charge via your computer or USB charger

**Band is charging now. You will see the charging icon in the LED display.**

#### Notes:

- Battery is charging automatically when the device is connecting to your computer or USB power source
- On/Off button does not control the charging via micro USB. It only controls the when charging the iPhone5/5S.
- Recommended temperature for battery charging is 0°C to 35°C
- Fully charge your Band at least 6 hours approximately especially for first time use, or it has not been used for a long period
- The battery could be over discharged if the device is not being used for a long time (over 3 months).
- To avoid over discharge, fully charge the device every 2 months.

Switch On/Off the product  
Switch On the product: Press "Main button" for 6 seconds, the LED display will show "X".  
Switch Off the product: Press "Main button" for 6 seconds, the LED display will show "X".

#### Quick Start Guide

#### APP/APK installation

Please search and download the APP from "App store" and "Google play". The APP name is **keefit2**.



#### APP/APK setting

#### Please follow the steps to control your Band

- Step 1: Click the KeeFit2 icon on your devices
- Step 2: Enter the APP user interface, click "My profile" in the "Settings" manual.



- Step 3: Select your gender, height, weight and age. Remark: Select Metric or Imperial to change the "cm to feet" and "kg to lbs".



Metric or Imperial button



Height  
Weight

When complete the "My Profile", please click to "Setting" page.  
Remark: Your personal data has been Selected and Saved in the APP and APK.

Step 4: Data Synchronization  
Make sure to switch On your Band.  
Press the Sync button in the APP/APK.

Press the Operation button for 1 second in the

The personal data in APP/APK has been transferred to your Band, when you can see the message "Bluetooth connect successfully" in the APP/APK.



The Band is ready to use now


Other APK/APP setting  
Band is able to Select: Daily Workout Goal, Reminder and Smart Alarm.

### Workout Goal

1. Click "Workout Goal" to set your daily sport goals. Choose the daily goal listed in the options and click "OK".



Workout Goal




When complete the "Workout Goal", please click to "Setting" page.  
Press the Sync button to transfer the data to your Band.  
Remark: the Goal will be indicated in % start from 0 to 100% in the Activity Manual. Data more than 100% is meaning of your goals has been reached and over



### Reminder

The Band is able to remind you for your important things  
Going to the "Reminder Setting" page in the "Setting" manual.  
Set the Starting, Ending Hour and Interval of your reminder.  
Switch on:  
to set activity reminder function.  
During interval time, if you have no obviously active behavior, the bracelet will vibrate twice and show SPOT to remind you to exercise.  
Remarks: If you want to set the reminder setting, please click "ON" to Orange color, and setting, When OFF/ON in grey, means close, settings doesn't work.



### Smart Alarm

Click "Smart Alarm" to enter alarm setting interface. After alarm setting, click "Save" or "OK" to store information in your Band. The Band will wake you up silently (vibrate) at the time that leaves you feeling most refreshed



### About US

Click "About US" to check related version information about the device.



### Important reminder:

1. No matter what settings you put or change, you have to sync the bracelet with your devices via the Bluetooth, in order to sync the setting done to Band. Press the Sync button, then click the OK button to save

### Data Synchronization After use

The data storage time of the bracelet is 3 days.  
Please sync your bracelet within 3 days.  
After charging and having the "My profile" setting, you can take the wristband on hand and doing exercise, like walking, running.  
After you complete the exercise, and get ready for data synchronization,  
Band is calculating the distance of the working steps, not including the distance of driving or taking bus.  
Press the button on wristband in short time, then the LED screen will light on.  
Click the Bluetooth connecting icon to connect with bracelet, it will show sync interface, the number of Steps, Distance, Burn and target goals that have completed will be showed outside the APP/APK.



### Other Operation

In Sleep mode, press 2 times button, can change it to Sport mode. The bracelet vibrate, and display will show STEP.

1. Sport mode  
Six types of parameter display on LED screen under sport mode: TIME (current time synced with your phone's), STEPS (steps covered); DIST (distance); CALS (Calories); GOAL (goal percentage that completed); battery power quantity.  
Press the button continuously and speedily to switch among above parameters, 2 seconds pause to review each parameter.




### 2. Sleep mode

- 1) Press button 2 times speedily, shift from sports mode to sleep mode, Wristband vibrate and show sleep icon SLEEP.
- 2) In sleep mode, you can also review current time by pressing button speedily
- 3) When user wake up in morning, wristband will detect user's sports situation and shift from sleep mode to sport mode automatically.
- 4) After sync wristband with phone, user can review sleep situation yesterday or previous sleep situation per day, month or year.




Steps  
Time  
Total steps

Sleep pattern



3. Smart Alarm  
User can set up clock alarm time on phone and sync with wristband, wristband will vibrate 10 times as per setting time, meantime show CLCK to wake up user. At this moment, press button one time can turn off clock.

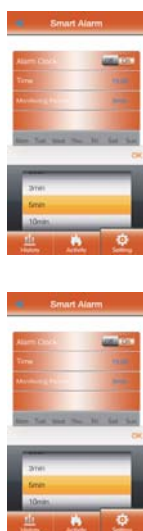

### POWER ON/OFF

#### 1. POWER OFF

In ON mode, press the button 6 seconds, bracelet vibrate and display "X".

#### 2. POWER ON

In OFF mode, press the button 6 seconds, bracelet vibrate and display "X".

Net weight: 1.2oz (including the cable)



### TRADEMARK

KeeFit is a registered trademark of Shenzhen Addition Audio Science & Technology Co., Ltd.. All other company names are trademarks, registered trademarks or service marks of their respective owners.

### Warranty

Adventure Labs, Inc. warrants its products against defects or malfunctions in material and workmanship under normal use and service: 1 years with 3 hours use per day, 7 days per week. In order to keep this warranty in effect, the product must have been handled and used as prescribed in the instructions accompanying the product. Adventure Labs, Inc. shall (at its option) repair or replace a defective unit covered by this warranty. Repair, or replacement with a new or reconditioned unit, as provided under this warranty, is your exclusive remedy. This warranty does not cover any damages due to accident, misuse, abuse, or negligence. Adventure Labs, Inc. shall not be liable for any incidental or consequential damages. Some states do not allow limitation or exclusion of incidental or consequential damages, so the above limitation or exclusion may not apply to you. Implied warranties of merchantability and fitness for a particular purpose are limited in duration to the duration of this warranty. Some states do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state. To make a warranty claim, you must obtain a return authorization number (RA) from Adventure Labs, Inc. Return the product to Adventure Labs, Inc., along with a copy of the original dated receipt or shipping document. To obtain a return authorization, send an e-mail to info@AdventureLabsInc.com, or contact us at: Adventure Labs, Inc., 974 Commercial Street, Suite 109, Palo Alto, CA 94303 USA. By phone or fax: Toll Free Tel: (866) 850-8832 Fax: (714) 610-8011. For repair or replacement of a failed product, allow 4 to 6 weeks for processing and shipment.

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.