


TVOLUTION M210

Quick Start

1 Your TVOLUTION M210

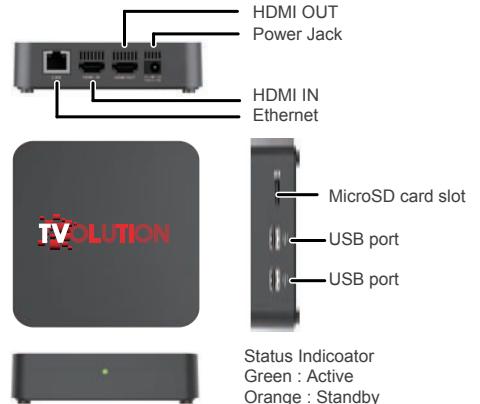

The figures in this guide are for your reference only. The actual products may vary.

1

2 Connecting cables

Connecting to an HDTV

Connect one end of the HDMI cable to your M210's HDMI out port and the other end to the HDTV's HDMI in port.



Note: The HDTV must support 720p or higher.

Connecting to a power supply

Connecting the power supply adapter to power jack



After being connected to a power supply, your M210 automatically powers on.


Switch the TV to HDMI input using the TV remote control. The M210's home screen is then displayed on the TV.

- If your M210 is idle for 4 minutes, it enters screen saver mode.
- After the M210 enters sleep mode, please press 3 seconds on your remote control to wake it up again.

2

Connecting to a set-top box (optional)

Connect one end of the HDMI cable to your M210's HDMI in port and the other end to the STB's HDMI out port.

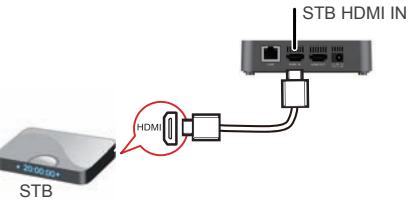

Note: You can also connect your M210 to other HDMI source devices, such as Blue-ray players.


When the STB is powered on. Alternatively, after you complete the initial setup of your M210, you can choose the HDMI icon in the lower left corner of the M210's home screen to switch to STB input.

To switch back to the M210's screen, please use the remote control to control M210.

3

3 Preparing a remote control

Remote control

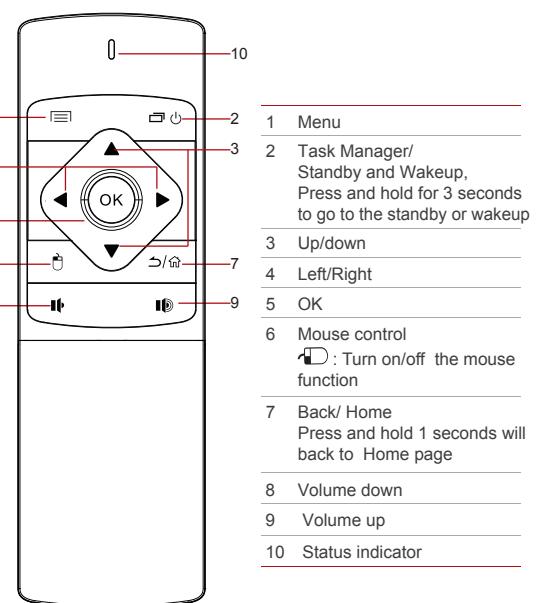

- | | |
|----|---|
| 10 | Status indicator |
| 9 | Volume up |
| 8 | Volume down |
| 7 | Back/ Home
Press and hold 1 seconds will back to Home page |
| 6 | Mouse control
Turn on/off the mouse function |
| 5 | OK |
| 4 | Left/Right |
| 3 | Up/down |
| 2 | Task Manager/
Standby and Wakeup,
Press and hold for 3 seconds to go to the standby or wakeup |
| 1 | Menu |

- Install two AAA batteries to the remote control.
- Please do not mix old and new batteries.

4

Pairing the remote control

- Insert the remote control USB receiver into your M210's USB port.
- Wait for the system to automatically install the driver. The installation takes about 20 seconds.

- Press any key on the remote control and observe indicator status:
 - If indicator turns on: The remote control has successfully paired with your M210 and is working properly.
 - If indicator blinks slowly: Press and hold and , simultaneously until indicator changes its status from blinking rapidly to blinking slowly three times until finally shutting off. The remote control then starts working properly.

Next time you only need to perform step 1 before using the remote control.

Mouse mode

The remote control supports the air mouse function. By waving the remote control, you can operate the mouse cursor on the TV, such as moving the mouse cursor and clicking or selecting an item.

- To enter mouse mode, press . To exit mouse mode, press again.

Optional remote control devices

In addition to the dedicated remote control, you can control your M210 using an smartphone, mouse or keyboard.

- Smartphone: Power on the M210 and follow the instructions on the TV to scan the QR code remote control application. For details, see the remote control application onscreen instructions.
- Mouse: Connect the mouse to your M210 via USB. The left mouse button functions as the OK button and the right button as Back. A wireless RF mouse is recommended.
- Keyboard: Connect the keyboard to your M210 via USB. The Enter button functions as the OK button, Esc as Back, and up, down, left, and right buttons as Navigation buttons. Android-compatible keyboards are recommended.

- Press Back button to close the current dialog box or onscreen keyboard.
- You can connect your M210 to a game controller via USB.

5

4 TVOLUTION Safety Information

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct

The interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver. Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of FCC Rules.

Operation is subject to the following two conditions:

This device may not cause harmful interference, and this device must accept any interference received, including interference that may cause undesired operation.

Note: The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate this equipment.

FCC RF Radiation Exposure Statement

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body.



5 FAQs

I connected my TV to the M210, but nothing is displayed. What can I do?

Make sure your M210 is properly connected to the power supply and TV. Check that the HDMI port on the TV is working, and that the TV is set to HDMI input. If the problem persists, your M210 may be in sleep mode or the HDMI cable may be damaged. Either wake up your M210 by pressing on the remote control, or replace the HDMI cable.

I connected my TV to the M210, but the image is not displayed properly. I am experiencing issues, such as incorrect aspect ratio, color distortion, or color bars. What can I do?

Make sure the M210 is securely connected to the HDMI port on your TV. Then go to Settings > Display / Display Position setting to change the parameters. If the problem persists, the HDMI cable may be damaged. Please replace the HDMI cable.

After I connected my TV to the M210, the image is displaying properly but there is no audio output. What can I do?

Check that your TV and M210 are not muted and the volume has not been turned down too low.

I cannot pair a Bluetooth device with my M210. What can I do?

Check that the batteries have sufficient power and are installed correctly. If the problem persists, the Bluetooth device may not be compatible with your M210. Verify this by checking whether other Bluetooth devices work properly with your M210.

What can I do if the remote control is not responsive?

- Stay within 8 meters of the M210.
- Make sure the USB receiver is properly inserted into your M210's USB port.

- Observe the indicators on the remote control. If indicator blinks rapidly, the remote control's batteries have insufficient power. To address this issue, replace the batteries. If indicator blinks slowly, the remote control has disconnected from your M210. In this case, press and hold and , simultaneously until indicator changes its status from blinking rapidly to blinking slowly three times until finally shutting off.
- If the issue persists, restart your M210.

I cannot install the remote control application. What can I do?

Completely remove the remote control application. Then scan the QR code application and install it again.

6

6 Knowing more

microSD card slot Holds a microSD card to expand your M210's storage space.

STB in Connects to an HDMI source device, such as a set-top box (STB) or Blue-ray player.

Status indicator Steady orange: in sleep mode. Steady green: in active mode.

USB port Connects to a mouse, keyboard, flash drive, or other USB device.

HDMI out Connects to an HDTV or HD display that has an HDMI port.

- Wi-Fi support: Enables the M210 to connect to a wireless network.
- Bluetooth support: Connects to a speaker or other Bluetooth device.

When your M210 has hotspot enabled, other devices, such as mobile phones, will be able to connect to the M210's wireless network.

7