

FCC TEST REPORT

Report No.: BCTC-LH180400794E

FCC ID: 2AEQP-CP510

| Product Name: | wireless charger |
|------------------|--|
| Trademark: | N/A |
| Model Number: | CP510 |
| Prepared For : | Shenzhen Canpow Technology Co., Ltd |
| Address : | Building B,No.339 Bulong Road,Longgang Dist, Shenzhen, China |
| Prepared By: | Shenzhen BCTC Testing Co., Ltd. |
| Address : | BCTC Building & 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China |
| Test Date: | Mar. 16 - Mar. 23, 2018 |
| Date of Report : | Mar. 23, 2018 |
| Report No.: | BCTC-LH180400794E |



TABLE OF CONTENTS

Report No.: BCTC-LH180400794E

| TEST F | REPORT DECLARATION | 3 |
|---------------|---|----|
| 1.GEN | ERAL INFORMATION | 4 |
| 1.1. | Report information | 4 |
| 1.2. | Measurement Uncertainty | 4 |
| 1.3. | Test Facility | 4 |
| 1.4. | Test Uncertainty | 4 |
| 2.PRO | DUCT DESCRIPTION | 5 |
| 2.1. | EUT Description | |
| 2.2. | Block Diagram of EUT Configuration | |
| 2.3. | Test Conditions | |
| 2.4. | Description Of Support Units (Conducted Mode) | |
| 3.TES | Г RESULTS SUMMARY | 6 |
| 4. TES | T EQUIPMENT USED | 7 |
| 4.1. | For Conducted Emission Test | 7 |
| 4.2. | For Radiated Emission Measurement | 7 |
| 5.CON | DUCTED EMISSION TEST | 8 |
| 5.1. | Block Diagram of Test Setup | 8 |
| 5.2. | Test Standard | 8 |
| 5.3. | Conducted Emission Limit | |
| 5.4. | EUT Configuration on Test | 8 |
| 5.5. | Operating Condition of EUT | |
| 5.6. | Test Procedure | |
| 5.7. | Test Result | |
| | IATED EMISSION MEASUREMENT | |
| 6.1. | Block Diagram of Test Setup | |
| 6.2. | Test Standard | |
| 6.3. | EMI Test Receiver Setup | |
| 6.4. 6.5. | Test Procedure Test Result | |
| | | |
| | TEST PHOTOS | |
| 8.EUT | PHOTOS | 20 |



TEST REPORT DECLARATION

Report No.: BCTC-LH180400794E

Applicant : Shenzhen Canpow Technology Co., Ltd

Address : Building B,No.339 Bulong Road,Longgang Dist, Shenzhen, China

EUT Description : wireless charger

Model Number : CP510

Serial Model : N/A

Test Standards:

FCC Part 15 C: 2015

This device described above has been tested by BCTC, and the test results show that the equipment under And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of BCTC, this document may be altered or revised by BCTC, personal only, and shall be noted in the revision of the document.

Prepared by(Engineer): Eric Yang

Reviewer(Supervisor): Jade Yang

Approved(Manager): Carson Zhang





1. GENERAL INFORMATION

1.1.Report information

- 1.1.1.This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that BCTC approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that BCTC in any way guarantees the later performance of the product/equipment.
- 1.1.2. The sample/s mentioned in this report is/are supplied by Applicant, BCTC therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.
- 1.1.3.Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through BCTC, unless the applicant has authorized BCTC in writing to do so.

1.2.Measurement Uncertainty

Available upon request.

1.3.Test Facility

Site Description

Name of Firm : Shenzhen BCTC Testing Co., Ltd.

Site Location : BCTC Building & 1-2F, East of B Building,

Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District,

Report No.: BCTC-LH180400794E

Shenzhen, China

1.4.Test Uncertainty

Conducted Emission = ± 2.66 dB

Uncertainty

Radiated Emission Uncertainty = ±4.15dB



2. PRODUCT DESCRIPTION

2.1.EUT Description

Description : wireless charger

Applicant : Shenzhen Canpow Technology Co., Ltd

Building B,No.339 Bulong Road,Longgang Dist, Shenzhen, China

Report No.: BCTC-LH180400794E

Manufacturer : Shenzhen Canpow Technology Co., Ltd

Building B,No.339 Bulong Road,Longgang Dist, Shenzhen, China

Model Number : CP510

Serial Model : N/A

Model : N/A

Difference

Power Supply Input: 5V2A


Output: 5V1A

Work

Frequency

110-205KHz

2.2.Block Diagram of EUT Configuration

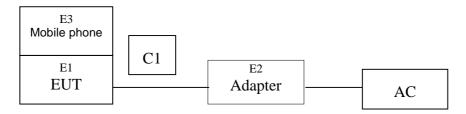

2.3.Test Conditions

Temperature: 23~25 °C

Relative Humidity: 55~63 %



2.4. Description Of Support Units (Conducted Mode)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Report No.: BCTC-LH180400794E

| Item | Equipment | Mfr/Brand | Model/Type No. | Series No. | Note |
|------|------------------|-----------|----------------|------------|-------------------------------------|
| E1 | wireless charger | N/A | CP510 | N/A | EUT |
| E2 | Adapter | N/A | BCTC-001 | NI/Δ | AC100-240V~50/60Hz Output: 9V 3A |
| E3 | Mobile phone | N/A | Redmi Note 4X | N/A | |

| Item | Shielded Type | Ferrite Core | Length | Note |
|------|---------------|--------------|--------|----------------------|
| C1 | NO | NO | 0.8M | USB cable unshielded |
| | | | | |
| | | | | |

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in <code>[Length]</code> column.
- (3) "YES" is means "shielded" "with core"; "NO" is means "unshielded" "without core".

3. TEST RESULTS SUMMARY

Table 1 Test Results Summary

| Test Items | Test Results |
|-----------------------|--------------|
| Conducted disturbance | Pass |
| Radiated disturbance | Pass |

Remark: "N/A" means "Not applicable."



4. TEST EQUIPMENT USED

4.1.For Conducted Emission Test

| Item | Equipment | Manufacturer | Type No. | Serial No. | Last calibration | Calibrated until |
|------|---------------|--------------|----------|----------------------------|------------------|------------------|
| 1 | Test Receiver | R&S | IESCI | 1166.5950K03-1 01165-ha | 2017.08.27 | 2018.08.26 |
| 2 | LISN | SCHWARZBECK | NSLK8127 | 8127739 | 2017.08.27 | 2018.08.26 |
| 3 | LISN | R&S | NSLK8126 | 8126487 | 2017.08.27 | 2018.08.26 |
| 4 | RF cables | R&S | R204 | R20X | 2017.08.27 | 2018.08.26 |
| 5 | Attenuator | R&S | ESH3-Z2 | 143206 | 2017.08.27 | 2018.08.26 |

Report No.: BCTC-LH180400794E


4.2.For Radiated Emission Measurement

| Item | Equipment | Manufacturer | Type No. | Serial No. | Last calibration | Calibrated until |
|------|---------------------------------|-----------------|-----------|------------|------------------|------------------|
| 5 | Horn Antenna (14GHz-40GHz) | SCHWARZBECK | BBHA 9170 | 9170-181 | 2017.09.03 | 2018.09.02 |
| 6 | Amplifier (9KHz-6GHz) | SCHWARZBECK | BBV9744 | 9744-0037 | 2017.08.27 | 2018.08.26 |
| 7 | Amplifier (1GHz-18GHz) | SCHWARZBECK | BBV9718 | 9718-309 | 2017.08.27 | 2018.08.26 |
| 8 | Amplifier (18GHz-40GHz) | SCHWARZBECK | BBV 9721 | 9721-205 | 2017.08.27 | 2018.08.26 |
| 9 | Loop Antenna (9KHz-30MHz) | SCHWARZBECK | FMZB1519B | 00014 | 2017.09.03 | 2018.09.02 |
| 10 | RF cables1 (9kHz-1GHz) | R&S | R203 | R20X | 2017.08.27 | 2018.08.26 |
| 11 | RF cables2 (1GHz-40GHz) | R&S | R204 | R21X | 2017.08.27 | 2018.08.26 |
| 12 | Antenna connector | Florida RF Labs | N/A | RF 01# | 2017.08.27 | 2018.08.26 |
| 13 | Power Metter | ANRITSU | ML2487A | 6K00001568 | 2017.08.27 | 2018.08.26 |
| 14 | Power Sensor (AV) | ANRITSU | ML2491A | 030989 | 2017.08.27 | 2018.08.26 |
| 15 | Signal Analyzer 9kHz-26.5GHz | Agilent | N9010A | MY48030494 | 2017.08.27 | 2018.08.26 |
| 16 | Test Receiver 20kHz-40GHz | R&S | ESU 40 | 100376 | 2017.08.27 | 2018.08.26 |
| 17 | D.C. Power Supply | LongWei | PS-305D | 010964729 | 2017.08.27 | 2018.08.26 |



5. CONDUCTED EMISSION TEST

5.1.Block Diagram of Test Setup

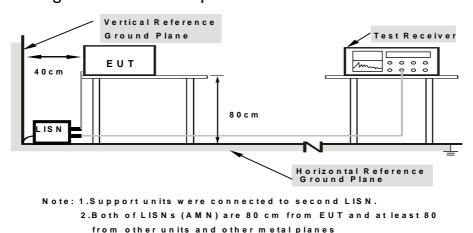

Report No.: BCTC-LH180400794E

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

(EUT: wireless charger)

5.2.Test Standard FCC§15.207

5.3. Conducted Emission Limit

| Frequency | Limits $dB(\mu V)$ | | | |
|--------------|--------------------|---------------|--|--|
| MHz | Quasi-peak Level | Average Level | | |
| 0.15 ~ 0.50 | 66 ~ 56* | 56 ~ 46* | | |
| 0.50 ~ 5.00 | 56 | 46 | | |
| 5.00 ~ 30.00 | 60 | 50 | | |

Notes: 1. *Decreasing linearly with logarithm of frequency.

5.4.EUT Configuration on Test

The following equipments are installed on conducted emission test to meet FCC Part 15.207 requirement and operating in a manner, which tends to maximize its emission characteristics in a normal application.



5.4.1.milestone dual

Model Number: CP510

5.5. Operating Condition of EUT

- 5.5.1. Setup the EUT and simulators as shown in Section 5.1.
- 5.5.2. Turn on the power of all equipments.
- 5.5.3.Let the EUT work in test modes (EUT Working) and test it.

5.6.Test Procedure

The EUT is put on a table of non-conducting material that is 80cm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI test receiver (R&S Test Receiver ESHS30) is used to test the emissions form both sides of AC line. The bandwidth of EMI test receiver is set at 9kHz.

Report No.: BCTC-LH180400794E

The bandwidth of the test receiver (R&S Test Receiver ESHS30) is set at 10KHz.

We pretest AC 120V and AC 240V, the worst voltage was AC 120V and the data recording in the report.

5.7.Test Result


PASS

Please refer to the following pages.



| EUT: | wireless charger | Model Name: | CP510 |
|----------------|------------------|--------------------|-------------|
| Temperature: | 26 ℃ | Relative Humidity: | 54% |
| Pressure: | 1010hPa | Phase : | L |
| Test Voltage : | AC 120V/60Hz | Test Mode: | Normal Link |

Shenzhen BCTC Testing Co., Ltd.

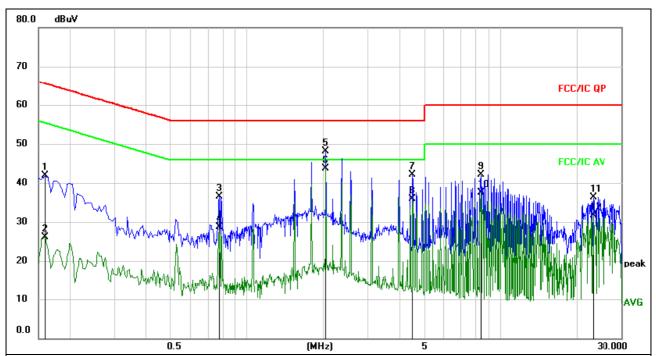

Remark:


- All readings are Quasi-Peak and Average values.
 Factor = Insertion Loss + Cable Loss.

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure- ment | Limit | Over | | |
|-----|-----|---------|------------------|-------------------|------------------|-------|--------|----------|---------|
| | | MHz | dBuV | dB | dBuV | dBuV | dB | Detector | Comment |
| 1 | | 0.1590 | 32.29 | 9.67 | 41.96 | 65.52 | -23.56 | QP | |
| 2 | | 0.1590 | 16.46 | 9.67 | 26.13 | 55.52 | -29.39 | AVG | |
| 3 | | 0.7755 | 26.84 | 9.68 | 36.52 | 56.00 | -19.48 | QP | |
| 4 | | 0.7755 | 18.95 | 9.68 | 28.63 | 46.00 | -17.37 | AVG | |
| 5 | | 2.0490 | 38.43 | 9.71 | 48.14 | 56.00 | -7.86 | QP | |
| 6 | * | 2.0490 | 33.97 | 9.71 | 43.68 | 46.00 | -2.32 | AVG | |
| 7 | | 4.4970 | 32.37 | 9.73 | 42.10 | 56.00 | -13.90 | QP | |
| 8 | | 4.4970 | 26.24 | 9.73 | 35.97 | 46.00 | -10.03 | AVG | |
| 9 | | 8.3715 | 32.20 | 9.81 | 42.01 | 60.00 | -17.99 | QP | |
| 10 | | 8.3715 | 27.63 | 9.81 | 37.44 | 50.00 | -12.56 | AVG | |
| 11 | | 23.1810 | 26.45 | 9.86 | 36.31 | 60.00 | -23.69 | QP | |
| 12 | | 23.1810 | 21.82 | 9.86 | 31.68 | 50.00 | -18.32 | AVG | |



| EUT: | wireless charger | Model Name. : | CP510 |
|----------------|------------------|--------------------|-------------|
| Temperature: | 26 ℃ | Relative Humidity: | 54% |
| Pressure: | 1010hPa | Phase : | N |
| Test Voltage : | AC 120V/60Hz | Test Mode: | Normal Link |

Shenzhen BCTC Testing Co., Ltd.

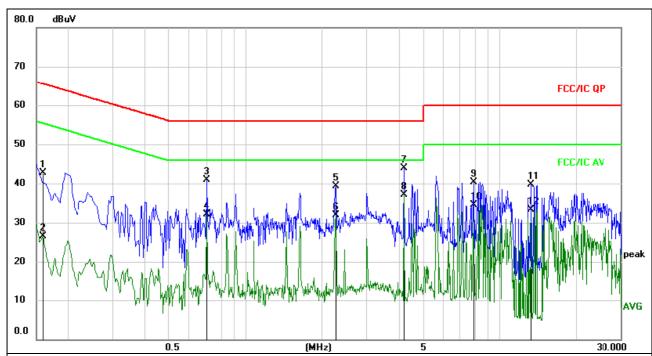

Remark:

- All readings are Quasi-Peak and Average values.
 Factor = Insertion Loss + Cable Loss.


| aoto: | | 10011 2000 1 00 | 20.0 E000. | | | | | |
|-------|----|-----------------|------------|------|-------|-------|--------|----------|
| 2.00 | | MHz | dBuV | dB | dBuV | dBuV | dB | Detector |
| 1 | 1 | 0.1590 | 32.96 | 9.67 | 42.63 | 65.52 | -22.89 | QP |
| 80 | 2 | 0.1590 | 16.76 | 9.67 | 26.43 | 55.52 | -29.09 | AVG |
| _ | 3 | 0.7035 | 31.32 | 9.68 | 41.00 | 56.00 | -15.00 | QP |
| 100 | 4 | 0.7035 | 22.37 | 9.68 | 32.05 | 46.00 | -13.95 | AVG |
| _ | 5 | 2.2650 | 29.61 | 9.72 | 39.33 | 56.00 | -16.67 | QP |
| _ | 6 | 2.2650 | 22.19 | 9.72 | 31.91 | 46.00 | -14.09 | AVG |
| | 7 | 4.1955 | 34.15 | 9.73 | 43.88 | 56.00 | -12.12 | QP |
| | 8 | * 4.1955 | 27.28 | 9.73 | 37.01 | 46.00 | -8.99 | AVG |
| - | 9 | 7.8945 | 30.48 | 9.81 | 40.29 | 60.00 | -19.71 | QP |
| | 10 | 7.8945 | 24.76 | 9.81 | 34.57 | 50.00 | -15.43 | AVG |
| | 11 | 13.2810 | 29.78 | 9.84 | 39.62 | 60.00 | -20.38 | QP |
| 199 | 12 | 13.2810 | 23.46 | 9.84 | 33.30 | 50.00 | -16.70 | AVG |
| | | | | | | | | |



6. RADIATED EMISSION MEASUREMENT


- 6.1.Block Diagram of Test Setup
 - 6.1.1.Block Diagram of connection between the EUT and the simulators

Report No.: BCTC-LH180400794E

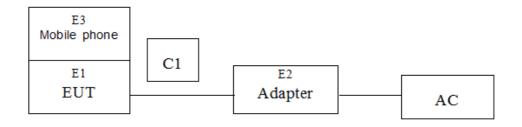


(EUT: wireless charger)

- 6.1.2. Anechoic Chamber Test Setup Diagram
- (A) Radiated Emission Test-Up Frequency Below 30MHz

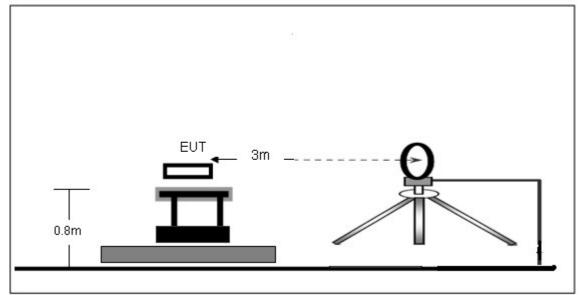

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

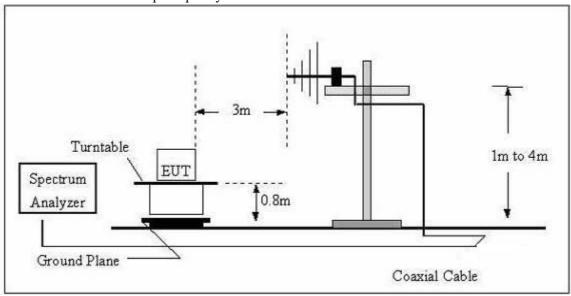

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.205 limits.

6.2.Test Standard

FCC §15.209; §15.205

6.3.EMI Test Receiver Setup

The system was investigated from 9kHz to1GHz.

During the radiated emission test, the EMI test receiver setup was set with the following configurations:

| Frequency Range | RBW | Video B/W | Detector |
|-------------------|---------|-----------|----------|
| 9 kHz – 150 kHz | 200 kHz | 1 kHz | QP |
| 150 kHz – 30MHz | 9kHz | 30kHz | QP |
| 30 MHz – 1000 MHz | 120 kHz | 300 kHz | QP |

Note: For the frequency bands 9-90 kHz and 110-490 kHz, the test was based on average detector.

6.4.Test Procedure

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can move up and down between 1 to 4 meters to find out the maximum emission level. Broadband antenna (calibrated by dipole antenna) are used as a receiving antenna. Both horizontal and vertical polarization of the antenna are set on measurement.

Report No.: BCTC-LH180400794E



6.5.Test Result

PASS

Please refer to the following pages.

FCC Report

Tel: 400-788-9558 0755-33019988



9kHz-30MHz

| EUT: | Wireless Charger | Model Name: | CP510 |
|---------------|------------------|--------------------|------------|
| Temperature: | 26 ℃ | Relative Humidity: | 54% |
| Pressure: | 1010 hPa | Polarization : | Horizontal |
| Test Voltage: | DC 5V | | |
| Test Mode: | Normal Link | | |

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Dotootor Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (kHz) | (dBµV) | (dB) | (dBµV/m) | (dBµV/m) | (dB) | Detector Type |
| 17.2800 | 39.08 | 20.15 | 59.23 | 142.85 | -83.62 | PK |
| 17.2800 | 34.67 | 20.15 | 54.82 | 122.85 | -68.03 | AV |
| 56.3800 | 58.67 | 20.33 | 79.00 | 132.58 | -53.58 | PK |
| 56.3800 | 55.63 | 20.33 | 75.96 | 112.58 | -36.62 | AV |
| 82.6100 | 69.13 | 20.55 | 89.68 | 129.26 | -39.58 | PK |
| 82.6100 | 65.42 | 20.55 | 85.97 | 109.26 | -23.29 | AV |
| 493.5600 | 53.77 | 20.64 | 74.41 | 73.74 | 0.67 | QP |
| 510.8200 | 33.69 | 21.26 | 54.95 | 73.74 | -18.79 | QP |
| 856.3300 | 13.87 | 22.32 | 36.19 | 68.95 | -32.76 | QP |

Note:

Pre-scan in the all of mode, the worst case in of was recorded.

Factor = antenna factor + cable loss – pre-amplifier.

Margin = Emission Level- Limit.



30MHz-1GHz

Shenzhen BCTC Testing Co., Ltd.

| EUT: | wireless charger | Model Name: | CP510 |
|----------------|------------------|--------------------|------------|
| Temperature: | 26 ℃ | Relative Humidity: | 54% |
| Pressure: | 1010 hPa | Polarization : | Horizontal |
| Test Voltage : | AC 120V/60Hz | | |
| Test Mode: | Normal Link | | |



Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure- ment | Limit | Over | |
|-----|------|----------|------------------|-------------------|------------------|-------|--------|----------|
| | | MHz | dBuV | dB | dBuV/m | dB/m | dB | Detector |
| 1 | * | 37.5479 | 48.56 | -15.59 | 32.97 | 40.00 | -7.03 | QP |
| 2 | | 46.6664 | 46.83 | -14.01 | 32.82 | 40.00 | -7.18 | QP |
| 3 | la . | 71.5806 | 48.58 | -17.91 | 30.67 | 40.00 | -9.33 | QP |
| 4 | | 210.0482 | 49.37 | -16.22 | 33.15 | 43.50 | -10.35 | QP |
| 5 | | 502.9395 | 31.74 | -9.26 | 22.48 | 46.00 | -23.52 | QP |
| 6 | | 909.6667 | 26.10 | -2.29 | 23.81 | 46.00 | -22.19 | QP |



Shenzhen BCTC Testing Co., Ltd.

| EUT: | wireless charger | Model Name: | CP510 | |
|----------------|------------------|--------------------|----------|--|
| Temperature: | 26 ℃ | Relative Humidity: | 54% | |
| Pressure: | 1010 hPa | Polarization : | Vertical | |
| Test Voltage : | AC 120V/60Hz | | | |
| Test Mode: | Normal Link | | | |

Report No.: BCTC-LH180400794E

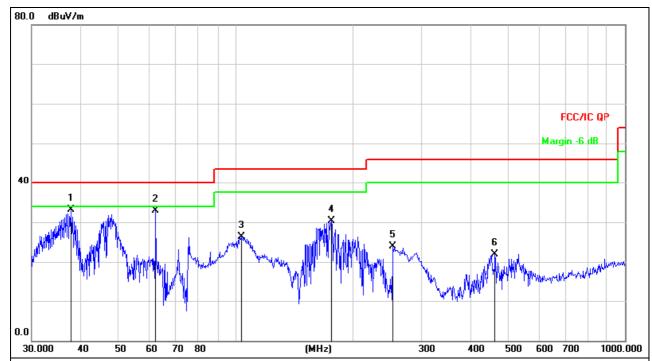

Remark:


Factor = Antenna Factor + Cable Loss - Pre-amplifier.

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure- ment | Limit | Over | |
|-----|-----|----------|------------------|-------------------|------------------|-------|--------|----------|
| | | MHz | dBuV | dB | dBuV/m | dB/m | dB | Detector |
| 1 | * | 37.8121 | 48.58 | -15.50 | 33.08 | 40.00 | -6.92 | QP |
| 2 | | 62.4314 | 48.90 | -16.08 | 32.82 | 40.00 | -7.18 | QP |
| 3 | | 103.0800 | 41.89 | -15.60 | 26.29 | 43.50 | -17.21 | QP |
| 4 | | 176.2686 | 48.48 | -18.27 | 30.21 | 43.50 | -13.29 | QP |
| 5 | | 253.8367 | 38.92 | -15.07 | 23.85 | 46.00 | -22.15 | QP |
| 6 | | 463.9696 | 32.56 | -10.57 | 21.99 | 46.00 | -24.01 | QP |



Report No.: BCTC-LH180400794E


7. EUT TEST PHOTOS






Radiated Measurement Photos

Shenzhen BCTC Testing Co., Ltd.

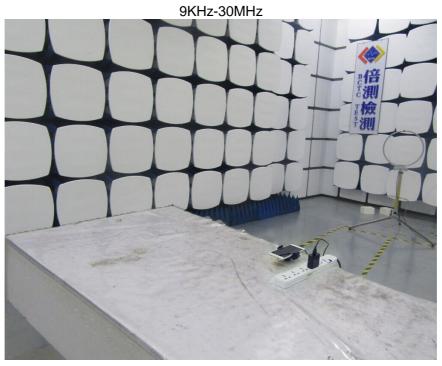


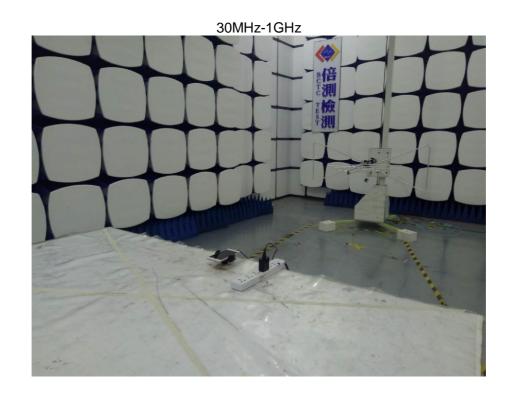

Report No.: BCTC-LH180400794E



8. EUT PHOTOS

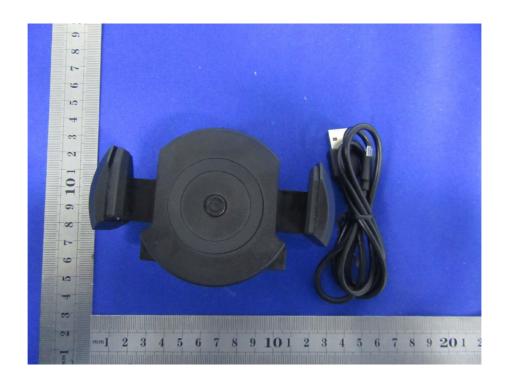



**** END OF REPORT ****