	1GHz—25GHz Radiated emissison Test result											
EUT	: Mini B	luetooth spe	eaker with	self-ti	mer		M/N: VTB	-BM3				
Pow	er: DC 5.	.0V From P	C AC 120)V/60H	Z							
Test	date: 20	15-09-25	Test site	: 3m Cł	namber	Tested by	y: Reak					
Test	Test mode: 8- DQPSK Tx CH1 2402MHz											
Ante	Antenna polarity: Vertical											
No	No Freq (MHz) Read Level Factor (dBuV/m) (dB/m) Result (dBuV/m) Result (dBuV/m) Remark (dBuV/m) Remark											
1	4804	41.73	33.95	10.18	34.26	51.6	74	22.4	PK			
2	4804	32.34	33.95	10.18	34.26	42.21	54	11.79	AV			
3	7206	/										
4	9608	/										
5	12010	/										
Ante	enna Pola	rity: Horizo	ontal									
1	4804	42.29	33.95	10.18	34.26	52.16	74	21.84	PK			
2	4804	30.85	33.95	10.18	34.26	40.72	54	13.28	AV			
3	7206	/										
4	9608	/										
5	12010	/										

- 1, Measuring frequency from 1GHz to 25GHz
- 2, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK
- 2, Spectrum Set for AV measure: RBW=1MHz, VBW=10Hz, Sweep time=Auto, Detector: PK
- 3, Result = Read level + Antenna factor + cable loss-Amp factor
- 4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.

		1GH	z—25GF	Iz Radia	ated em	issison Test	result		
EUT:	Mini Blu	ietooth spea	ker with	self-tim	er	M/	N: VTB-I	BM3	
Powe	r: DC 5.0	V From PC	AC 120V	V/60Hz					
Test o	date: 2015	5-09-25	Test site:	3m Cha	mber	Tested by:	Reak		
Test r	node: 8- I	OQPSK Tx (CH40 244	1MHz					
Anter	na polari	ty: Vertical							
No	Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(d B)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4882	43.36	33.93	10.2	34.29	53.2	74	20.8	PK
2	4882	31.37	33.93	10.2	34.29	41.21	54	12.79	AV
3	7323	/							
4	9764	/							
5	12205	/							
Anter	nna Polari	ty: Horizon	ıtal						
1	4882	43.12	33.93	10.2	34.29	52.96	74	21.04	PK
2	4882	30.53	33.93	10.2	34.29	40.37	54	13.63	AV
3	7323	/							
4	9764	/							
5	12205	/							


- 1, Measuring frequency from 1GHz to 25GHz
- 2, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK
- 2, Spectrum Set for AV measure: RBW=1MHz, VBW=10Hz, Sweep time=Auto, Detector: PK
- 3, Result = Read level + Antenna factor + cable loss-Amp factor
- 4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.

	1GHz—25GHz Radiated emissison Test result										
EU.	Γ: Mini B	luetooth sp	eaker wit	h self-ti	mer	M/N	N: VTB-E	BM3			
Pow	ver: DC	5.0V From	PC AC 1	20V/60)Hz						
Test	Test date: 2015-09-25 Test site: 3m Chamber Tested by: Reak										
Test	Test mode: 8- DQPSK Tx CH79 2480MHz										
Ant	Antenna polarity: Vertical										
No	Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(d B)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark		
1	4960	43.37	33.98	10.22	34.25	53.32	74	20.68	PK		
2	4960	32.94	33.98	10.22	34.25	42.89	54	11.11	AV		
3	7440	/									
4	9920	/									
5	12400	/									
Ant	enna Pola	arity: Horizo	ontal								
1	4960	41.42	33.98	10.22	34.25	51.37	74	22.63	PK		
2	4960	31.89	33.98	10.22	34.25	41.84	54	12.16	AV		
3	7440	/									
4	9920	/									
5	12400	/									

- 1, Measuring frequency from 1GHz to 25GHz
- 2, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK
- 2, Spectrum Set for AV measure: RBW=1MHz, VBW=10Hz, Sweep time=Auto, Detector: PK
- 3, Result = Read level + Antenna factor + cable loss-Amp factor
- 4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.

9. Band Edge Compliance

9.1. Block Diagram of Test Setup

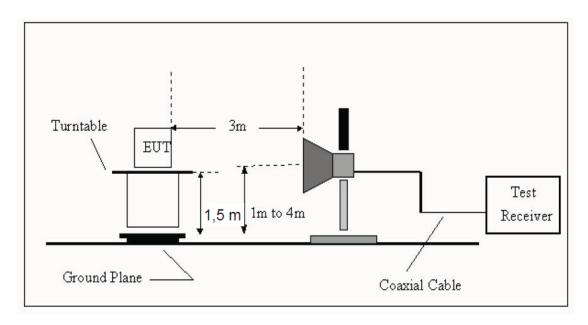

9.2. Limit

All the lower and upper band-edges emissions appearing within restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

9.3. Test Procedure

All restriction band and non- restriction band have been tested , only worse case is reported.

9.4. Test Result

PASS. (See below detailed test data)

Radiated Method

GFSK (CH Low)

			Duna D	-8 - 1 - 1 - 1	1 0 0 0 0 1 1 0			
EUT: Mini B	luetooth spe	eaker with	n self-ti	mer	I	M/N: VTB-I	BM3	
Power: DC 3	.7V From b	attery						
Test date: 20	15-09-24	Test site	: 3m Cl	namber	Tested by	: Reak		
Test mode: T	x CH Low 2	2402MHz	Z					
Antenna pola	rity: Vertica	al						
Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(d B)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2390	43.22	27.62	3.92	34.97	39.79	74	34.21	PK
Antenna Pola	rity: Horizo	ntal		•				
2390	43.05	27.62	3.92	34.97	39.62	74	34.38	PK
Mata				•			•	

Band Edge Test result

- 1, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK
- 2, Spectrum Set for AV measure: RBW=1MHz, VBW=10Hz, Sweep time=Auto, Detector: PK
- 3, Result = Read level + Antenna factor + cable loss-Amp factor
- 4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.

GFSK (CH High)

Band Edge Test Tesuit										
EUT: Mini B	luetooth spe	eaker with	n self-tii	mer	I	M/N: VTB-I	BM3			
Power: DC 3.	7V From b	attery								
Test date: 201	15-09-24	Test site	: 3m Cl	namber	Tested by	: Reak				
Test mode: T	x CH High	2480MH	Z							
Antenna pola	rity: Vertica	al								
Freq (MHz) Read Level Factor (dBuV/m) (dB/m) Result (dBuV/m) Result (dBuV/m) Remark										
2483.5	48.25	27.89	4	34.97	45.17	74	28.83	PK		
Antenna Pola	rity: Horizo	ntal								
2483.5	51.04	27.89	4	34.97	47.96	74	26.04	PK		
Note:										

Band Edge Test result

- 1, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK
- 2, Spectrum Set for AV measure: RBW=1MHz, VBW=10Hz, Sweep time=Auto, Detector: PK
- 3, Result = Read level + Antenna factor + cable loss-Amp factor
- 4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.

GFSK (Hopping Low)

			Band Ed	dge Test	result						
EUT: Mini B	luetooth spe	eaker with	n self-tii	mer	1	M/N: VTB-E	BM3				
Power: DC 3	.7V From b	attery									
Test date: 20	15-09-24	Test site	: 3m Cl	namber	Tested by	: Reak					
Test mode: T	X										
Antenna pola	rity: Vertica	al									
Freq (MHz)	$(MHz) \qquad (dBuV/m) \qquad (dB/m) \qquad B) \qquad (dB) \qquad (dBuV/m) \qquad (dB) \qquad (dB)$										
2390	43.26	27.62	3.92	34.97	39.83	74	34.17	PK			
Antenna Pola	rity: Horizo	ntal									
2390	43.23	27.62	3.92	34.97	39.8	74	34.2	PK			
Matai											

- 1, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK
- 2, Spectrum Set for AV measure: RBW=1MHz, VBW=10Hz, Sweep time=Auto, Detector: PK
- 3, Result = Read level + Antenna factor + cable loss-Amp factor
- 4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.

GFSK (Hopping High)

			Band Ed	dge Test	result						
EUT: Mini B	luetooth spe	eaker with	n self-tii	mer]	M/N: VTB-I	BM3				
Power: DC 3	.7V From b	attery									
Test date: 20	15-09-24	Test site	: 3m Cł	namber	Tested by	: Reak					
Test mode: T	X										
Antenna pola	rity: Vertica	al									
Freq (MHz)	$\frac{1}{2}$										
2483.5	46.98	27.89	4	34.97	43.9	74	30.1	PK			
Antenna Pola	rity: Horizo	ntal									
2483.5	50.33	27.89	4	34.97	47.25	74	26.75	PK			
NT a 4 a .											

- 1, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK
- 2, Spectrum Set for AV measure: RBW=1MHz, VBW=10Hz, Sweep time=Auto, Detector: PK
- 3, Result = Read level + Antenna factor + cable loss-Amp factor
- 4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.

$\pi/4$ DQPSK (CH Low)

			Band Ed	dge Test	result					
EUT: Mini B	luetooth spe	eaker with	n self-tii	mer]	M/N:VTB-E	BM3			
Power: DC 3.	.7V From b	attery								
Test date: 20	15-09-24	Test site	: 3m Cl	namber	Tested by	: Reak				
Test mode: T	x CH Low 2	2402MHz	Z		-					
Antenna pola	rity: Vertica	al								
Freq (MHz) Read Level Factor (dBuV/m) (dB/m) Result (dBuV/m) Result (dBuV/m) Result (dBuV/m) Remark										
2390	43.05	27.62	3.92	34.97	39.62	74	34.38	PK		
Antenna Pola	rity: Horizo	ntal								
2390	42.95	27.62	3.92	34.97	39.52	74	34.48	PK		
Note:										

- 1, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK
- 2, Spectrum Set for AV measure: RBW=1MHz, VBW=10Hz, Sweep time=Auto, Detector: PK
- 3, Result = Read level + Antenna factor + cable loss-Amp factor
- 4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.

π /4 DQPSK (CH High)

			Band Ed	dge Test	result						
EUT: Mini B	luetooth spe	eaker with	n self-tii	mer]	M/N: VTB-I	BM3				
Power: DC 3	.7V From b	attery									
Test date: 20	15-09-24	Test site	: 3m Cl	namber	Tested by	: Reak					
Test mode: T	x CH High	2480MH:	Z								
Antenna pola	rity: Vertica	al									
Freq (MHz)	$(MHz) \qquad (dBuV/m) \qquad (dB/m) \qquad B) \qquad (dB) \qquad (dBuV/m) \qquad (dB) \qquad (dB)$										
2483.5	46.33	27.89	4	34.97	43.25	74	30.75	PK			
Antenna Pola	rity: Horizo	ntal		•							
2483.5	49.91	27.89	4	34.97	46.83	74	27.17	PK			
Note:											

- 1, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK
- 2, Spectrum Set for AV measure: RBW=1MHz, VBW=10Hz, Sweep time=Auto, Detector: PK
- 3, Result = Read level + Antenna factor + cable loss-Amp factor
- 4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.

π /4 DQPSK (Hopping Low)

			Band Ed	dge Test	result						
EUT: Mini B	luetooth spe	eaker with	n self-tii	mer	I	M/N: VTB-I	3M3				
Power: DC 3.	.7V From b	attery									
Test date: 201	15-09-24	Test site	: 3m Cł	namber	Tested by	: Reak					
Test mode: T	X										
Antenna pola	rity: Vertica	al									
Freq (MHz)	$\frac{1}{2}$										
2390	42.77	27.62	3.92	34.97	39.34	74	34.66	PK			
Antenna Pola	rity: Horizo	ntal									
2390	42.86	27.62	3.92	34.97	39.43	74	34.57	PK			
Note:											

- 1, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK
- 2, Spectrum Set for AV measure: RBW=1MHz, VBW=10Hz, Sweep time=Auto, Detector: PK
- 3, Result = Read level + Antenna factor + cable loss-Amp factor
- 4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.

 π /4 DQPSK (Hopping High)

			Band Ed	dge Test	result			
EUT: Mini B	Bluetooth spe	eaker with	n self-ti	mer]	M/N: VTB-I	BM3	
Power: DC 3	.7V From b	attery						
Test date: 20	15-09-24	Test site	: 3m Cl	namber	Tested by	: Reak		
Test mode: T	X							
Antenna pola	arity: Vertica	al						
Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(d B)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2483.5	43.14	27.89	4	34.97	40.06	74	33.94	PK
Antenna Pola	arity: Horizo	ntal	•	•				
2483.5	45.92	27.89	4	34.97	42.84	74	31.16	PK
Note:								

- 1, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK
- 2, Spectrum Set for AV measure: RBW=1MHz, VBW=10Hz, Sweep time=Auto, Detector: PK
- 3, Result = Read level + Antenna factor + cable loss-Amp factor
- 4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.

8- DPSK (CH Low)

			Band Ed	lge Test	result				
EUT: Mini B	luetooth spe	eaker with	n self-tii	mer	I	M/N: VTB-I	BM3		
Power: DC 3.	7V From b	attery							
Test date: 201	5-09-24	Test site	: 3m Cl	namber	Tested by	: Reak			
Test mode: T	x CH Low 2	2402MHz	7						
Antenna pola	rity: Vertica	al							
Freq (MHz) Read Level Factor (dBuV/m) (dB/m) Result (dBuV/m) Result (dBuV/m) Remark									
2390	42.86	27.62	3.92	34.97	39.43	74	34.57	PK	
Antenna Pola	rity: Horizo	ntal							
2390	43.06	27.62	3.92	34.97	39.63	74	34.37	PK	

- 1, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK
- 2, Spectrum Set for AV measure: RBW=1MHz, VBW=10Hz, Sweep time=Auto, Detector: PK
- 3, Result = Read level + Antenna factor + cable loss-Amp factor
- 4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.

8- DPSK (CH High)

			Band Ed	dge Test	result					
EUT: Mini B	luetooth spe	eaker with	n self-ti	mer]	M/N: VTB-E	BM3			
Power: DC 3	.7V From b	attery								
Test date: 20	15-09-24	Test site	: 3m Cl	namber	Tested by	: Reak				
Test mode: T	x CH High	2480MH	Z							
Antenna pola	rity: Vertica	al								
Freq (MHz) Read Level Factor (dBuV/m) Result (dBuV/m) Remark (
2483.5	46.75	27.89	4	34.97	43.67	74	30.33	PK		
Antenna Pola	rity: Horizo	ontal								
2483.5	50.32	27.89	4	34.97	47.24	74	26.76	PK		
Note:										

- 1, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK
- 2, Spectrum Set for AV measure: RBW=1MHz, VBW=10Hz, Sweep time=Auto, Detector: PK
- 3, Result = Read level + Antenna factor + cable loss-Amp factor
- 4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.

8- DPSK (Hopping Low)

			Band Ed	dge Test	result					
EUT: Mini B	luetooth spe	eaker with	n self-tii	mer	1	M/N: VTB-I	BM3			
Power: DC 3	.7V From b	attery								
Test date: 20	15-09-24	Test site	: 3m Cl	namber	Tested by	: Reak				
Test mode: T	X				-					
Antenna pola	rity: Vertica	al								
Freq (MHz) Read Level Factor (dBuV/m) (dB/m) Result (dBuV/m) Result (dBuV/m) Result (dBuV/m) Rem										
2390	42.64	27.62	3.92	34.97	39.21	74	34.79	PK		
Antenna Pola	rity: Horizo	ontal								
2390	42.39	27.62	3.92	34.97	38.96	74	35.04	PK		
Note:										

- 1, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK
- 2, Spectrum Set for AV measure: RBW=1MHz, VBW=10Hz, Sweep time=Auto, Detector: PK
- 3, Result = Read level + Antenna factor + cable loss-Amp factor
- 4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.

8- DPSK (Hopping High)


			Band Ed	dge Test	result						
EUT: Mini B	luetooth spe	eaker with	n self-tii	mer]	M/N: VTB-I	BM3				
Power: DC 3	.7V From b	attery									
Test date: 20	15-09-24	Test site	: 3m Cł	namber	Tested by	: Reak					
Test mode: T	X										
Antenna pola	rity: Vertica	al									
Freq (MHz) Read Level Factor (dBuV/m) (dB/m) Result (dBuV/m) Result (dBuV/m) Remarks											
2483.5	42.91	27.89	4	34.97	39.83	74	34.17	PK			
Antenna Pola	rity: Horizo	ntal		ı							
2483.5	43.83	27.89	4	34.97	40.75	74	33.25	PK			
Note:											

- 1, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK
- 2, Spectrum Set for AV measure: RBW=1MHz, VBW=10Hz, Sweep time=Auto, Detector: PK
- 3, Result = Read level + Antenna factor + cable loss-Amp factor
- 4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.


Conducted Method

GFSK


CH LOW:

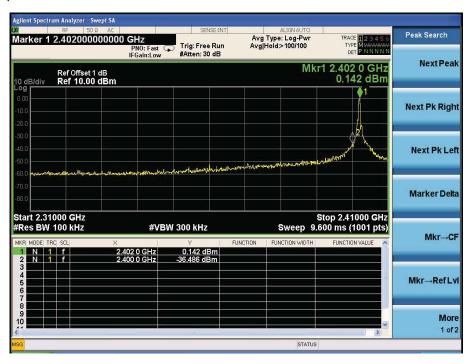


CH High:

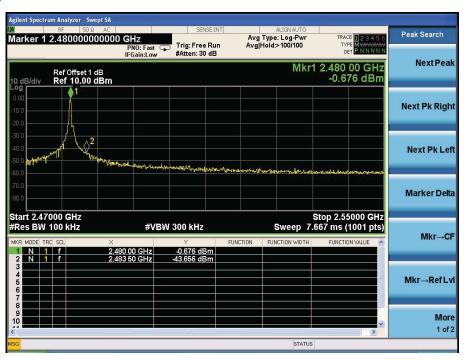

Hopping Low

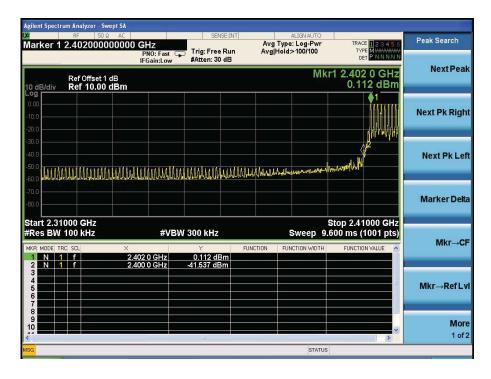


High

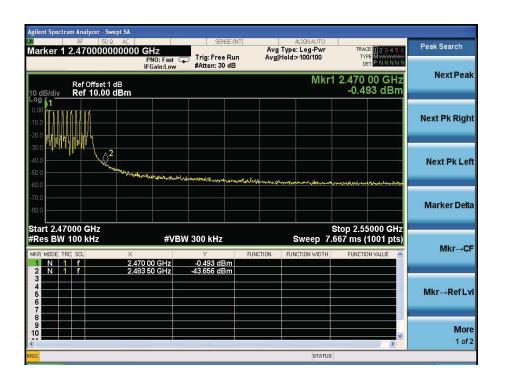


π /4 DQPSK


Low

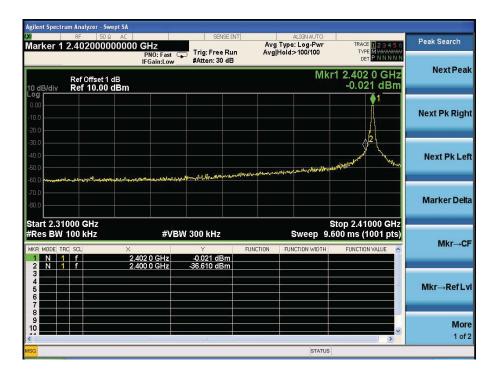


High

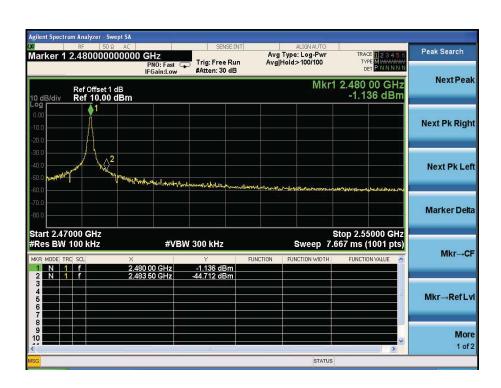

Hopping Low

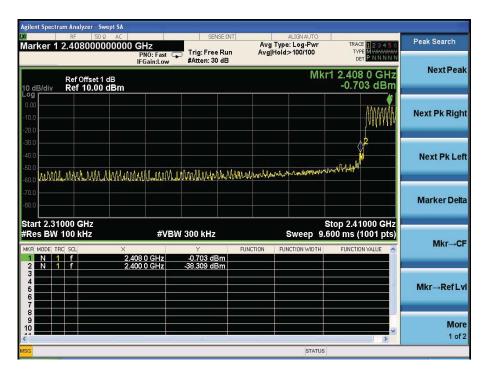


High

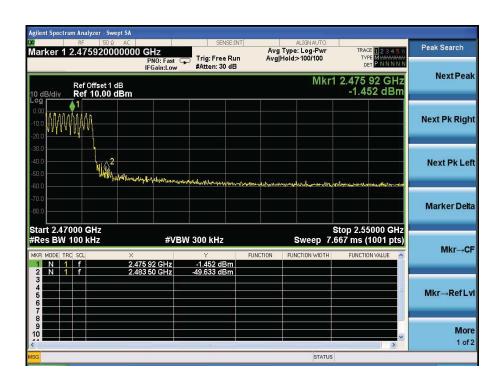


8- DPSK:


Low

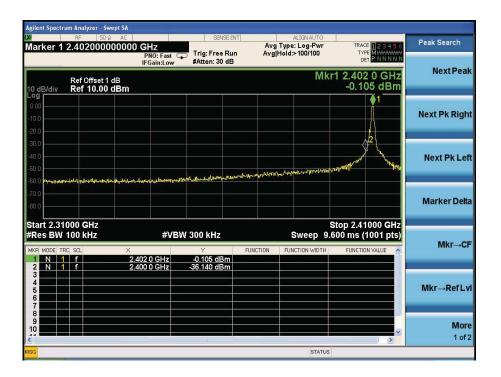


High

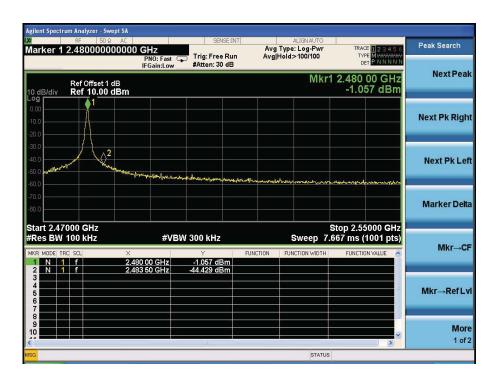

Hopping Low

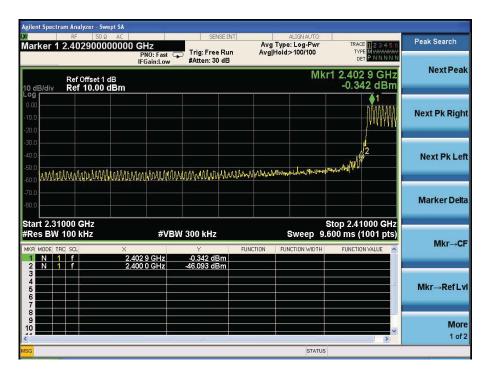


High

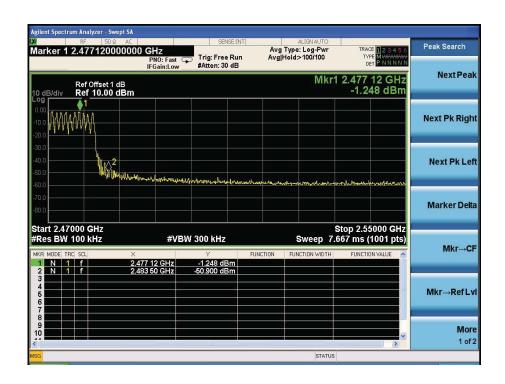

10. Power Line Conducted Emissions

10.1.Block Diagram of Test Setup

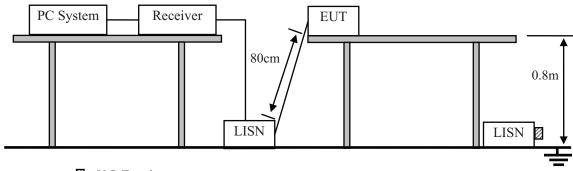

2 :50Ω Terminator

10.2.Limit

	Maximum RF Line Voltage					
Frequency	Quasi-Peak Level	Average Level				
	$dB(\mu V)$	$dB(\mu V)$				
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*				
500kHz ~ 5MHz	56	46				
5MHz ~ 30MHz	60	50				

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

10.3. Test Procedure

- (1) The EUT was placed on a non-metallic table, 80cm above the ground plane.
- (2) Setup the EUT and simulator as shown in 10.1
- (3) The EUT Power connected to the power mains through a power adapter and a line impedance stabilization network (L.I.S.N1). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N2), this provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). Both sides of power line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.4:2014on conducted Emission test.
- (4) The bandwidth of test receiver is set at 10KHz.
- (5) The frequency range from 150 KHz to 30MHz is checked.

10.4.Test Result


PASS. (See below detailed test data)

Note: If QP Result comply with AV limit, AV Result is deemed to comply with AV limit



Shenzhen Alpha Product Testing Co., Ltd.

2F, Building B, East Area of Nanchang Second Industrial Zone,
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
Tel: 4006786199 Fax: +86-755-26736857
Website: http://www.cessz.com/Email:Service@cessz.com/

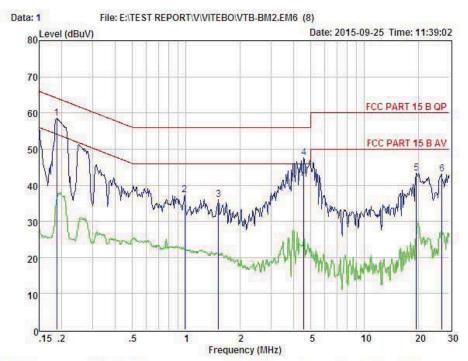

Condition : FCC PARI 15 B QP POL: LINE Temp:25.7 °C Hum:51 %

EUI : Mini Bluetooth speaker with self-timer

Model No : VTB-BM2

Test Mode : Charging and Working

Power : AC 120V/60Hz

Test Engineer: Reak


Remark :

	Iten	i Freq	Read		Preamp Factor		Level	Limit	Margin	Remark
		MHz	dBuV	dB	dB	dB	dBuV	dBuV	dBuV	
-	are gran									
	1	0.188	48.81	0.03	-9.52	0.10	58.46	64.12	-5.66	Peak
	2	0.985	27.52	0.04	-9.63	0.10	37.29	56.00	-18.71	Peak
	3	1.523	26.26	0.05	-9.68	0.10	36.09	56.00	-19.91	Peak
	4	4.569	37.51	0.09	-9.90	0.12	47.62	56.00	-8.38	Peak
	5	19,593	32,91	0.31	-9.80	0.34	43,36	60.00	-16.64	Peak
	6	27.141	32.25	0.46	-9.84	0.54	43.09	60.00	-16.91	Peak

Remarks: Level = Read + LISN Factor - Preamp Factor + Cable loss



Shenzhen Alpha Product Testing Co., Ltd. 2F, Building B, East Area of Nanchang Second Industrial Zone, Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China Tel: 4006786199 Fax: +86-755-26736857 Website: http://www.cessz.com/Email:Service@cessz.com/

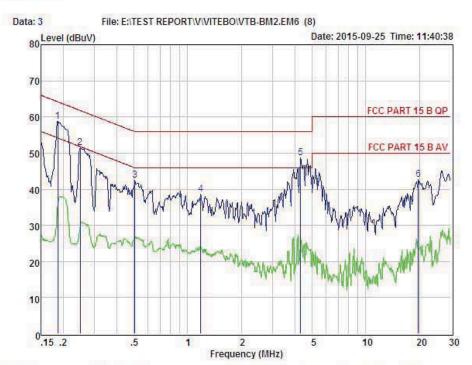

Condition : FCC PART 15 B QP POL: NEUTRAL Temp:25.7 °C Hum:51 %

EUI : Mini Bluetooth speaker with self-timer

Model No : VTB-BM2

: Charging and Working Test Mode

Power : AC 120V/60Hz

Test Engineer: Reak

Remark

I	tem	Freq	Read	LISN Factor	Preamp Factor		Level	Limit	Margin	Remark
		MHz	dBuV	dB	dB	dB	dBuV	dBuV	dBuV	
	1	0.186	49.12	0.03	-9.52	0.10	58.77	64.20	-5.43	Peak
	2	0.249	41.89	0.03	-9.52	0.10	51.54	61.78	-10.24	Peak
	3	0.505	32.81	0.03	-9.58	0.10	42.52	56.00	-13.48	Peak
	4	1.184	28.85	0.04	-9.65	0.10	38.64	56.00	-17.36	Peak
	5	4.315	38,48	0.09	-9.89	0.12	48.58	56.00	-7.42	Peak
	6	19.740	32.27	0.31	-9.80	0.34	42.72	60.00	-17.28	Peak

Remarks: Level = Read + LISN Factor - Preamp Factor + Cable loss

11. Antenna Requirements

11.1.Limit


For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


11.2.Result

The antennas used for this product are PCB Antenna for Bluetooth, no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is only 0dBi for Bluetooth.

12. Test setup photo

12.1.Photos of Radiated emission

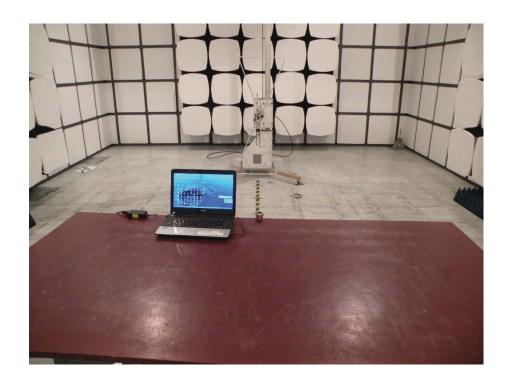

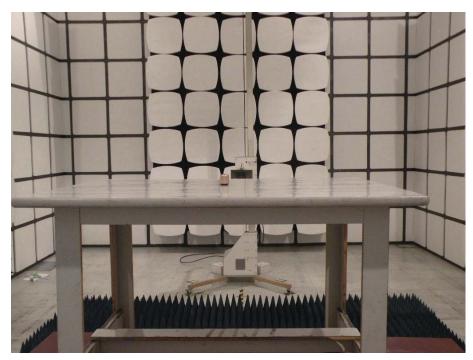


12.2.Photos of Conducted Emission test




13. Photos of EUT




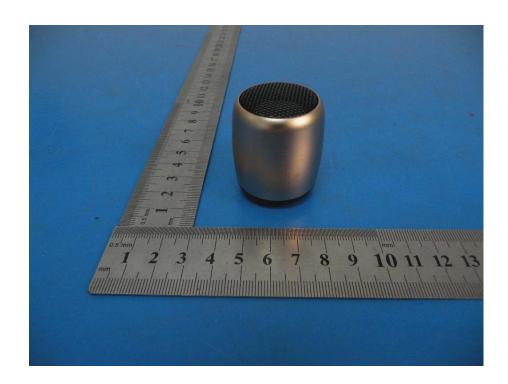








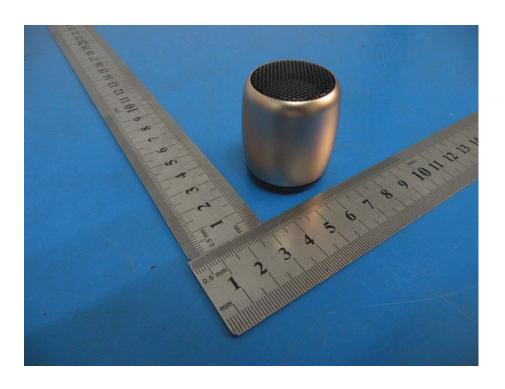

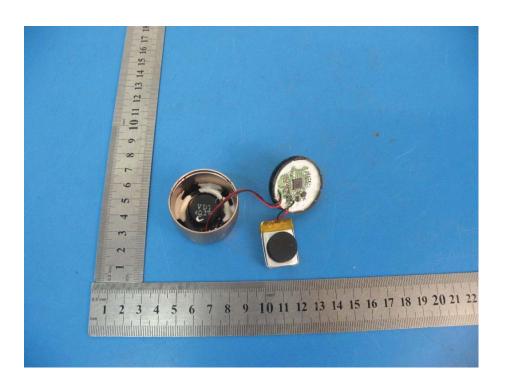

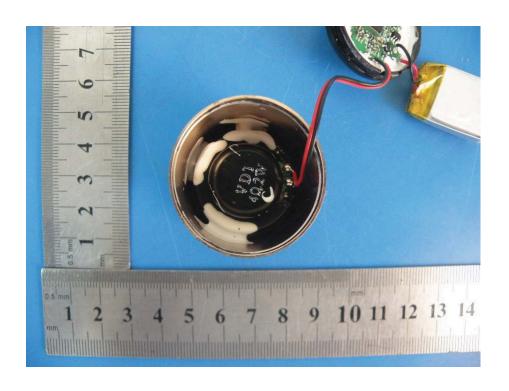

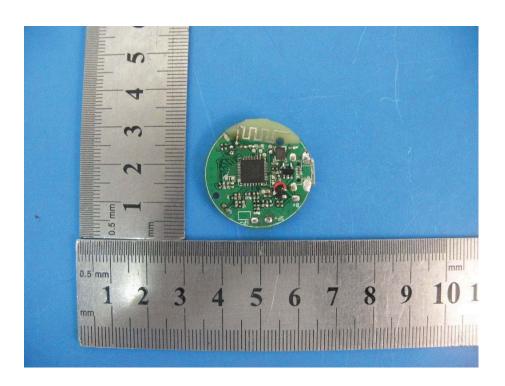

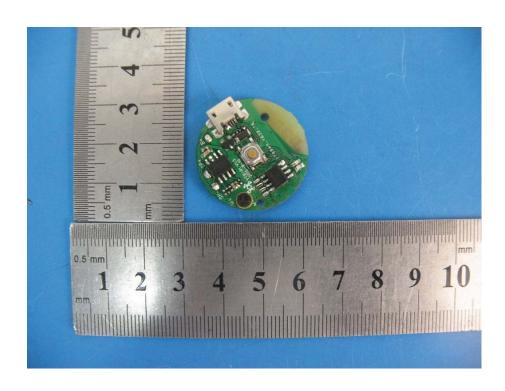





----END OF THE REPORT-----