



5-IN-1 TURNTABLE

MODEL: VTA-75


PLEASE READ THIS INSTRUCTION MANUAL CAREFULLY BEFORE USING AND KEEP IT FOR FUTURE REFERENCE.

HOW TO REPLACE THE TURNTABLE NEEDLE

The stylus should last about 50 hours under normal use. It is recommended that the stylus be replaced as soon as you notice a change in sound quality. Prolonged use of a worn-out stylus may damage the record. Wear and tear on the stylus will be accelerated when playing 78 RPM records. The higher speed of 78 RPM records can wear the stylus faster.

REMOVING THE STYLUS FROM THE CARTRIDGE

1. Set a screwdriver at the tip of the stylus and push down to the direction "A".
WARNING: When applying force to stylus, too much may damage or break the stylus.
2. Push the stylus out toward direction "B".

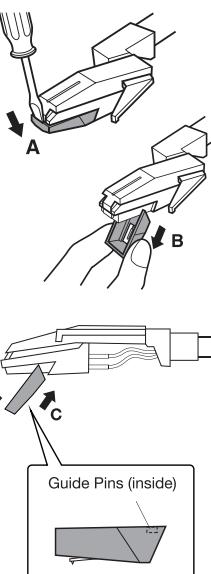

INSTALLING THE STYLUS

1. Hold the tip of the stylus and insert the other edge by pressing toward direction "C".
2. Push the stylus up toward direction "D" until it locks at the tip.

CAUTION

- Do not bend the stylus.
- To avoid injury, do not touch the needle.
- Turn off the unit before you replace the needle.
- Keep out of reach of children.
- Handling the stylus with care is delicate. Use of a bent or broken stylus may damage the record and cause the turntable to malfunction.
- Do not expose the stylus to extreme heat.
- Contact a qualified repair company if you have experienced difficulty in changing the stylus.

REPLACEMENT NEEDLE # ITNP-S1


3

HOW TO OPEN/CLOSE THE TURNTABLE COVER

TO OPEN:
1. Unclasp the buckles on either side of the unit.
2. Lift up the turntable cover all the way until it stops.
3. Secure the hinge on the right side of the unit so that the cover will remain open.
Caution: Make sure you don't pinch your fingers when securing the hinge.

TO CLOSE:
1. Slightly lift the cover and pull the hinge.
2. Lower the cover until it closed, then re-clasp the buckles on the side of the unit.
Caution: Make sure you don't pinch your fingers when closing the cover.

TURNTABLE PARTS

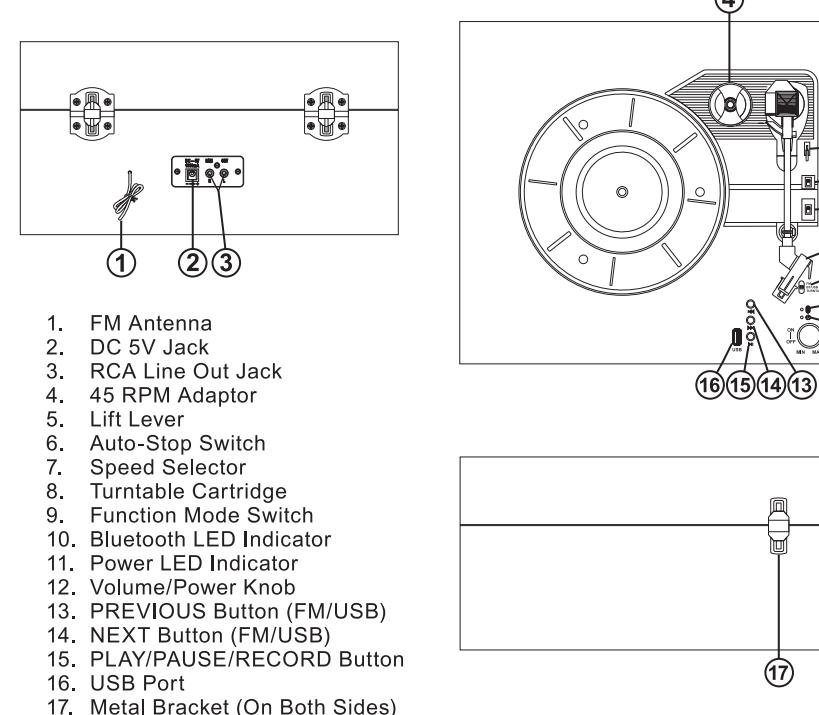


4

ASSEMBLY INSTRUCTIONS - ATTACHING THE LEGS

Carefully turn the unit over and place it onto a flat, smooth surface. Line up the screws on the legs/feet to the metal mounting brackets on the bottom of the unit. Take each leg/foot and screw it into the metal brackets until they are tightly secure. When finished, turn over the unit and make sure it stands firmly on a flat surface.

NOTE: There are two legs options: Long Wood Legs (4x) and Short Feet (4x).
NOTE: When the legs/feet are installed properly, they should be at an angle, as shown.

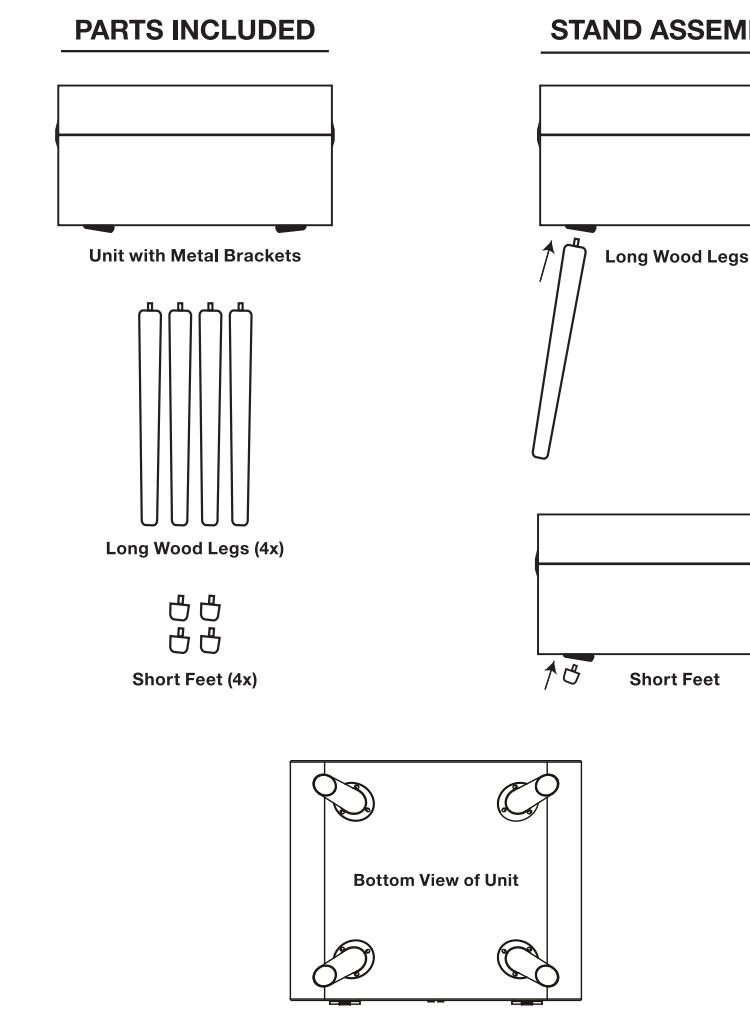

5


LISTENING TO THE RADIO

1. Turn the unit ON by switching the POWER knob.
2. Set the FUNCTION SWITCH to the FM position.



3. Simply press the **FM** button to auto-search the radio stations. Each successful station will be saved automatically the next time the FM Radio function is used.
4. Simply press the **FM** to listen to the next station.
5. Simply press the **FM** to listen to the previous station.
6. Turn the Volume knob to adjust the volume.
7. In FM mode, the LED Indicator will light up RED when a station signal is strong.

NOTE: If the station reception is poor, extend and move the FM antenna until you receive a station clearly.



6

LISTENING TO AN EXTERNAL DEVICE VIA RCA OUT


LINE OUT Jacks are on the back of the unit. For amplifier device listening, first reduce the volume level. Insert the white plug (red jack) into the **LINE OUT** port and the red plug (white jack) into the **LINE OUT** port. Then insert the opposite end into your amplifier device. Be sure to connect the white plug into the white jack and the red plug into the red jack.




7

LISTENING TO A VINYL RECORD (CONTINUED)

9. Move the Tone Arm to the edge of the record (or the starting point of a track). The turntable will begin to turn.




10. Gently lower the Tone Arm using the Lift Lever. You can lower the Tone Arm manually if the Lift Lever has not been raised.

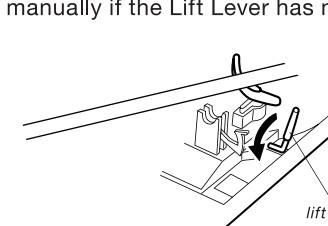

11. Turn the Volume Knob to adjust the volume.

12. When playback has finished, lift the tone arm using the Lift Lever and return it to the Tone Arm Holder. The record will stop rotating.

NOTE: The record will begin to spin only when the tone arm is moved over the record if the Auto Stop is turned on. If the AUTO AND MANUAL STOP SELECTION SWITCH is turned ON, the record will stop automatically when finished. If this switch is at OFF position, record will continue to spin.

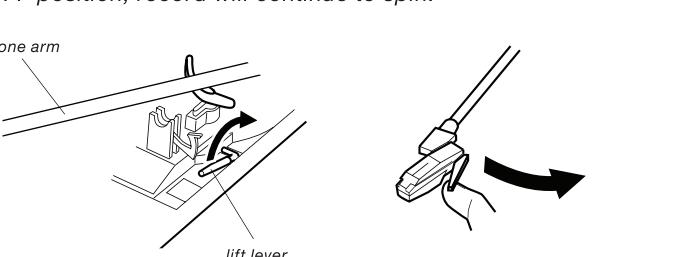

8

LISTENING TO AN EXTERNAL DEVICE VIA BLUETOOTH

1. Turn the unit ON by switching the POWER knob.
2. Set the FUNCTION SWITCH to the BT/USB position. The Bluetooth LED Indicator will begin to flash Blue.



3. Ensure that the Bluetooth function is activated on your external device. The device "VTA-75" will appear on your device's search list.
4. Select "VTA-75" and a sound will chime indicating that the connection to your device was successful. A password may be required to enter depending on the device manufacturer, model or software version of your device. If a password is asked, type "0000" and press enter.
5. Once the device is connected the Bluetooth LED Indicator will remain lit.
6. Turn the Volume Knob to adjust the volume.
7. Press **FM** and **BT** to choose the NEXT or PREVIOUS track.
Press **FM** to PAUSE or PLAY the current track.
NOTE: An external Bluetooth device will automatically reconnect with the unit after being paired for the first time.

LISTENING TO AN EXTERNAL DEVICE VIA USB

1. Turn the unit ON by switching the POWER knob.
2. Set the FUNCTION SWITCH to the BT/USB position.



3. When the Bluetooth LED Indicator is flashing, insert a USB Stick into the USB port. The unit will automatically begin playing the music on the USB stick.
4. Press **FM** and **BT** to choose the NEXT or PREVIOUS track.
NOTE: An external Bluetooth device will automatically reconnect with the unit after being paired for the first time.




4. Follow the listening to a device via USB directions for further instructions.

9

RECORDING FROM VINYL TO USB

1. Turn the FUNCTION SWITCH to the TURNTABLE position to play a vinyl record and then insert the USB stick into a USB port.

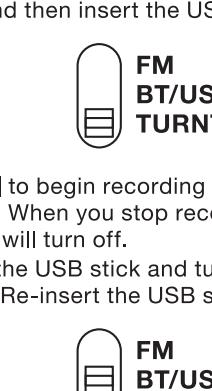

2. Press **FM** to begin recording the record, the Bluetooth LED Indicator will turn on. When you stop recording, press **FM** again and the LED Indicator will turn off.
3. Remove the USB stick and turn the FUNCTION SWITCH to the BT/USB position. Re-insert the USB stick to listen to the recorded track.



4. Follow the listening to a device via USB directions for further instructions.

10

TROUBLESHOOTING

If you experience any problems with the unit, please take a moment to look through this guide and see if you can solve the problem yourself before you call our dealer.

General

No power:

• Check the connection to the AC power source. Make sure the AC source is not a switched outlet and if it is, turn the switch on. Make sure there is power to the AC outlet by plugging another item such as a lamp or fan.

No sound:

• Adjust the volume.

The sound has interference:

• The unit is too close to a TV set or similar appliance. Relocate the unit further away from them, or turn the other appliances off.

Radio

Cannot listen to any station, or signal is too weak:

• Tune in the station properly.
• If a TV is near the unit, turn it off.
• Rotate the unit or antenna wire for the best reception position.

Record Player

Will not turn:

• Turn the VOLUME KNOB clockwise.

• Remove the white plastic stylus guard from the needle, failing to remove will not allow the needle to contact the grooves of the record and no sound will be heard!

• If the stylus is worn-out, change the stylus. Select the correct playback speed.

Sound skips:

• Place the unit on a stable surface to avoid vibration and shock. Make sure the unit is level both front to back and side to side.

• Clean the surface of the record/disc.

• Do not use scratched, damaged or warped records/discs.

If normal operation cannot be obtained, unplug power cord from the outlet and wait a few minutes.

Bearings or condensation:

When the unit (or a record) is moved from a cold to warm place, or used after a sudden temperature change, condensation may form; vapor in the air could condense on the internal mechanism, making correct operation erratic or impossible.

To prevent this, or if this occurs, leave the unit turned off for one or two hours. The unit will stabilize at the temperature of its surroundings.

Maintenance

Always keep the turntable clean. If the surface of the unit gets dirty, wipe with a soft dry cloth or use a diluted mild liquid soap. Be sure to remove any excess liquid completely. Do not use thinner, benzine or alcohol as they may damage the surface of the unit. Allow the surface of the unit to dry completely before using.

11

SPECIFICATIONS

Amplifier Output Power.....2 x 2.3 W

Bluetooth Working Range33 feet (10 meters)

Tuner Frequency Range (FM)87.5MHz to 108MHz

Record Player Motor.....DC servo motor
Drive System.....Bell Drive
Speed.....33 1/3 RPM, 45 RPM, 78 RPM
Stylus.....ITNP-S1

Speaker System Unit.....1-way
Impedance.....4 ohms

General Power Requirements.....AC100-240/50-60Hz
Power Consumption.....9.5W

Dimensions (with wood legs).....L 383mm x W 345mm x H 703mm

Dimensions (with rubber feet).....L 383mm x W 345mm x H 276.5mm

L 35 in x W 13.5 in x H 8.85 in

L 35 in x W 345mm x H 215mm

Weight (with wood legs).....14 lbs / 6.35 kgs

Weight (with rubber feet).....12 lbs / 5.53 kgs

Weight (unassembled).....12 lbs / 5.44 kgs

Accessories Included

Owner's Manual

Warranty (Back of Manual)

AC Power Adaptor

45 RPM Adapter

Turntable Sheet

Rubber Feet (4x)

Wood Legs (4x)

Design and specification are subject to change without notice.

Photos and illustrations may differ slightly from the production models.

Victrola is a registered trademark of Innovative Technology Electronics LLC.

Bluetooth is a registered trademark of Bluetooth SIG, Inc.

Other trademarks and trade names are those of their respective owners.

Made in China.

12

INDUSTRY CANADA

English: This device complies with Industry Canada RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

French: L'appareil présent est conforme aux CNR d'Industrie Canada applicable aux appareils radio. Exempts de licence. L'exploitation est autorisée aux deux conditions suivantes: (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

FCC STATEMENT

Warning: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and stores radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

CALIFORNIA PROP 65 WARNING

WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov

! This product contains a chemical known to the State of California to cause cancer and birth defects or other reproductive harm.

Innovative Technology Electronics LLC.
Limited Warranty: 90 Days Labor, One Year Parts

Innovative Technology Electronics LLC. ("