




Thank you for purchasing our over-ear Bluetooth Earphone. Please read the instructions carefully before using it, in order to know the proper operations of the product.

Bluetooth Wireless Communications Technology

Bluetooth is a kind of wireless technology which supports short distance communications (works normally within a distance of 10M) with it you can exchange information wirelessly between many IT digital devices like mobile phones / wireless earphones / computers etc. Bluetooth technology works effectively and simplifies the communications which makes device and data transmission quick and effective.

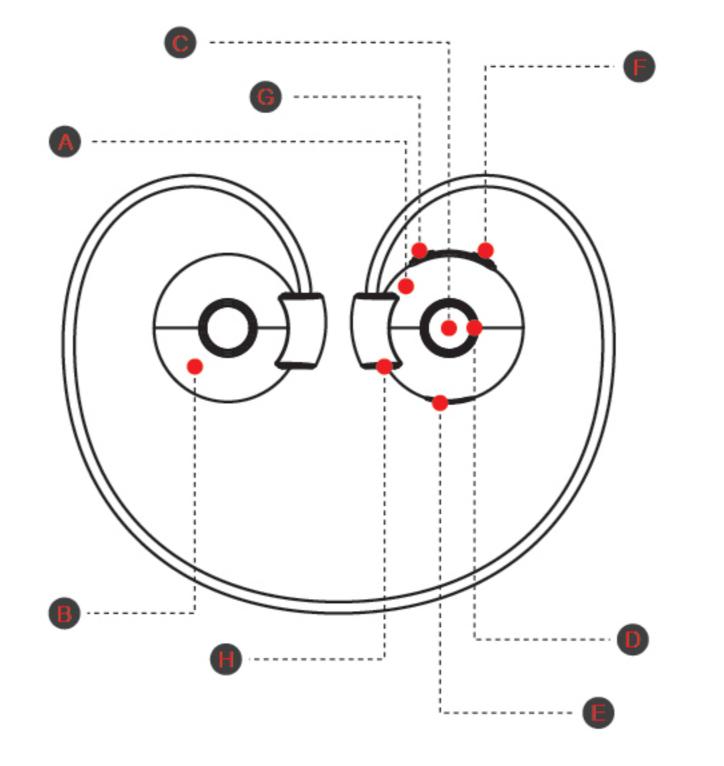

A.Left (L) B.Right (R)

C.Switch / MFB

D.Indicator Light

E.Micro USB Charging Port

F.Vol(+) / Next Track G.Vol(-) / Previous Track

H.Microphone

• Enable Bluetooth Function on first mobile phone, then connect to the first mobile phone.

Power on: Long press the Multi-Function Button for 4

seconds until the white indicator light starts flashing for 1

second with the voice prompt "Power on. You've plugged

seconds until the red indicator light starts flashing for 1

second with the voice prompt "Adios amigo, powering off"

Power off: Long press the Multi-Function Button for 6

Long press Multi-Function Button for 4 seconds, as

and red indicator light will start flashing alternatively.

Choose "boAt Rockerz 210" (If password is required,

White LED light will start flashing slowly with the voice

Refer to the pairing steps to connect the first mobile

phone with boAt Rockerz 210 and disable the Bluetooth

function on your phone to pair with the second mobile

prompt "You're now connected to boAt Rockerz 210", if

Open Bluetooth settings on the phone.

Search for available Bluetooth Devices.

product is paired successfully.

please input "0000")

■ Paring two mobile phones

soon as the earphone goes into pairing mode, white

Call

Answer/End a call: Short Press the MFB to connect or hang up the current phone.

Reject a call: Long press the MFB for 4 seconds.

Redial a call: Double click the MFB for 2 seconds.

Switching a call: Short press the MFB to hang up current phone call and answer another call when you are making a phone call.

Double click on the MFB to answer second call, and switch between two calls.

Short press the MFB, you can end the phone one by one.

■ Voice prompt switch

In the state of pairing mode (when red and white lights are flashing alternatively), double click the "V+" button, then you could switch the voice language between English and Chinese.

Button Definition

Power off: Long press the MFB for 6 seconds Power on: Long press the MFB for 4 seconds Paring Mode: Long press the MFB for 6 seconds Answer incoming call: click the MFB Reject incoming call: Long press the MFB for 4 seconds Hang up the phone: Click the MFB Call transfer: long press the phone button 1 second Volume up: long press V+ button Volume down: long press V- button Previous: Click V+ Next: Click V-

• Note :- MFB (MULTI-FUNCTION BUTTON)



Wireless Bluetooth Headsets

ROCKERZ 2

USER MANUAL

Bluetooth Version: V4.1

Profile support: HFP/HSP/A2DP/AVRCP

Stand-by Time: 200 hours Talk Time: 10 hours Play Music Time: 8 hours Charging Time: 2.5 hours

Frequency Range: 2.40GHz~2.48GHz Ambient Temperature: -20/+60°C

Charging Voltage: DC 5V Transmission Distance: 10m

Battery capacity: 100mAh

Driver Specification

Drive: 10 mm

Sensitivity: 90dB ± 3 dB Impedance: $32\Omega \pm 15\%$

Frequency Response: 20-20000 Hz

- WARNING: To reduce the risk of fire or electric shock, do not expose this apparatus to rain or moisture.
- CAUTION: Use of controls or adjustments or performance of procedures other than those specified may result in hazardous radiation exposure.
- · WARNING: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's warranty.
- WARNING: Do not place the unit on top of any rough or hard surfaces to avoid damaging the product. Use a protective barrier between the unit and surface to protect the product.

- Read the instructions carefully.
- Do not lose the instructions.
- Heed all warnings.
- Follow all instructions.
- · Do not use this apparatus near water.
- Clean only with a dry cloth.
- Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
- Follow applicable laws and regulations for transport, shipping, and disposal of batteries. For details on recycling lithium, lithium phosphate, and lithium ion batteries, pleases contacts a government recycling agency, or your waste disposal service.
- Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.

- · Only use the attachment/accessories specified by the manufacturer.
- Unplug this apparatus during lighting, storms or when unused for long periods of time.
- Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power -supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.
- Headphones are capable of producing sound levels which can be harmful to your hearing. Do not listen at high volume for prolonged periods of time. Headphones may block out surrounding sounds. Never wear headphones while operating a vehicle. Use with caution. Users assume all risks associated with the use of this product.
- · Do not keep in on charging for more than 10 hours continuously, the battery may explode due to overcharging.

NOTE: - If the product does not work properly, please send it to boAt authorized service center. Our service team will help to solve the problems for you.

■ Power On/Off


into Nirvana"

Paring

phone.

1X Bluetooth Headphones 1X USB Charging Cable

1X User Manual 1X Carrying Case

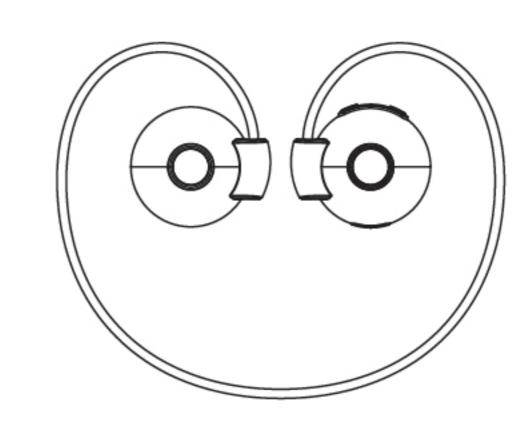






boAt Rockerz 390 Wireless Headphones comes with a one year all India warranty.

| Warranty Card | |
|---|--|
| Customer Namer: | <u> </u> |
| Product Namer: | Model No.: |
| Address: | Date of Purchase: |
| Dealer Namer: | Phone No.: |
| For Service please contact :- Imagine Marketing Pvt. Ltd, 131, Guru C Phone: 02242102409, Email: info@imagi | Gobind Ind Est Jay Coach Goregaon, East Mumbai- 400063 nemarketingindia.com |













This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.