

WLAN Antenna Test Report

Prepared for GOLDTEK

【DUV060】 Project

Author Nick Lu
Date 20th Jun 2015

Client Information

Client	Goldtek
Engineer of Client	
Project Name	DUV060
Project Stage	<input type="checkbox"/> 2D Drawing <input type="checkbox"/> PCB <input type="checkbox"/> Housing <input checked="" type="checkbox"/> CNC(EVT) <input type="checkbox"/> Soft Tooling <input type="checkbox"/> Hot Tooling(DVT) <input type="checkbox"/> PVT
Antenna Type	Linear Polarization
Antenna Band	2400-2500MHz 、 5150-5825MHz
Antenna Engineer	Nick

Tuning Note

Version	Date	Revision Description	Designer
01	2013/09/24	Version 1	Long
02	2014/11/07	Version 2	Nick
03	2014/11/13	Version 3	Nick
04	2015/01/20	Version 4	Nick

Antenna Info

LNA Name	Material	Dimension	Feed-In Location	PIN Length

一.測試內容：

WiFi Antenna in **DUV060** housing pattern measurement

二.測試項目：

S11 Return Loss 、 Efficiency 、 Radiation Pattern 、 Peak Gain 、

Average Gain

三.測試設定：

Network Analyzer ： Agilent E5071C

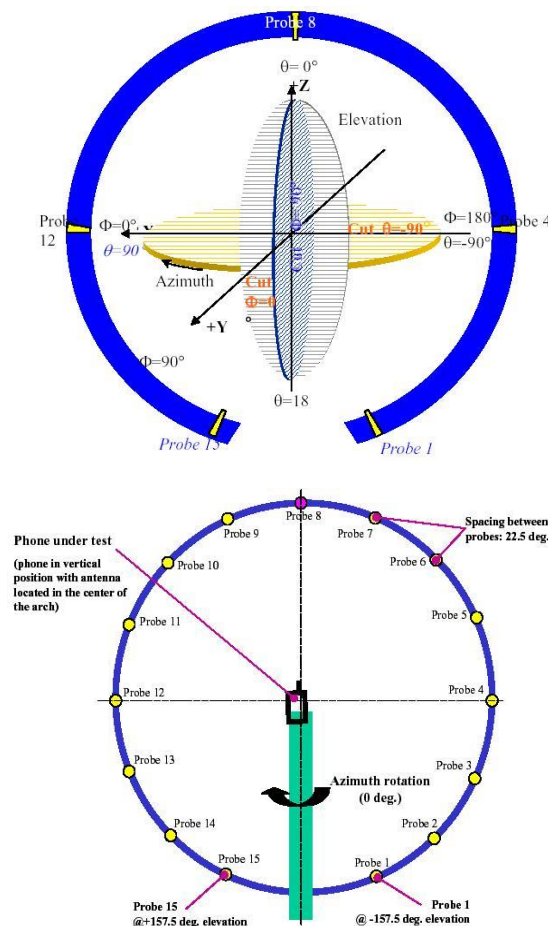
Source Antenna ： SATIMO

Test Frequency ：

四.測試環境：



Room temperature ： 24°C Humidity ： 32.5%

五.測試設定示意圖：



六.測試數據：

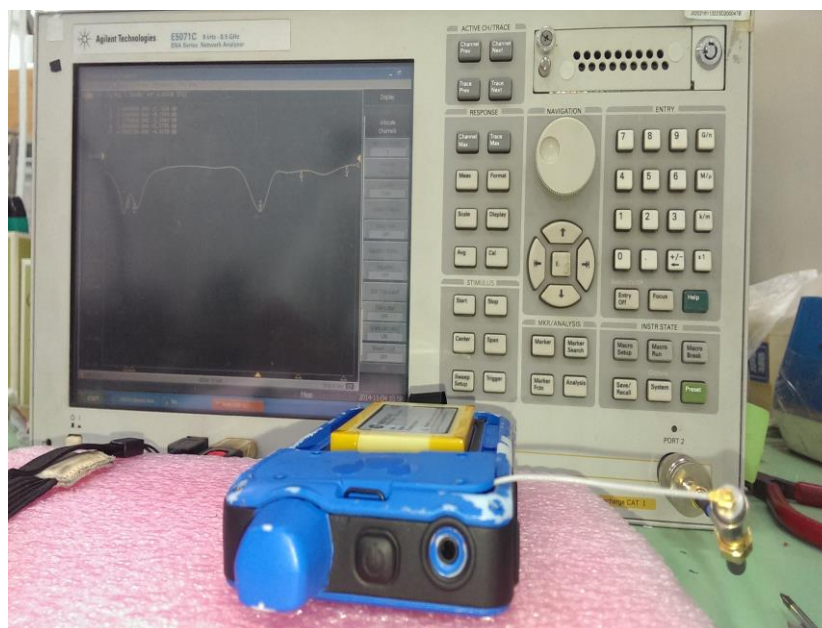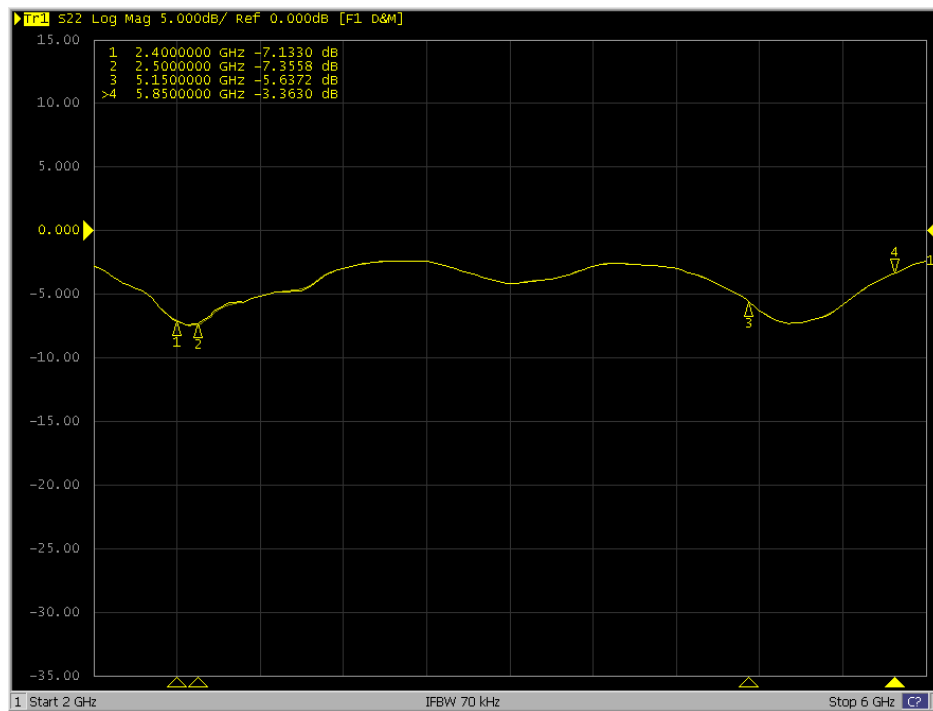WiFi Antenna in DUV060 housing S11 Return Loss Measurement



Frequency (MHZ)	2400	2500	5150	5850
Return Loss(dB)	-7.13	-7.35	-5.63	-3.36

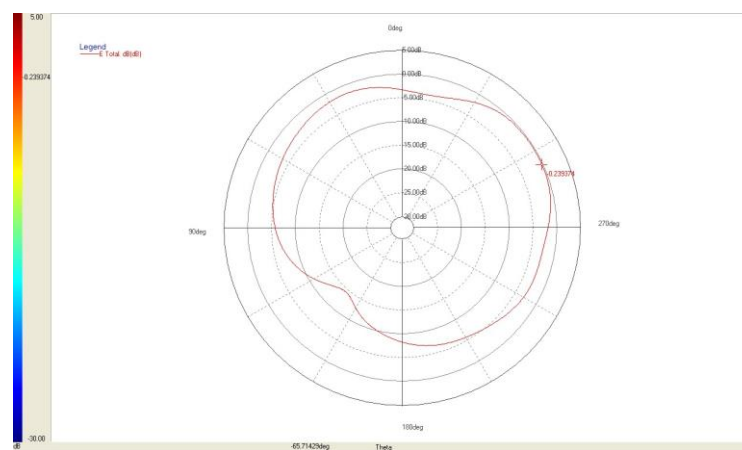
XZ-Plane 2450MHz




XZ-Plane 5550MHz




YZ-Plane 2450MHz




YZ-Plane 5550MHz

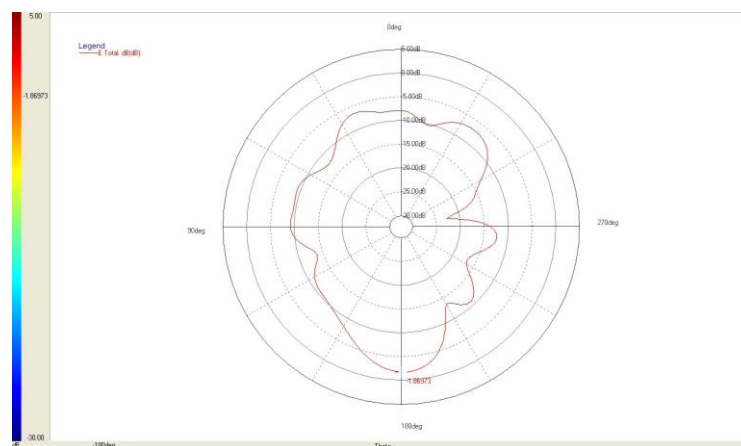

XY-Plane 2450MHz

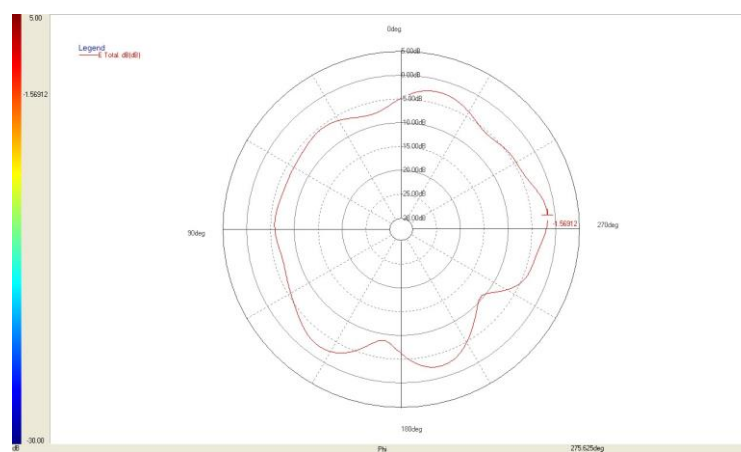

XY-Plane 5550MHz

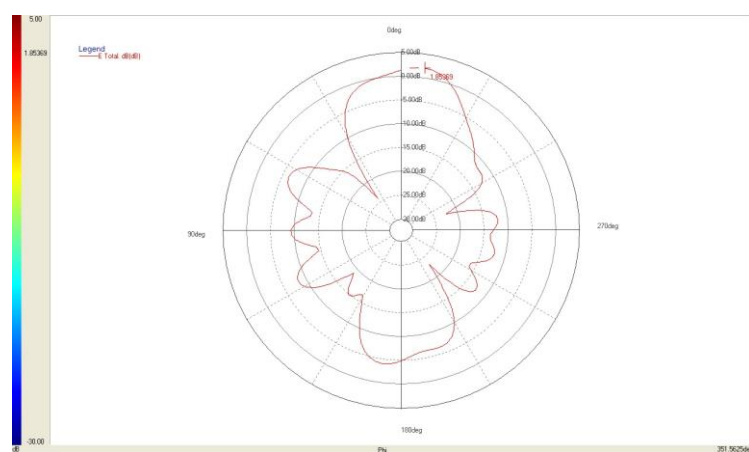

2450MHz	Peak Gain
XZ-Plane	-1.71
YZ-Plane	-0.23
XY-Plane	-1.56

5550MHz	Peak Gain
XZ-Plane	3.92
YZ-Plane	-1.86
XY-Plane	1.85

(Unit : dBi)

Efficiency :



Average Gain :



Peak Gain :



Frequency (MHz)	2400	2450	2450	5150	5850
Efficiency (%)	38.22	38.99	35.89	11.22	19.10
Average Gain(dBi)	-4.06	-4.08	-4.55	-9.62	-7.19
Peak Gain(dBi)	0.20	0.01	-0.44	0.41	2.79

3D Pattern

Photo :

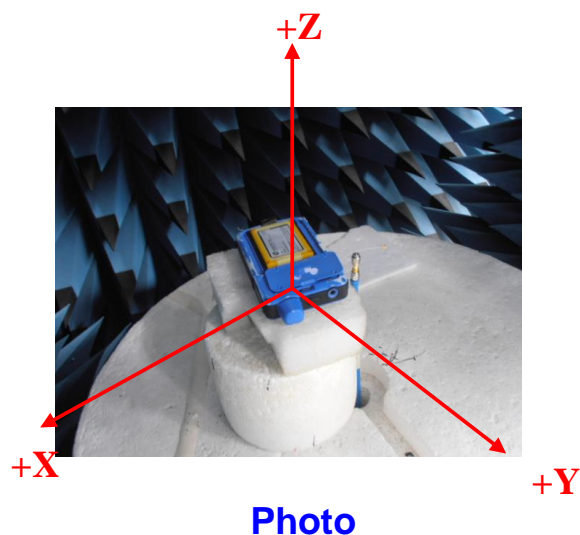
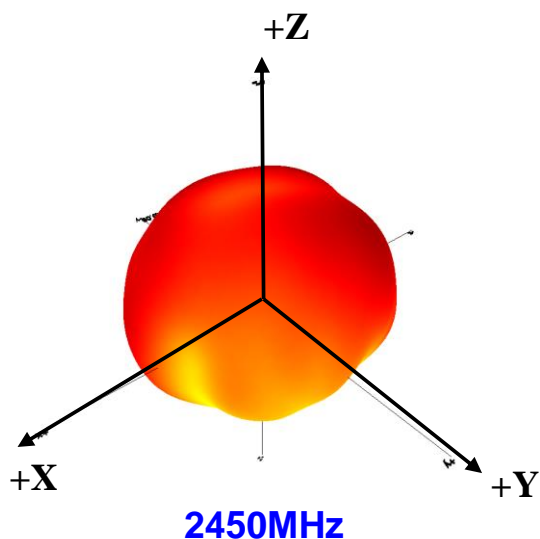


Photo :

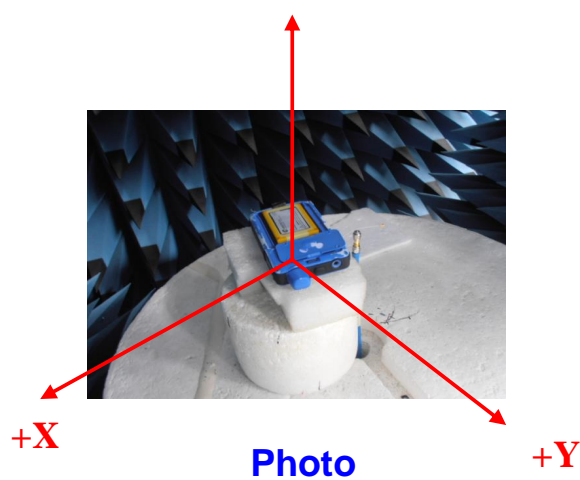
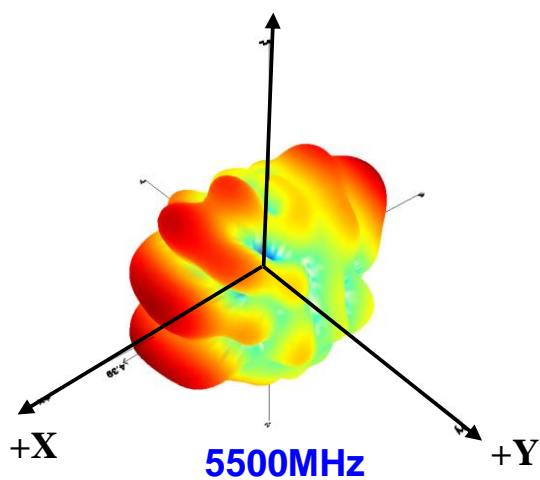


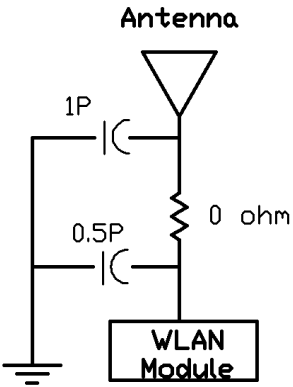



Photo :

Antenna Outline	Antenna Environment
	
Antenna Matching	Antenna Feed Pogo Pin
	

七.測試結果：

依照客戶需求於 DUV060 樣機中調測WiFi Antenna，經頻率及阻抗匹配後，其各頻段之 Return Loss、Efficiency、Radiation Pattern、Average Gain 以及Peak Gain等特性皆如上所述，供客戶參考評估。