User's Manual
Welcome to use this BT stereo headset. Please read this user's
manual carefully before using it.

1.Specifications

BT version	BT V4.0+EDR
BT profiles	Headset, Hands free, A2DP, AVRCP
Speaker size	50 mm
Effective range	10 meters
Working time	Music:Up to 10 hours / Talk: Up to 11hours
Standby time	Up to 250 hours
Input DC:	5V/130mA
Battery capacity	400 mAh
Charging time	Approx 3 hours
Dimensions	190×195×75 mm
Weight	Approx. 230 g

Overview

1, < Key: last song
2, > Key: next song
3, LED Indicator
4, Multifunction button (MFB):
5, + key: Volume up
6, – Key: Volume down
7, Line-in port
8, Charging port

Switch on/off the headset, answer,
end and reject call, microphone
mute, voice dial and voice transfer,
redial last number, pause and play

Charging the headset

First time charging

Before you use this BT headset, please
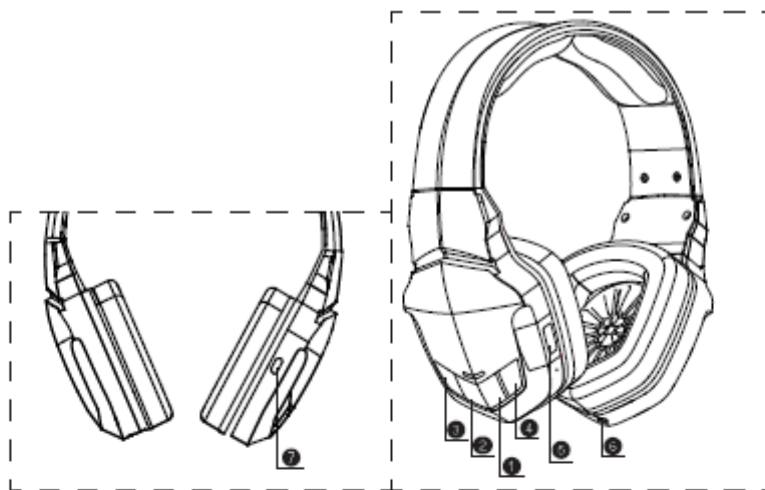charge the battery of BT headset fully.

Next time

When you hear three warning
tones of "DONG" every 20
seconds,
at the same time, the red
light blinks two times. It means the
battery is low power and need to
be charged. The battery can be
charged as below:

Package Contents:

BT headset
USB Charging cable
3.5 mm audio cable

User's manual

Charging the battery with USB cable

Step1: Insert USB charging cable into USB port of PC or into wall charger with USB port.

Step2: Connect charging cable with the charging port of headset.

When the red light is on, the headset is charging.

When the red light is off, the headset is charged fully.

It takes about 3 hours to charge the headset fully.

Warning:

The battery is recycled.

Do not dispose of the battery in fire, as it may cause explosion.

How to use

Switching on / off headset

Function	Operation	LED indicator	Indication tone
Switch on	Press the MFB button for 3 seconds, and release it till the blue LED is on	Blue LED is on for 1 second	A long "DI" tone
Switch off	Press the MFB button for 5 seconds, and release it till the red LED is on	Red LED is on for 1 second	A long "DU" tone

Note: In order to save power, the headset will automatically switch off if no devices can be connected within 10 minutes after switching on.

Pairing the headset with BT devices
How to enter pairing mode

Function	Operation	LED indicator	Indication tone
Enter pairing mode	Make sure the headset is off,Press and hold MFB button for 3-seconds, and release it till the red and blue LEDS blink alternately	Red and blue LEDs blink alternately.	Two "DU" tones

Note: The pairing mode will last 2 minutes, if the headset still can't pair with any BT devices after 2 minutes, it will switch into standby mode automatically.

Pairing the headset with BT mobile phone

Please make sure your mobile phone has BT function that can be used. Specific pairing procedures may vary with different mobile phone. Please refer to your mobile phone manual for further information. Steps as follows:

a) Please keep the headset and mobile phone in the range of 1 meter when pairing.

b) Make the headset enter into pairing mode (Please refer to "how to enter into pairing mode").

c) Start the BT function of mobile phone and search the BT devices. After searched, select "BT headset" in the BT device list.

d) According to indication, enter password or PIN No. "0000", and press the key of" Yes" or "confirm.

f) After successful pairing, select "BT headset" in the BT device list, and press "connect".

g) After successful connecting, the blue LED of the headset quickly blinks twice or three times every 4 seconds.

h) If the mobile phone has NFC function, put it close to the ear cup of headset (about 10 mm), the BT headset can pair with mobile phone automatically.

Making calls with the headset

Function	Status of headset	Operation
Voice dial	Standby mode	Press and hold > (next song) button for 2s, release it till hearing indication sound
Redial last number	Standby mode	Short press MFB twice quickly
Volume up	Conversation mode	Short press or long press + key
Volume down	Volume down	Short press or long press - key
Answer calling	Ringing	Short press MFB
Reject calling	Ringing	Press and hold MFB for 2s, and release it till hearing indication sound
End calling	Conversation mode	Short press MFB
Call transfer	Conversation mode	Press and hold MFB for 2s, and release it till hearing indication tone
Microphone mute	Conversation mode	Quickly press the MFB twice
Cancel mute	Conversation mode (mute)	Quickly press the MFB twice

Notes:

• Not all the mobile phones support all the functions listed above.
Please refer to the instruction of your mobile phone.
• Some functions and indication tones may vary with different mobile phones.
• When the volume is adjusted to max or min, you will hear a indication tone.
• For some mobile phones, when you press the key of accepting on the phone, the conversation will be sent to the mobile phone. At this time, you can switch the call to headset by using the conversation switch button or through operating on the mobile phone.
Please refer to the instruction of your mobile phone for further information.

Playing music

When the headset connects with the mobile phone or BT transmitter which supports A2DP, you can enjoy music through headset wirelessly.

Function	Status of headset	Operation
Volume up	Playing music	Short or long press + key
Volume down	Playing music	Short or long press – key
Pause	Playing music	Short press MFB
Play	Pausing	Short press MFB
Last song	Playing music	Short press < key
Next song	Playing music	Short press > key

When you connect the BT headset and another available music device with the audio cable, the BT headset will transfer to "plug in" mode and works as a wired headset automatically.

Notes:

• For some of mobile phones, when they are playing music, the music will transmit to the speaker of mobile phone, you have to choose "transmit the sound through BT" in the "setting" of music play interface, and then choose "BT headset" in the device list,the music will be transmitted to the headset. Please refer to the instruction of your mobile phone for further information.

• When the volume of headset is adjusted to max. or min, you will hear a indication tone.

• Remote control the function of last song/next song/pause/revert, it needs your mobile phone or BT transmitter supports AVRCP. Please refer to the instruction of your mobile phone or BT transmitter for further information.

LED indicator
Charging

LED indicator	Status of the headset
Red and blue LEDs blink alternately	Pairing mode
Blue LED quickly blinks once every 2 seconds,	Not connected to a device
Blue LED quickly blinks twice every 4 seconds	Set up HFP or A2DP connection
Blue LED quickly blinks three times every 2 seconds	Set up HFP and A2DP connection
Blue LED gradually turns on and off	Conversation mode
Red LED blinks twice every 20 seconds	Low power

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

— Reorient or relocate the receiving antenna.
— Increase the separation between the equipment and receiver.
— Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
— Consult the dealer or an experienced radio/TV technician for help

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1)this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

Care and maintenance
Please read the following suggestions carefully, that will help you
to fulfill any warranty obligations and to enjoy this product for many years.
• Keep dry and don't put it in the dump place, in case of effecting the interior circuit of product.
• Don't put the product under the sunlight or place hot areas. High temperature will short the life of electronic device, destroy the battery, or distort certain plastic.
• Don't expose the product in the cold areas. It may damage the internal circuit board.
• Don't try to take apart the product. It may damage the product if you are not professional.
• Don't fall off on the floor or knock the hard substance. It may damage interior circuit.
• Don't use intensify chemical or detergent to clean the product.
• Don't scrap the surface with sharp things.

Caution:Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Distributed by
DongGuan Kotion Electronics Tech Co,.LTD

NO 35 Building Industrial park Hengli Town
DongDuan City,Guangdong ,China.

Tel:+86-0769-33388111   Hot line: 400-180-2096
Fax: 0769-86729009   Website: www.kotion.cc