Bluetooth

User Manual
用户手册

手机电量有状态显示
支持IOS系统与Android系统
Battery indication
on iPhone and non Android Phone

多媒体播放：听歌，看电影，称心所欲
听歌，QQ，微信，……，最大力力
Compatible
with almost all Multimedia

产品参数：

蓝牙标准：Bluetooth V2.1
支持协议：AVRCP1.3,A2DP1.0,HFP1.5,HSP1.0
有效范围：10m
工作频率：2.402—2.480GHz
电池规格：3.7V/300mAH内置可充电锂电池。
充电电压：DC4.2—5.5V
充电时间：约2小时
续航时间：约5个小时
待机时间：约10个小时

包装清单：

1) 一个头戴式多媒体蓝牙耳机BT009
2) 一条USB数据线
3) 一条AUX-in音频线
4) 一本使用说明书

按键说明：

" ▶∥ "：开启/关闭/播放/暂停/接听电话/挂断电话
" ▶▶∣ "：长按下一曲（电台）/短按加音量
" ∣◀◀ "：长按上一曲（电台）/短按减音量

功能说明：

开机：
长按 ▶∥ 3秒以上，设备启动，语音提示"Bluetooth Mode"，自动进入

蓝牙模式，LED指示灯蓝色长亮。。
关机：
耳机开机状态中，长按 ▶∥ ，设备关闭，LED指示灯熄灭。

按键指引：

1) 接通电话:来电时，短按 " ▶∥ "
2) 挂断电话:通话时，短按 " ▶∥ "
3) 拒接来电：来电时，长按 " ▶∥ " 3秒左右。
4) 重拨最后一次去电号码：双击 " ▶∥ "。
5) 播放音乐：正常状态下，短按 " ▶∥ "，自动打开智能设备播放音乐。

播放模式：

Bluetooth模式：

1) 配对状态：
a首次配对：开机自动进入蓝牙模式，语音提示"Bluetooth Mode"，LED指示灯蓝色长亮，3秒内搜索不到最后一次连接的蓝牙设备，耳机自动进入蓝牙匹配模式，LED指示灯蓝、绿两色快速交替闪烁，打开智能设备蓝牙功能，开启搜索并选择设备"BT009"，无需密码，配对成功后语音提示"Connected"，LED指示灯蓝色长亮，工作状态为两秒闪一次。
b重新配对：关闭已连接智能蓝牙，LED指示灯蓝色两秒闪烁一次，3秒内搜索不到最后一次连接的蓝牙设备，耳机重新进入配对模式，LED指示灯蓝、绿两色快速交替闪烁。打开新智能设备蓝牙功能，开启搜索并选

择设备"BT009"，无需密码，配对成功后语音提示"Connected"，LED指示灯蓝色长亮，进入播放工作后为两秒闪一次。
c后续配对：开机后3秒内会自动搜索并连接最后一次已配对的设备。
2) 最大音量警示语音："du du"。
3) 全解码，支持MP，WAV，WNA，FLAC格式播放。
4) IOS系统电量显。
5) 国际通用Micro USB充电口。

AUX-in播放模式：

在其他模式下，插入AUX-in线，耳机自动关机，切换到AUX-in功能。

LED灯状态：

充电状态	红色LED指示灯长亮，满电时，指示灯熄灭
开机提示	蓝色LED指示灯常亮
关机提示	LED指示灯熄灭
配对状态	蓝绿色LED指示灯交替闪烁
待机状态	蓝色LED指示灯长亮
连接成功状态	蓝色LED指示灯长亮
使用状态	Bluetooth Mode，蓝色LED指示灯长亮
	AUX-in Mode，耳机自动关机，LED指示灯熄灭

注意事项：

蓝牙耳机进入配对模式后若无配对成功后成功3分钟自动关机。
搜索蓝牙时不要进行其他操作，防止程序出错。
在使用中请选择适当的音量，以防对耳朵造成伤害。
请注意蓝牙耳机的良好使用环境，避免对耳机造成损伤。
长时间未使用的耳机，请先将耳机进行一次充电过程后再使用。

Product Parameters:

Bluetooth Version: V2.1
Support Profile: AVRCP1.3, A2DP1.0, HFP1.5, HSP1.0
Working Distance Range: 10m
Frequency Range: 2.402GHz-2.480GHz
Battery Specifications: 3.7V, 300mAh, Built-in rechargeable lithium battery
Charging Voltage: DC4.2 - 5.5V
Charging Time: about 2 hours
Talking/Music time: about 5 hours
Standby Time: about 10 hours

Items Included:

1. One Multifunction Bluetooth headset "BT009"
2. One charging cable
3. One AUX-in cable
4. One User's Manual

Button Description:

" ▶∥ ": ON/OFF Switch/ Play/ Pause/ Answer Calls/ Play Music
" ▶▶∣ ": long press for Next song or radio station/ short press increase volume
" ∣◀◀ ": long press for Previous song or radio station/ short press reduce volume

Function Description:

1. Startup:
Press the ▶∥ for 3 seconds, the device starts up, voice prompts "Bluetooth Mode", thenenter Bluetooth pairing mode automatically, LED indicator light stays blue.
2. Shutdown:
Press the ▶∥ for 3 seconds, LED indicator light turns off and the device will be off.

Button Operation:

1) Answer Calls: Short press " ▶∥ " when calls' coming.
2) Hang up phone calls:Short press " ▶∥ " after calling.
3) Reject Calls:Long press " ▶∥ " for 3 second when calls are coming.
4) Redial the last outgoing number: double-click " ▶∥ ".
5) Music Play:short press " ▶∥ " after connected with the smart device.

Mode:

Bluetooth Mode:

1) Pairing Operation:
a. For the first time pairing: boot into "Bluetooth Mode" automatically, voice prompts "Bluetooth Mode", LED indicator light turns to blue. If can't search and pair with the last connected smart device within 3 seconds, it will automatically enter pairing mode. LED indicator light rapidly alternating flashes with blue and green colors. Please open the smart device's Bluetooth searching function, and

select the device " BT009 ", no password required, after successful pairing, voice prompts "Connected", LED indicator light flash every two seconds while working.
b. Re-pairing: turn off the attached smart device's Bluetooth function. If the headset can't search and pair with the last connected smart device within 3 seconds, it will automatic re-enter the pairing mode. LED indicator light rapidly alternating flashes with blue and green. Open another smart device's Bluetooth searching function, and select the device "KD-B08", no password required, after successful pairing, voice prompts "Connected", LED indicator light flash every two seconds while working.
c. Follow-up pairing: automatically pair the last connected device in 3 seconds after boot.
2. Maximum volume warning voice prompts "du du".
3. Supports MP3, WAV, WNA, FLAC format playback.
4. Battery indication on IOS.
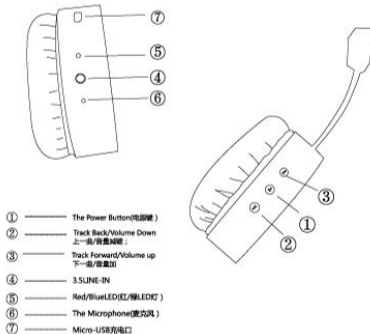5. Micro USB as common use charging port.

AUX-in Mode:

When the headset is on, insert the AUX-in cable. Then it plays smart device's media automatically.

LED STATUS:

Charge Status	LED indicator light steady red. When fully charged, it turns off.
Power on Status	Blue LED indicator light turns on
Power off Status	LED indicator light turns off.
Pairing Status	Green and Blue LED indicator lights rapidly alternating flash.
Standby Status	Blue LED indicator light turns on
Connected Status	Blue LED indicator light turns on
Using Status	Bluetooth Mode, Blue LED indicator light turns on
	AUX-in Mode, the headset automatically turns off, LED light turns off

Note:

If no pairing connection after the Bluetooth headset enters the pairing mode, Power-saving mode will automatically shut it down within three minutes.
Do not perform other operations when searching Bluetooth to prevent the program error.
Please select the appropriate volume in use to prevent damage to your ears.
Please note that a good environmental for using the Bluetooth headset can avoid damage to the headphones.
Please charging the headset after a long time none-use.

① —— The Power Button(电源键)
② —— Track Back/Volume Down 上一曲/音量减键
③ —— Track Forward/Volume up 下一曲/音量加
④ —— 3.5LINE-IN
⑤ —— Red/BlueLED(红/蓝LED灯)
⑥ —— The Microphone(麦克风)
⑦ —— Micro-USB充电口

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

-- Reorient or relocate the receiving antenna.

-- Increase the separation between the equipment and receiver.

-- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

-- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.