


Content

1.GOFree AND ACCESSORIES.....	11
2. GOFree OVERVIEW.....	12
3.INSTRUCTIONS FOR USE.....	13
4.SPECIFICATIONS.....	16
5.CHARGE AND MONITOR THE BATTERY	17
6.IMPORTANT SAFETY INSTRUCTIONS.....	18
7.Q&A.....	19

GOFree AND ACCESSORIES


* Please check the product model number on your product box. If the product is different from what you want to order, please contact your dealer immediately.

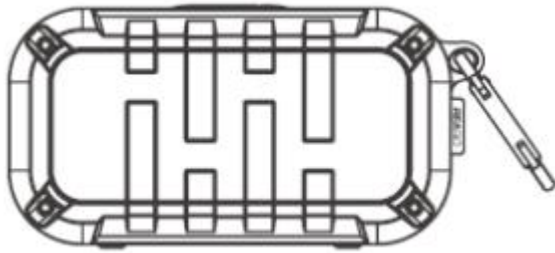

GOFree Bluetooth portable audio



Manual and after-sales service card

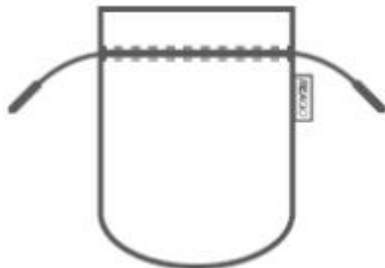

配件袋

Accessory bag



USB充电连接线

USB charging line




3.5mm音频连接线

3.5mm audio cable


Ps: All the pictures in this manual are schematic, it may have deviation with real, please in kind prevail.

GOFree OVERVIEW

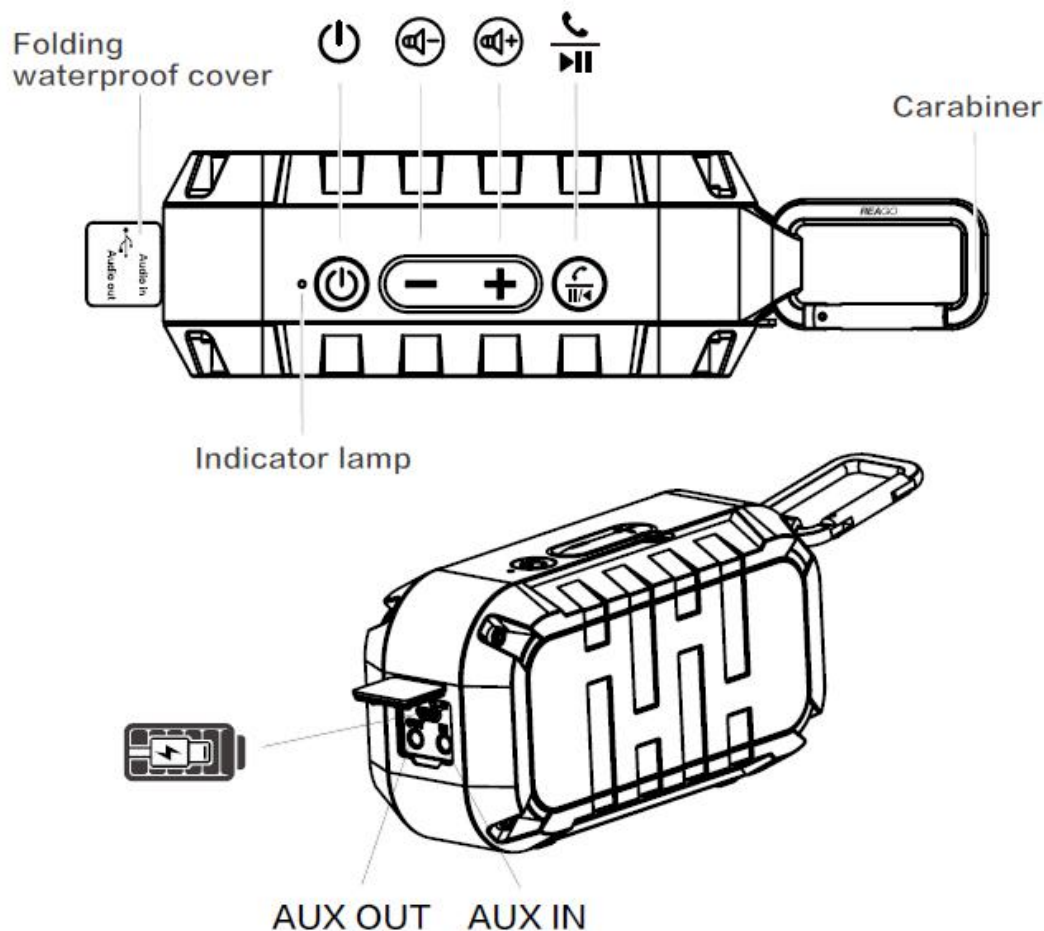

INSTRUCTIONS FOR USE


1. Turning GOFree on:

Press and hold the  key for 2 seconds, your GOFree has been turned on.

(1) If the GOFree has been paired with a mobile phone, the blue lights flash once per 2 seconds, GOFree will automatically connect the paired list. (Keep the list of 5 pairs)

2. If GOFree is not connected to the mobile phone or the removal of the paired list, GOFree will automatically enter pairing mode, blue light and red light flashing alternately, find GOFree and click, mobile phone display has been connected, the blue lights flash once per 4 seconds, so you can use GOFree.


2. Pairing phone: For your first use or connecting to new mobile phone, your GOFree has to pair with the phone.

(1) Press and hold the  for 2 seconds. When you hear an inciting voice and see

red and blue indicators blinking alternately, your GOFree has been in pairing mode.

(2) Turn on the phone's Bluetooth and search for your GOFree. Once you find it,

please click to connect with the phone. If the phone shows that your GOFree has been successfully connected to the phone, you can start to use your GOFree.

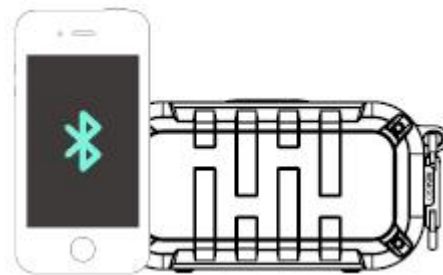

3.Changing the volume:


(1)Short press the volume adjustment key + to increase volume 1 level,press and hold down the volume adjustment keys+ can increase the volume of a continuous

level.Short press the volume adjustment key - to reduce volume 1 level,press and

hold down the volume adjustment keys - can reduce the volume of a continuous level.

(2)TWS B machine+,-keys can be synchronized with the A machine to increase or reduce volume.


4.Pairing TWS machine:

(1)The GOFree which connecting the mobile phone is A,the blue indicator light and red indicator light flashing alternately after continuously press the  twice,and

then GOFree is looking for the another GOFree.

(2) GOFree, which is not connecting to the phone, is B. Firstly, clean its pairing record

(Press and hold the volume +, - key for 1 second at the same time,the blue and

red indicator will light up 1 second.). Secondly, press the  for twice. When the

blue indicator light is on, GOFree is looking for another GOFree.

(3) When two GOFree are TWS pairing, the blue indicator light will light up once every 4 seconds. The GOFree which is connecting to the phone is left channel,

and the GOFree not connected to the phone is right channel.


- (4) After the TWS has been paired, the GOFree will be automatically connected next time in the case of the GOFree does not clear the pairing list.

IMPORTANT TIP: The music sometimes drops out

- (1) Two GOFrees might be too far away, please put them closer;
- (2) GOFree B might still keep the phone pairing records. Please press the volume adjustment + - key at the same time to delete the pairing records, and then pair with GOFree A.



5. Playing music:

- (1) If you want to play music by GOFree through Bluetooth, any music player on the phone can be used. Pressing the  key, you can pause and continue to play music.
- (2) Play AUX_IN music, use the random distribution of audio connection cable of GOFree to connect the AUX_IN of GOFree and the player. (When access to AUX_IN, if the GOFree connection is still playing music, AUX_IN will not be able to play music, because GOFree design Bluetooth is preferred.)


Note: TWS(B) can not plug AUX_IN, otherwise it will lead to the connection of the

A machine' s phone can not play music.



其他设备：Other equipment

6.A plurality of connection: when you have multiple GOFree, GOFreeA connected audio (Connect AUX_OUT interface of GOFreeA with audio connection line, when the other side connect to AUX_IN interface of GOFreeB. GOFreeB's AUX_OUT interface connect with GOFreeC's AUX_IN interface. The rest may be deduced by analogy. GOFree can create a more powerful music scene.

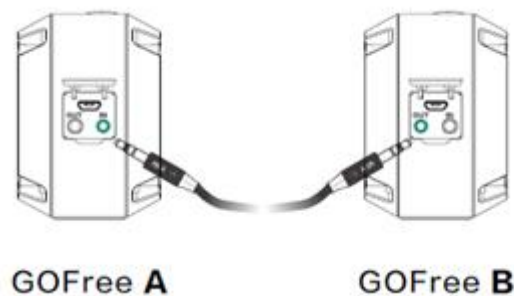


7.A sketch of sound field changing


(1)When a single GOFree is connected to the phone:



(2)When the two GOFree is paired with TWS:

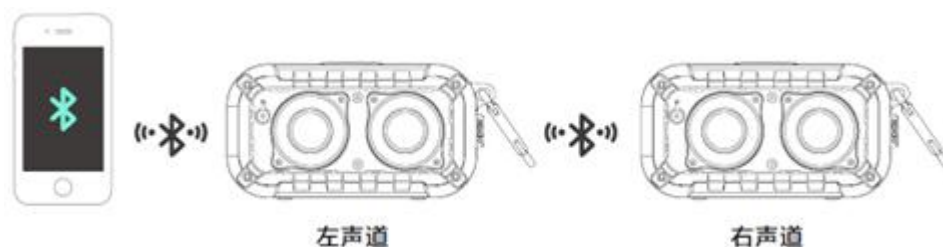

(3) When there are two GOFree for TWS pairing, and the audio connection cable are connected to multiple GOFree:

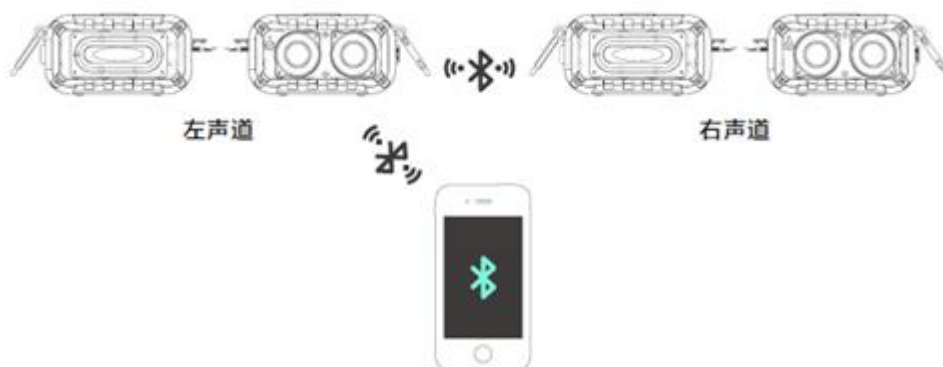

8.HFP phone:

(A) If the phone receives a phone call, no matter what mode GOFree is in, short press is

to answer the phone.

(B) When you answer the phone, short press  to hang up the phone and return to the

state before the call.

(C) When you in HFP phone, TWS B machine is not available.

9.Turning GOFree off:

(1) Press and hold the power button for 2 seconds. When you hear an inciting voice and

see red and blue indicator become bright for 1 second, your GOFree has been turned

off.

SPECIFICATIONS

Sound source : Bluetooth , AUX_IN

Bluetooth version : V4.2

Bluetooth protocol : A2DP、 AVRCP、 HFP、 HSP

Transmission format : APTX、 AAC、 SBC

Horn : 2x40mm

Output power : 2x6W

Frequency response : 80Hz-20KHz

Noise ratio : >80dB

Battery : Lithiumion polymer battery (3.7V 2500mAh)

Charging time : 3.5 hour

Charge input : Direct current 5V 1A

Play music time : Maximum six hours (Because of the volume and music content varies)

Size: Length135*Height72*Width51 mm

Weight:370g

CHARGE AND MONITOR THE BATTERY

- 1.Connect your GOFree to a computer or a mobile phone using a USB charging cable.
2. When your GOFree is charging, the red indicator lights up. It will be out when the COFree is fully charged.
- 3.For the first time,GOFree needs to be fully charged.

4. Low power tips: When

5.To ensure and extend the service life of the battery, when the GOFree long period of time not in use, please make the GOFree full of electricity once a month.

- 6.When your GOFree is not used, please turn it off.

IMPORTANT SAFETY INSTRUCTIONS

1. Read all the instructions carefully before you use your GOFree.
2. Please retain this instruction booklet for reference by you and others.
3. Do not use your GOFree in or near wet locations. Do not immerse it in water or other liquids.

4. Please put the product in a proper place to play music, in case of falling and hurting someone.
5. Please do not use the object to block the horn, and to leave enough space to the sound, in order to play a perfect sound quality.
6. Please don't put GOFree near any heat source place (Such as heat sink, heating installation, stove or other heat generating equipment.).
7. If the connecting line do not match your device, please contact the seller.
8. Please be sure to use the manufacture's accessories.
9. When GOFree has not been used for a long time, please unplug the connecting line from the device and turn it off.
10. To ensure your rights and safety, no matter what cause the sound damage, please connect seller in time and do not crack open the sound by yourself.
11. Set your GOFree's volume to a safe level so as to avoid damage to your hearing.

Q&A

My GOFree isn't playing music.

1. Please check if the connection is correct.
2. Make sure the volume is turned up.
3. Please check whether the normal audio playback.
4. Please check if your Bluetooth device is available and the connection is correct.
5. In Bluetooth mode, if there is a disconnect phenomenon, please put the machine close to your Bluetooth device and reconnect.
6. In Bluetooth mode to ensure the best effect of this machine, please send your Bluetooth device to a suitable volume.
7. If Bluetooth connection is not successful, please restart the phone and pair again.

* AFTER SALES SERVICE

For further advice on using the appliance, please contact GOFree Customer Care Line: 400-004-2549

FCC RF Exposure Information and Statement

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance of 20 cm between the radiator and your body.

The USB port is for charge use only.

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE: The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help
- This device and its antenna(s) must not be co-located or operating in conjunction with any other antenna or transmitter.