


# **SPORTON International Inc.**

No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C. Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

# **FCC RADIO TEST REPORT**

Applicant's company	Ralink Technology Corporation
Applicant Address	5F., No.36, Taiyuan St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.
FCC ID	VQF-RT3090-1T1R
Manufacturer's company	Ralink Technology Corporation
Manufacturer Address	5F., No.36, Taiyuan St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.

Product Name	11b/g/n 111R WLAN Mini Card
Brand Name	Ralink
Model Name	RT3090
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz
Received Date	Nov. 04, 2008
Final Test Date	Dec. 03, 2008
Submission Type	Original Equipment



### Statement

Test result included in this report is for the Draft n and 802.11b/g part of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full. The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in ANSI C63.4-2003 and 47 CFR FCC Part 15 Subpart C. The test equipment used to perform the test is calibrated and traceable to NML/ROC.





# **Table of Contents**

1. C	ERTI	FICATE OF COMPLIANCE	1
2. Sl	JMM	IARY OF THE TEST RESULT	2
3. G	ENE	RAL INFORMATION	3
	.1.	Product Details	
3.	.2.	Accessories	
3.	.3.	Table for Filed Antenna	5
3.	.4.	Table for Carrier Frequencies	6
3.	.5.	Table for Test Modes	7
3.	.6.	Table for Testing Locations	8
3.	.7.	Table for Supporting Units	8
3.	.8.	Table for Parameters of Test Software Setting	9
3.	.9.	Test Configurations	10
4. TE	ST R	ESULT	12
4.	.1.	AC Power Line Conducted Emissions Measurement	12
4.	.2.	Maximum Conducted Output Power Measurement	18
4.	.3.	Power Spectral Density Measurement	27
4.	.4.	6dB Spectrum Bandwidth Measurement	36
4.	.5.	Radiated Emissions Measurement	45
4.	.6.	Band Edge Emissions Measurement	
4.	.7.	Antenna Requirements	84
5. LI	ST O	f Measuring Equipments	85
6. TE	ST L	OCATION	86
7. T <i>F</i>	₹F C	ERTIFICATE OF ACCREDITATION	87
APPE	ENDI	X A. PHOTOGRAPHS OF EUTA1 ~	A12
APP	ENDI	X B. TEST PHOTOSB1 ~	B10
APP	ENDI	X C. MAXIMUM PERMISSIBLE EXPOSURE	-C3
APPI	ENDI	X D. ANTENNA LIST	- D5



# History of This Test Report

Original Issue Date: Dec. 08, 2008

Report No.: FR8N2012-01

No additional attachment.

□ Additional attachment were issued as following record:

Attachment No.	Issue Date	Description

FCC ID: VQF-RT3090-1T1R Issued Date : Dec. 08, 2008



Certificate No.: CB9712043

## 1. CERTIFICATE OF COMPLIANCE

Product Name :

11b/g/n 1T1R WLAN Mini Card

Brand Name :

Ralink

Model Name :

RT3090

Applicant:

Ralink Technology Corporation

Test Rule Part(s) :

47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Nov. 04, 2008 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

Wayne Hsu

SPORTON INTERNATIONAL INC.

Report Format Version: 01 FCC ID: VQF-RT3090-1T1R

Page No. : 1 of 87

Issued Date : Dec. 08, 2008



## 2. SUMMARY OF THE TEST RESULT

	Applied Standard: 47 CFR FCC Part 15 Subpart C							
Part	Rule Section	Result	Under Limit					
4.1	15.207	AC Power Line Conducted Emissions	Complies	11.43 dB				
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	8.92 dB				
4.3	15.247(e)	Power Spectral Density	Complies	21.87 dB				
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-				
4.5	15.247(d)	Radiated Emissions	Complies	3.53 dB				
4.6	15.247(d)	Band Edge Emissions	Complies	0.91 dB				
4.7	15.203	Antenna Requirements	Complies	-				

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Conducted Output Power	±0.8dB	Confidence levels of 95%
Power Spectral Density	±0.5dB	Confidence levels of 95%
6dB Spectrum Bandwidth	±8.5×10 <sup>-8</sup>	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

Report Format Version: 01 Page No. : 2 of 87 Issued Date : Dec. 08, 2008

FCC ID: VQF-RT3090-1T1R



## 3. GENERAL INFORMATION

## 3.1. Product Details

### Draft n

Items	Description
Product Type	WLAN (1TX, 1RX)
Radio Type	Intentional Transceiver
Power Type	From Host System
Modulation	see the below table for draft n
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	see the below table for Draft n
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11 for 20MHz bandwidth ; 7 for 40MHz bandwidth
Channel Band Width (99%)	MCS0 (20MHz): 17.52 MHz ; MCS0 (40MHz): 36.00 MHz
Conducted Output Power	MCS0 (20MHz): 19.14 dBm; MCS0 (40MHz): 18.27 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

## 802.11b/g

Items	Description
Product Type	802.11b :WLAN (1TX, 1RX)
	802.11g :WLAN (1TX, 1RX)
Radio Type	Intentional Transceiver
Power Type	From Host System
Modulation	DSSS for IEEE 802.11b; OFDM for IEEE 802.11g
Data Modulation	DSSS (BPSK / QPSK / CCK); OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	DSSS (1/ 2/ 5.5/11); OFDM (6/9/12/18/24/36/48/54)
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11
Channel Band Width (99%)	11b: 15.12 MHz ; 11g: 16.40 MHz
Conducted Output Power	11b: 21.08 dBm ; 11g: 19.07 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

 Report Format Version: 01
 Page No.
 : 3 of 87

 FCC ID: VQF-RT3090-1T1R
 Issued Date
 : Dec. 08, 2008



## Antenna & Band width

Antenna	Single (TX)				
Band width Mode	20 MHz	40 MHz			
802.11b	V	Х			
802.11g	V	Х			
Draft n	V	V			

## Draft n spec

MCS				NBPSC	NCBPS		NDBPS		Datarate(Mbps)			
Index	Nss	Modulation	R						800nsGI		400nsGI	
iiidex					20MHz	40MHz	20MHz	40MHz	20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5	7.200	15
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0	14.400	30
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5	21.700	45
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0	28.900	60
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0	43.300	90
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0	57.800	120
6	1	64-QAM	3/4	6	312	648	234	486	58.5	121.5	65.000	135
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0	72.200	150

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPSC	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	guard interval

## 3.2. Accessories

N/A

: 4 of 87 FCC ID: VQF-RT3090-1T1R Issued Date : Dec. 08, 2008



### 3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
A.(Main)	Тусо	1909967-1	PIFA Antenna	I-PEX	2.99
B. (Aux)	Тусо	1909966-1	PIFA Antenna	I-PEX	1.04

#### Note:

(1) There are four types of EUT.

EUT 1: Full Size Module with one Antenna Connecter

EUT 2: Full Size Module with two Antenna Connecters

EUT 3: Half Size Module with one Antenna Connecter

EUT 4: Half Size Module with two Antenna Connecters

Connecter 1 : Ant. A Connecter 2 : Ant. B

The EUT 2 / EUT 4 have two antenna connecters, the Connecter 1 have TX function, Connecter 2 have only RX function.

The EUT 1 / EUT 3 have one antenna connecters, the Connecter 1 have both TX/RX function.

(2) Only one of all antennas is used as transmitting antenna.

Due to Ant. A is the highest gain value among PIFA antennas, only Ant. A was tested and recorded in this report.

Please refer to Appendix. D for all antennas.



 Report Format Version: 01
 Page No. : 5 of 87

 FCC ID: VQF-RT3090-1T1R
 Issued Date : Dec. 08, 2008



## 3.4. Table for Carrier Frequencies

There are two bandwidth systems for draft n.

For both 20MHz bandwidth systems, use Channel 1~Channel 11.

For both 40MHz bandwidth systems, use Channel 3 $\sim$ Channel 9.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
2400~2483.5MHz	3	2422 MHz	9	2452 MHz
2400~2463.5IVID2	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz		



#### 3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Line Conducted Emissions	Normal Link	-	-	-
Maximum Peak Conducted Output Power	MCS0/20MHz	6.5 Mbps	1/6/11	Α
	MCS0/40MHz	13.5 Mbps	3/6/9	Α
	11b/BPSK	1 Mbps	1/6/11	Α
	11g/BPSK	6 Mbps	1/6/11	Α
Power Spectral Density	MCS0/20MHz	6.5 Mbps	1/6/11	Α
6dB Spectrum Bandwidth	MCS0/40MHz	13.5 Mbps	3/6/9	Α
	11b/BPSK	1 Mbps	1/6/11	Α
	11g/BPSK	6 Mbps	1/6/11	Α
Radiated Emissions 9kHz~1GHz	Normal Link	-	-	-
Radiated Emissions 1GHz~10 <sup>th</sup> Harmonic	MCS0/20MHz	6.5 Mbps	1/6/11	Α
	MCS0/40MHz	13.5 Mbps	3/6/9	Α
	11b/BPSK	1 Mbps	1/6/11	Α
	11g/BPSK	6 Mbps	1/6/11	Α
Band Edge Emissions	MCS0/20MHz	6.5 Mbps	1/11	Α
	MCS0/40MHz	13.5 Mbps	3/9	Α
	11b/BPSK	1 Mbps	1/11	Α
	11g/BPSK	6 Mbps	1/11	Α

#### Note:

There are four types of EUT, and have two different size.

The EUT 1 and EUT 3 have one antenna connecters, the EUT 2 and EUT 4 have two antenna connecters, but their internal circuit board are exactly identical.

ALL the test mode were listed as below.

Test Mode 1 (EUT 1): Full Size Module with one Antenna Connecter (with PCB board)

Test Mode 2 (EUT 2): Full Size Module with two Antenna Connecter (with PCB board)

Test Mode 3 (EUT 3): Half Size Module with one Antenna Connecter (without PCB board)

Test Mode 4 (EUT 4): Half Size Module with two Antenna Connecter (without PCB board)

<For Conducted Emissions Test>:

After pretest, it was selected Mode 2 and Mode 4 for for Conducted emission test.

 Report Format Version: 01
 Page No. : 7 of 87

 FCC ID: VQF-RT3090-1T1R
 Issued Date : Dec. 08, 2008

<For Radiated Emissions Test>:

For Radiated Emissions Below 1GHz:

Radiated emissions below 1GHz, Mode 4 were tested and recorded in this report.

For Radiated Emissions Above 1GHz:

After pretest, it was selected Mode 2 for Radiated emissions above 1GHz test as worse case and recorded the test data in the report.

## 3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH03-HY	SAC	Hwa Ya	101377	IC 4088	-
CO04-HY	Conduction	Hwa Ya	101377	IC 4088	-
TH01-HY	OVEN Room	Hwa Ya	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.

## 3.7. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Notebook	DELL	PP25L	E2K4965AGNM
Modem	ACEEX	DM1414	IFAXDM1414
Mouse	НР	M-UV96	DoC
Wireless AP	Planex	GW-AP54SGX	N/A

Report Format Version: 01 Page No. : 8 of 87

FCC ID: VQF-RT3090-1T1R

Issued Date : Dec. 08, 2008

### 3.8. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

#### Power Parameters of Draft n MCSO 20MHz

Test Software Version	QA				
Frequency	2412 MHz	2437 MHz	2462 MHz		
Draft n MCSO 20MHz Ant. A	1F	1F	1F		

#### Power Parameters of Draft n MCSO 40MHz

Test Software Version	QA				
Frequency	2422 MHz	2437 MHz	2452 MHz		
Draft n MCSO 40MHz Ant. A	1F	1F	1F		

### Power Parameters of IEEE 802.11b/g

Test Software Version	QA .				
Frequency	2412 MHz	2437 MHz	2462 MHz		
IEEE 802.11b Ant. A	1F	1F	1F		
IEEE 802.11g Ant. A	1F	1F	1F		

An executive program, EMCTEST.EXE under WIN XP, which generates a complete line of continuously repeating "H" pattern was used as the test software.

The program was executed as follows:

- a. Turn on the power of all equipment.
- b. The NB sends "H" messages to the panel, and the panel displays "H" patterns on the screen.
- c. The NB sends "H" messages to the modem.
- d. Repeat the steps from b to d.

At the same time, "QA" was executed the test program to control the EUT continuously transmit RF signal.

: 9 of 87 Page No. FCC ID: VQF-RT3090-1T1R Issued Date : Dec. 08, 2008






## 3.9. Test Configurations

### 3.9.1. Radiation Emissions Test Configuration

Test Configuration: 9KHz~1GHz


Test Mode: Mode 4

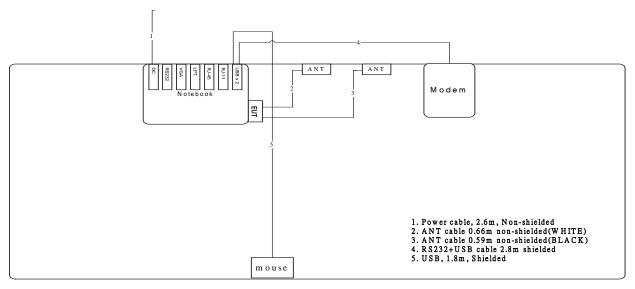

A P

Test Configuration: above 1GHz

Test Mode: Mode 2

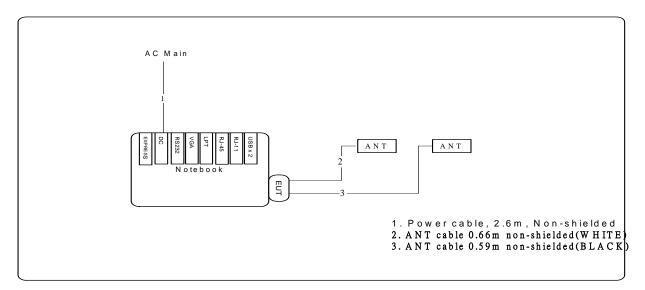


 Report Format Version: 01
 Page No. : 10 of 87

 FCC ID: VQF-RT3090-1T1R
 Issued Date : Dec. 08, 2008



## 3.9.2. AC Power Line Conduction Emissions Test Configuration

Test Mode: Mode 2 / Mode 4

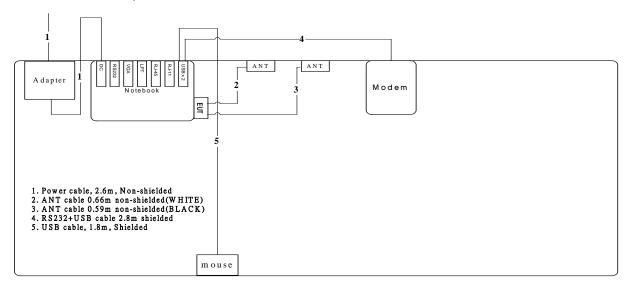

A P

 Report Format Version: 01
 Page No. : 11 of 87

 FCC ID: VQF-RT3090-1T1R
 Issued Date : Dec. 08, 2008

### 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

### 4.1.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz


#### 4.1.3. Test Procedures

- Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far
  from the conducting wall of the shielding room and at least 80 centimeters from any other
  grounded conducting surface.
- 2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
- 3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
- 4. The frequency range from 150 KHz to 30 MHz was searched.
- 5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- 6. The measurement has to be done between each power line and ground at the power terminal.

 Report Format Version: 01
 Page No. : 12 of 87

 FCC ID: VQF-RT3090-1T1R
 Issued Date : Dec. 08, 2008

#### 4.1.4. Test Setup Layout

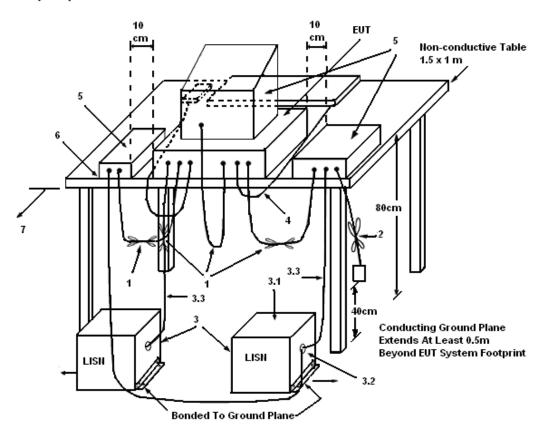

#### LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50  $\Omega$ . LISN can be placed on top of, or immediately beneath, reference ground plane.
- (3.1) All other equipment powered from additional LISN(s).
- (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

### 4.1.5. Test Deviation

There is no deviation with the original standard.




## 4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.

### 4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	24.3°C	Humidity	56.4%
Test Engineer	Aric Li	Phase	Line
Configuration	Normal Link / Mode 2		

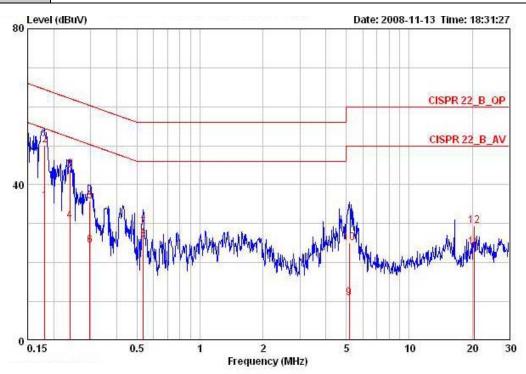


	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	*
1	0.18152	35.79	-18.63	54.42	35.53	0.06	0.20	AVERAGE
2 @	0.18152	50.10	-14.32	64.42	49.84	0.06	0.20	QP
3	0.23910	43.74	-18.38	62.13	43.50	0.04	0.20	QP
4	0.23910	30.64	-21.48	52.13	30.40	0.04	0.20	AVERAGE
5	0.29712	35.78	-24.54	60.32	35.54	0.04	0.20	QP
6	0.29712	24.32	-26.00	50.32	24.08	0.04	0.20	AVERAGE
7	0.53498	28.93	-27.07	56.00	28.70	0.03	0.20	Average
8 9	0.53498	26.01	-29.99	56.00	25.78	0.03	0.20	QP
9	5.166	10.95	-39.05	50.00	10.48	0.17	0.30	AVERAGE
10	5.166	25.11	-34.89	60.00	24.64	0.17	0.30	QP
11	20.377	23.87	-26.13	50.00	22.52	0.85	0.50	AVERAGE
12	20.377	29.37	-30.63	60.00	28.02	0.85	0.50	QP

 Report Format Version: 01
 Page No.
 : 14 of 87

 FCC ID: VQF-RT3090-1T1R
 Issued Date
 : Dec. 08, 2008



Temperature	24.3°C	Humidity	56.4%
Test Engineer	Aric Li	Phase	Neutral
Configuration	Normal Link / Mode 2		

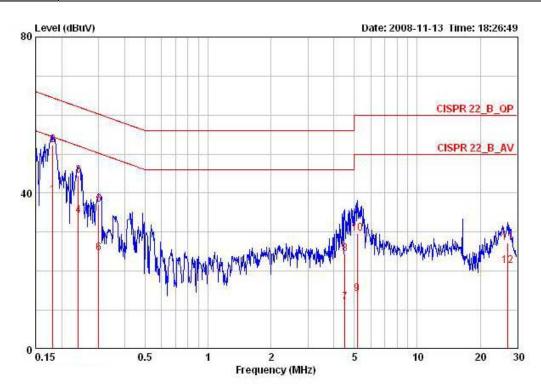

			Over	Limit	Read	LISN	Cable	
	Freq	Level	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1 @	0.18152	39.35	-15.07	54.42	39.06	0.09	0.20	AVERAGE
2 @	0.18152	52.22	-12.20	64.42	51.93	0.09	0.20	QP
3	0.24037	44.51	-17.58	62.08	44.23	0.08	0.20	QP
4	0.24037	34.31	-17.78	52.08	34.03	0.08	0.20	AVERAGE
5	0.30028	37.07	-23.16	60.24	36.80	0.07	0.20	QP
6	0.30028	24.62	-25.61	50.24	24.35	0.07	0.20	AVERAGE
7	4.501	11.92	-34.08	46.00	11.45	0.17	0.30	AVERAGE
8	4.501	24.42	-31.58	56.00	23.95	0.17	0.30	QP
9	5.166	14.16	-35.84	50.00	13.65	0.21	0.30	AVERAGE
10	5.166	29.70	-30.30	60.00	29.19	0.21	0.30	QP
11	26.984	27.23	-32.77	60.00	25.33	1.30	0.60	QP
12	26.984	21.32	-28.68	50.00	19.42	1.30	0.60	AVERAGE


Note:

Level = Read Level + LISN Factor + Cable Loss.





Temperature	24.3°C	Humidity	56.4%
Test Engineer	Aric Li	Phase	Line
Configuration	Normal Link / Mode 4		

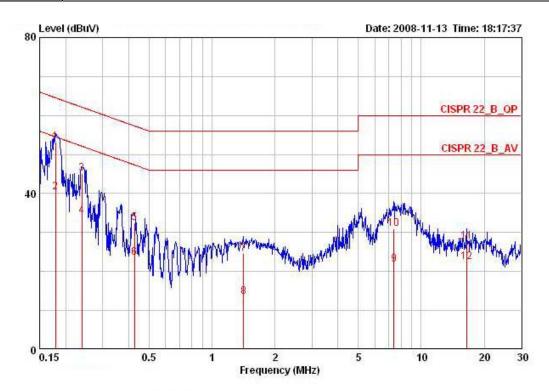


	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark	
	MHz	dBuV	dB	dBuV	dBuV	dB	dВ	75	
1 @	0.17866	53.12	-11.43	64.55	52.86	0.06	0.20	QP	
2 @	0.17866	40.39	-14.16	54.55	40.13	0.06	0.20	AVERAGE	
3	0.23910	45.10	-17.02	62.13	44.86	0.04	0.20	QP	
4	0.23910	34.13	-17.99	52.13	33.89	0.04	0.20	AVERAGE	
4 5 6	0.42599	32.44	-24.89	57.33	32.21	0.03	0.20	QP	
6	0.42599	23.59	-23.74	47.33	23.36	0.03	0.20	AVERAGE	
7	1.418	24.62	-31.38	56.00	24.47	0.04	0.11	QP	
8	1.418	13.59	-32.41	46.00	13.44	0.04	0.11	AVERAGE	
9	7.407	21.81	-28.19	50.00	21.16	0.27	0.38	AVERAGE	
10	7.407	30.93	-29.07	60.00	30.28	0.27	0.38	QP	
11	16.486	27.77	-32.23	60.00	26.73	0.64	0.40	QP	
12	16 496	22 52	-27 49	50 00	21 40	0 64	0 40	BUEDACE	

 Report Format Version: 01
 Page No.
 : 16 of 87

 FCC ID: VQF-RT3090-1T1R
 Issued Date
 : Dec. 08, 2008



Temperature	24.3°C	Humidity	56.4%
Test Engineer	Aric Li	Phase	Neutral
Configuration	Normal Link / Mode 4		

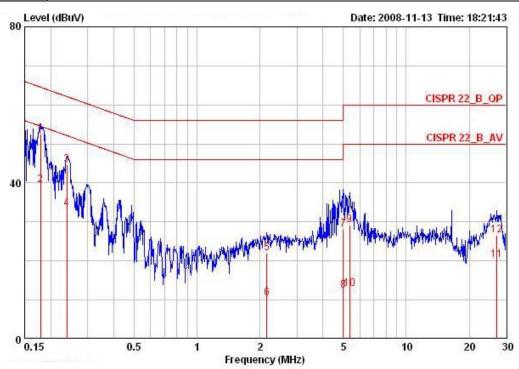

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	****
<b>1</b> @	0.17866	52.50	-12.05	64.55	52.21	0.09	0.20	QP
2 @	0.17866	39.35	-15.20	54.55	39.06	0.09	0.20	AVERAGE
3	0.23910	44.71	-17.42	62.13	44.43	0.08	0.20	QP
4 5	0.23910	33.41	-18.72	52.13	33.13	0.08	0.20	AVERAGE
5	2.155	21.92	-34.08	56.00	21.62	0.10	0.20	QP
6	2.155	10.55	-35.45	46.00	10.25	0.10	0.20	AVERAGE
7	5.005	28.17	-31.83	60.00	27.67	0.20	0.30	QP
8	5.005	12.40	-37.60	50.00	11.90	0.20	0.30	AVERAGE
9	5.362	29.14	-30.86	60.00	28.62	0.22	0.30	QP
10	5.362	12.95	-37.05	50.00	12.43	0.22	0.30	AVERAGE
11	27.127	20.27	-29.73	50.00	18.37	1.30	0.60	AVERAGE
12	27.127	26.49	-33.51	60.00	24.59	1.30	0.60	QP

Note:

Level = Read Level + LISN Factor + Cable Loss.

### 4.2. Maximum Conducted Output Power Measurement

#### 4.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

### 4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz
VB	3000 kHz
Detector	RMS
Trace	Max Hold
Sweep Time	Auto

#### 4.2.3. Test Procedures

- 1. The transmitter output (antenna port) was connected to the spectrum analyzer.
- 2. Test was performed in accordance with Measurement of Digital Transmission Systems Operating under Section 15.247 March 23, 2005.

### 4.2.4. Test Setup Layout



#### 4.2.5. Test Deviation

There is no deviation with the original standard.

### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

 Report Format Version: 01
 Page No. : 18 of 87

 FCC ID: VQF-RT3090-1T1R
 Issued Date : Dec. 08, 2008



## 4.2.7. Test Result of Maximum Conducted Output Power

Temperature	25℃	Humidity	60%
Test Engineer	Johnson Chang	Configurations	Draft n

### Configuration Draft n MCS0 20MHz Ant. A

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	19.14	30.00	Complies
6	2437 MHz	18.96	30.00	Complies
11	2462 MHz	18.22	30.00	Complies

## Configuration Draft n MCS0 40MHz Ant. A

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	17.26	30.00	Complies
6	2437 MHz	18.27	30.00	Complies
9	2452 MHz	17.68	30.00	Complies

 Report Format Version: 01
 Page No.
 : 19 of 87

 FCC ID: VQF-RT3090-1T1R
 Issued Date
 : Dec. 08, 2008



Temperature	<b>25</b> ℃	Humidity	60%
Test Engineer	Johnson Chang	Configurations	802.11b/g

## Configuration IEEE 802.11b Ant. A

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	19.68	30.00	Complies
6	2437 MHz	21.08	30.00	Complies
11	2462 MHz	20.30	30.00	Complies

## Configuration IEEE 802.11g Ant. A

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	17.28	30.00	Complies
6	2437 MHz	19.07	30.00	Complies
11	2462 MHz	18.76	30.00	Complies

 Report Format Version: 01
 Page No.
 : 20 of 87

 FCC ID: VQF-RT3090-1T1R
 Issued Date
 : Dec. 08, 2008





## Conducted Output Power Plot on Configuration Draft n MCS0 20MHz Ant. A / 2412 MHz



Date: 6.NOV.2008 10:41:27

## Conducted Output Power Plot on Configuration Draft n MCS0 20MHz Ant. A / 2437 MHz



Date: 6.NOV.2008 10:42:24

 Report Format Version: 01
 Page No. : 21 of 87

 FCC ID: VQF-RT3090-1T1R
 Issued Date : Dec. 08, 2008






## Conducted Output Power Plot on Configuration Draft n MCS0 20MHz Ant. A / 2462 MHz



Date: 6.NOV.2008 10:45:00

## Conducted Output Power Plot on Configuration Draft n MCSO 40MHz Ant. A / 2422 MHz

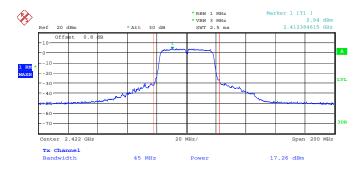

Date: 3.DEC.2008 15:47:18


 Report Format Version: 01
 Page No. : 22 of 87

 FCC ID: VQF-RT3090-1T1R
 Issued Date : Dec. 08, 2008






## Conducted Output Power Plot on Configuration Draft n MCS0 40MHz Ant. A / 2437 MHz



Date: 6.NOV.2008 10:47:43

## Conducted Output Power Plot on Configuration Draft n MCSO 40MHz Ant. A / 2452 MHz

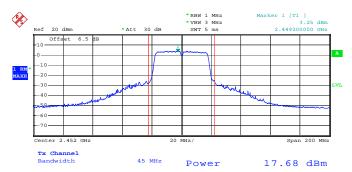

Date: 6.NOV.2008 10:48:45

 Report Format Version: 01
 Page No. : 23 of 87

 FCC ID: VQF-RT3090-1T1R
 Issued Date : Dec. 08, 2008






## Conducted Output Power Plot on Configuration IEEE 802.11b Ant. A / 2412 MHz



Date: 3.DEC.2008 15:49:28

## Conducted Output Power Plot on Configuration IEEE 802.11b Ant. A / 2437 MHz

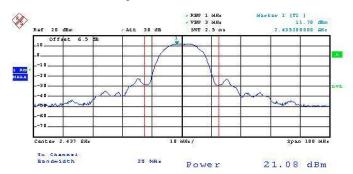

Date: 6.NOV.2008 10:36:02


 Report Format Version: 01
 Page No. : 24 of 87

 FCC ID: VQF-RT3090-1T1R
 Issued Date : Dec. 08, 2008






## Conducted Output Power Plot on Configuration IEEE 802.11b Ant. A / 2462 MHz



Date: 6.NOV.2008 10:36:49

## Conducted Output Power Plot on Configuration IEEE 802.11g Ant. A / 2412 MHz

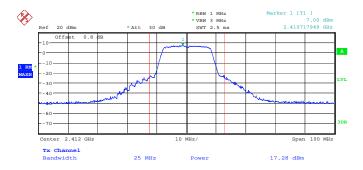

Date: 3.DEC.2008 15:48:38

 Report Format Version: 01
 Page No. : 25 of 87

 FCC ID: VQF-RT3090-1T1R
 Issued Date : Dec. 08, 2008






## Conducted Output Power Plot on Configuration IEEE 802.11g Ant. A / 2437 MHz



Date: 6.NOV.2008 10:39:25

## Conducted Output Power Plot on Configuration IEEE 802.11g Ant. A / 2462 MHz

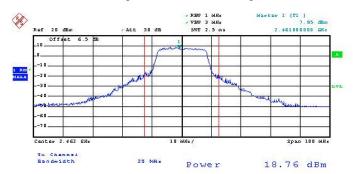

Date: 6.NOV.2008 10:38:22

 Report Format Version: 01
 Page No. : 26 of 87

 FCC ID: VQF-RT3090-1T1R
 Issued Date : Dec. 08, 2008

### 4.3. Power Spectral Density Measurement

#### 4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 4.3.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	30MHz
RB	3 kHz
VB	30 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	10s

#### 4.3.3. Test Procedures

- 1. The transmitter output (antenna port) was connected to the spectrum analyser.
- 2. Set RBW of spectrum analyzer to 3kHz and VBW to 30kHz. Set Detector to Peak, Trace to Max Hold.
- 3. Mark the frequency with maximum peak power as the center of the display of the spectrum.
- 4. Set the span to 1.5MHz and the sweep time to 500s and record the maximum peak value.

### 4.3.4. Test Setup Layout



#### 4.3.5. Test Deviation

There is no deviation with the original standard.

 Report Format Version: 01
 Page No. : 27 of 87

 FCC ID: VQF-RT3090-1T1R
 Issued Date : Dec. 08, 2008



## 4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

## 4.3.7. Test Result of Power Spectral Density

Temperature	<b>25℃</b>	Humidity	60%
Test Engineer	Johnson Chang	Configurations	Draft n

## Configuration Draft n MCS0 20MHz Ant. A

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	-23.98	8.00	Complies
6	2437 MHz	-14.24	8.00	Complies
11	2462 MHz	-22.04	8.00	Complies

## Configuration Draft n MCS0 40MHz Ant. A

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	-30.31	8.00	Complies
6	2437 MHz	-28.76	8.00	Complies
9	2452 MHz	-28.87	8.00	Complies

 Report Format Version: 01
 Page No. : 28 of 87

 FCC ID: VQF-RT3090-1T1R
 Issued Date : Dec. 08, 2008



Temperature	<b>25</b> ℃	Humidity	60%
Test Engineer	Johnson Chang	Configurations	802.11b/g

## Configuration IEEE 802.11b Ant. A

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	-19.08	8.00	Complies
6	2437 MHz	-13.87	8.00	Complies
11	2462 MHz	-18.55	8.00	Complies

## Configuration IEEE 802.11g Ant. A

•	•			
Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	-23.49	8.00	Complies
6	2437 MHz	-15.66	8.00	Complies
11	2462 MHz	-21.61	8.00	Complies


 Report Format Version: 01
 Page No.
 : 29 of 87

 FCC ID: VQF-RT3090-1T1R
 Issued Date
 : Dec. 08, 2008






## Power Density Plot on Configuration Draft n MCS0 20MHz Ant. A / 2412 MHz



Date: 6.NOV.2008 11:56:48

## Power Density Plot on Configuration Draft n MCS0 20MHz Ant. A / 2437 MHz

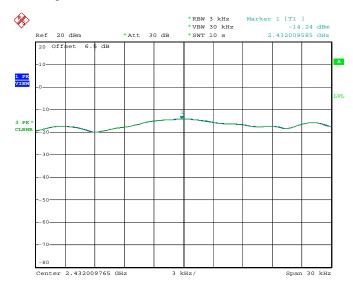

Date: 6.NOV.2008 11:53:55


 Report Format Version: 01
 Page No. : 30 of 87

 FCC ID: VQF-RT3090-1T1R
 Issued Date : Dec. 08, 2008






## Power Density Plot on Configuration Draft n MCS0 20MHz Ant. A / 2462 MHz



Date: 6.NOV.2008 11:47:33

## Power Density Plot on Configuration Draft n MCS0 40MHz Ant. A / 2422 MHz

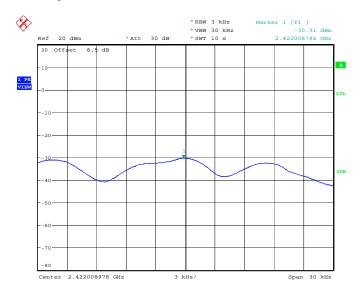


Date: 3.DEC.2008 16:06:08

 Report Format Version: 01
 Page No. : 31 of 87

 FCC ID: VQF-RT3090-1T1R
 Issued Date : Dec. 08, 2008




## Power Density Plot on Configuration Draft n MCS0 40MHz Ant. A / 2437 MHz



Date: 6.NOV.2008 12:04:22

## Power Density Plot on Configuration Draft n MCS0 40MHz Ant. A / 2452 MHz

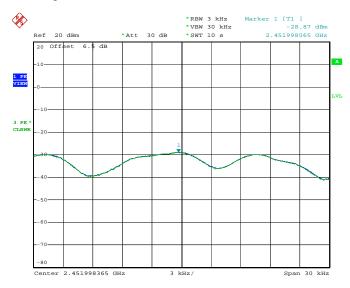

Date: 6.NOV.2008 12:07:44


 Report Format Version: 01
 Page No. : 32 of 87

 FCC ID: VQF-RT3090-1T1R
 Issued Date : Dec. 08, 2008






## Power Density Plot on Configuration IEEE 802.11b Ant. A / 2412 MHz

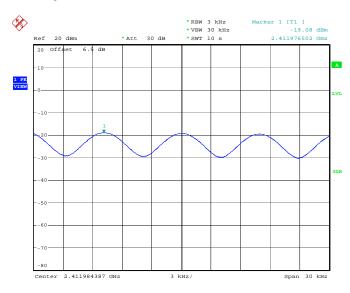

Date: 3.DEC.2008 16:22:27

## Power Density Plot on Configuration IEEE 802.11b Ant. A / 2437 MHz

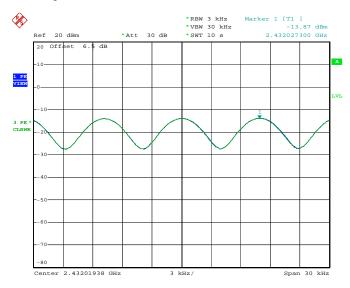

Date: 6.NOV.2008 11:24:02


 Report Format Version: 01
 Page No. : 33 of 87

 FCC ID: VQF-RT3090-1T1R
 Issued Date : Dec. 08, 2008






# Power Density Plot on Configuration IEEE 802.11b Ant. A / 2462 MHz



Date: 6.NOV.2008 11:20:12

# Power Density Plot on Configuration IEEE 802.11g Ant. A / 2412 MHz

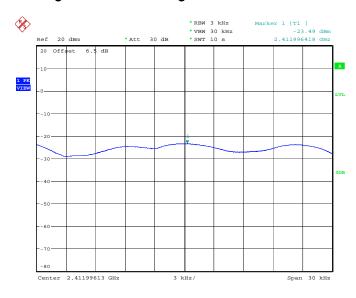

Date: 3.DEC.2008 16:00:43


 Report Format Version: 01
 Page No. : 34 of 87

 FCC ID: VQF-RT3090-1T1R
 Issued Date : Dec. 08, 2008






# Power Density Plot on Configuration IEEE 802.11g Ant. A / 2437 MHz



Date: 6.NOV.2008 11:35:11

# Power Density Plot on Configuration IEEE 802.11g Ant. A / 2462 MHz

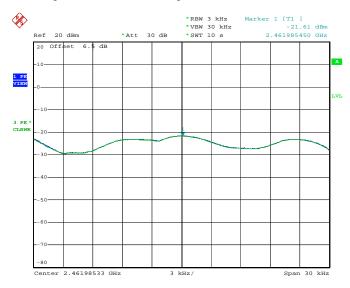

Date: 6.NOV.2008 11:42:49

 Report Format Version: 01
 Page No. : 35 of 87

 FCC ID: VQF-RT3090-1T1R
 Issued Date : Dec. 08, 2008

# 4.4. 6dB Spectrum Bandwidth Measurement

#### 4.4.1. Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

### 4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RB	100 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

#### 4.4.3. Test Procedures

- 1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
- 2. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were used.
- 3. Measured the spectrum width with power higher than 6dB below carrier.

### 4.4.4. Test Setup Layout



### 4.4.5. Test Deviation

There is no deviation with the original standard.

# 4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

 Report Format Version: 01
 Page No. : 36 of 87

 FCC ID: VQF-RT3090-1T1R
 Issued Date : Dec. 08, 2008



# 4.4.7. Test Result of 6dB Spectrum Bandwidth

Temperature	<b>25℃</b>	Humidity	60%
Test Engineer	Johnson Chang	Configurations	Draft n

# Configuration Draft n MCS0 20MHz Ant. A

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	17.60	17.52	500	Complies
6	2437 MHz	17.56	17.48	500	Complies
11	2462 MHz	17.60	17.48	500	Complies

# Configuration Draft n MCSO 40MHz Ant. A

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
3	2422 MHz	36.34	35.76	500	Complies
6	2437 MHz	36.40	35.92	500	Complies
9	2452 MHz	36.40	36.00	500	Complies

 Report Format Version: 01
 Page No. : 37 of 87

 FCC ID: VQF-RT3090-1T1R
 Issued Date : Dec. 08, 2008



Temperature	25°C	Humidity	60%
Test Engineer	Johnson Chang	Configurations	802.11b/g

# Configuration IEEE 802.11b Ant. A

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	12.11	15.00	500	Complies
6	2437 MHz	12.12	15.08	500	Complies
11	2462 MHz	12.12	15.12	500	Complies

# Configuration IEEE 802.11g Ant. A

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	16.37	16.34	500	Complies
6	2437 MHz	16.40	16.36	500	Complies
11	2462 MHz	16.48	16.40	500	Complies


 Report Format Version: 01
 Page No.
 : 38 of 87

 FCC ID: VQF-RT3090-1T1R
 Issued Date
 : Dec. 08, 2008






# 6 dB Bandwidth Plot on Configuration Draft n MCS0 20MHz Ant. A / 2412 MHz



Date: 6.NOV.2008 11:55:20

# $6\ dB$ Bandwidth Plot on Configuration Draft n MCS0 20MHz Ant. A / 2437 MHz




Date: 6.NOV.2008 11:52:27






# 6 dB Bandwidth Plot on Configuration Draft n MCSO 20MHz Ant. A / 2462 MHz



Date: 6.NOV.2008 11:46:06

# $6\ dB$ Bandwidth Plot on Configuration Draft n MCS0 40MHz Ant. A / 2422 MHz

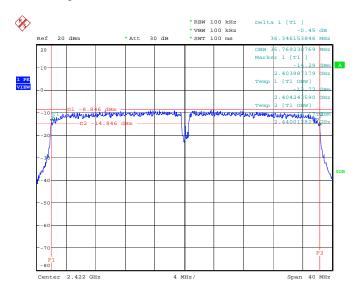


Date: 3.DEC.2008 16:04:40






# 6 dB Bandwidth Plot on Configuration Draft n MCSO 40MHz Ant. A / 2437 MHz



Date: 6.NOV.2008 12:02:55

# $6\ dB$ Bandwidth Plot on Configuration Draft n MCS0 40MHz Ant. A / 2452 MHz



Date: 6.NOV.2008 12:06:16


 Report Format Version: 01
 Page No. : 41 of 87

 FCC ID: VQF-RT3090-1T1R
 Issued Date : Dec. 08, 2008






# 6 dB Bandwidth Plot on Configuration IEEE 802.11b Ant. A / 2412 MHz



Date: 3.DEC.2008 16:21:00

# 6 dB Bandwidth Plot on Configuration IEEE 802.11b Ant. A / 2437 MHz



Date: 6.NOV.2008 11:22:33


 Report Format Version: 01
 Page No. : 42 of 87

 FCC ID: VQF-RT3090-1T1R
 Issued Date : Dec. 08, 2008






# 6 dB Bandwidth Plot on Configuration IEEE 802.11b Ant. A / 2462 MHz



Date: 6.NOV.2008 11:18:45

# 6 dB Bandwidth Plot on Configuration IEEE 802.11g Ant. A / 2412 MHz

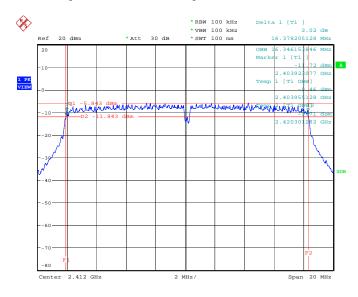

Date: 3.DEC.2008 15:59:15


 Report Format Version: 01
 Page No. : 43 of 87

 FCC ID: VQF-RT3090-1T1R
 Issued Date : Dec. 08, 2008






# 6 dB Bandwidth Plot on Configuration IEEE 802.11g Ant. A / 2437 MHz



Date: 6.NOV.2008 11:33:43

# $6\ dB$ Bandwidth Plot on Configuration IEEE 802.11g Ant. A / 2462 MHz

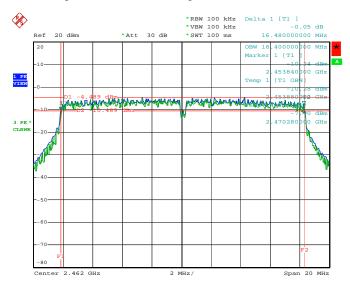

Date: 6.NOV.2008 11:41:22

 Report Format Version: 01
 Page No. : 44 of 87

 FCC ID: VQF-RT3090-1T1R
 Issued Date : Dec. 08, 2008

# 4.5. Radiated Emissions Measurement

### 4.5.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies	Field Strength	Measurement Distance
(MHz)	(micorvolts/meter)	(meters)
0.009~0.490	2400/F(KHz) 300	
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

# 4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1000KHz / 1000KHz for peak

Receiver Parameter	Setting
Attenuation	Auto
Start $\sim$ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start $\sim$ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

 Report Format Version: 01
 Page No. : 45 of 87

 FCC ID: VQF-RT3090-1T1R
 Issued Date : Dec. 08, 2008

### 4.5.3. Test Procedures


Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8
meter above ground. The phase center of the receiving antenna mounted on the top of a
height-variable antenna tower was placed 3 meters far away from the turntable.

- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 m to 4 m) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.




# 4.5.4. Test Setup Layout

#### For radiated emissions below 30MHz

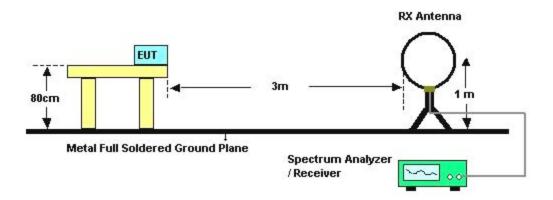

### For radiated emissions above 30MHz

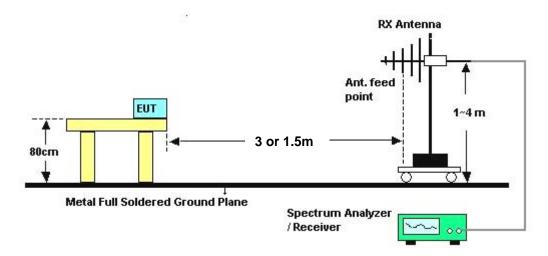

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade form 3m to 1.5m.

Distance extrapolation factor = 20 log (specific distanc [3m] / test distance [1.5m]) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

#### 4.5.5. Test Deviation

There is no deviation with the original standard.

# 4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

 Report Format Version: 01
 Page No. : 47 of 87

 FCC ID: VQF-RT3090-1T1R
 Issued Date : Dec. 08, 2008



# 4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	25°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Normal Link

Freq.	Level	Over Limit	Limit Line	Remark
(MHz)	(dBuV)	(dB)	(dBuV)	
-	-	-	-	See Note

#### Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor = 40 log (specific distance / test distance) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

 Report Format Version: 01
 Page No. : 48 of 87


 FCC ID: VQF-RT3090-1T1R
 Issued Date : Dec. 08, 2008



# 4.5.8. Results of Radiated Emissions (30MHz~1GHz)

Temperature	25°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Normal Link / Mode 4

# Horizontal

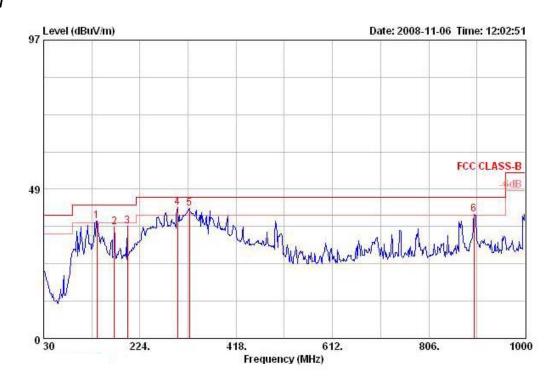


			Over	Limit	Read	Antenna	Preamp	Cable			Table	Ant
	Freq	Level	Limit	Line	Level	Factor	Factor	Loss	Remark	Pol/Phase	Pos	Pos
	Mtz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dВ	dВ			deg	cm
1!	137.670	38.23	-5.27	43.50	51.93	12.33	27.41	1.38	Peak	HORI ZONTAL	0	100
2	172.590	36.19	-7.31	43.50	48.88	12.97	27.23	1.56	Peak	HORI ZONTAL	0	100
3	198.780	36.60	-6.90	43.50	52.76	9.25	27.11	1.70	Peak	HORIZONTAL	0	100
4 @	299.660	42.47	-3.53	46.00	53.91	13.36	26.90	2.10	Peak	HORIZONTAL	256	100
5 @	323.910	42.33	-3.67	46.00	53.23	14.02	27.06	2.15	Peak	HORI ZONTAL	0	100
6 !	897.180	40.35	-5.65	46.00	43.66	20.51	27.41	3.59	Peak	HORIZONTAL	0	100

 Report Format Version: 01
 Page No. : 49 of 87

 FCC ID: VQF-RT3090-1T1R
 Issued Date : Dec. 08, 2008

### Vertical

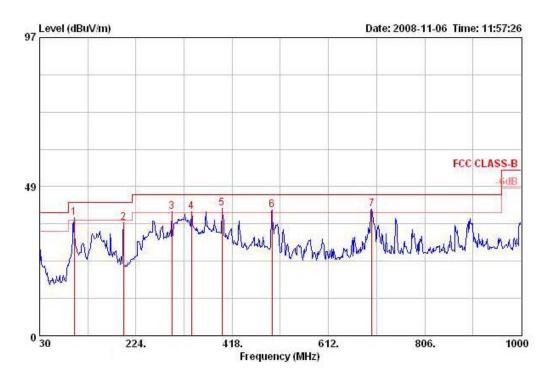

			Over	Limit	Read	Antenna	Preamp	Cable			Table	Ant
	Freq	Level	Limit	Line	Level	Factor	Factor	Loss	Remark	Pol/Phase	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dВ	dB			deg	cm
1!	99.840	38.34	-5.16	43.50	53.75	10.99	27.60	1.20	Peak	VERTICAL	0	400
2	198.780	36.65	-6.85	43.50	52.81	9.25	27.11	1.70	Peak	VERTICAL	0	400
3 !	296.750	40.38	-5.62	46.00	51.87	13.33	26.91	2.09	Peak	VERTICAL	0	400
4!	335.550	40.41	-5.59	46.00	51.06	14.33	27.15	2.17	Peak	VERTICAL	0	400
5 !	397.630	41.58	-4.42	46.00	50.86	16.01	27.58	2.30	Peak	VERTICAL	197	100
6 !	498.510	40.92	-5.08	46.00	48.71	17.60	28.09	2.70	Peak	VERTICAL	0	400
7 !	699.300	41.29	-4.71	46.00	46.90	19.09	28.00	3.30	Peak	VERTICAL	0	400

#### Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) =  $20 \log Emission$  level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

 Report Format Version: 01
 Page No. : 50 of 87


 FCC ID: VQF-RT3090-1T1R
 Issued Date : Dec. 08, 2008



# 4.5.9. Results for Radiated Emissions (1GHz~10<sup>th</sup> Harmonic)

Temperature	25°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS0 20MHz Ch 1 / Mode 2

# Horizontal

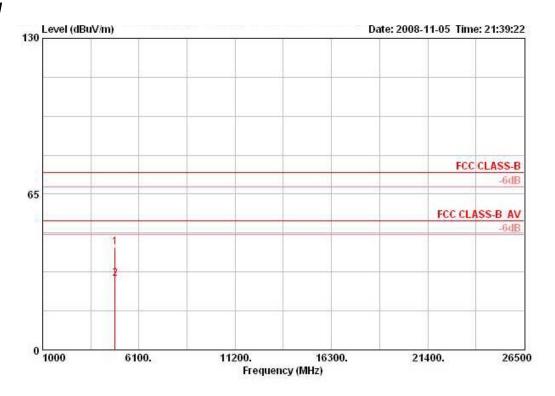


	Freq	Level		Limit Line		Antenna Factor				Ant Pos	Pol/Phase
	MHz	dBuV/m	dВ	dBuV/m	dBuV	dB/m	dB	dB			
1	4825.200	42.85	-31.15	74.00	41.02	33.06	3.94	35.16	PEAK	100	HORIZONTAL
2	4825.950	29.86	-24.14	54.00	28.04	33.06	3.94	35.16	AVERAGE	100	HORIZONTAL

 Report Format Version: 01
 Page No.
 : 51 of 87

 FCC ID: VQF-RT3090-1T1R
 Issued Date
 : Dec. 08, 2008





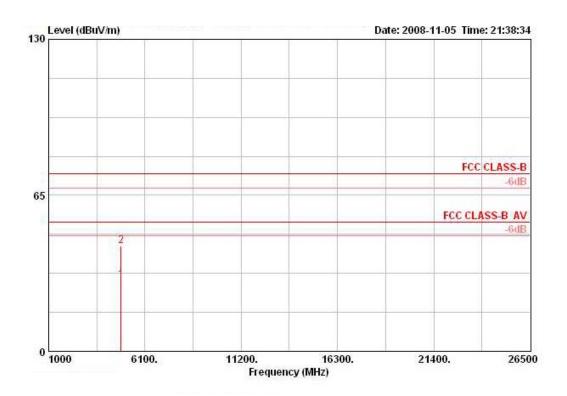

	Freq	Level				Antenna Factor				Ant Pos	Pol/Phase	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	ф	dB		- cm	-	
1	4826.360	29.64	-24.36	54.00	27.82	33.06	3.94	35.16	AVERAGE	100	VERTICAL	
2	4826.380	44.09	-29.91	74.00	42.26	33.06	3.94	35.16	PEAK	100	VERTICAL	

 Report Format Version: 01
 Page No.
 : 52 of 87


 FCC ID: VQF-RT3090-1T1R
 Issued Date
 : Dec. 08, 2008



: 53 of 87


Temperature	25°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS0 20MHz Ch 6 / Mode 2

# Horizontal

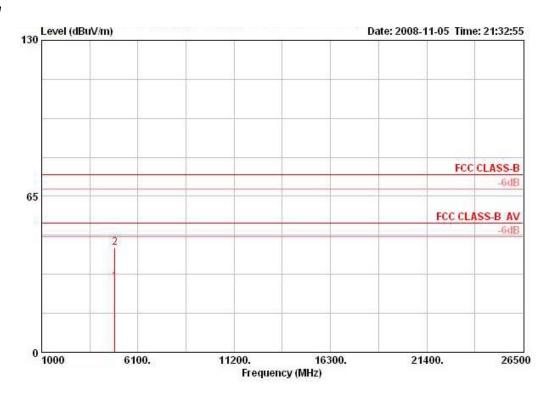

	Freq	Level		Limit Line		Antenna Factor				Ant Pos	Pol/Phase		
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	-				
1	4872.390	29.57	-24.43	54.00	27.60	33.16	3.96	35.15	AVERAGE	100	HORI ZONTAL		
2	4873.620	43.46	-30.54	74.00	41.49	33.16	3.96	35.15	PEAK	100	HORIZONTAL		



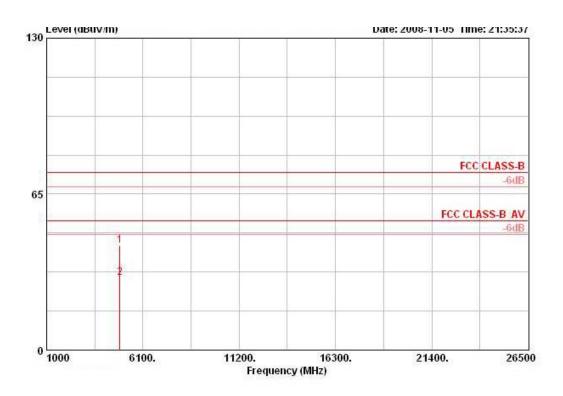


	Freq	Level		Limit Line						Ant Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	Sia.	cm	
1	4872.070	43.41	-30.59	74.00	41.45	33.16	3.96	35.15	PEAK	100	VERTICAL
2	4873.220	30.26	-23.74	54.00	28.29	33.16	3.96	35.15	AVERAGE	100	VERTICAL



Temperature	25°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS0 20MHz Ch11 / Mode 2


# Horizontal

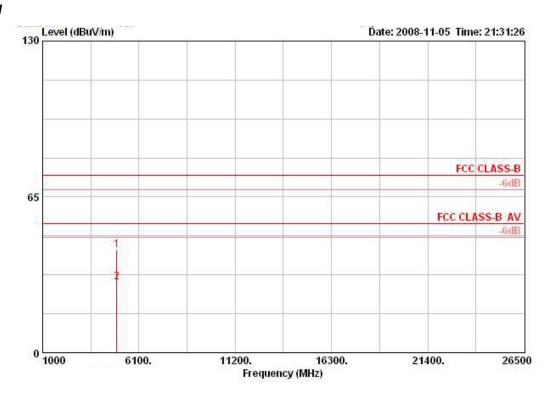

			Over	Limit	Readi	Antenna	Cable	Preamp		Ant	
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dВ	-	cm	
1	4925.220	42.96	-31.04	74.00	40.85	33.26	3.98	35.14	PEAK	100	HORI ZONTAL
2	4925.820	29.50	-24.50	54.00	27.40	33.26	3.98	35.14	AVERAGE	100	HORIZONTAL





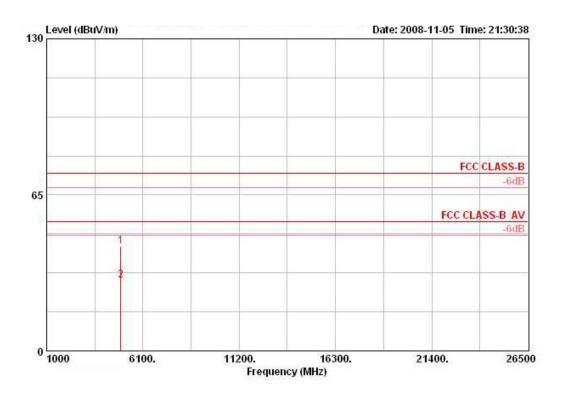

	Freq	Level				Antenna Factor				Ant Pos	Pol/Phase	
	MHz	dBuV/m	dВ	dBuV/m	dBuV	dB/m	дв	dB	-	cm	-	
1	4927.860	43.68	-30.32	74.00	41.57	33.26	3.98	35.14	PEAK	100	VERTICAL	
2	4928.740	29.43	-24.57	54.00	27.33	33.26	3.98	35.14	AVERAGE	100	VERTICAL	


 Report Format Version: 01
 Page No.
 : 56 of 87

 FCC ID: VQF-RT3090-1T1R
 Issued Date
 : Dec. 08, 2008



Temperature	25°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS0 40MHz Ch 3 / Mode 2


# Horizontal

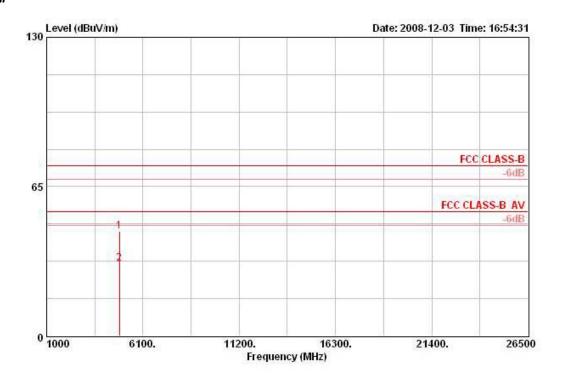

	Freq	Level	Over Limit			Preamp Factor		Ant Pos	Table Pos	Remark	Pol/Phase
	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB -	cm.	deg	ř <u>.</u>	
1	4845.280	45.38	-28.62	43.38	33.09	35.03	3.95	100	360	PEAK	HORI ZONTAL
2	4846.480	31.56	-22.44	29.55	33.09	35.03	3.95	100	360	AVERAGE	HORI ZONTAL





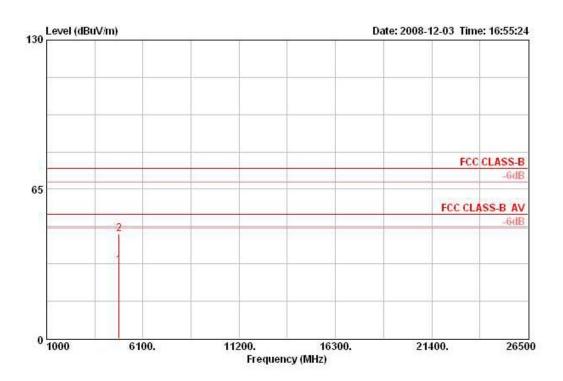


			Over	Readi	Antenna	Preamp	Cable	Ant	Table		
	Freq	Level	Limit	Level	Factor	Factor	Loss	Pos	Pos	Remark	Pol/Phase
	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	cm.	deg	-	
1 @	4844.230	31.81	-22.19	29.80	33.09	35.03	3.95	100	0	AVERAGE	VERTICAL
2	4845.100	45.56	-28.44	43.55	33.09	35.03	3.95	100	0	PEAK	VERTICAL



Temperature	25°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS0 40MHz Ch 6 / Mode 2

# Horizontal

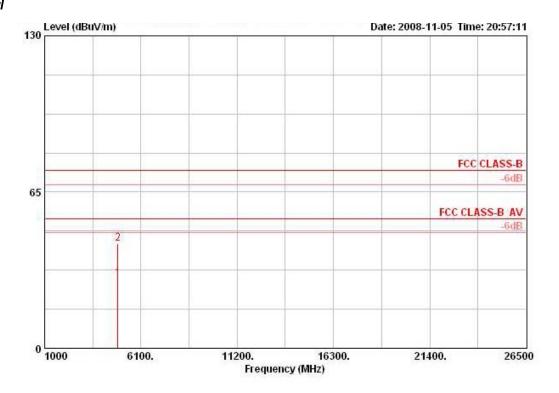


			Over	Limit	Readi	Antenna	Cable	Preamp		Ant	
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	7	- cm	
1	4871.620	29.20	-24.80	54.00	27.24	33.16	3.96	35.15	AVERAGE	100	HORIZONTAL
2	4871.630	43.42	-30.58	74.00	41.46	33.16	3.96	35.15	PEAK	100	HORIZONTAL

 Report Format Version: 01
 Page No.
 : 59 of 87

 FCC ID: VQF-RT3090-1T1R
 Issued Date
 : Dec. 08, 2008





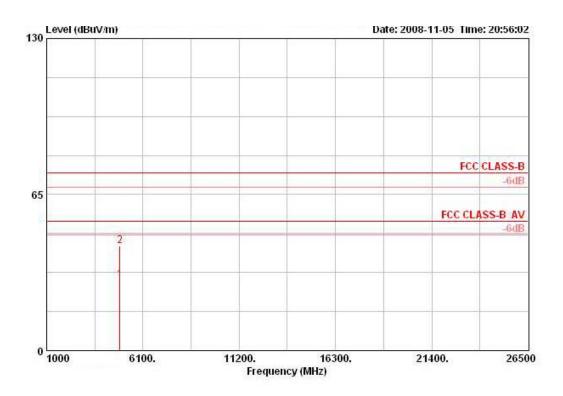


			Over	Limit	Read	Antenna	Cable	Preamp		Ant	
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	В		
1	4871.740	29.56	-24.44	54.00	27.59	33.16	3.96	35.15	AVERAGE	100	VERTICAL
2	4872.040	43.71	-30.29	74.00	41.75	33.16	3.96	35.15	PEAK	100	VERTICAL




Temperature	25°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS0 40MHz Ch 9 / Mode 2

# Horizontal

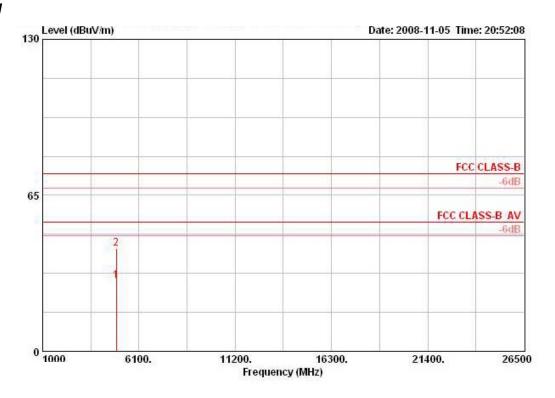

			Over	Limit	Read	Antenna	Cable	Preamp		Ant	
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	₫В	dB	-	cm	
1	4904.780	29.48	-24.52	54.00	27.43	33.23	3.97	35.15	AVERAGE	100	HORIZONTAL
2	4905.750	42.97	-31.03	74.00	40.92	33.23	3.97	35.15	PEAK	100	HORIZONTAL

### Vertical

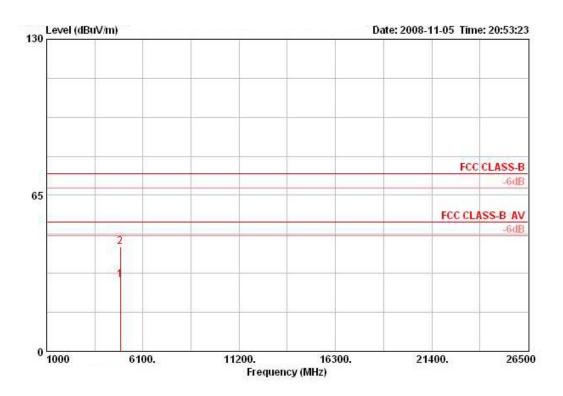

	Freq	Level				Antenna Factor				Ant Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	-		
1	4904.420	29.79	-24.21	54.00	27.77	33.19	3.97	35.15	AVERAGE	100	VERTICAL
2	4905.930	43.41	-30.59	74.00	41.36	33.23	3.97	35.15	PEAK	100	VERTICAL

#### Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) =  $20 \log Emission$  level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


 Report Format Version: 01
 Page No. : 62 of 87

 FCC ID: VQF-RT3090-1T1R
 Issued Date : Dec. 08, 2008



Temperature	25°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11b CH 1 / Mode 2


# Horizontal

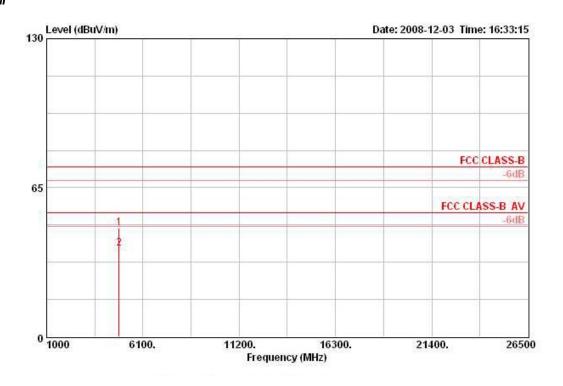

	Freq	Level	Over Limit			Preamp Factor		Ant Pos	Table Pos	Remark	Pol/Phase
	MHz	dBuV/m	dB dBu	dBuV	dB/m	dB	dB	cm	deg		-
1	4824.120	47.33	-26.67	45.37	33.06	35.04	3.94	181	169	PEAK	HORIZONTAL
2 @	4824 230	38 67	-15 33	36 71	33 06	35 04	3 94	181	169	AVERAGE	HORT ZONTAL





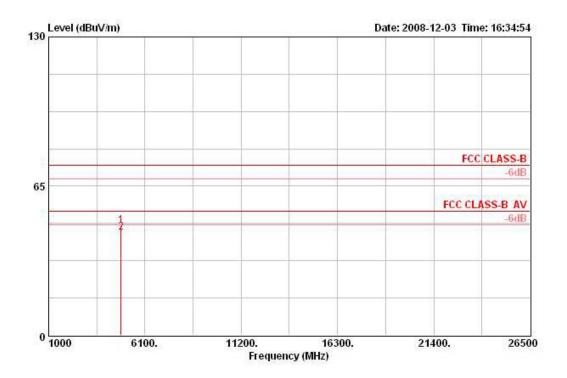


			Over	Read	Antenna	Preamp	Cable	Ant	Table		
	Freq	Level	Limit	Level	Factor	Factor	Loss	Pos	Pos	Remark	Pol/Phase
	MHz	dBuV/m	dB	dBuV	dB/m	dB		cm.	deg	<u> </u>	
1	4824.150	47.89	-26.11	45.94	33.06	35.04	3.94	100	173	PEAK	VERTICAL
2 @	4824.250	44.66	-9.34	42.70	33.06	35.04	3.94	100	173	AVERAGE	VERTICAL



Temperature	<b>25</b> ℃	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11b CH 6 / Mode 2


# Horizontal

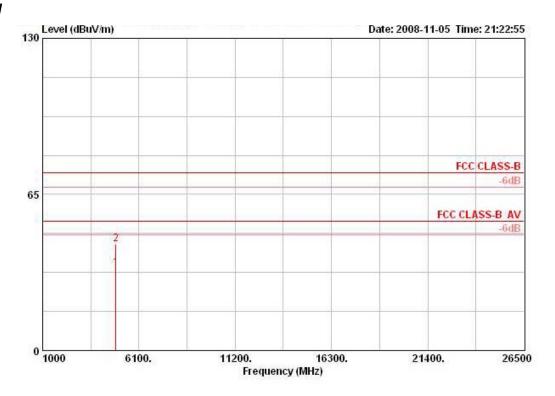

			Over	Limit	Read	Antenna	Cable	Preamp		Ant	
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	-	cm	
1	4874.240	34.35	-19.65	54.00	32.39	33.16	3.96	35.15	AVERAGE	150	HORIZONTAL
2	4874.540	44.32	-29.68	74.00	42.35	33.16	3.96	35.15	PEAK	150	HORIZONTAL





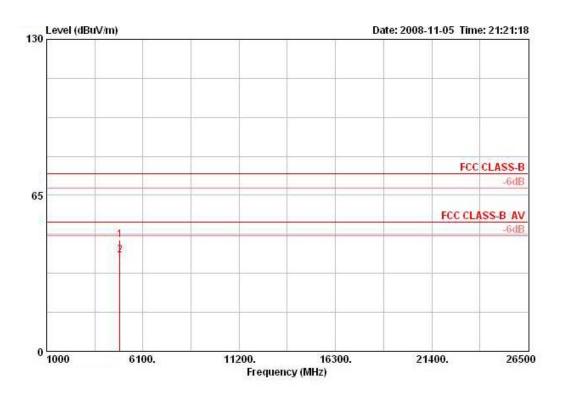

	Freq	Level	Over Limit	Limit Line		Antenna Factor				Ant Pos	Pol/Phase
	MKz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		- cm	
1	4874.100	46.24	-27.76	74.00	44.27	33.16	3.96	35.15	PEAK	100	VERTICAL
2	4874 220	40 11	-13.89	54 00	38 14	33.16	3.96	35 15	AVERAGE	100	VERTICAL


 Report Format Version: 01
 Page No.
 : 66 of 87

 FCC ID: VQF-RT3090-1T1R
 Issued Date
 : Dec. 08, 2008




Temperature	25°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11b CH 11/ Mode 2

# Horizontal

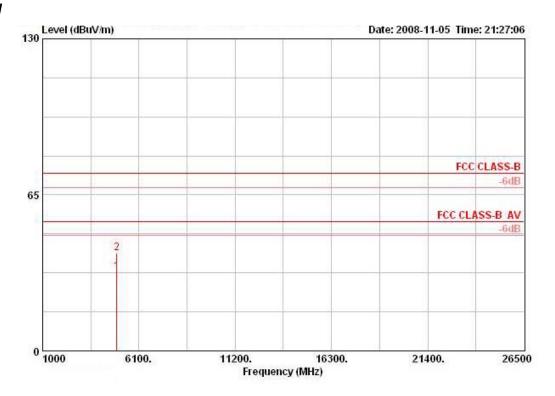

				Limit						Ant	(PSACO)
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB/m dB	dB dB	dB		
1	4924.240	32.82	-21.18	54.00	30.71	33.26	3.98	35.14	AVERAGE	148	HORI ZONTAL
2	4924.480	40.82	-33.18	74.00	38.71	33.26	3.98	35.14	PEAK	148	HORIZONTAL



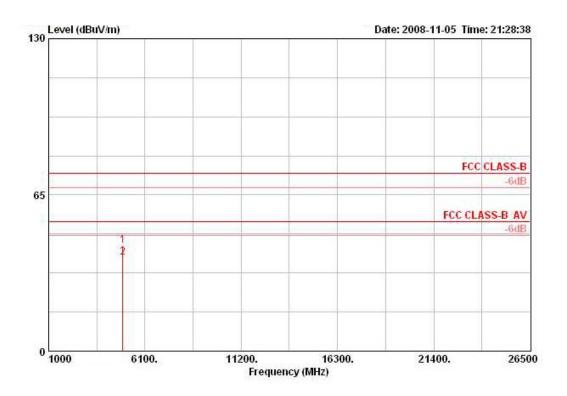

	Freq	Level		Limit Line		Antenna Factor				Ant Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	-	- cm	
1	4923.920	43.76	-30.24	74.00	41.66	33.26	3.98	35.14	PEAK	100	VERTICAL
2	4924 220	38 79	-15 21	54 00	36 68	33 26	3 98	35 14	DUFFACE	100	VERTICAL.


 Report Format Version: 01
 Page No.
 : 68 of 87

 FCC ID: VQF-RT3090-1T1R
 Issued Date
 : Dec. 08, 2008



Temperature	25°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11g CH 1 / Mode 2

# Horizontal

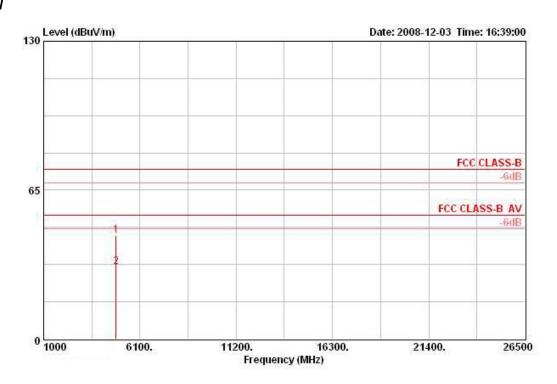

			Over			Preamp		Ant	Table		
	Freq	Level	Limit	Level	Factor	Factor	Loss	Pos	Pos	Remark	Pol/Phase
	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		
1	4827.750	45.01	-28.99	43.05	33.06	35.04	3.94	100	361	PEAK	HORIZONTAL
2	4827.960	31.34	-22.66	29.38	33.06	35.04	3.94	100	361	AVERAGE	HORIZONTAL


 Report Format Version: 01
 Page No.
 : 69 of 87

 FCC ID: VQF-RT3090-1T1R
 Issued Date
 : Dec. 08, 2008





### Vertical

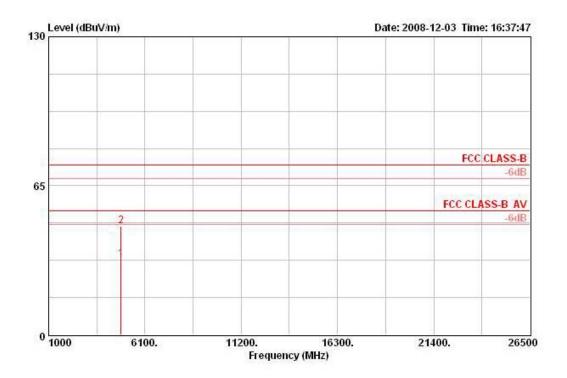


	Freq	Level	Over Limit			Preamp Factor		Ant Pos	Table Pos	Remark	Pol/Phase
	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB -	cm	deg	·	_
1 @	4826.850	33.07	-20.93	31.11	33.06	35.04	3.94	100	173	AVERAGE	VERTICAL
2	4829.900	47.48	-26.52	45.51	33.06	35.04	3.95	100	173	PEAK	VERTICAL



Temperature	25°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11g CH 6 / Mode 2

### Horizontal

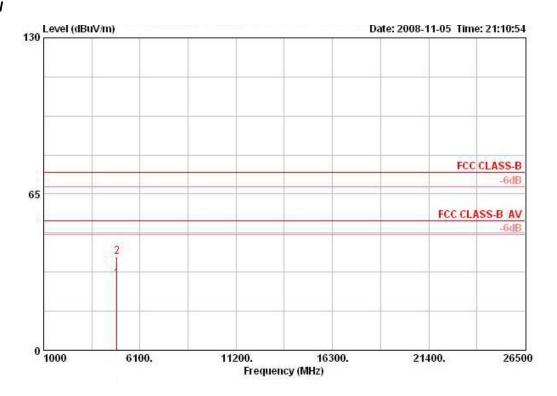


			Over	Limit	Read	Antenna	Cable	Preamp		Ant	
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		- cm	-
1	4869.180	29.72	-24.28	54.00	27.79	33.12	3.96	35.15	AVERAGE	100	HORIZONTAL
2	4872.000	38.81	-35.19	74.00	36.84	33.16	3.96	35.15	PEAK	100	HORIZONTAL





## Vertical

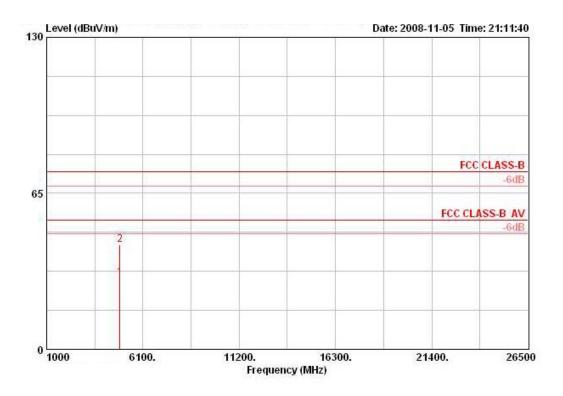

	Freq	Level		Limit Line						Ant Pos	Pol/Phase
	Mkz	MHz dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		- cm	
1	4870.960	29.66	-24.34	54.00	27.69	33.16	3.96	35.15	AVERAGE	100	VERTICAL
2	4871.480	43.62	-30.38	74.00	41.65	33.16	3.96	35.15	PEAK	100	VERTICAL


 Report Format Version: 01
 Page No.
 : 72 of 87

 FCC ID: VQF-RT3090-1T1R
 Issued Date
 : Dec. 08, 2008



Temperature	25°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11g CH 11 / Mode 2

#### Horizontal

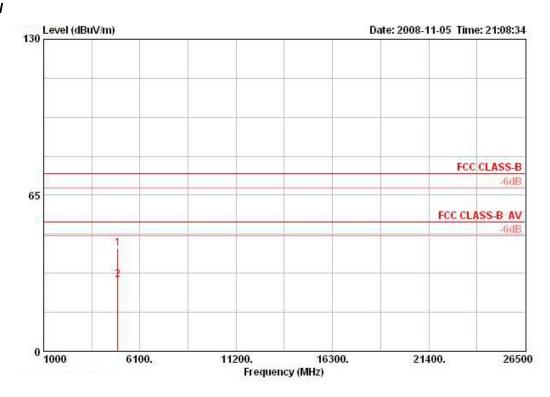


	Freq	Level		Limit Line						Ant Pos	Pol/Phase
	MHz	dBuV/m	dВ	dBuV/m	dBuV	dB/m	dB	dB	-	cm	
1	4925.060	42.78	-31.22	74.00	40.67	33.26	3.98	35.14	PEAK	100	HORIZONTAL
2	4925.760	29.64	-24.36	54.00	27.53	33.26	3.98	35.14	AVERAGE	100	HORIZONTAL

 Report Format Version: 01
 Page No.
 : 73 of 87

 FCC ID: VQF-RT3090-1T1R
 Issued Date
 : Dec. 08, 2008

#### Vertical

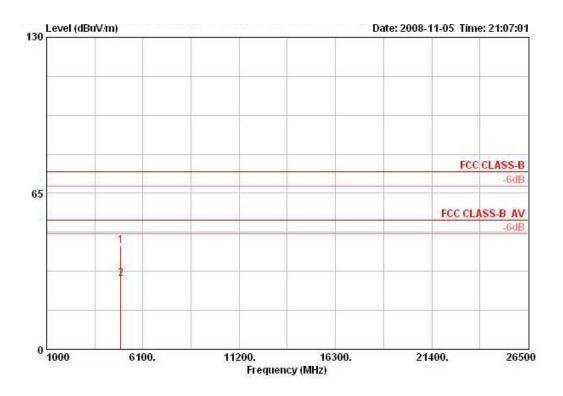

			Over	Limit	Read	Antenna	Cable	Preamp		Ant	
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	₫В	dB		cm	-
1	4923.340	43.23	-30.77	74.00	41.12	33.26	3.98	35.14	PEAK	100	VERTICAL
2	4927.000	29.53	-24.47	54.00	27.43	33.26	3.98	35.14	AVERAGE	100	VERTICAL

#### Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) =  $20 \log Emission$  level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

 Report Format Version: 01
 Page No. : 74 of 87

 FCC ID: VQF-RT3090-1T1R
 Issued Date : Dec. 08, 2008



## 4.6. Band Edge Emissions Measurement

#### 4.6.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

-		
Frequencies	Field Strength	Measurement Distance
(MHz)	(micorvolts/meter)	(meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### 4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	100 KHz /100 KHz for Peak

#### 4.6.3. Test Procedures

- 1. The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around bandedges.
- 2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

#### 4.6.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.5.4.

#### 4.6.5. Test Deviation

There is no deviation with the original standard.

#### 4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

 Report Format Version: 01
 Page No. : 75 of 87

 FCC ID: VQF-RT3090-1T1R
 Issued Date : Dec. 08, 2008

## 4.6.7. Test Result of Band Edge and Fundamental Emissions

Temperature	25°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MC\$0 20MHz Ch 1, 6, 11 / Mode 2
Test Date	Nov. 05, 2008		

#### Channel 1

			Over	Limit	Read	Antenna	Cable	Preamp		Ant	
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pol/Phase
	MHz	dBuV/m	ав	dBuV/m	dBuV	dB/m	dВ	dB	-	cm	
1 *	2389.800	69.85	-4.15	74.00	38.97	28.17	2.71	0.00	PEAK	100	HORI ZONTAL
2 *	2390.000	48.04	-5.96	54.00	17.16	28.17	2.71	0.00	AVERAGE	100	HORIZONTAL
3	2410.000	101.37			70.43	28.21	2.73	0.00	PEAK	100	HORIZONTAL
4	2413.800	90.64			59.70	28.21	2.73	0.00	AVERAGE	100	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz

## Channel 6

			Over	Limit	Read	Antenna	Cable	Preamp		Ant	
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pol/Phase
	MHz	dBuV/m	- dB	dBuV/m	dBuV	dB/m	dB	dB	V <u>.                                      </u>	cm	
1	2380.200	55.61	-18.39	74.00	24.77	28.13	2.71	0.00	PEAK	100	VERTICAL
2	2385.000	42.94	-11.06	54.00	12.06	28.17	2.71	0.00	AVERAGE	100	VERTICAL
3	2440.200	89.42			58.39	28.29	2.74	0.00	AVERAGE	100	VERTICAL
4	2440.200	100.27			69.24	28.29	2.74	0.00	PEAK	100	VERTICAL
5 *	2489.100	48.21	-5.79	54.00	17.02	28.41	2.77	0.00	AVERAGE	100	VERTICAL
6	2489.400	59.61	-14.39	74.00	28.42	28.41	2.77	0.00	PEAK	100	VERTICAL

Item 3, 4 are the fundamental frequency at 2437MHz.

#### Channel 11

			Over	Limit	Read	Antenna	Cable	Preamp		Ant	
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dВ	dB	W <u>4</u>	cm	
10	2465.200	93.10			62.02	28.33	2.76	0.00	AVERAGE	100	VERTICAL
2	2465.400	104.20			73.12	28.33	2.76	0.00	PEAK	100	VERTICAL
3	2483.900	47.15	-6.85	54.00	16.01	28.37	2.77	0.00	AVERAGE	100	VERTICAL
4	2485.700	65.76	-8.24	74.00	34.58	28.41	2.77	0.00	PEAK	100	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

 Report Format Version: 01
 Page No. : 76 of 87

 FCC ID: VQF-RT3090-1T1R
 Issued Date : Dec. 08, 2008

Temperature	25°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS0 40MHz Ch 3, 6, 9 / Mode 2
Test Date	Nov. 05, 2008		

#### Channel 3

			0ver	Read	Antenna	Preamp	Cable	Ant	Table		
	Freq	Level	Limit	Level	Factor	Factor	Loss	Pos	Pos	Remark	Pol/Phase
	MC	dBuV/m	dB	dBuV	dB/m	dB	dB -	cm.	deg		<del></del>
10	2385.600	69.89	-4.11	39.01	28.17	0.00	2.71	127	152	PEAK	HORI ZONTAL
2 @	2390.000	53.09	-0.91	22.21	28.17	0.00	2.71	127	152	AVERAGE	HORIZONTAL
3 @	2416.400	91.95			28.21	0.00	2.73	127	152	AVERAGE	HORIZONTAL
4	2417.200	102.57			28.25	0.00	2.73	127	152	PEAK	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

#### Channel 6

			Over	Limit	Read	Antenna	Cable	Preamp		Ant	
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	- дв	dB	<u> </u>	cm	
1	2390.000	45.73	-8.27	54.00	14.85	28.17	2.71	0.00	AVERAGE	100	VERTICAL
2	2390.000	59.32	-14.68	74.00	28.44	28.17	2.71	0.00	PEAK	100	VERTICAL
3	2435.400	88.96			57.93	28.29	2.74	0.00	AVERAGE	100	VERTICAL
4	2442.600	99.32			68.29	28.29	2.74	0.00	PEAK	100	VERTICAL
5	2483.500	62.61	-11.39	74.00	31.47	28.37	2.77	0.00	PEAK	100	VERTICAL
6	2483.500	45.47	-8.53	54.00	14.33	28.37	2.77	0.00	AVERAGE	100	VERTICAL

Item 3, 4 are the fundamental frequency at 2437MHz.

#### Channel 9

			Over	Limit	Readi	Antenna	Cable	Preamp		Ant	
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pol/Phase
	MHz	dBuV/m	dВ	dBuV/m	dBuV	dB/m	dВ	dB	8 <u>2</u>	cm.	
1	2468.400	99.10			67.97	28.37	2.76	0.00	PEAK	105	VERTICAL
2	2468.400	89.03			57.90	28.37	2.76	0.00	AVERAGE	105	VERTICAL
3 *	2483.500	49.70	-4.30	54.00	18.55	28.37	2.77	0.00	AVERAGE	105	VERTICAL
4 *	2484.700	69.67	-4.33	74.00	38.53	28.37	2.77	0.00	PEAK	105	VERTICAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

#### Note:

Emission level (dBuV/m) =  $20 \log Emission$  level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

 Report Format Version: 01
 Page No. : 77 of 87

 FCC ID: VQF-RT3090-1T1R
 Issued Date : Dec. 08, 2008

Temperature	25°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11b CH 1, 6, 11 / Mode 2
Test Date	Nov. 05, 2008		

#### Channel 1

			Over	Readi	Antenna	Preamp	Cable	Ant	Table		
	Freq	Level	Limit	Level	Factor	Factor	Loss	Pos	Pos	Remark	Pol/Phase
	MHz	dBuV/m	dB	dBuV	dB/m	dB		cm	deg		
1 @	2385.800	48.63	-5.37	17.74	28.17	0.00	2.71	128	153	AVERAGE	HORIZONTAL
2 @	2386.000	59.32	-14.68	28.44	28.17	0.00	2.71	128	153	PEAK	HORI ZONTAL
3 @	2409.400	101.64			28.21	0.00	2.73	128	153	AVERAGE	HORIZONTAL
4 ^	2413.600	106.22			28.21	0.00	2.73	128	153	PEAK	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

#### Channel 6

			Over	Limit	Read	Antenna	Cable	Preamp		Ant	
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	872	cm.	
1	2381.600	55.44	-18.56	74.00	24.59	28.13	2.71	0.00	PEAK	100	VERTICAL
2	2381.600	44.32	-9.68	54.00	13.47	28.13	2.71	0.00	AVERAGE	100	VERTICAL
3	2438.600	103.12			72.09	28.29	2.74	0.00	PEAK	100	VERTICAL
4 @	2439.800	98.56			67.53	28.29	2.74	0.00	AVERAGE	100	VERTICAL
5	2492.700	47.23	-6.77	54.00	16.05	28.41	2.77	0.00	AVERAGE	100	VERTICAL
6	2493.100	58.66	-15.34	74.00	27.47	28.41	2.77	0.00	PEAK	100	VERTICAL

Item 3, 4 are the fundamental frequency at 2437MHz.

#### Channel 11

	Freq	Level		Limit Line		Intenna Factor				Ant Pos	Pol/Phase
	MHz	dBuV/m	dВ	dBuV/m	dBuV	dB/m	dВ	dB	8 <del>2</del>	cm	
1	2463.800	101.33			70.24	28.33	2.76	0.00	PEAK	103	VERTICAL
2 @	2464.800	97.01			65.93	28.33	2.76	0.00	AVERAGE	103	VERTICAL
3	2487.900	60.82	-13.18	74.00	29.63	28.41	2.77	0.00	PEAK	103	VERTICAL
4 *	2488.300	52.62	-1.38	54.00	21.44	28.41	2.77	0.00	AVERAGE	103	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Page No. : 78 of 87

Issued Date : Dec. 08, 2008

Temperature	25°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11g CH 1, 6, 11 / Mode 2
Test Date	Nov. 05, 2008		

#### Channel 1

			Over	Readi	Intenna	Preamp	Cable	Ant	Table		
	Freq	Level	Limit	Level	Factor	Factor	Loss	Pos	Pos	Remark	Pol/Phase
	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB -	cm	deg	<u> </u>	
1 @	2390.000	63.13	-10.87	32.25	28.17	0.00	2.71	128	153	PEAK	HORIZONTAL
2 @	2390.000	48.58	-5.42	17.70	28.17	0.00	2.71	128	153	AVERAGE	HORIZONTAL
3 @	2408.800	95.43			28.21	0.00	2.73	128	153	AVERAGE	HORIZONTAL
4	2413.800	104.41			28.21	0.00	2.73	128	153	PEAK	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

#### Channel 6

			Over	Limit	Read	Antenna	Cable	Preamp		Ant	
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pol/Phase
	MHz	dBuV/m		dBuV/m	dBuV	dB/m	<u>ав</u>	dB	8 <u>7 </u>	cm	
1	2384.200	55.14	-18.86	74.00	24.25	28.17	2.71	0.00	PEAK	101	VERTICAL
2	2384.200	44.60	-9.40	54.00	13.72	28.17	2.71	0.00	AVERAGE	101	VERTICAL
3	2435.800	91.12		1,000,000,000	60.09	28.29	2.74	0.00	AVERAGE	101	VERTICAL
4	2441.000	101.10			70.07	28.29	2.74	0.00	PEAK	101	VERTICAL
5	2489.800	59.22	-14.78	74.00	28.04	28.41	2.77	0.00	PEAK	101	VERTICAL
6	2489.900	47.99	-6.01	54.00	16.81	28.41	2.77	0.00	AVERAGE	101	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

#### Channel 11

			Over Limit		ReadAntenna		Cable Preamp			Ant	
	Freq	Level			Level	Factor	Loss	Factor	Remark	Pos	Pol/Phase
	MHz	dBuV/m	<u>ав</u>	dBuV/m	dBuV	dB/m	₫В	dB	8 <del>1</del>	cm	-
1	2468.800	99.49			68.36	28.37	2.76	0.00	PEAK	101	VERTICAL
2	2469.400	92.56			61.43	28.37	2.76	0.00	AVERAGE	101	VERTICAL
3	2483.500	47.89	-6.11	54.00	16.74	28.37	2.77	0.00	AVERAGE	101	VERTICAL
4	2483.700	65.91	-8.09	74.00	34.77	28.37	2.77	0.00	PEAK	101	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

## Note:

Emission level (dBuV/m) =  $20 \log Emission$  level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

 Report Format Version: 01
 Page No. : 79 of 87


 FCC ID: VQF-RT3090-1T1R
 Issued Date : Dec. 08, 2008






# For Emission not in Restricted Band

## Low Band Edge Plot on Configuration Draft n MCS0 20MHz Ant. A / $2412\,\mathrm{MHz}$



Date: 6.NOV.2008 11:56:56

## High Band Edge Plot on Configuration Draft n MCSO 20MHz Ant. A / 2462 MHz

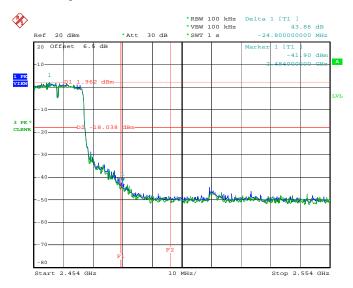

Date: 6.NOV.2008 11:47:41


 Report Format Version: 01
 Page No. : 80 of 87

 FCC ID: VQF-RT3090-1T1R
 Issued Date : Dec. 08, 2008






## For Emission not in Restricted Band Low Band Edge Plot on Configuration Draft n MCSO 40MHz Ant. A / 2422 MHz

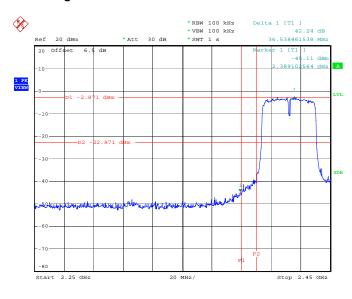

Date: 3.DEC.2008 16:06:16

## High Band Edge Plot on Configuration Draft n MCSO 40MHz Ant. A / 2452 MHz

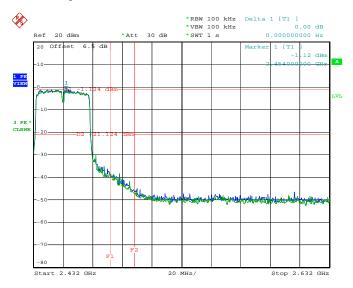

Date: 6.NOV.2008 12:08:04


 Report Format Version: 01
 Page No. : 81 of 87

 FCC ID: VQF-RT3090-1T1R
 Issued Date : Dec. 08, 2008






## Low Band Edge Plot on Configuration IEEE 802.11b Ant. A / 2412 MHz

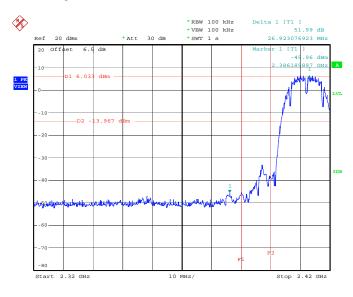

Date: 3.DEC.2008 16:22:36

## High Band Edge Plot on Configuration IEEE 802.11b Ant. A / 2462 MHz

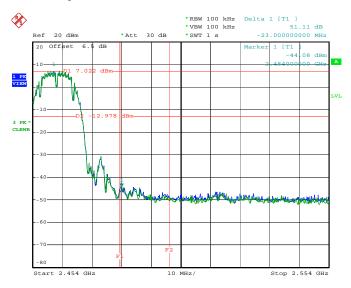

Date: 6.NOV.2008 11:20:20


 Report Format Version: 01
 Page No. : 82 of 87

 FCC ID: VQF-RT3090-1T1R
 Issued Date : Dec. 08, 2008






## Low Band Edge Plot on Configuration IEEE 802.11g Ant. A / 2412 MHz

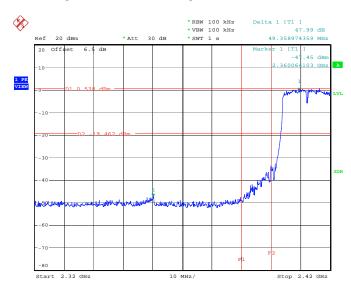

Date: 3.DEC.2008 16:00:51

## High Band Edge Plot on Configuration IEEE 802.11g Ant. A / 2462 MHz



Date: 6.NOV.2008 11:42:57

 Report Format Version: 01
 Page No. : 83 of 87

 FCC ID: VQF-RT3090-1T1R
 Issued Date : Dec. 08, 2008



## 4.7. Antenna Requirements

#### 4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

#### 4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.



## 5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	Mar. 03, 2008	Conduction (CO04-HY)
LISN	MessTec	NNB-2/16Z	99079	9kHz – 30MHz	Mar. 31, 2008	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz – 30MHz	Mar. 22, 2008	Conduction (CO04-HY)
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9kHz – 30MHz	Apr. 20, 2008	Conduction (CO04-HY)
ISN	SCHAFFNER	ISN ST08	21653	9kHz –30MHz	Mar. 27, 2008	Conduction (CO04-HY)
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30 MHz - 1 GHz 3m	Jun. 14, 2008	Radiation (03CH03-HY)
Amplifier	SCHAFFNER	COA9231A	18667	9 kHz - 2 GHz	Jan. 14, 2008	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1 GHz - 26.5 GHz	Jul. 21, 2008	Radiation (03CH03-HY)
Amplifier	MITEQ	AMF-6F-260400	9121372	26.5 GHz - 40 GHz	Jan. 22, 2007*	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP30	100023	9 kHz - 30 GHz	Oct. 08, 2008	Radiation (03CH03-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	May 23, 2007*	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30 MHz – 1 GHz	Jul. 12, 2008	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6741	1GHz ~ 18GHz	Apr. 04, 2008	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15 GHz - 40 GHz	Jan.18, 2008	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30 MHz - 1 GHz	Dec. 03, 2007	Radiation (03CH03-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1 GHz - 40 GHz	Dec. 03, 2007	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 – 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP30	100023	9kHz ~ 30GHz	Jan. 10, 2008	Conducted (TH01-HY)
Power Meter	R&S	NRVS	100444	DC ~ 40GHz	Jul. 11, 2008	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z51	100458	DC ~ 30GHz	Jul. 11, 2008	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z32	100057	30MHz ~ 6GHz	Jul. 11, 2008	Conducted (TH01-HY)
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	May 30, 2008*	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Mar. 13, 2008	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-S	MAB0103-001	N/A	Jul. 18, 2008	Conducted (TH01-HY)
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Dec. 01, 2007	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Dec. 01, 2007	Conducted (TH01-HY)
Vector Signal Generator	R&S	SMU200A	102098	100kHz ~ 6GHz	Nov. 14, 2007	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Mar. 10, 2008	Conducted (TH01-HY)
Oscilloscope	Tektonix	TDS380	B016197	400MHz/ 2GS/s	Jun. 27, 2008	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

Note: \*Calibration Interval of instruments listed above is two year.

 Report Format Version: 01
 Page No. : 85 of 87

 FCC ID: VQF-RT3090-1T1R
 Issued Date : Dec. 08, 2008



## 6. TEST LOCATION

SHIJR	ADD	:	6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C.
	TEL	:	886-2-2696-2468
	FAX	:	886-2-2696-2255
HWA YA	ADD	:	No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
	TEL	:	886-3-327-3456
	FAX	:	886-3-318-0055
LINKOU	ADD	:	No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C
	TEL	:	886-2-2601-1640
	FAX	:	886-2-2601-1695
DUNGHU	ADD	:	No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C.
	TEL	:	886-2-2631-4739
	FAX	:	886-2-2631-9740
JUNGHE	ADD	:	7FI., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C.
	TEL	:	886-2-8227-2020
	FAX	:	886-2-8227-2626
NEIHU	ADD	:	4FI., No. 339, Hsin Hu 2 <sup>nd</sup> Rd., Taipei 114, Taiwan, R.O.C.
	TEL	:	886-2-2794-8886
	FAX	:	886-2-2794-9777
JHUBEI	ADD	:	No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C.
	TEL	:	886-3-656-9065
	FAX	:	886-3-656-9085



### 7. TAF CERTIFICATE OF ACCREDITATION



Certificate No.: L1190-070110

## 財團法人全國認證基金會 Taiwan Accreditation Foundation

## Certificate of Accreditation

This is to certify that

### Sporton International Inc.

## EMC & Wireless Communications Laboratory

No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

#### is accredited in respect of laboratory

Accreditation Criteria

: ISO/IEC 17025:2005

Accreditation Number

: 1190

Originally Accredited

: December 15, 2003

Effective Period

: January 10, 2007 to January 09, 2010

Accredited Scope

: Testing Field, see described in the Appendix

Accreditation Program for Designated Testing Laboratory

Specific Accreditation

. for Commodities Inspection

Program

Accreditation Program for Telecommunication Equipment

Testing Laboratory

Jay-San Chen

President, Taiwan Accreditation Foundation

Date: January 10, 2007

P1, total 9 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when used without the Appendix.

Report Format Version: 01 Page No. · 87 of 87 FCC ID: VQF-RT3090-1T1R Issued Date: Dec. 08, 2008