

Report No.: GTS201806000075F02

### FCC Report (Bluetooth)

KEYDIY HK TECH LIMITED **Applicant:** 

Room1318-19, 13/F, Hollywood Plaza, 610 Nathan Road, **Address of Applicant:** 

Mongkok, Kowloon, Hong Kong

Shenzhen Ecartek Co., Ltd Manufacturer/Factory:

Address of Room 201, Building A, 5#, Chuangwei Innovation Valley,

Tangtou No.1 Road, Shiyan Subdistrict, Bao'an Shenzhen, Manufacturer/Factory:

China

**Equipment Under Test (EUT)** 

**Product Name:** Remote programmer KD-X2

Model No.: KD-X2

Trade mark: N/A

FCC ID: 2AJMY-KD-X2

FCC CFR Title 47 Part 15 Subpart C Section 15.247 **Applicable standards:** 

Date of sample receipt: May 8, 2018

**Date of Test:** May 8, 2018-May 24, 2018

Date of report issued: May 24, 2018

PASS \* Test Result:

### Authorized Signature:



### **Robinson Lo Laboratory Manager**

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

<sup>\*</sup> In the configuration tested, the EUT complied with the standards specified above.



Report No.: GTS201806000075F02

#### 2 Version

Version No.	Date	Description
00	May 24, 2018	Original

Prepared By:	Spently	Date:	May 24, 2018	
	Project Engineer			
Check By:	Andy. wa	Date:	May 24, 2018	
	Reviewer	_		_



Report No.: GTS201806000075F02

### **Contents**

			Page
1	COV	/ER PAGE	1
2	VER	SION	2
3	CON	ITENTS	3
4	TES	T SUMMARY	4
5	GEN	IERAL INFORMATION	5
	5.1	GENERAL DESCRIPTION OF EUT	5
	5.2	TEST MODE	
	5.3	DESCRIPTION OF SUPPORT UNITS	
	5.4	TEST FACILITY	
	5.5	TEST LOCATION	7
	5.6	ADDITIONAL INSTRUCTIONS	8
6	TES	T INSTRUMENTS LIST	9
7	TES	T RESULTS AND MEASUREMENT DATA	10
	7.1	ANTENNA REQUIREMENT	10
	7.2	CONDUCTED EMISSIONS	
	7.3	CONDUCTED OUTPUT POWER	
	7.4	CHANNEL BANDWIDTH	_
	7.5	POWER SPECTRAL DENSITY	
	7.6	BAND EDGES	
	7.6.1		
	7.6.2		
	7.7	SPURIOUS EMISSION	
	7.7.1	Conducted Emission Mountain	
	7.7.2		_
8	TES	T SETUP PHOTO	32
^	EUT	CONSTRUCTIONAL DETAILS	24



Report No.: GTS201806000075F02

### **Test Summary**

Test Item	Section in CFR 47	Result
Antenna requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Output Power	15.247 (b)(3)	Pass
Channel Bandwidth	15.247 (a)(2)	Pass
Power Spectral Density	15.247 (e)	Pass
Band Edge	15.247(d)	Pass
Spurious Emission	15.205/15.209	Pass

Pass: The EUT complies with the essential requirements in the standard.

Remark: Test according to ANSI C63.4:2014 and ANSI C63.10:2013.

### **Measurement Uncertainty**

,			
Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz ~ 30MHz	± 4.34dB	(1)
Radiated Emission	30MHz ~ 1000MHz	± 4.24dB	(1)
Radiated Emission	1GHz ~ 26.5GHz ± 4.68dB		(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	± 3.45dB	(1)
Note (1): The measurement unce	ertainty is for coverage factor of k	=2 and a level of confidence of	95%.



Report No.: GTS201806000075F02

#### 5 **General Information**

#### **General Description of EUT** 5.1

Product Name:	Remote programmer KD-X2
Model No.:	KD-X2
Test Model No:	N/A
Remark: All above models a circuits. The differences are co	re identical in the same PCB layout, interior structure and electrical plor and model name for commercial purpose.
Sample(s) Status:	Engineer sample
Quantity of tested samples	1
Serial No.:	1
Tested Sample(s) ID:	/
Hardware Version:	/
Software Version:	/
Operation Frequency:	2402MHz~2480MHz
Channel Numbers:	40
Channel Separation:	2MHz
Modulation Type:	GFSK
Antenna Type:	Integral antenna
Antenna Gain:	1dBi
Power Supply:	



Report No.: GTS201806000075F02

Operation Frequency each of channel							
Channel	annel Frequency Channel		Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	11	2422MHz	21	2442MHz	31	2462MHz
2	2404MHz	12	2424MHz	22	2444MHz	32	2464MHz
•			• !	• !	• !		•
9	2418MHz	19	2438MHz	29	2458MHz	39	2478MHz
10	2420MHz	20	2440MHz	30	2460MHz	40	2480MHz

### Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2440MHz
The Highest channel	2480MHz



Report No.: GTS201806000075F02

### 5.2 Test mode

Transmitting mode Keep the EUT in continuously transmitting mode

Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.

#### 5.3 **Description of Support Units**

None

#### 5.4 **Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

### • FCC —Registration No.: 381383

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383, January 08, 2018.

#### • Industry Canada (IC) —Registration No.: 9079A-2

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, August 15, 2016.

#### 5.5 **Test Location**

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102

Tel: 0755-27798480 Fax: 0755-27798960

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



Report No.: GTS201806000075F02


### 5.6 Additional instructions

Software (Used for test) from client

	Special software is used.
Mode	The software provided by client to enable the EUT under transmission
	condition continuously at specific channel frequencies individually.

Power level setup in software							
Test Software Name	SmartRF_Studio_7						
Test Software Version	2.9.0						
Support Units	Description Manufacturer Model						
(Software installation media)	Notebook PC	Notebook PC ACER ZQT					
Mode	Channel	Channel Frequency (MHz) Soft Set					
GFSK	CH1	2402	TX LEVEL is built-in set				
	CH21	parameters and cannot be					
	CH40	CH40 2480 changed and selected.					

### Run Software:

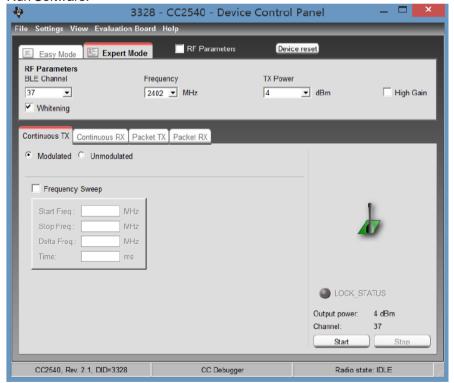



Report No.: GTS201806000075F02

#### 6 **Test Instruments list**

Radi	Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)	
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.0(L)*6.0(W)* 6.0(H)	GTS250	July. 03 2015	July. 02 2020	
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A	
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June 28 2017	June 27 2018	
4	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June 28 2017	June 27 2018	
5	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June 28 2017	June 27 2018	
6	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	June 28 2017	June 27 2018	
7	Horn Antenna	ETS-LINDGREN	3160	GTS217	June 28 2017	June 27 2018	
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A	
9	Coaxial Cable	GTS	N/A	GTS213	June 28 2017	June 27 2018	
10	Coaxial Cable	GTS	N/A	GTS211	June 28 2017	June 27 2018	
11	Coaxial cable	GTS	N/A	GTS210	June 28 2017	June 27 2018	
12	Coaxial Cable	GTS	N/A	GTS212	June 28 2017	June 27 2018	
13	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June 28 2017	June 27 2018	
14	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	June 28 2017	June 27 2018	
15	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June 28 2017	June 27 2018	
16	Band filter	Amindeon	82346	GTS219	June 28 2017	June 27 2018	

Conduc	Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)	
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.16 2014	May.15 2019	
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June 28 2017	June 27 2018	
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June 28 2017	June 27 2018	
4	Artificial Mains Network	SCHWARZBECK MESS	NSLK8127	GTS226	June 28 2017	June 27 2018	
5	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A	
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A	
7	Thermo meter	KTJ	TA328	GTS233	June 28 2017	June 27 2018	

Gen	General used equipment:							
Ite m	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)		
1	Barometer	ChangChun	DYM3	GTS257	June 28 2017	June 27 2018		



Report No.: GTS201806000075F02

#### 7 **Test results and Measurement Data**

#### 7.1 Antenna requirement

Standard requirement: FCC Part15 C Section 15.203 /247(c)

#### 15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

### **E.U.T Antenna:**

The antenna is Integral antenna, the best case gain of the antenna is 1dBi

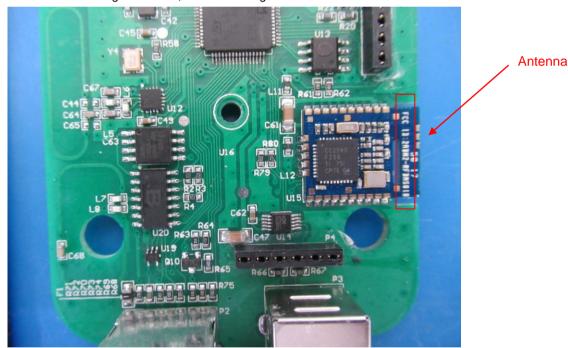



Report No.: GTS201806000075F02

### 7.2 Conducted Emissions


Test Requirement:	FCC Part15 C Section 15.207	•				
Test Method:	ANSI C63.10:2013					
Test Frequency Range:	150KHz to 30MHz					
Class / Severity:	Class B					
Receiver setup:	RBW=9KHz, VBW=30KHz, Sv	weep time=auto				
Limit:	Limit (dRu\/)					
Limit.	Frequency range (MHz)	Quasi-peak	Average			
	0.15-0.5	66 to 56*	56 to 46*			
	0.5-5	56	46			
	5-30	60	50			
	* Decreases with the logarithn	n of the frequency.				
Test setup:	Reference Plane					
	AUX Equipment E.U.T  Test table/Insulation plane  Remark E.U.T. Equipment Under Test LISN: Line Impedence Stabilization Network Test table height=0.8m	Filter — AC pow				
Test procedure:	<ol> <li>The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</li> <li>Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2009 on conducted measurement.</li> </ol>					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details	3				
Test results:	Pass					



Report No.: GTS201806000075F02

### Measurement data

Line:

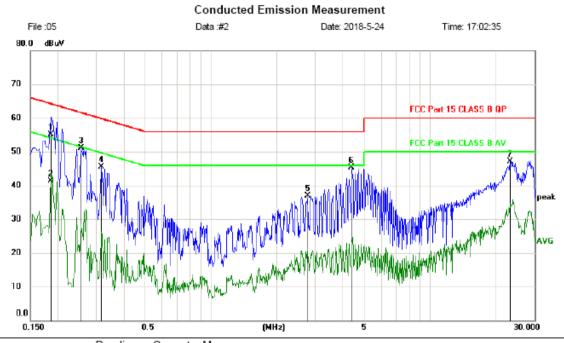

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	ı	
		MHz	dBu∀	dB	dBu∀	dBu∀	dB	Detector	Comment
1	*	0.1860	45.35	9.74	55.09	64.21	-9.12	QP	
2		0.1860	31.62	9.74	41.36	54.21	-12.85	AVG	
3		0.2550	41.35	9.76	51.11	61.59	-10.48	peak	
4		0.3180	35.69	9.77	45.46	59.76	-14.30	peak	
5		2.7750	26.88	10.02	36.90	56.00	-19.10	peak	
6		4.4040	35.15	10.16	45.31	56.00	-10.69	peak	
7		23.2050	36.40	10.68	47.08	60.00	-12.92	peak	

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable


Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102 Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960

<sup>\*:</sup>Maximum data x:Over limit !:over margin



Report No.: GTS201806000075F02

#### Neutral:

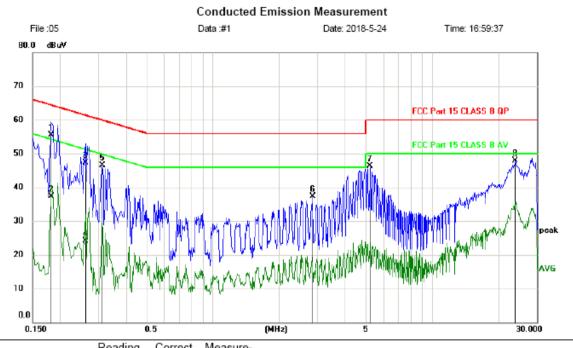

No.	Mk.	Freq.	Level	Factor	ment	Limit	Margir	1	
		MHz	dBu∀	dB	dBu∀	dBu∀	dB	Detector	Comment
1	*	0.1830	45.79	9.74	55.53	64.35	-8.82	QP	
2		0.1830	27.49	9.74	37.23	54.35	-17.12	AVG	
3		0.2610	37.59	9.76	47.35	61.40	-14.05	QP	
4		0.2610	14.41	9.76	24.17	51.40	-27.23	AVG	
5		0.3120	36.76	9.77	46.53	59.92	-13.39	peak	
6		2.8470	27.27	10.03	37.30	56.00	-18.70	peak	
7		5.2170	36.16	10.20	46.36	60.00	-13.64	peak	
8		23.9160	37.17	10.72	47.89	60.00	-12.11	peak	

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

### Notes:

- 1. An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3. Final Level = Receiver Read level + LISN Factor + Cable Loss
- 4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

Global United Technology Services Co., Ltd.

No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone,

Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960

<sup>\*:</sup>Maximum data x:Over limit !:over margin



Report No.: GTS201806000075F02

### 7.3 Conducted Output Power

Test Requirement:	FCC Part15 C Section 15.247 (b)(3)			
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V04			
Limit:	30dBm			
Test setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane			
Test Instruments:	Refer to section 6.0 for details			
Test mode:	Refer to section 5.2 for details			
Test results:	Pass			

### **Measurement Data**

Test channel	Peak Output Power (dBm)	Limit(dBm)	Result
Lowest	0.46		
Middle	0.67	30.00	Pass
Highest	-1.01		



Report No.: GTS201806000075F02

### Test plot as follows:



### Lowest channel



#### Middle channel



Highest channel



Report No.: GTS201806000075F02

### 7.4 Channel Bandwidth

Test Requirement:	FCC Part15 C Section 15.247 (a)(2)	
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V04	
Limit:	>500KHz	
Test setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane	
Test Instruments:	Refer to section 6.0 for details	
Test mode:	Refer to section 5.2 for details	
Test results:	Pass	

### **Measurement Data**

Test channel	Channel Bandwidth (MHz)	Limit(KHz)	Result
Lowest	0.676		
Middle	0.669	>500	Pass
Highest	0.679		



Report No.: GTS201806000075F02

### Test plot as follows:



### Lowest channel



#### Middle channel




Highest channel



Report No.: GTS201806000075F02

### 7.5 Power Spectral Density

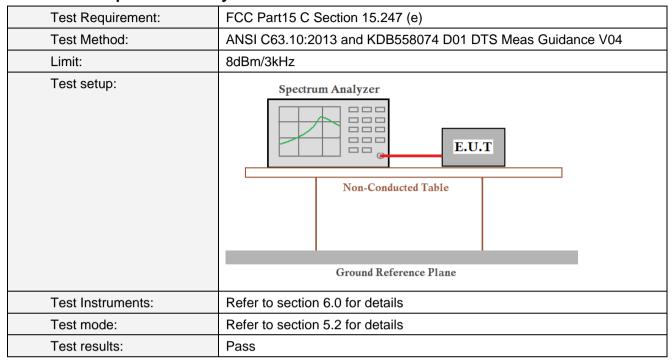


#### **Measurement Data**

Test channel	Power Spectral Density (dBm)	Limit(dBm/3kHz)	Result
Lowest	-14.705		
Middle	-14.464	8.00	Pass
Highest	-16.640		




Report No.: GTS201806000075F02


### Test plot as follows:



### Lowest channel



#### Middle channel



Highest channel




Report No.: GTS201806000075F02


### 7.6 Band edges

### 7.6.1 Conducted Emission Method

Test Requirement:	FCC Part15 C Section 15.247 (d)			
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V04			
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.			
Test setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane			
Test Instruments:	Refer to section 6.0 for details			
Test mode:	Refer to section 5.2 for details			
Test results:	Pass			

### Test plot as follows:





Lowest channel

Highest channel



Report No.: GTS201806000075F02

### 7.6.2 Radiated Emission Method

Test Requirement:	FCC Part15 C S	FCC Part15 C Section 15.209 and 15.205						
Test Method:	ANSI C63.10:20	ANSI C63.10:2013						
Test Frequency Range	e: All of the restric	ct bands were	tested, only	the worst ba	nd's (2310MHz to			
	2500MHz) data	was showed.						
Test site:	Measurement D	Distance: 3m						
Receiver setup:	Frequency	Detector	RBW	VBW	Value			
	Above 4CU-	Peak	1MHz	3MHz	Peak			
	Above 1GHz	RMS	1MHz	3MHz	Average			
Limit:	Freque	ency	Limit (dBuV	/m @3m)	Value			
	Abovo	ICH-	54.0	0	Average			
	Above 1	IGHZ	74.0	0	Peak			
Test Procedure:	Tum Table <150cm>	A-	< lm	J. P				
Test Procedure:	the ground a determine th  2. The EUT wa antenna, whi tower.  3. The antenna ground to de horizontal an measuremer  4. For each sus and then the and the rota the maximum  5. The test-rece Specified Ba  6. If the emission the limit specified by the EUT with the second	<ol> <li>The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasipeak or average method as specified and then reported in a data sheet.</li> <li>The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test</li> </ol>						
	sheet. 7. The radiation And found the	n measuremer	nts are perfori	med in X, Y, it is worse ca	Z axis positioning.			

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



Test mode:	Refer to section 5.2 for details
Test results:	Pass



Report No.: GTS201806000075F02

### Measurement data:

Remark: The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.

#### Peak value:

i oak valao	•							
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	44.78	27.59	5.38	30.18	47.57	74.00	-26.43	Horizontal
2400.00	46.95	27.58	5.39	30.18	49.74	74.00	-24.26	Horizontal
2390.00	44.89	27.59	5.38	30.18	47.68	74.00	-26.32	Vertical
2400.00	48.77	27.58	5.39	30.18	51.56	74.00	-22.44	Vertical

### Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	34.18	27.59	5.38	30.18	36.97	54.00	-17.03	Horizontal
2400.00	36.21	27.58	5.39	30.18	39.00	54.00	-15.00	Horizontal
2390.00	35.07	27.59	5.38	30.18	37.86	54.00	-16.14	Vertical
2400.00	37.25	27.58	5.39	30.18	40.04	54.00	-13.96	Vertical

- 1		
	Test channel:	Highest
	1 CSt Gridifici.	i ligitost

#### Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	46.45	27.53	5.47	29.93	49.52	74.00	-24.48	Horizontal
2500.00	45.92	27.55	5.49	29.93	49.03	74.00	-24.97	Horizontal
2483.50	48.07	27.53	5.47	29.93	51.14	74.00	-22.86	Vertical
2500.00	47.34	27.55	5.49	29.93	50.45	74.00	-23.55	Vertical

### Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	37.90	27.53	5.47	29.93	40.97	54.00	-13.03	Horizontal
2500.00	34.67	27.55	5.49	29.93	37.78	54.00	-16.22	Horizontal
2483.50	39.18	27.53	5.47	29.93	42.25	54.00	-11.75	Vertical
2500.00	35.57	27.55	5.49	29.93	38.68	54.00	-15.32	Vertical

#### Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- The emission levels of other frequencies are very lower than the limit and not show in test report.



Report No.: GTS201806000075F02

### 7.7 Spurious Emission

### 7.7.1 Conducted Emission Method


Test Requirement:	FCC Part15 C Section 15.247 (d)						
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V04						
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.						
Test setup:	Spectrum Analyzer    E.U.T     Non-Conducted Table     Ground Reference Plane						
Test Instruments:	Refer to section 6.0 for details						
Test mode:	Refer to section 5.2 for details						
Test results:	Pass						



Report No.: GTS201806000075F02


### Test plot as follows:

### Lowest channel

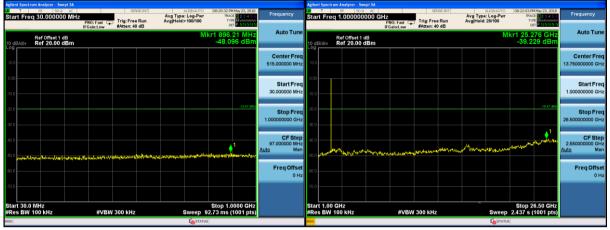


30MHz~25GHz

### Middle channel

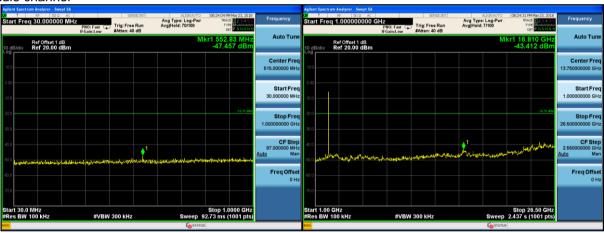

30MHz~25GHz

### Highest channel

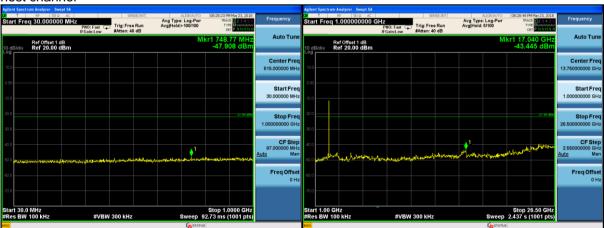

30MHz~25GHz

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



Report No.: GTS201806000075F02

### 7.7.2 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209								
Test Method:	ANSI C63.10:2013								
Test Frequency Range:	30MHz to 25GHz								
Test site:	Measurement Distance: 3m								
Receiver setup:	Frequency Detector RBW VBW Value								
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak				
	Above 1GHz	Peak	1MHz	3MHz	Peak				
	Above IGHZ	RMS	1MHz	3MHz	Average				
Limit:	Frequen	icy	Limit (dBuV/	m @3m)	Value				
	30MHz-88	MHz	40.0	0	Quasi-peak				
	88MHz-216	6MHz	43.5	0	Quasi-peak				
	216MHz-96	0MHz	46.0	0	Quasi-peak				
	960MHz-1	GHz	54.0	0	Quasi-peak				
	Above 10	2H-7	54.0	0	Average				
	Above 10	71 12	74.0	0	Peak				
Test setup:	Above 1GHz	EUT+		Antenna 4m >	ñer-				



	Report No.: GTS201806000075F02
	Tum Table  <150cm >4  Receiver  Preamplifier  Test Antenna  Preamplifier  Test Antenna  Tum Table  Tum Table
Test Procedure:	The EUT was placed on the top of a rotating table (0.8 meters below 1G and 1.5 meters above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
	2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
	3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
	4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
	The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
	6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasipeak or average method as specified and then reported in a data sheet.
	7. The radiation measurements are performed in X, Y, Z axis positioning. And found the Y axis positioning which it is worse case, only the test worst case mode is recorded in the report.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

#### Remark:

Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.



Report No.: GTS201806000075F02

### **Measurement Data**

### **Below 1GHz**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
35.75	36.68	11.2	0.62	30.07	18.43	40.00	-21.57	Vertical
94.10	30.32	11.35	1.14	29.73	13.08	43.50	-30.42	Vertical
106.01	32.36	11.5	1.25	29.66	15.45	43.50	-28.05	Vertical
180.02	35.33	8.8	1.74	29.27	16.60	43.50	-26.90	Vertical
305.68	27.20	13.62	2.39	29.96	13.25	46.00	-32.75	Vertical
633.91	25.11	19.46	3.85	29.27	19.15	46.00	-26.85	Vertical
88.03	29.32	10.6	1.09	29.76	11.25	43.50	-32.25	Horizontal
111.74	34.20	10.6	1.29	29.62	16.47	43.50	-27.03	Horizontal
189.07	37.24	9.7	1.78	29.24	19.48	43.50	-24.02	Horizontal
326.74	28.69	14.03	2.5	29.85	15.37	46.00	-30.63	Horizontal
497.68	26.21	17.44	3.29	29.31	17.63	46.00	-28.37	Horizontal
801.79	26.27	21.33	4.46	29.2	22.86	46.00	-23.14	Horizontal



Report No.: GTS201806000075F02

### Above 1GHz

Test channel	Test channel: Lowest								
Peak value:									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization	
4804.00	36.19	31.78	8.6	32.09	44.48	74.00	-29.52	Vertical	
7206.00	31.34	36.15	11.65	32	47.14	74.00	-26.86	Vertical	
9608.00	31.34	37.95	14.14	31.62	51.81	74.00	-22.19	Vertical	
12010.00	*					74.00		Vertical	
14412.00	*					74.00		Vertical	
4804.00	39.95	31.78	8.6	32.09	48.24	74.00	-25.76	Horizontal	
7206.00	32.51	36.15	11.65	32	48.31	74.00	-25.69	Horizontal	
9608.00	29.98	37.95	14.14	31.62	50.45	74.00	-23.55	Horizontal	
12010.00	*					74.00		Horizontal	
14412.00	*					74.00		Horizontal	

### Average value:

Average var	<del>40.</del>							
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	24.95	31.78	8.6	32.09	33.24	54.00	-20.76	Vertical
7206.00	19.70	36.15	11.65	32	35.50	54.00	-18.50	Vertical
9608.00	19.13	37.95	14.14	31.62	39.60	54.00	-14.40	Vertical
12010.00	*					54.00		Vertical
14412.00	*					54.00		Vertical
4804.00	29.37	31.78	8.6	32.09	37.66	54.00	-16.34	Horizontal
7206.00	21.70	36.15	11.65	32	37.50	54.00	-16.50	Horizontal
9608.00	18.51	37.95	14.14	31.62	38.98	54.00	-15.02	Horizontal
12010.00	*					54.00		Horizontal
14412.00	*					54.00		Horizontal

### Remark:

<sup>1.</sup> Final Level =Receiver Read level + Antenna Factor + Cable Loss - Preamplifier Factor

<sup>2. &</sup>quot;\*", means this data is the too weak instrument of signal is unable to test.



Report No.: GTS201806000075F02

Test channel:					Middle				
Peak value:				*					
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Pream Factor (dB)	1 1 6//61	Limit Line (dBuV/m)	Over Limit (dB)	polarization	
4880.00	36.67	31.85	8.67	32.12	45.07	74.00	-28.93	Vertical	
7320.00	32.08	36.37	11.72	31.89	48.28	74.00	-25.72	Vertical	
9760.00	31.67	38.35	14.25	31.62	52.65	74.00	-21.35	Vertical	
12200.00	*					74.00		Vertical	
14640.00	*					74.00		Vertical	
4880.00	40.92	31.85	8.67	32.12	49.32	74.00	-24.68	Horizontal	
7320.00	33.43	36.37	11.72	31.89	49.63	74.00	-24.37	Horizontal	
9760.00	31.31	38.35	14.25	31.62	52.29	74.00	-21.71	Horizontal	
12200.00	*					74.00		Horizontal	
14640.00	*					74.00		Horizontal	
Average val	ue:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Pream Factor (dB)	l Level	Limit Line (dBuV/m)	Over Limit (dB)	polarization	
4880.00	25.59	31.85	8.67	32.12	33.99	54.00	-20.01	Vertical	
7320.00	21.00	36.37	11.72	31.89	37.20	54.00	-16.80	Vertical	
9760.00	19.81	38.35	14.25	31.62	40.79	54.00	-13.21	Vertical	
12200.00	*					54.00		Vertical	
14640.00	*					54.00		Vertical	
4880.00	30.15	31.85	8.67	32.12	38.55	54.00	-15.45	Horizontal	
7320.00	22.70	36.37	11.72	31.89	38.90	54.00	-15.10	Horizontal	
9760.00	19.02	38.35	14.25	31.62	40.00	54.00	-14.00	Horizontal	
12200.00	*					54.00		Horizontal	

#### Remark:

14640.00

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. "\*", means this data is the too weak instrument of signal is unable to test.

Horizontal

54.00



Report No.: GTS201806000075F02

Test channel:					Highest				
Peak value:				•					
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Pream Facto (dB)	r	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	37.17	31.93	8.73	32.16		45.67	74.00	-28.33	Vertical
7440.00	32.33	36.59	11.79	31.78		48.93	74.00	-25.07	Vertical
9920.00	31.91	38.81	14.38	31.88		53.22	74.00	-20.78	Vertical
12400.00	*						74.00		Vertical
14880.00	*						74.00		Vertical
4960.00	41.58	31.93	8.73	32.16		50.08	74.00	-23.92	Horizontal
7440.00	33.67	36.59	11.79	31.78	3	50.27	74.00	-23.73	Horizontal
9920.00	31.40	38.81	14.38	31.88	3	52.71	74.00	-21.29	Horizontal
12400.00	*						74.00		Horizontal
14880.00	*						74.00		Horizontal
Average val	ue:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Pream Facto (dB)	r	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	26.19	31.93	8.73	32.16	6	34.69	54.00	-19.31	Vertical
7440.00	20.93	36.59	11.79	31.78	3	37.53	54.00	-16.47	Vertical
9920.00	20.13	38.81	14.38	31.88	3	41.44	54.00	-12.56	Vertical
12400.00	*						54.00		Vertical
14880.00	*						54.00		Vertical
4960.00	30.87	31.93	8.73	32.16	6	39.37	54.00	-14.63	Horizontal
7440.00	23.58	36.59	11.79	31.78	3	40.18	54.00	-13.82	Horizontal
9920.00	19.36	38.81	14.38	31.88	3	40.67	54.00	-13.33	Horizontal
12400.00	*						54.00		Horizontal
14880.00	*						54.00		Horizontal

#### Remark:

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- $2. \quad \hbox{``*", means this data is the too weak instrument of signal is unable to test.}$



Report No.: GTS201806000075F02

#### **Test Setup Photo** 8

Radiated Emission







Report No.: GTS201806000075F02

### Conducted Emission





Report No.: GTS201806000075F02


#### **EUT Constructional Details** 9









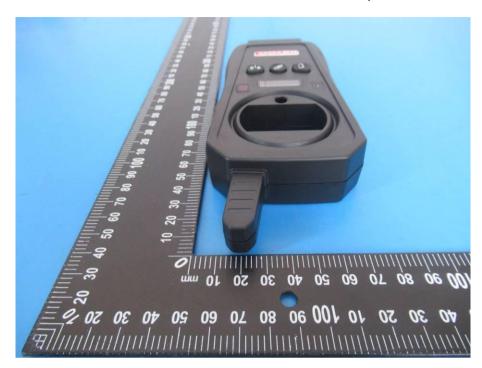












Report No.: GTS201806000075F02

### **Internal Photos**



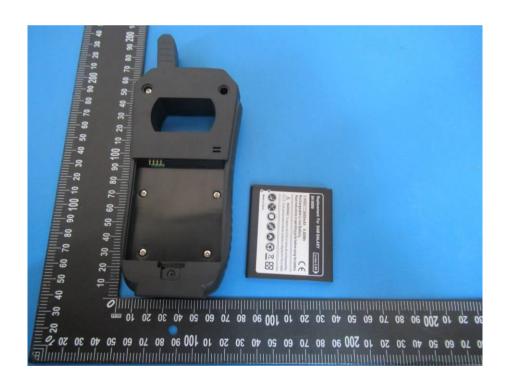













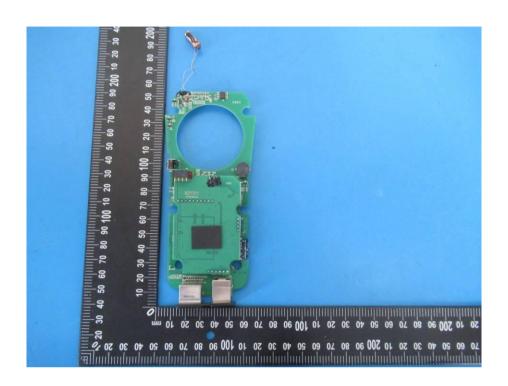

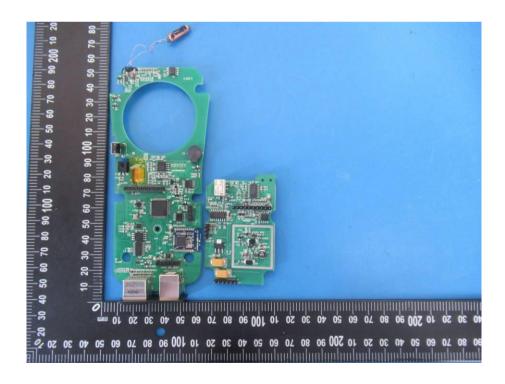



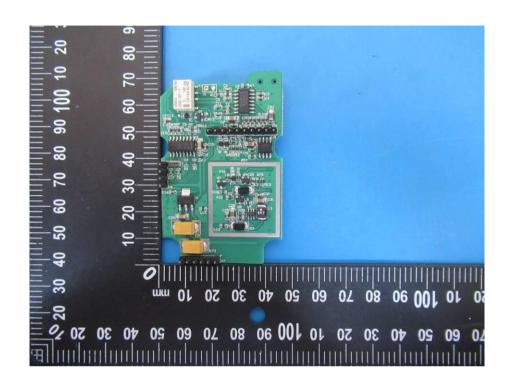


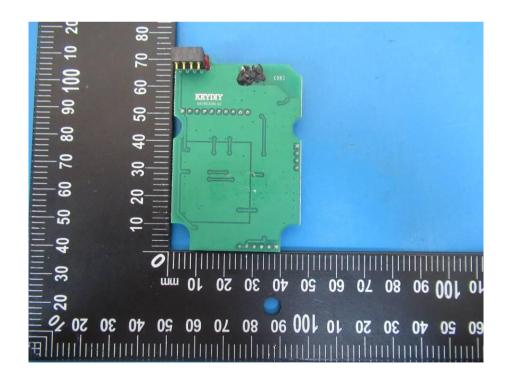



Report No.: GTS201806000075F02



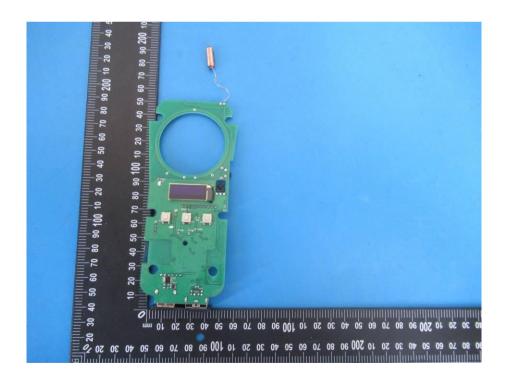

-----End-----