## FCC PART 15 SUBPART C TEST REPORT

for

**Wireless Module** 

Model No.: 2ALHR001

FCC ID: 2ALHR001

of

Applicant: Fieldpiece Instruments, Inc

Address: 1636 WEST COLLINS AVE ORANGE, CA 92867

Tested and Prepared

by

Worldwide Testing Services (Taiwan) Co., Ltd.

FCC Registration No.: 930600

Industry Canada filed test laboratory Reg. No. IC 5679A-1, IC 5107A-1

A2LA Accredited No.: 2732.01





Report No.: W6D21703-16763-C-1

6F, NO. 58, LANE 188, RUEY-KUANG RD., NEIHU TAIPEI 114, TAIWAN, R.O.C. TEL: 886-2-66068877 FAX: 886-2-66068879 E-mail: wts@wts-lab.com



Registration number: W6D21703-16763-C-1

FCC ID: 2ALHR001

## **TABLE OF CONTENTS**

1	GEN	ERAL INFORMATION	2
	1.1	Notes	2
	1.2	TESTING LABORATORY	
	1.2.1	Location	
	1.2.2	Details of accreditation status	
	1.3	DETAILS OF APPROVAL HOLDER	
	1.4	APPLICATION DETAILS	
	1.5	GENERAL INFORMATION OF TEST ITEM	
	1.6	TEST STANDARDS	
	1.0	1EST STANDARDS	
2	TEC	HNICAL TEST	6
	2.1	SUMMARY OF TEST RESULTS	£
	2.2	TEST ENVIRONMENT	6
	2.3	TEST EQUIPMENT LIST	
	2.4	GENERAL TEST PROCEDURE	
•	TENER CO	E DEGLII TO (ENGLOQUIDE)	10
3	TES	T RESULTS (ENCLOSURE)	12
	3.1	PEAK OUTPUT POWER (TRANSMITTER)	13
	3.2	RF Exposure Compliance Requirements	16
	3.3	TRANSMITTER RADIATED EMISSIONS IN RESTRICTED BANDS	17
	3.4	Spurious Emissions (TX)	18
	3.5	RADIATED EMISSION ON THE BAND EDGE.	20
	3.6	MINIMUM 6 DB BANDWIDTH	22
	3.7	PEAK POWER SPECTRAL DENSITY	
	3.8	RADIATED EMISSION FROM RECEIVER PART	28
	3.9	Power Line Conducted Emission	29
A	PPENT	)IX	30

FCC ID: 2ALHR001

### 1 General Information

#### 1.1 Notes

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample which has passed all the relevant tests conforms to a specification.

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems. The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that is performance generally conforms to representative cases of communications equipment.

The test results of this test report relate exclusively to the item tested as specified in 1.5.

The test report may only be reproduced or published in full.

Reproduction or publication of extracts from the report requires the prior written approval of the Worldwide Testing Services(Taiwan) Co., Ltd.

**Tester:** 

May 27, 2017 Rick Chen Rick Chen.

Date WTS-Lab. Name Signature

**Technical responsibility for area of testing:** 

May 27, 2017 Kevin Wang

Date WTS Name Signature

FCC ID: 2ALHR001

### 1.2 Testing laboratory

#### 1.2.1 Location

**OATS** 

No.5-1, Lishui, Shuang Sing Village, Wanli Dist., New Taipei City 207,

Taiwan (R.O.C.)

3 meter semi-anechoic chamber

No.35, Aly. 21, Ln. 228, Ankang Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

TEL:886-2-6613-0228 FAX:886-2-2791-5046

Company

Worldwide Testing Services(Taiwan) Co., Ltd. 6F, NO. 58, LANE 188, RUEY-KUANG RD. NEIHU, TAIPEI 114, TAIWAN R.O.C.

Tel : 886-2-66068877 Fax : 886-2-66068879

#### 1.2.2 Details of accreditation status

Accredited testing laboratory

A2LA accredited number: 2732.01

FCC filed test laboratory Reg. No. 930600

Industry Canada filed test laboratory Reg. No. IC 5679A-1, IC 5107A-1

### Test location, where different from Worldwide Testing Services (Taiwan) Co., Ltd.:

Name:	./.
Accredited number:	./.
Street:	./.
Town:	./.
Country:	./.
Telephone:	./.
Fax:	./.

### 1.3 Details of approval holder

Name: Fieldpiece Instruments, Inc

Street: 1636 WEST COLLINS AVE ORANGE,

Town: CA 92867 Country: USA

Telephone: (714) 634-1844 Fax: (714) 714-6341848

FCC ID: 2ALHR001

1.4 Application deta	ils
Date of receipt of test item.	./.
Date of test:	from March 31, 2017 to May 23, 2017
1.5 General informat	ion of Test item
Type of test item:	Wireless Module
Model Number:	2ALHR001
Brand Name:	Fieldpiece
Multi-listing model numbe	r: ./.
Photos:	see Appendix
Technical data	
Frequency band:	2402 MHz – 2480 MHz
Frequency (ch 0 or A):	2402 MHz
Frequency (ch 19 or B):	2440 MHz
Frequency (ch 39 or C):	2480 MHz
Number of Channels:	40
Operation modes:	Duplex
Modulation Type:	GFSK
Fixed point-to-point operat	ion: Yes / No
Type of Antenna:	PCB Antenna
Antenna gain: Power supply:	-0.25 dBi 9Vdc(from testing jig)
Emission designator:	1M17G1D

none

Host device:



FCC ID: 2ALHR001

Classification

Fixed Device	
Mobile Device (Human Body distance > 20cm)	
Portable Device (Human Body distance < 20cm)	
Modular Radio Device	

<u>Transmitter</u> <u>Unom</u>

Power ( ch 0 or A):Conducted: 3.02 dBmPower ( ch 19 or B):Conducted: 2.15 dBmPower ( ch 39 or C):Conducted: 1.77 dBm

Manufacturer: (if applicable)

Name: CHY FIREMATE CO., LTD.

Street: No.3 Sheng-Li 1st Street, Xintian Village, Rende District,

Town: Tainan City, Country: Taiwan R.O.C.

Additional information: ./.

#### 1.6 Test standards

Technical standard: FCC RULES SUBPART C § 15.247 (2015-10)

### Special Statement:

- 1. This test report is based on the original test report no.: W6M21703-16761-C-1.
- 2. The relevant Circuitry, PCB Layout, Inner element, Appearance and Function of this model number are exactly the same as the one in original test report. The differences are the applicant, model number and brand name. Therefore the test result is also based on the original test report no.: W6M21703-16761-C-1 without re-testing.

FCC ID: 2ALHR001

### 2 Technical test

## 2.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course	×
of the tests performed.	
OR .	

or

The deviations as specified in 2.5 were ascertained in the course of the tests performed.  $\Box$ 

### 2.2 Test environment

Temperature: 23 °C

Relative humidity content: 20 ... 75 %

Air pressure: 86 ... 103 kPa

Power supply: 9Vdc(from testing jig)

Extreme conditions parameters: ./.

Test item Name	Uncertainty
Estimation Result of Uncertainty of Conducted Emission	Expanded Uncertainty: 0.74 dB
Estimation Result of Uncertainty of Radiated Emission(3M)	Expanded Uncertainty: 0.009-30 MHz: 2.17 dB 30-1000 MHz: 3.30 dB 1-18 GHz: 2.28 dB 18-40 GHz: 2.19 dB
Estimation Result of Uncertainty of Bandwidth Measurement 20 dB Bandwidth, Occupied bandwidth, Channel bandwidth, Necessary Bandwidth	Expanded Uncertainty: 0.45 kHz
Estimation Result of Uncertainty of Conducted Output Power Measurement Output power	Expanded Uncertainty: 1.01 dB
Estimation Result of Uncertainty of Power Density Measurement Power density	Expanded Uncertainty: 1.09 dB
Estimation Result of Uncertainty of Band Edge Measurement	Expanded Uncertainty: 0.98 dBc



FCC ID: 2ALHR001

## 2.3 Test Equipment List

No. Test equipment		Туре	Serial No.	Manufacturer	Cal. Date	Next Cal. Date
ETSTW-CE 001	EMI TEST RECEIVER	ESHS10	842121/013	R&S	2017/5/19	2018/5/19
ETSTW-CE 003	AC POWER SOURCE	APS-9102	D161137	GW	Functi	on Test
ETSTW-CE 008	HF-EICHLEITUNG RF STEP ATTENUATOR 139dB DPSP	334.6010.02	844581/024	R&S	Functi	on Test
ETSTW-CE 009	TEMP.&HUMIDITY CHAMBER	GTH-225-40-1P-U	MAA0305-009	GIANT FORCE	2016/7/15	2017/7/14
ETSTW-CE 016	TWO-LINE V-NETWORK	ENV216	100050	R&S	2016/9/12	2017/9/11
ETSTW-CE 028	MXE EMI Receiver	N9038A	MY53220110	Agilent	2016/8/26	2017/8/25
ETSTW-RE 003	EMI TEST RECEIVER	ESI 26	831438/001	R&S	2017/5/19	2018/5/18
ETSTW-RE 004	EMI TEST RECEIVER	ESI 40	832427/004	R&S	2017/5/19	2018/5/18
ETSTW-RE 005	EMI TEST RECEIVER	ESVS10	843207/020	R&S	2016/7/4	2017/7/3
ETSTW-RE 012	TUNABLE BANDREJECT FILTER	D.C 0309	146	K&L	Functi	on Test
ETSTW-RE 013	TUNABLE BANDREJECT FILTER	D.C 0336	397	K&L	Functi	on Test
ETSTW-RE 018	MICROWAVE HORN ANTENNA	AT4560	27212	AR	2016/6/24	2017/6/23
ETSTW-RE 027	Passive Loop Antenna	6512	00034563	ETS-Lindgren	2016/6/29	2017/6/28
ETSTW-RE 030	Double-Ridged Guide Horn Antenna	3117	00035224	ETS-Lindgren	2017/3/22	2018/3/21
ETSTW-RE 042	Biconical Antenna	HK116	100172	R&S	2017/2/7	2018/2/6
ETSTW-RE 043	Log-Periodic Dipole Antenna	HL223	100166	R&S	2017/4/10	2018/4/9
ETSTW-RE 044	Log-Periodic Antenna	HL050	100094	R&S	2017/4/27	2018/4/26
ETSTW-RE 045	ESA-E SERIES SPECTRUM ANALYZER	E4404B	MY45111242	Agilent	Pre-te	st Use
ETSTW-RE 050	Attenuator 10dB	50HF-010-1	None	JFW	2017/3/1	2018/2/28
ETSTW-RE 051	Attenuator 6dB	50HF-006-1	None	JFW	2017/3/1	2018/2/28
ETSTW-RE 053	Attenuator 3dB	50HF-003-1	None	JFW	2017/3/1	2018/2/28
ETSTW-RE 055	SPECTRUM ANALYZER	FSU 26	200074	R&S	2017/3/1	2018/2/28
ETSTW-RE 060	Attenuator 30dB	5015-30	F651012z-01	ATM	2017/3/1	2018/2/28
ETSTW-RE 062	Amplifier Module	CHC 2	None	KMIC	2017/4/12	2018/4/11
ETSTW-RE 064	Bluetooth Test Set	MT8852B-042	6K00005709	Anritsu	Functi	on Test
ETSTW-RE 069	Double-Ridged Guide Horn Antenna	3117	00069377	ETS-Lindgren	Functi	on Test
ETSTW-RE 072	CELL SITE TEST SET	8921A	3339A00375	HP	2016/9/8	2017/9/7
ETSTW-RE 088	SOLID STATE AMPLIFIER	KMA180265A01	99057	KMIC	2016/9/20	2017/9/19
ETSTW-RE 091	Match Pad	MDCS1500	None	WOKEN	2017/4/6	2018/4/5
ETSTW-RE 099	DC Block	50DB-007-1	None	JFW	2017/3/1	2018/2/28
ETSTW-RE 112	AC POWER SOURCE	TFC-1005	T-0A023536	T-Power	Functi	on test
ETSTW-RE 115	2.4GHz Notch Filter	N0124411	473874	MICROWAVE CIRCUITS	2017/1/12	2018/1/11
ETSTW-RE 120	RF Player	MP9200	MP9210-111022	ADIVIC	Functi	on test



Registration number: W6D21703-16763-C-1 FCC ID: 2ALHR001

ETSTW-RE 122	SIGNAL GENERATOR	SMF100A	102149	R&S	2017/5/19	2018/5/18
-		5NSL11-				
ETSTW-RE 125	5GHz Notch filter	5200/E221.3-O/O 5NSL12-	1	K&L Microwave	2016/8/10	2017/8/9
ETSTW-RE 126	5GHz Notch filter	5800/E221.3-O/O	1	K&L Microwave	2016/8/10	2017/8/9
ETSTW-RE 127	RF Switch Box	RFS-01	None	WTS	2017/3/1	2018/2/28
ETSTW-RE 128	5.3GHz Notch filter	N0153001	SN487233	Microwave Circuits	2016/8/10	2017/8/9
ETSTW-RE 129	5.5GHz Notch filter	N0555984	SN487234	Microwave Circuits	2016/8/10	2017/8/9
ETSTW-RE 130	Handheld RF Spectrum Analyzer	N9340A	CN0147000204	Agilent	Pre-te	st Use
ETSTW-RE 142	Amplifier	8447D	2805A03378	Agilent	2017/4/12	2018/4/11
ETSTW-RE 143	Humidity Temperature Meter	TES-1260	110104623	TES	2016/8/19	2017/8/18
ETSTW-RE 147	Bi-log Hybrid Antenna	MCTD 2786B	BLB16M04005	ETC	2017/3/22	2018/3/21
ETSTW-EMI 011	USB Compact Modulator	SFC-U	101689	R&S	2017/5/10	2018/5/9
ETSTW-GSM 002	Universal Radio Communication Tester	CMU 200	109439	R&S	2017/2/24	2018/2/23
ETSTW-GSM 003	Radio Communication Analyzer	MT8820C	6201342073	Anritsu	2017/2/10	2018/2/9
ETSTW-GSM 004	Wideband Radio Communication Tester	CMW500	128092	R&S	2016/12/15	2017/12/14
ETSTW-GSM 019	Band Reject Filter	WRCTF824/849- 822/851-40 /12+9SS	3	WI	2017/1/12	2018/1/11
ETSTW-GSM 020	Band Reject Filter	WRCD1747/1748- 1743/1752-32/5SS	1	WI	2017/1/12	2018/1/11
ETSTW-GSM 021	Band Reject Filter	WRCD1879.5/1880.5 -1875.5/1884.5- 32/5SS	3	WI	2017/1/12	2018/1/11
ETSTW-GSM 022	Band Reject Filter	WRCT901.9/903.1- 904.25-50/8SS	1	WI	2017/1/12	2018/1/11
ETSTW-GSM 023	Power Divider	4901.19.A	None	SUHNER	2016/9/14	2017/9/13
ETSTW-Cable 010	BNC Cable	RGS-142	None	THERMAX	2016/9/12	2017/9/11
ETSTW-Cable 011	SMA to N type Cable	RGU-400	None	THERMAX	Pre-test U	Use NCR
ETSTW-Cable 012	BNC Cable	RGS-400	None	THERMAX	2016/9/12	2017/9/11
ETSTW-Cable 016	BNC Cable	Switch Box	B Cable 1	Schwarz beck	2017/2/23	2018/2/22
ETSTW-Cable 017	BNC Cable	X Cable	B Cable 2	Schwarz beck	2017/2/23	2018/2/22
ETSTW-Cable 018	BNC Cable	Y Cable	B Cable 3	Schwarz beck	2017/2/23	2018/2/22
ETSTW-Cable 019	BNC Cable	Z Cable	B Cable 4	Schwarz beck	2017/2/23	2018/2/22
ETSTW-Cable 020	N TYPE Cable	OATS Cable 1	N30N30-L335-15M	JYE BAO CO.,LTD.	2017/4/21	2018/4/20
ETSTW-Cable 022	N TYPE Cable	5006	0002	JYE BAO CO.,LTD.	2017/4/6	2018/4/5
ETSTW-Cable 026	Microwave Cable	SUCOFLEX 104	279075	HUBER+SUHNER	2017/3/1	2018/2/28
ETSTW-Cable 027	Microwave Cable	SUCOFLEX 104	279083	HUBER+SUHNER	2017/5/3	2018/5/2
ETSTW-Cable 028	Microwave Cable	FA147A0015M2020	30064-2	UTIFLEX	2016/9/20	2017/9/19
ETSTW-Cable 029	Microwave Cable	FA147A0015M2020	30064-3	UTIFLEX	2016/9/20	2017/9/19
ETSTW-Cable 030	Microwave Cable	SUCOFLEX 104 (S_Cable 9)	279067	HUBER+SUHNER	2017/3/1	2018/2/28
ETSTW-Cable 031	Microwave Cable	SUCOFLEX 104 (S_Cable 10)	238092	HUBER+SUHNER	2017/4/12	2018/4/11
ETSTW-Cable 043	Microwave Cable	SUCOFLEX 104	317576	HUBER+SUHNER	2017/4/12	2018/4/11
ETSTW-Cable 048	Microwave Cable	SUCOFLEX 104	325519	HUBER+SUHNER	2017/4/12	2018/4/11



Registration number: W6D21703-16763-C-1

ETSTW-Cable 058	Microwave Cable	SUCOFLEX 104	none	HUBER+SUHNER	2017/2/20	2018/2/19
ETSTW-Cable 064	Microwave Cable	SUCOFLEX 104	MY28891	HUBER+SUHNER	2017/4/12	2018/4/11
ETSTW-Cable 066	SMA type cable	32022	None	ASTROLAB	2016/9/12	2017/9/11
ETSTW-Cable 071	N TYPE CABLE	EMCCFD400-NM- NM-25000	170239	EMCI	2017/2/20	2018/2/19
WTSTW-SW 002	EMI TEST SOFTWARE	EZ_EMC	None	Farad	Version ETS-03A1	
WTSTW-SW 006	EMI TEST SOFTWARE	e3	None	AUDIX	Version	9.161014
WTSTW-SW 008	Signal studio	Agilent	None	AUDIX	Version 2.0.0.1	

FCC ID: 2ALHR001

#### 2.4 General Test Procedure

**POWER LINE CONDUCTED INTERFERENCE:** The procedure used was ANSI STANDARD C63.10-2013 5.2 using a 50μH LISN (if necessary). Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

**RADIATION INTERFERENCE:** The test procedure used was according to ANSI STANDARD C63.10-2013 6.4 employing a spectrum analyzer. For investigated frequency is equal to or below 1GHz, the RBW and VBW of the spectrum analyzer was 100 kHz and 100kHz respectively with an appropriate sweep speed. For investigated frequency is above 1GHz, both of RBW and VBW of the spectrum analyzer were 1 MHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna.

**FORMULA OF CONVERSION FACTORS:** The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of  $dB\mu V$ ) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB.

Example:

Freq (MHz) METER READING + ACF + CABLE LOSS (to the receiver) = FS

33  $20 \text{ dB}\mu\text{V} + 10.36 \text{ dB} + 6 \text{ dB} = 36.36 \text{ dB}\mu\text{V/m} \text{ (a)3m}$ 

The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m (non metallic table) and arranged according to ANSI C63.10-2013 6.3.1. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to the frequency specified as follows:

- (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (4) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a)(1)-(a)(3) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this Section, whichever is the higher frequency range of investigation.

For hand-held devices, a exploratory test was performed with three (3) orthogonal planes to determine the highest emissions.

Measurements were made by Worldwide Testing Services(Taiwan) Co., Ltd. at the registered open field test site located at No.5-1, Lishui, Shuang Sing Village, Wanli Dist., New Taipei City 207, Taiwan (R.O.C.). The Registration Number: 930600.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.



FCC ID: 2ALHR001

When the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

The formula is as follows:

Average = Peak + Duty Factor

Duty Factor = 20 log (dwell time/T)

T = 100ms when the pulse train period is over 100 ms or the period of the pulse train.

Modified Limits for peak according to 15.35 (b) = Max Permitted average Limits + 20dB

ANSI STANDARD C63.10-2013 B.2.7: Any measurements that utilize special test software shall be indicated and referenced in the test report. During testing, test software 'EZ EMC' was used for setting up different operation modes.

FCC ID: 2ALHR001

## 3 Test results (enclosure)

TEST CASE	Para. Number	Required	Test passed	Test failed
Peak Output Power	15.247(d)	×	×	
Equivalent isotropically radiated Power	15.247(b)	×	×	
Spurious Emissions radiated – Transmitter operating	15.247(d):	×	×	
	15.209			
Band Edge Measurement	15.247(d)	×	×	
Minimum 6 dB Bandwidth	15.247(a)(2)	×	×	
Peak Power Spectral Density	15.247(e)	×	×	
Radiated Emission from Receiver part	15.109	×	×	
Power Line Conducted Emission	15.207			


The following is intentionally left blank.

FCC ID: 2ALHR001

## 3.1 Peak Output Power (transmitter)

FCC Rule: 15.247(d)(3)

This measurement applies to equipment with an integral antenna and to equipment with an antenna connector and equipped with an antenna as declared by the applicant.

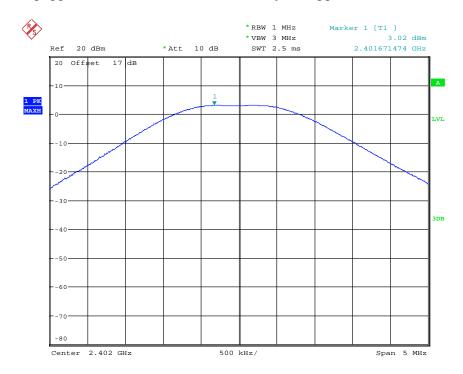


MAX OUTPUT POWER BT4.0 CH00 Date: 12.MAY.2017 15:00:53




Registration number: W6D21703-16763-C-1

FCC ID: 2ALHR001

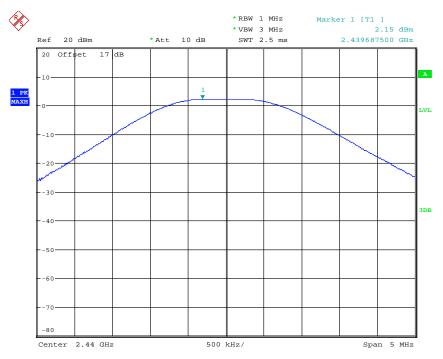

MAX OUTPUT POWER BT4.0 CH19 Date: 12.MAY.2017 15:01:55

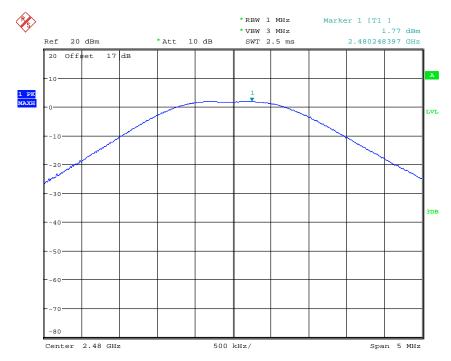

MAX OUTPUT POWER BT4.0 CH39 Date: 12.MAY.2017 15:03:03



Registration number: W6D21703-16763-C-1

FCC ID: 2ALHR001

#### Limits:

Frequency	Power
MHz	dBm
902 - 928	30
2400 – 2483.5	30
5725 - 5850	30

In case of employing transmitter antennas having antenna gain > 6 dBi and using fixed point-to point operation consider \$15.247 (b)(4)

Test equipment used: ETSTW-RE 055, ETSTW-RE 050

FCC ID: 2ALHR001

## 3.2 RF Exposure Compliance Requirements

FCC Rule: 15.247(b)(3)

Test exclusion = max. conducted output power

Test exclusion = 3.02 dBm

**RESULT:** 

Test standard : FCC KDB Publication

447498 D01 General RF Exposure Guidance v06

According to 447498 D01 General RF Exposure Guidance v06:

SAR evaluation, by measurement or numerical simulation, is not required when the corresponding SAR Exclusion Threshold condition, listed below, is satisfied.

The enclosure of the device provides  $\geq 0.5$  cm separation from the antenna elements to significant metal parts of the enclosure to minimize potential perturbations.

Frequency Band:2400-2483.5 MHz

Maximum Power fed to Antenna: 2.0045 mW

Separation distances: Radiator to user: > 5 mm

Distance prescribed in user manual: > 5 mm

N	ИHz		5		1	0		15		20		25		mm		
2	450		10		1	9		29		38		48		SAR Test Exclusion Threshold (mW)		W)
MHz			30		35		40			45		50		mm		
2450			57		6	7		77		86		96		Exc	R Test clusion old (m'	W)
MHz	50	60	70	80	90	100	110	120	130	140	150	160	170	180	190	mm
2/150	06	106	206	306	106	506	606	706	806	006	1006	1106	1296	1306	1/106	mW

FCC ID: 2ALHR001

### 3.3 Transmitter Radiated Emissions in Restricted Bands

FCC Rules: 15.247 (d), 15.205, 15.209, 15.35

Radiated emission measurements were performed from 30 MHz to 26500 MHz.

For radiated emission tests, the analyzer setting was as followings:

Frequency ≤ 1 GHz, RBW:100 kHz, VBW: 100 kHz (Peak measurements)
Frequency > 1 GHz, RBW: 1 MHz, VBW: 1 MHz (Peak measurements)
Frequency > 1 GHz, RBW:1 MHz, VBW: 10 Hz (Average measurements)

Limits.

For frequencies below 1GHz:

Frequency of Emission	Field strength	Field Strength
(MHz)	(microvolts/meter)	(dB microvolts/meter)
30 - 88	100	40.0
88 - 216	150	43.5
216 - 960	200	46.0
Above	500	54.0

For frequencies above 1GHz (Average measurements).

Guidance on Measurement of Digit Transmission Systems:

"If the emission is pulsed, modify the unit for continuous operation, use the setting shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation."

The correction factor, based on the total channel dwell time in a 100 ms period, may be mathematically applied to a measurement made with an average detector, to further reduce the value.

Duty cycle correction = 20 log (dwell time/ 100ms)

Note: No duty cycle correction was added to the reading of this EUT.

Explanation: See attached diagrams in Appendix.

FCC ID: 2ALHR001

### 3.4 Spurious Emissions (tx)

Spurious emission was measured with modulation (declared by manufacturer).

In any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c))

FCC Rule: 15.247(d), 15.35

For out of band emissions that are close to or that exceed the 20 dB attenuation requirement described in the specification, radiated measurements were performed at a 3 m separation distance to determine whether these emissions complied with the general radiated emission requirement.

#### Limits:

For frequencies above 1GHz (Peak measurements). Modified Limit for peak according to 15.35 (b) = Max Permitted average Limits + 20dB

For frequencies above 1GHz (Average measurements).

Max. reading – 20dB

Max. reading – 20 dB

Guidance on Measurement of Digit Transmission Systems:

"If the emission is pulsed, modify the unit for continuous operation, use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation."

The correction factor, based on the total channel dwell time in a 100 ms period, may be mathematically applied to a measurement made with an average detector, to further reduce the value.

Duty Cycle correction = 20 log (dwell time/100ms)

Note: No duty cycle correction was added to the reading of EUT.



FCC ID: 2ALHR001

SAMPLE CALCULATION OF LIMIT. All results will be updated by an automatic measuring system in accordance with point 2.3.

### Calculation of test results:

Such factors like antenna correction, cable loss, external attenuation etc. are already included in the provided measurement results. This is done by using validated test software and calibrated test system according the accreditation requirements.

The peak and average spurious emission plots was measured with the average limits. In the Table being listed the critical peak and average value and exhibit the compliance with the above calculated Limits.

If in the column's correction factor states a value then the max. Field strength in the same row is corrected by a value gained from the "Correction Factor".

#### Summary table with radiated data of the test plots

Model: Mode: Polarization:	<del>-</del> -	2ALHR001 	·	Date: Temperature: Humidity:	  	°C %	Engineer:	
Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)

Frequency		leading Factor		Limit		Margin	Table	Ant.		
	(dBuV)		(dB)	Result	(dBuV/m)	(dBuV/m)			Degree	High
(MHz)	Peak	Ave.	Corr.	Peak	Ave.	Peak	Ave.	(dB)	(Deg.)	(m)
		1					1		1	
		1					1		1	
		-					-		-	

#### Note

- 1. Correction Factor = Antenna factor + Cable loss Preamplifier
- 2. The formula of measured value as: Test Result = Reading + Correction Factor
- 3. Detector function in the form: PK = Peak, QP = Quasi Peak, AV = Average
- 4. All not in the table noted test results are more than 20 dB below the relevant limits.
- 5. Measurement uncertainty for 3m measurement:  $30-1000 \text{ MHz} = \pm 3.30 \text{ dB}$ ,  $1-18 \text{ GHz} = \pm 2.28 \text{ dB}$ ,  $18-40 \text{ GHz} = \pm 2.19 \text{ dB}$ ; Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 6. Please see attached diagrams in Appendix.

**TEST RESULT (Transmitter):** The unit DOES meet the FCC requirements.


Test equipment used: ETSTW-RE 004, ETSTW-RE 030, ETSTW-RE 062, ETSTW-RE 142, ETSTW-RE 147, ETSTW-RE 088, ETSTW-RE 018

FCC ID: 2ALHR001

## 3.5 Radiated Emission on the band edge

According to FCC rules part 15 subpart C §15.247(d) in any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required.

In addition radiated emission which fall in the restricted bands, as defined in section 15.205(a), must also with the radiated emission limits.

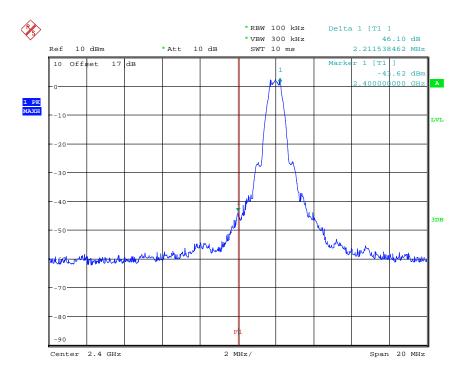


BANDEDGE BT4.0 CH00 Date: 12.MAY.2017 15:01:27



Registration number: W6D21703-16763-C-1

FCC ID: 2ALHR001

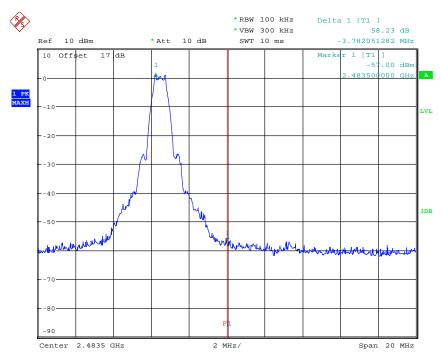

BANDEDGE BT4.0 CH39
Date: 12.MAY.2017 15:03:37

### Limit:


Frequency Range / MHz	Limit
902 –928	
2400 – 2483.5	- 20 dB
5725 - 5850	

Test equipment used: ETSTW-RE 055, ETSTW-RE 050

FCC ID: 2ALHR001

#### 3.6 Minimum 6 dB Bandwidth

The analyzer ResBW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A PEAK reading was taken, two markers were set 6 dB below the maximum level on the right and the left side of the emission. The 6 dB bandwidth is the frequency difference between the two markers.

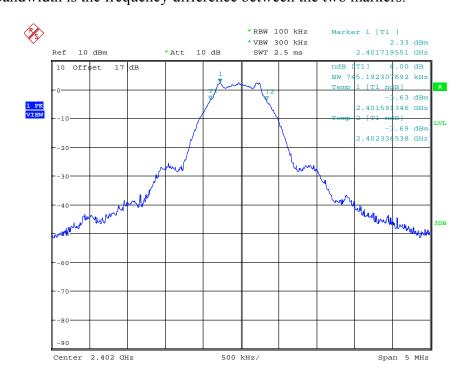


6DB BANDWIDTH BT4.0 CH00 Date: 12.MAY.2017 15:01:05




Registration number: W6D21703-16763-C-1

FCC ID: 2ALHR001

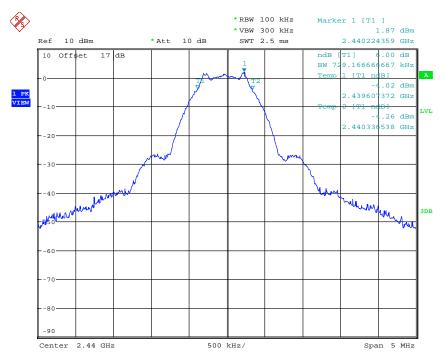

6DB BANDWIDTH BT4.0 CH19
Date: 12.MAY.2017 15:02:05

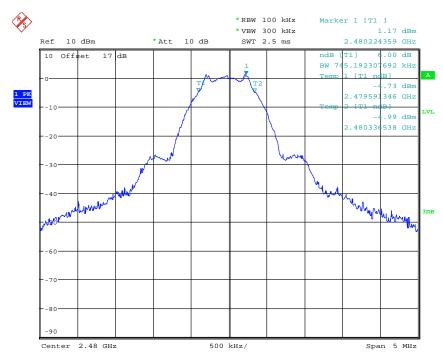

6DB BANDWIDTH BT4.0 CH39
Date: 12.MAY.2017 15:03:17



FCC ID: 2ALHR001

### **Limits:**

Frequency Range MHz	Limits
902-928	min 500 kHz
2400-2483.5	min 500 kHz
5725-5850	min 500 kHz


Test equipment used: ETSTW-RE 055, ETSTW-RE 050

FCC ID: 2ALHR001

### 3.7 Peak Power Spectral Density

Peak Power Spectral density is a measured at low, middle and high channel.

The peak output power is measured with a measurement bandwidth of 10 MHz and displayed on diagram together with Peak Power Spectral Density result which was measured with a bandwidth of 3 kHz, appreciate frequency span and sweep time.

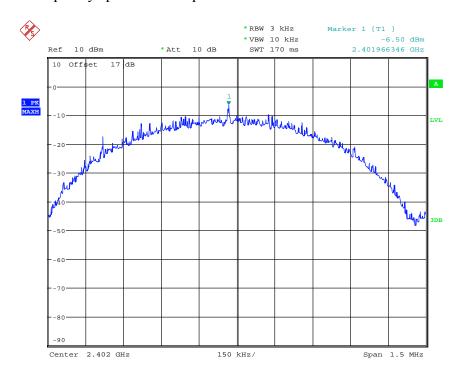


POWER DENSITY BT4.0 CH00
Date: 12.MAY.2017 15:01:19




Registration number: W6D21703-16763-C-1

FCC ID: 2ALHR001

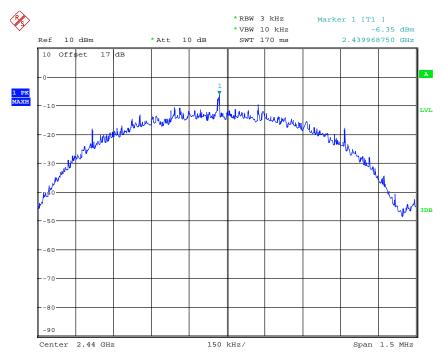

POWER DENSITY BT4.0 CH19
Date: 12.MAY.2017 15:02:19

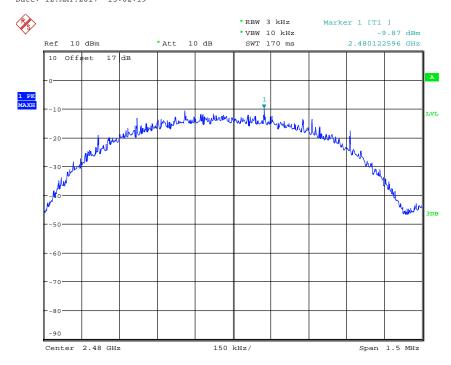

POWER DENSITY BT4.0 CH39
Date: 12.MAY.2017 15:03:29



FCC ID: 2ALHR001

### **Limits:**

Frequency Range MHz	dBm
902-928	8
2400-2483.5	8
5725-5850	8

Test equipment used: ETSTW-RE 055, ETSTW-RE 050



Registration number: W6D21703-16763-C-1

FCC ID: 2ALHR001

#### 3.8 Radiated Emission from Receiver Part

FCC Rule: 15.109

Model: 2ALHR001 Date: --

Mode: -- °C Engineer: --

Polarization: Horizontal Humidity: -- %

i dianzation.	Honzontai			riairiiaity.		70			
Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB) Result (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)	
						-		-	

Frequency (MHz)	Reading (dBuV) Peak Ave.		Factor (dB) Corr.	(dBuV/m)		Limit @3m (dBuV/m) Peak Ave.		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)			Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)

Frequency (MHz)	Reading (dBuV) Peak Ave.		Factor (dB) Corr.	Result @3m (dBuV/m) Peak Ave.		Limit @3m (dBuV/m) Peak Ave.		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)

#### Note

- 1. Correction Factor = Antenna factor + Cable loss Preamplifier
- 2. The formula of measured value as: Test Result = Reading + Correction Factor
- 3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average
- 4. All not in the table noted test results are more than 20 dB below the relevant limits.
- 5. Measurement uncertainty for 3m measurement:  $30\text{-}1000 \text{ MHz} = \pm 3.30 \text{ dB}$ ,  $1\text{-}18 \text{ GHz} = \pm 2.28 \text{ dB}$ ,  $18\text{-}40 \text{ GHz} = \pm 2.19 \text{ dB}$ ; Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.
- 6. Please see attached diagrams in Appendix.

Test equipment used: ETSTW-RE 004, ETSTW-RE 030, ETSTW-RE 062, ETSTW-RE 142, ETSTW-RE 147, ETSTW-RE 088, ETSTW-RE 018



FCC ID: 2ALHR001

#### 3.9 Power Line Conducted Emission

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the table bellows with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

This measurement was transact first with instrumentation using an average and peak detector and a 10 kHz bandwidth. If the peak detector achieves a calculated level, the measurement is repeated by an instrumentation using a quasi-peak detector.

Model:		2ALHR001	Date:				
Mode:			Tempera	ature:	°C	Engineer:	
Polarization:	Ν	Humio	dity:	%			
Frequency		Paading	Factor	Docult	ŀ	Limit	Marg

Frequency	Reading (dBuV)		Factor (dB)				mit uV)	Margin
(MHz)	QP	Ave.	Corr.	QP	Äve.	QP	Äve.	(dB)
		-		1				
		-						

Polarization: L1

Tolanzation. E1								
Frequency	Reading (dBuV)		Factor (dB)	Result (dBuV)		Limit (dBuV)		Margin
(MHz)	QP	Ave.	Corr.	QP	Ave.	QP	Ave.	(dB)

Note: 1. The formula of measured value as: Test Result = Reading + Correction Factor

- 2. The Correction Factor = Cable Loss + LISN Insertion Loss + Pulse Limit Loss
- 3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average
- 4. All not in the table noted test results are more than 20 dB below the relevant limits.
- 5. Measurement uncertainty =  $\pm 0.74$  dB; Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.
- 6. This test is not required because there is no AC power line or signal line for this EUT.

#### **Limits:**

Frequency of Emission (MHz)	Conducted Limit (dBuV)			
	Quasi Peak	Average		
0.15-0.5	66 to 56	56 to 46		
0.5-5	56	46		
5-30	60	50		

Test equipment used: ETSTW-CE 001, ETSTW-CE 016, ETSTW-CE 028.

FCC ID: 2ALHR001

## **Appendix**

## A Photos

- 1. EUT Photos
- 2. Set Up Photo of Radiated Emission

## **B** Measurement diagrams


Spurious Emissions radiated



Registration number: W6D21703-16763-C-1


FCC ID: 2ALHR00

## **EUT Photos**

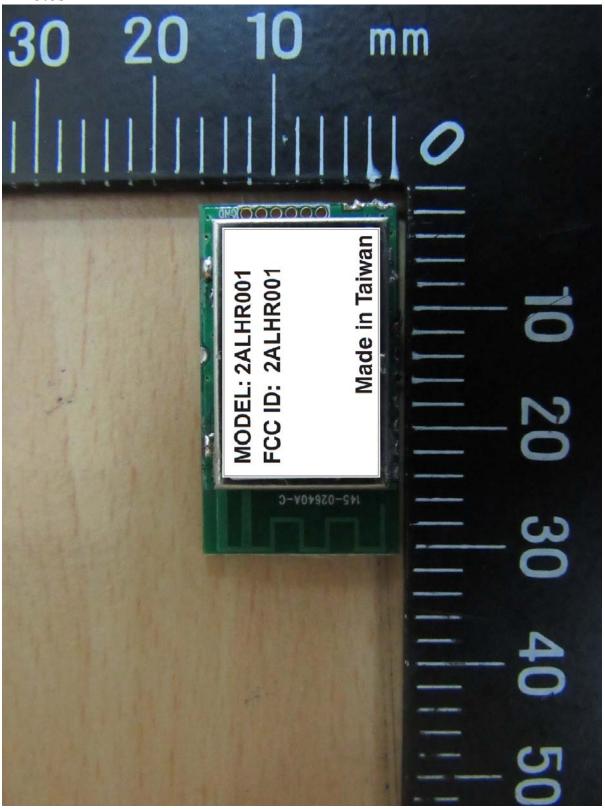




Registration number: W6D21703-16763-C-1

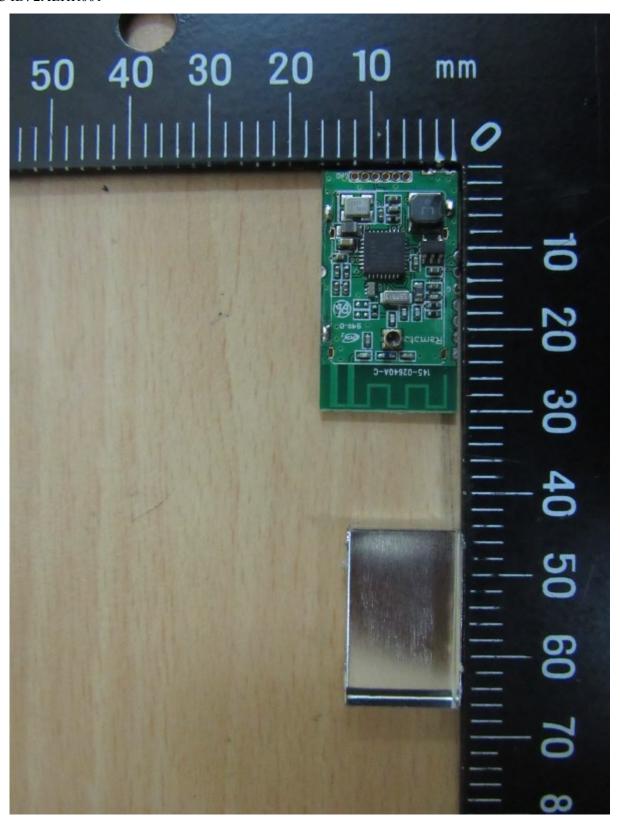




Registration number: W6D21703-16763-C-1

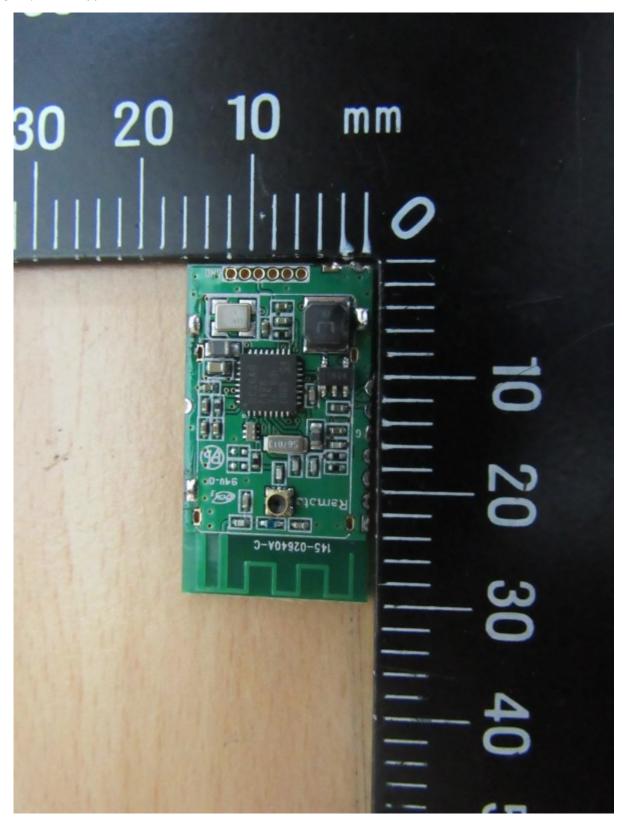



Registration number: W6D21703-16763-C-1

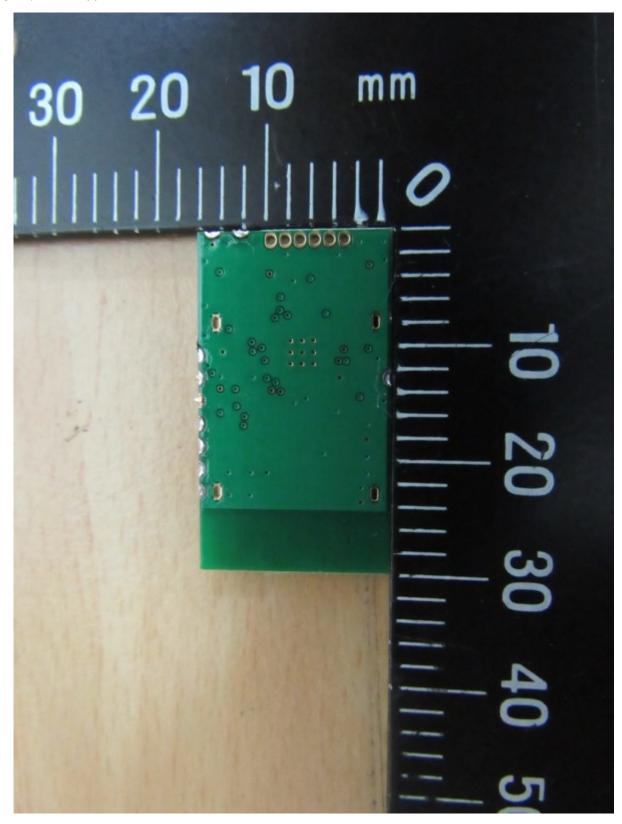



Registration number: W6D21703-16763-C-1 FCC ID: 2ALHR001


## Set Up Photo of Radiated Emission







Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

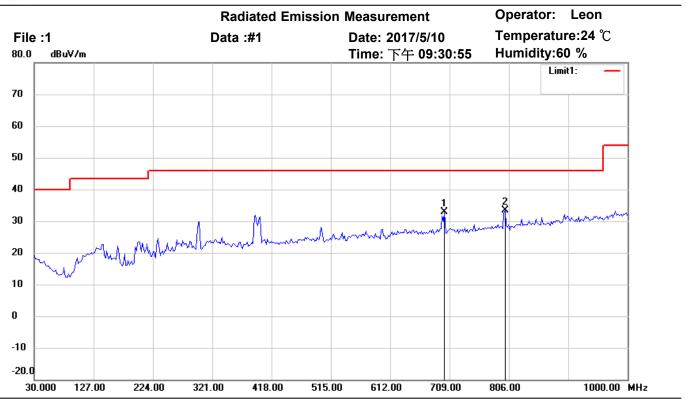

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Horizontal

Test Mode: TX 2402MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	700.6413	33.23	peak	-0.32	32.91	46.00	100	245	-13.09	
*	799.7796	31.98	peak	1.39	33.37	46.00	100	190	-12.63	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

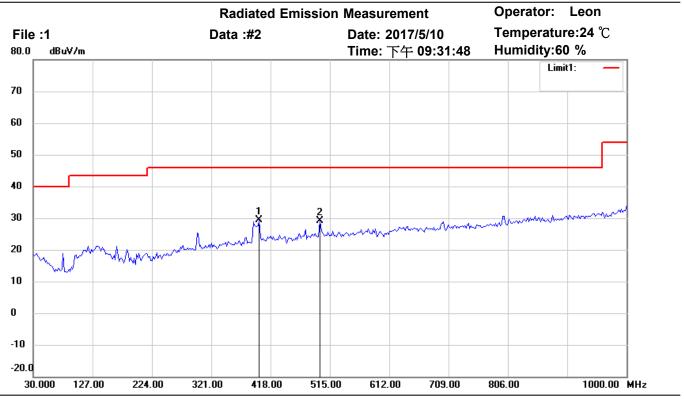

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Vertical

Test Mode: TX 2402MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	399.3387	32.84	peak	-3.57	29.27	46.00	100	185	-16.73	
	498.4770	31.91	peak	-2.79	29.12	46.00	100	70	-16.88	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

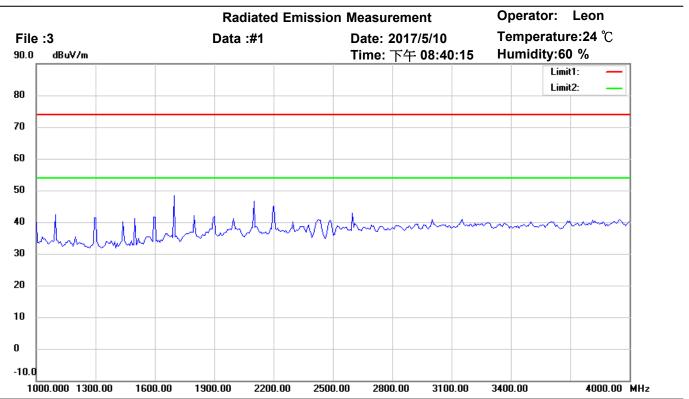

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 2402MHz

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

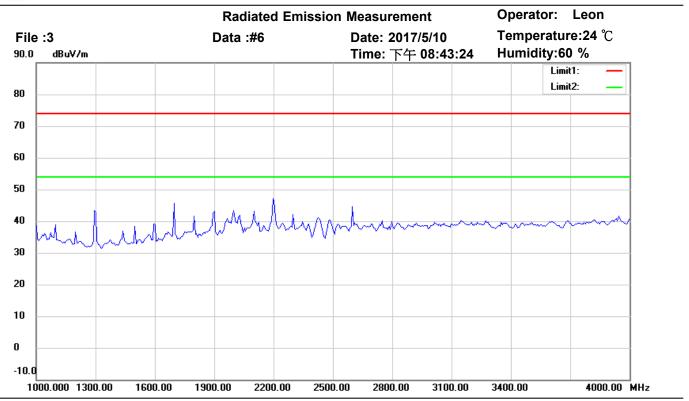

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 2402MHz

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

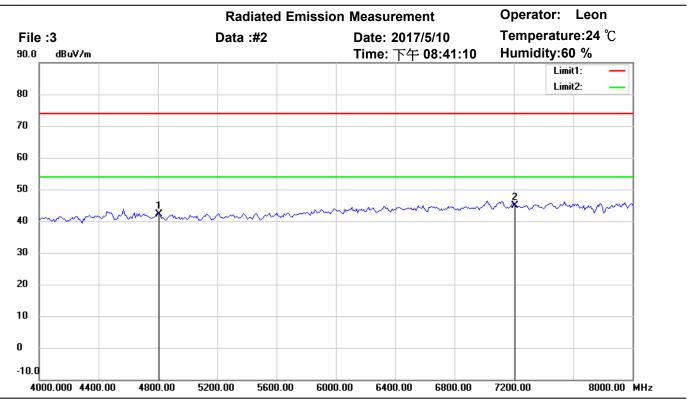

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 2402MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4804.000	42.09	peak	0.08	42.17	74.00	150	235	-31.83	
*	7206.000	39.92	peak	5.06	44.98	74.00	150	160	-29.02	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

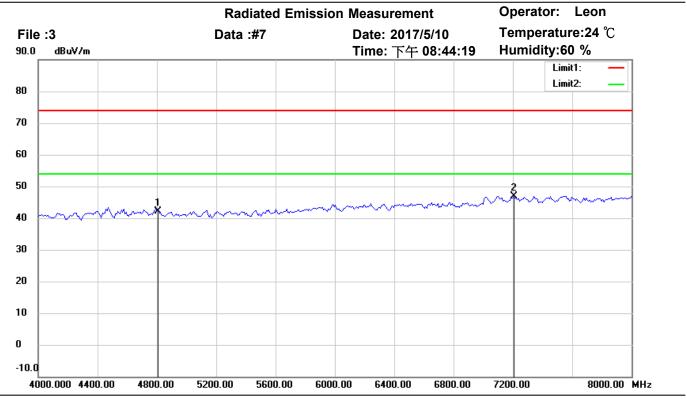

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 2402MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4804.000	41.99	peak	0.08	42.07	74.00	150	225	-31.93	
*	7206.000	41.81	peak	5.06	46.87	74.00	150	185	-27.13	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

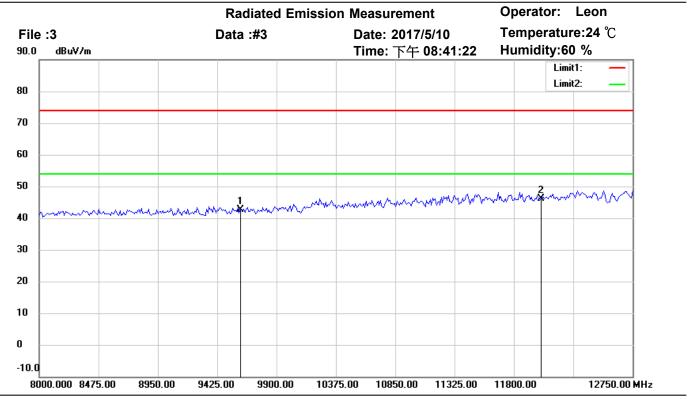

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 2402MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9608.000	34.66	peak	7.96	42.62	74.00	150	245	-31.38	
*	12010.000	33.15	peak	12.90	46.05	74.00	150	170	-27.95	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

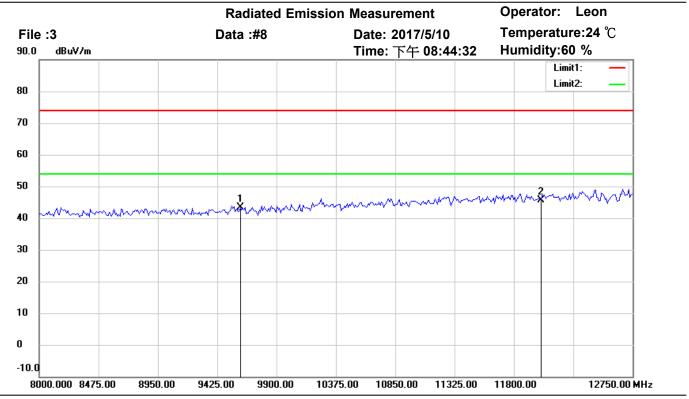

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 2402MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9608.000	35.33	peak	7.96	43.29	74.00	150	35	-30.71	
*	12010.000	32.73	peak	12.90	45.63	74.00	150	240	-28.37	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

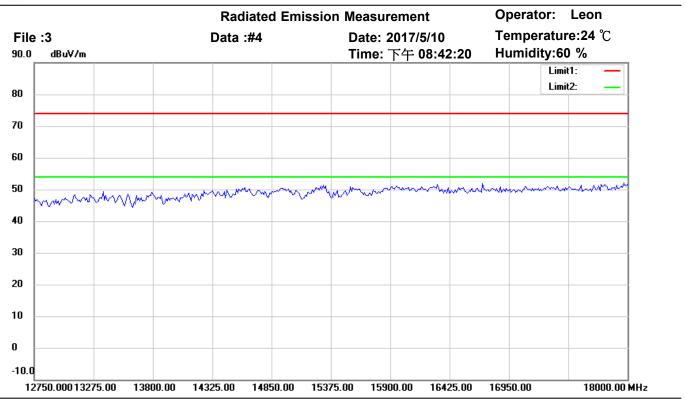

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 2402MHz

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

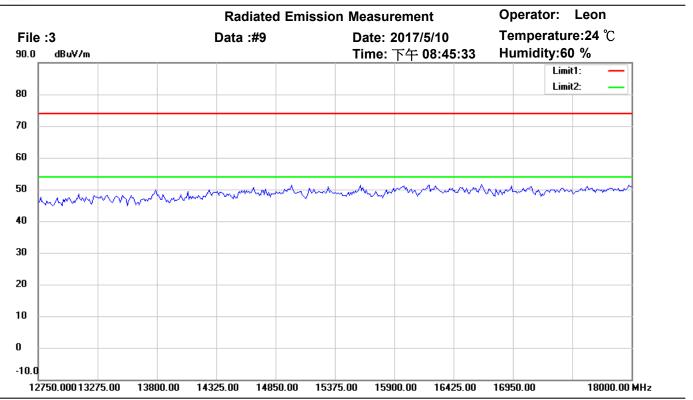

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 2402MHz

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

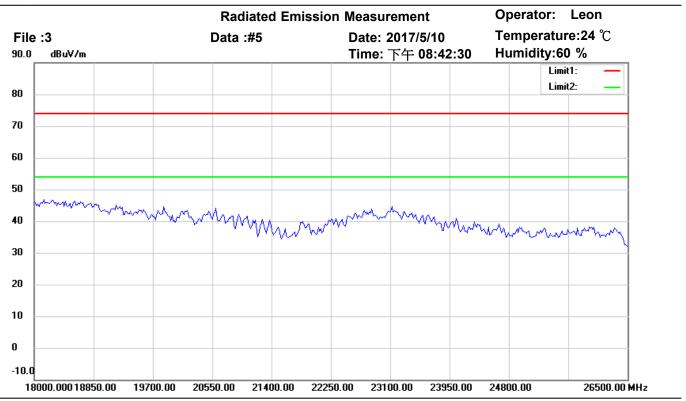

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 2402MHz

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

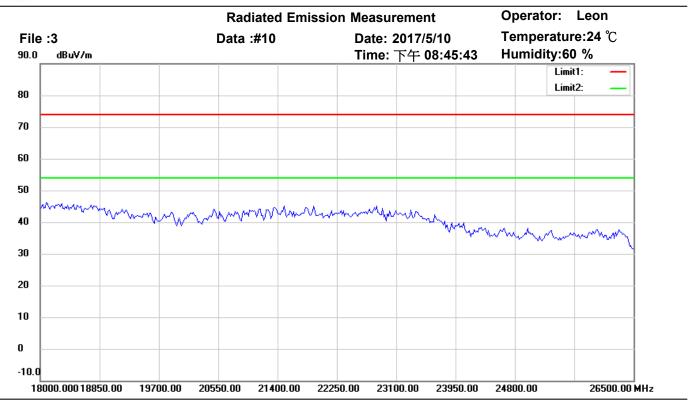

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 2402MHz

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

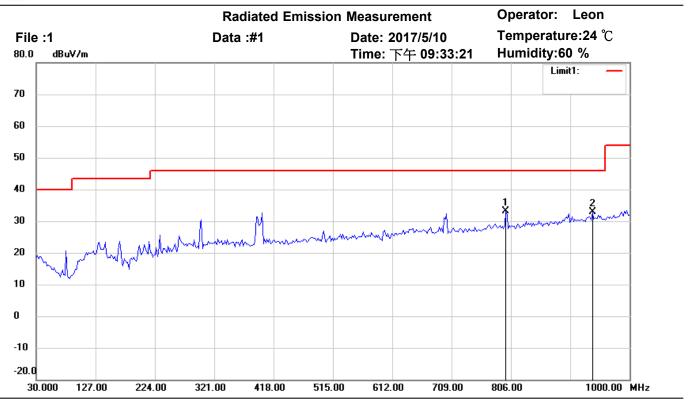

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Horizontal

Test Mode: TX 2440MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	797.8357	31.90	peak	1.35	33.25	46.00	100	55	-12.75	
	939.7395	28.61	peak	4.31	32.92	46.00	100	210	-13.08	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

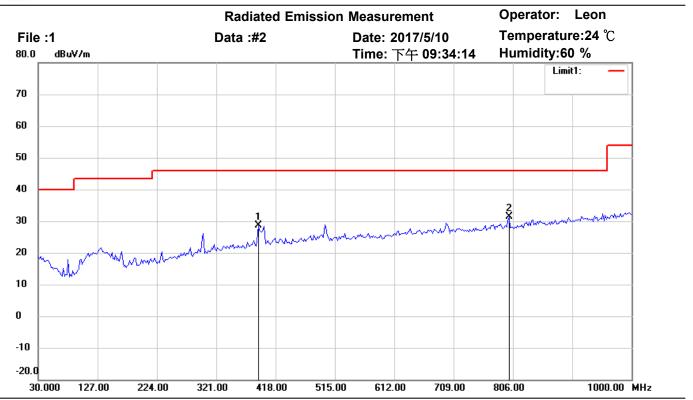

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Vertical

Test Mode: TX 2440MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	389.6192	32.29	peak	-3.78	28.51	46.00	100	175	-17.49	
*	799.7796	29.91	peak	1.39	31.30	46.00	100	90	-14.70	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

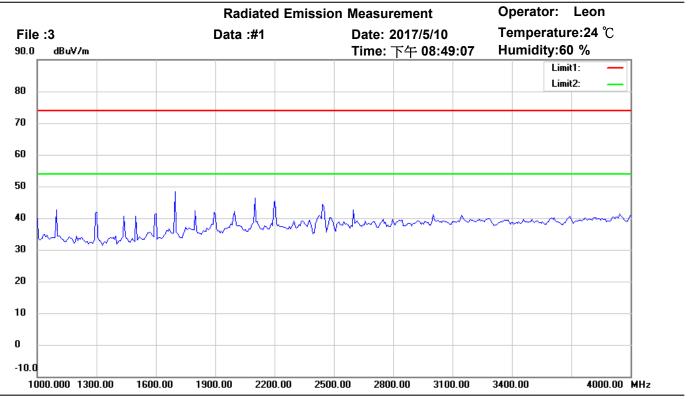

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 2440MHz

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

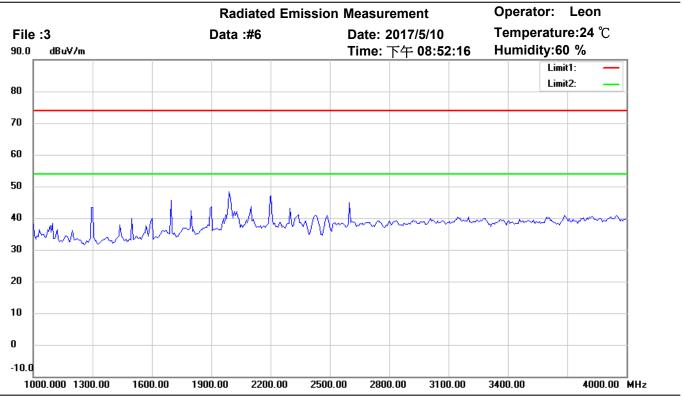

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 2440MHz

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

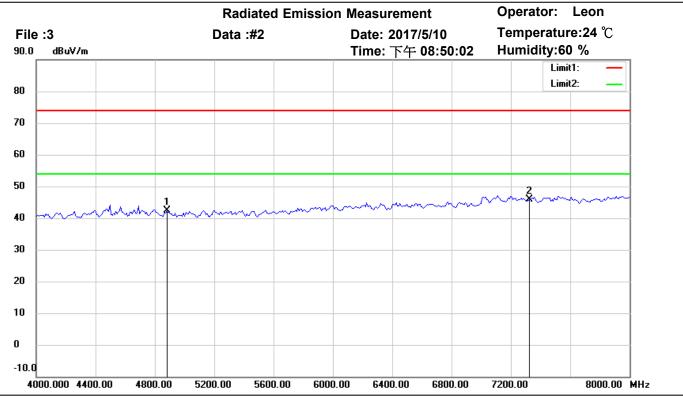

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 2440MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4880.000	42.13	peak	0.17	42.30	74.00	150	175	-31.70	
*	7320.000	40.75	peak	5.10	45.85	74.00	150	235	-28.15	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

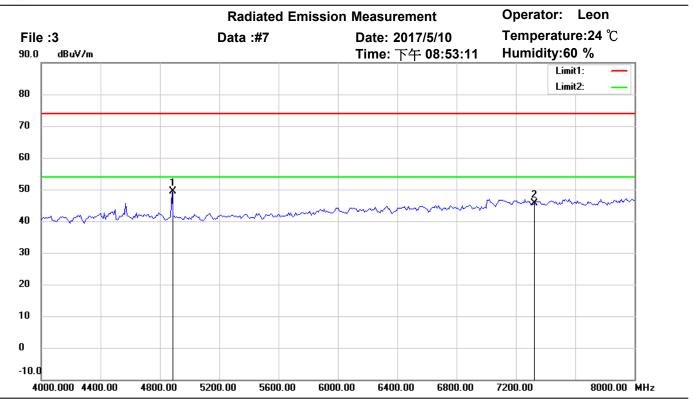

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 2440MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	4881.764	49.30	peak	0.17	49.47	74.00	150	280	-24.53	
	7320.000	40.41	peak	5.10	45.51	74.00	150	195	-28.49	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

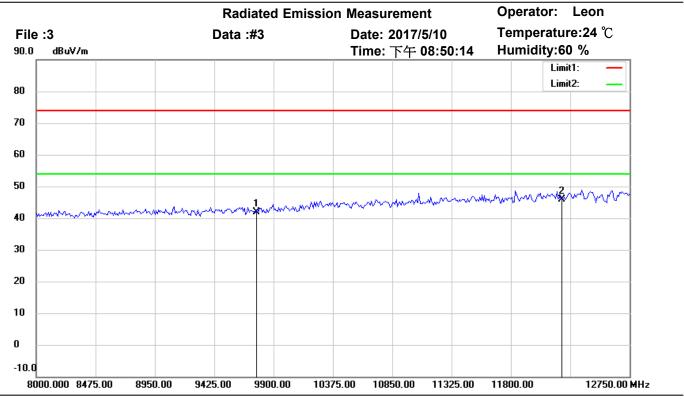

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 2440MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9760.000	33.79	peak	8.21	42.00	74.00	150	275	-32.00	
*	12200.000	31.83	peak	14.09	45.92	74.00	150	190	-28.08	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

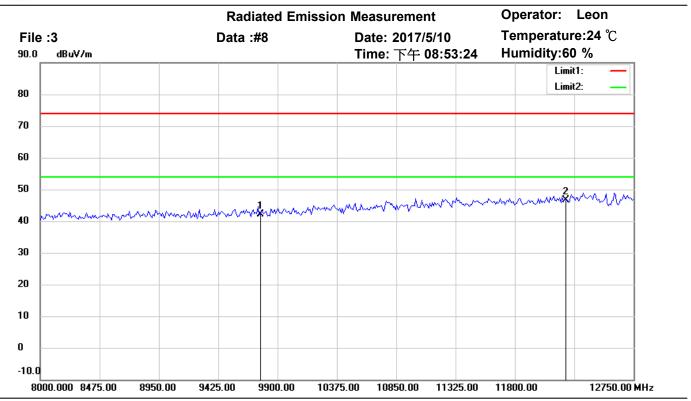

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 2440MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9760.000	33.97	peak	8.21	42.18	74.00	150	220	-31.82	
*	12200.000	32.53	peak	14.09	46.62	74.00	150	175	-27.38	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

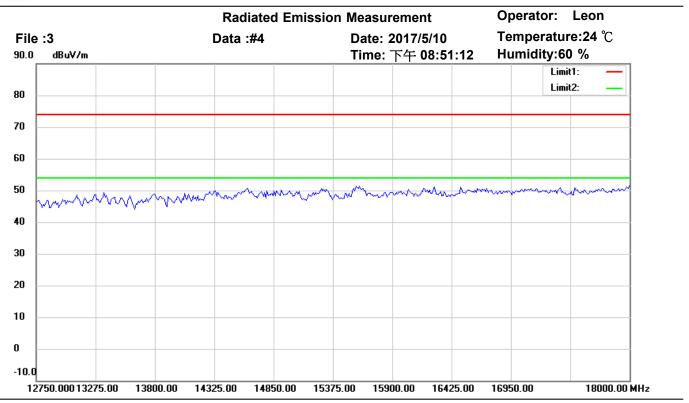

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 2440MHz

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

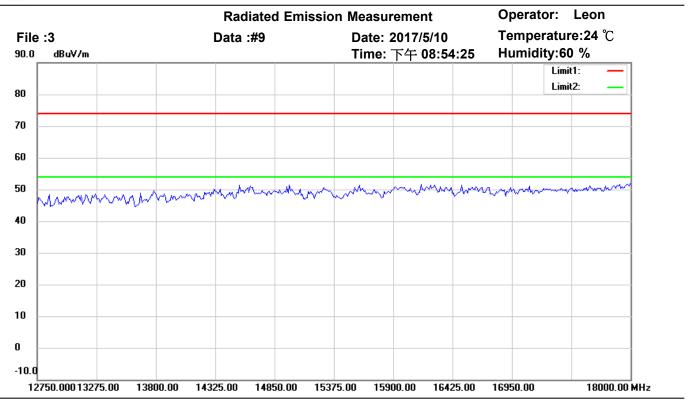

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 2440MHz

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

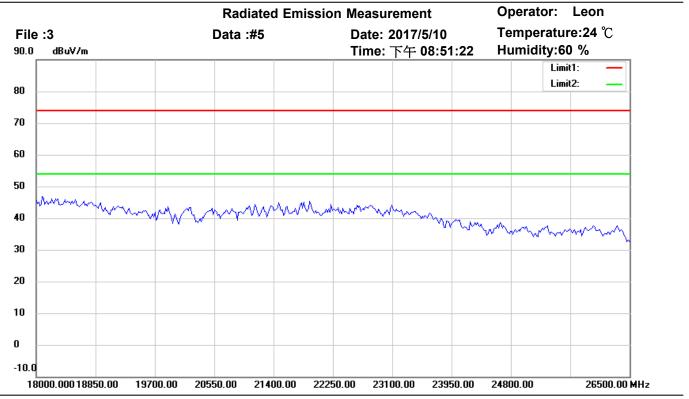

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 2440MHz

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

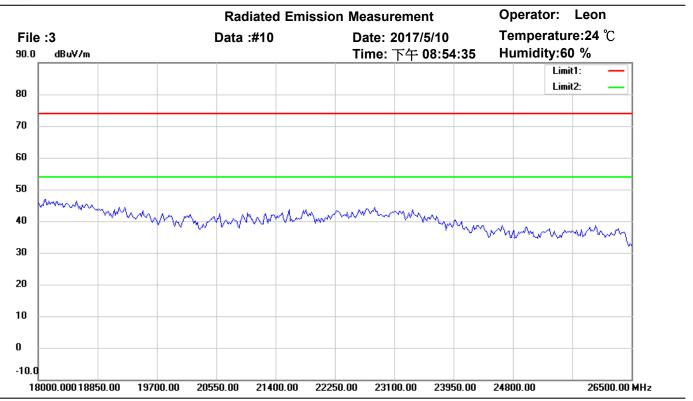

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 2440MHz

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

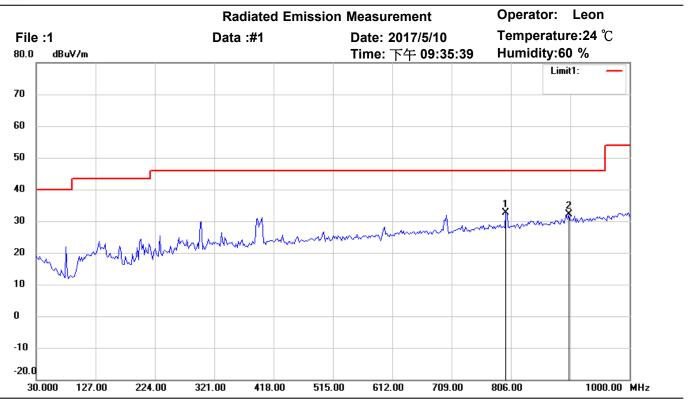

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Horizontal

Test Mode: TX 2480MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	797.8357	31.16	peak	1.35	32.51	46.00	100	155	-13.49	
	900.8617	28.82	peak	3.24	32.06	46.00	100	240	-13.94	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

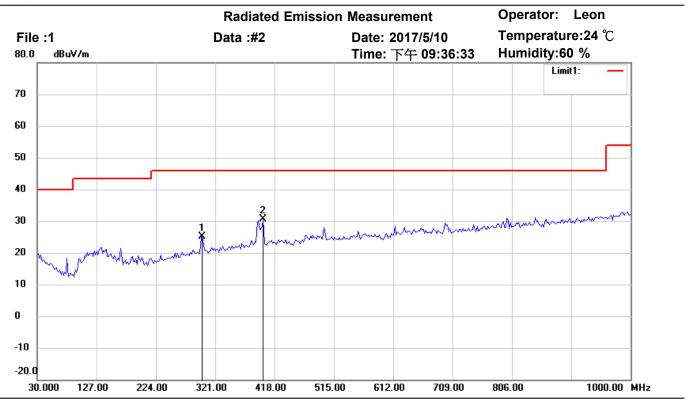

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Vertical

Test Mode: TX 2480MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	300.2004	31.16	peak	-5.94	25.22	46.00	100	230	-20.78	
*	399.3387	34.29	peak	-3.57	30.72	46.00	100	185	-15.28	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

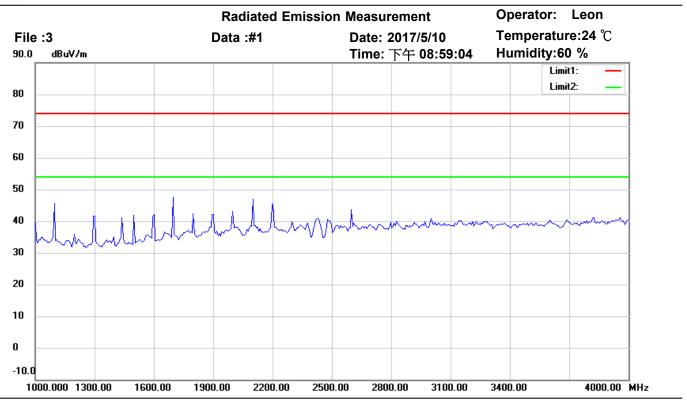

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 2480MHz

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

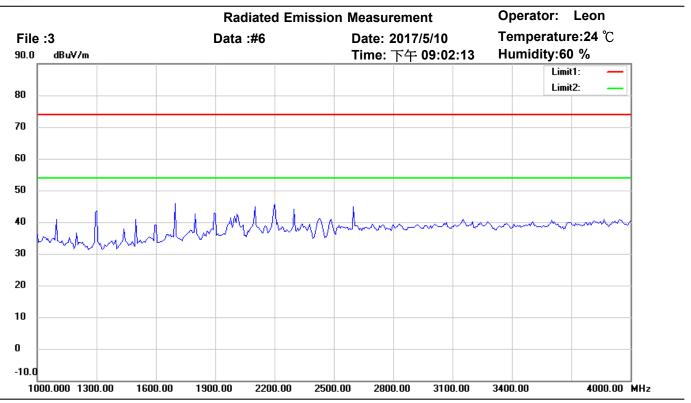

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 2480MHz

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

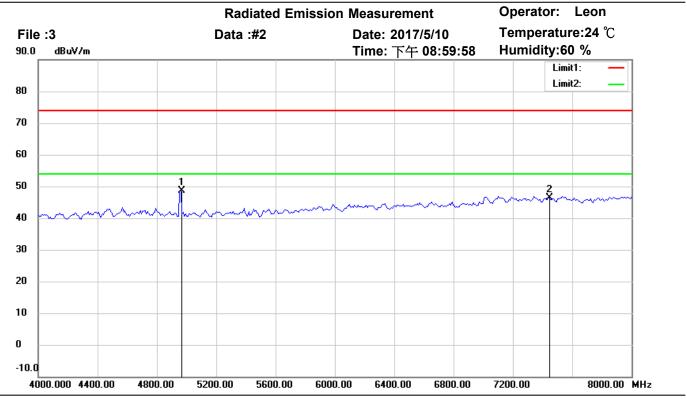

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 2480MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	4961.924	48.45	peak	0.21	48.66	74.00	150	170	-25.34	
	7440.000	41.18	peak	5.18	46.36	74.00	150	235	-27.64	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

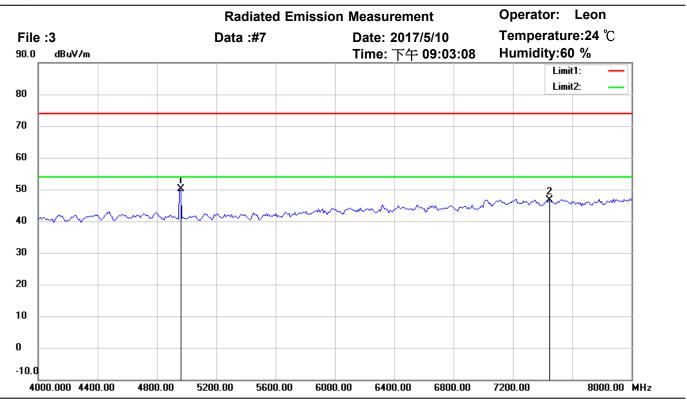

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 2480MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	4953.908	50.01	peak	0.21	50.22	74.00	150	290	-23.78	
	7440.000	41.39	peak	5.18	46.57	74.00	150	175	-27.43	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

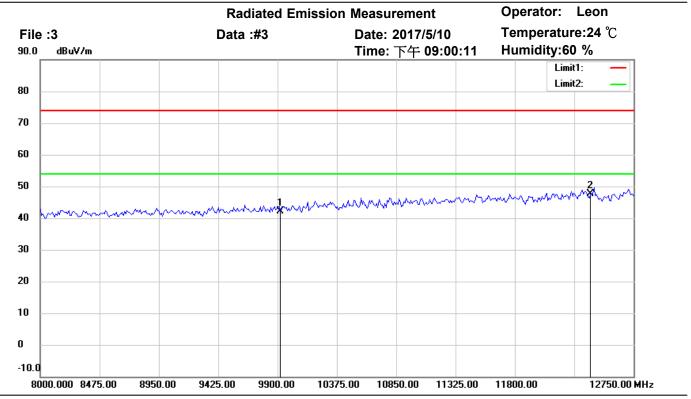

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 2480MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9920.000	33.52	peak	8.55	42.07	74.00	150	95	-31.93	
*	12400.000	33.10	peak	14.41	47.51	74.00	150	240	-26.49	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

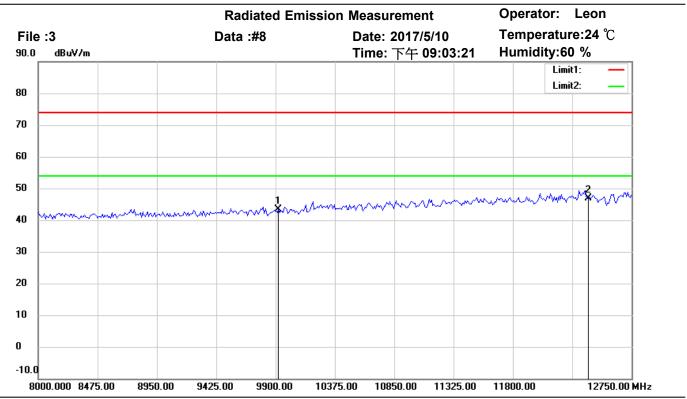

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 2480MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9920.000	34.88	peak	8.55	43.43	74.00	150	210	-30.57	
*	12400.000	32.47	peak	14.41	46.88	74.00	150	155	-27.12	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

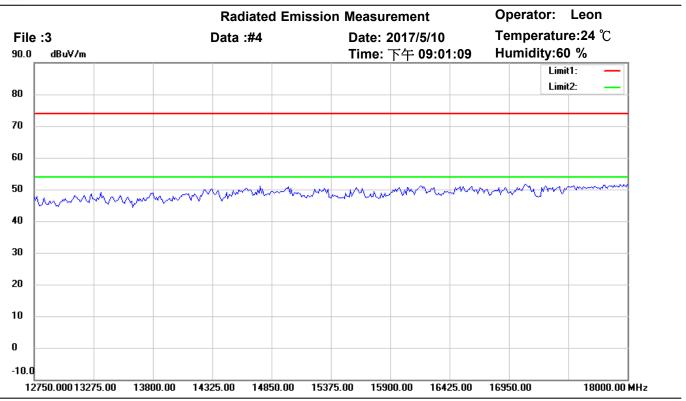

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 2480MHz

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

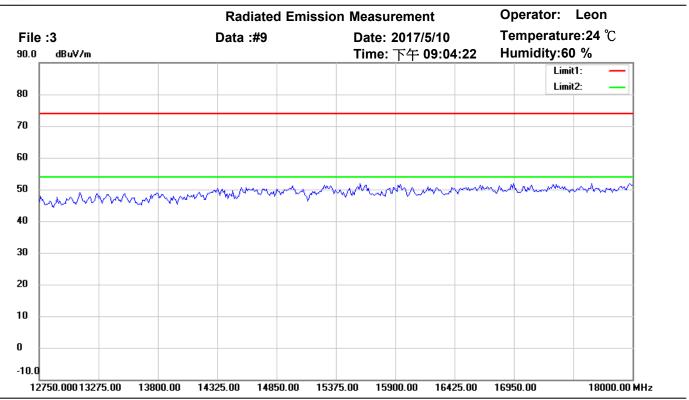

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 2480MHz

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

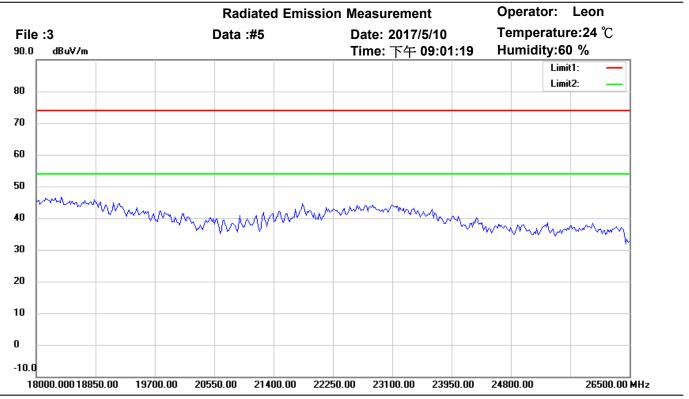

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 2480MHz

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

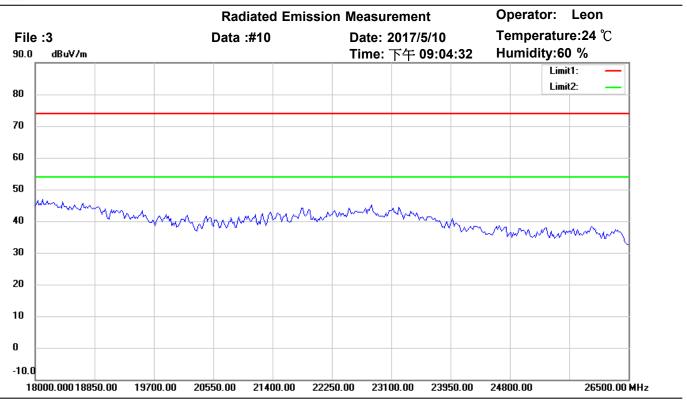

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 2480MHz

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

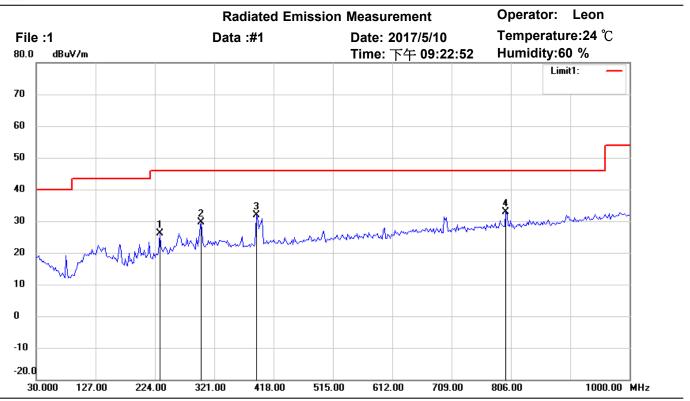

Site: Chamber


Condition: FCC\_part 15 RE-Class B\_30-1000MHz Polarization: Horizontal

Test Mode: RX 2402MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	232.1642	34.98	peak	-8.77	26.21	46.00	100	145	-19.79	
	300.2004	35.68	peak	-5.94	29.74	46.00	100	220	-16.26	
	389.6192	35.65	peak	-3.78	31.87	46.00	100	60	-14.13	
*	797.8357	31.45	peak	1.35	32.80	46.00	100	95	-13.20	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

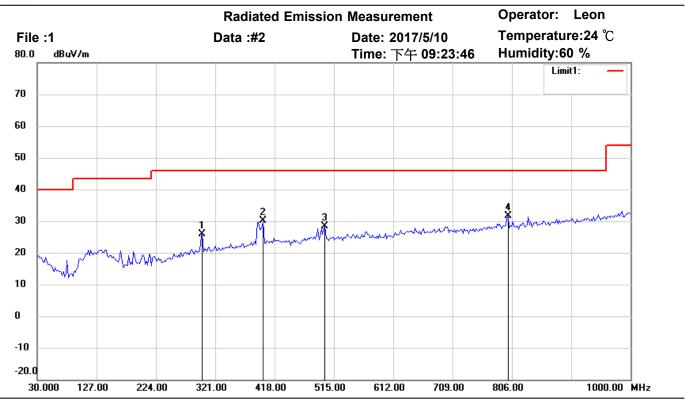

Site: Chamber


Condition: FCC\_part 15 RE-Class B\_30-1000MHz Polarization: Vertical

Test Mode: RX 2402MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	300.2004	31.90	peak	-5.94	25.96	46.00	100	60	-20.04	
	399.3387	33.71	peak	-3.57	30.14	46.00	100	185	-15.86	
	500.4208	31.14	peak	-2.77	28.37	46.00	100	135	-17.63	
*	799.7796	30.33	peak	1.39	31.72	46.00	100	220	-14.28	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

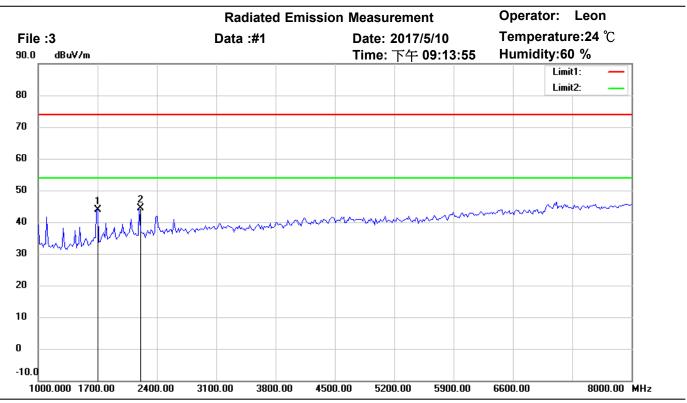

Site: Chamber


Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: RX 2402MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1687.375	51.47	peak	-7.48	43.99	74.00	150	35	-30.01	
*	2192.385	49.75	peak	-5.34	44.41	74.00	150	60	-29.59	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

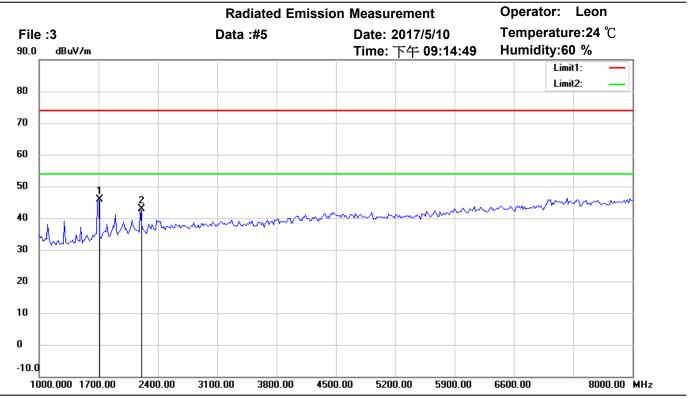

Site: Chamber


Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Vertical

Test Mode: RX 2402MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1701.403	53.22	peak	-7.38	45.84	74.00	150	220	-28.16	
	2192.385	48.26	peak	-5.34	42.92	74.00	150	175	-31.08	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

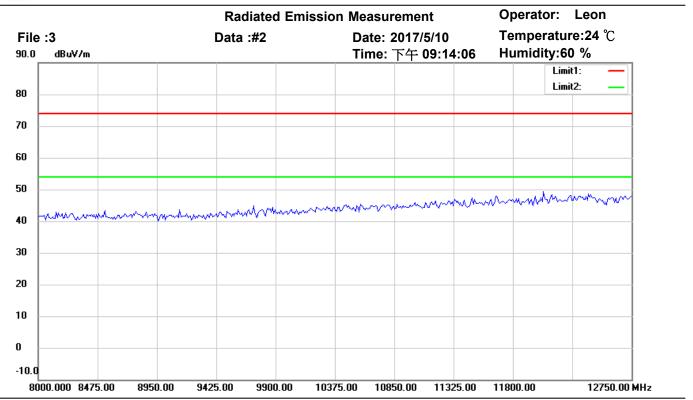

Site: Chamber


Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: RX 2402MHz

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

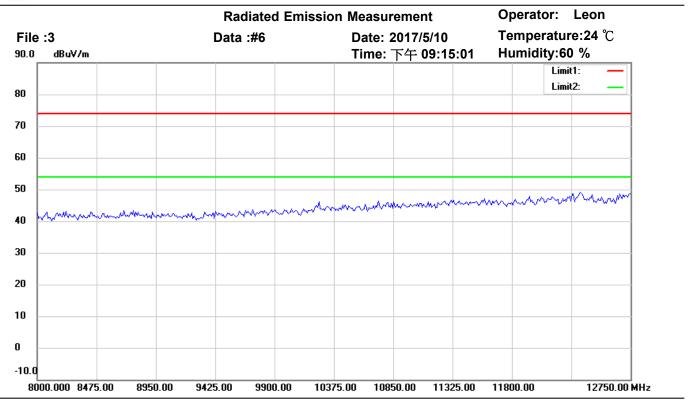

Site: Chamber


Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Vertical

Test Mode: RX 2402MHz

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

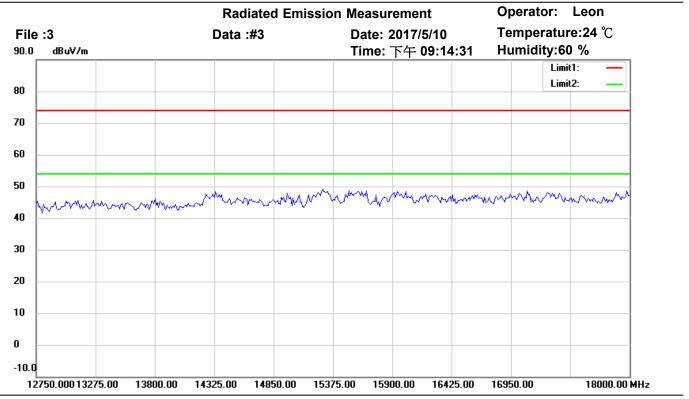

Site: Chamber


Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: RX 2402MHz

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

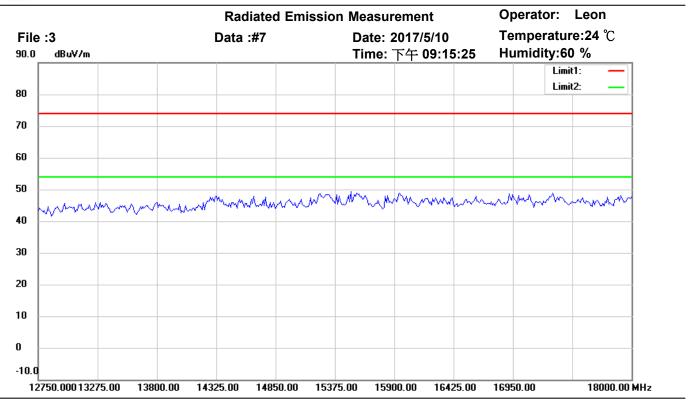

Site: Chamber


Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Vertical

Test Mode: RX 2402MHz

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

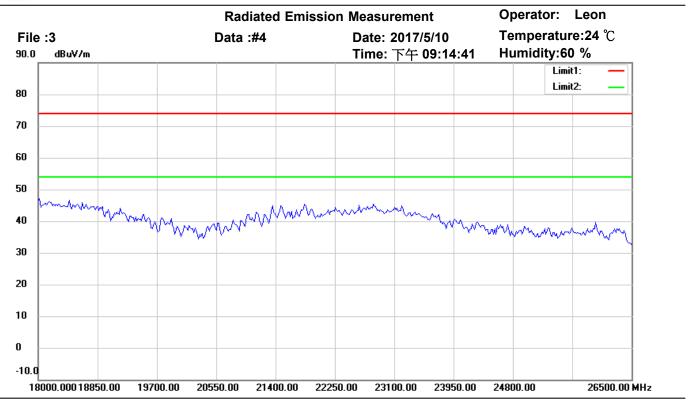

Site: Chamber


Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: RX 2402MHz

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

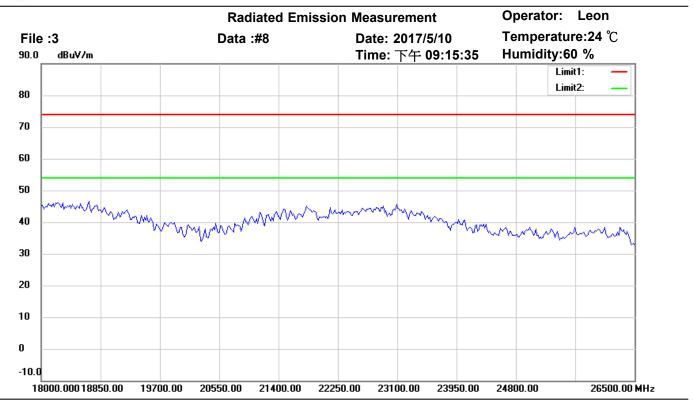

Site: Chamber


Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Vertical

Test Mode: RX 2402MHz

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

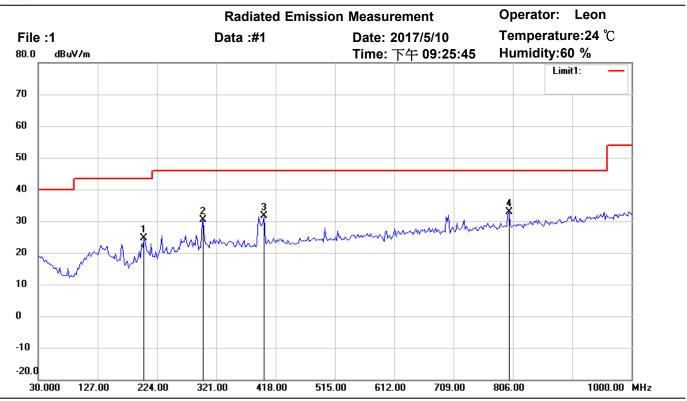

Site: Chamber


Condition: FCC\_part 15 RE-Class B\_30-1000MHz Polarization: Horizontal

Test Mode: RX 2440MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	203.0060	35.40	peak	-10.66	24.74	43.50	100	270	-18.76	
	300.2004	36.33	peak	-5.94	30.39	46.00	100	80	-15.61	
	399.3387	35.09	peak	-3.57	31.52	46.00	100	245	-14.48	
*	799.7795	31.41	peak	1.39	32.80	46.00	100	150	-13.20	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

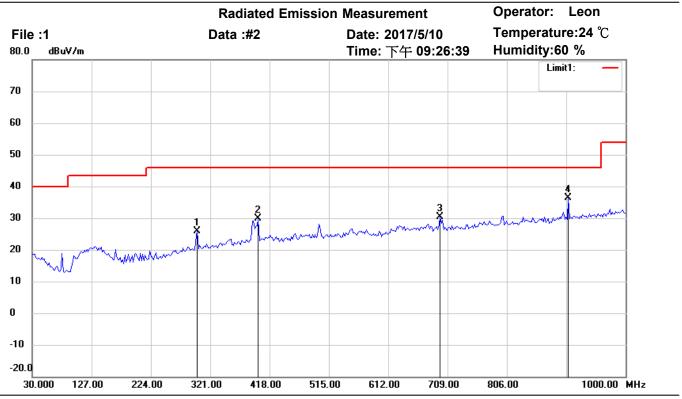

Site: Chamber


Condition: FCC\_part 15 RE-Class B\_30-1000MHz Polarization: Vertical

Test Mode: RX 2440MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	300.2004	31.70	peak	-5.94	25.76	46.00	100	110	-20.24	
	399.3387	33.48	peak	-3.57	29.91	46.00	100	80	-16.09	
	696.7535	30.65	peak	-0.32	30.33	46.00	100	175	-15.67	
*	906.6934	33.05	peak	3.40	36.45	46.00	100	25	-9.55	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

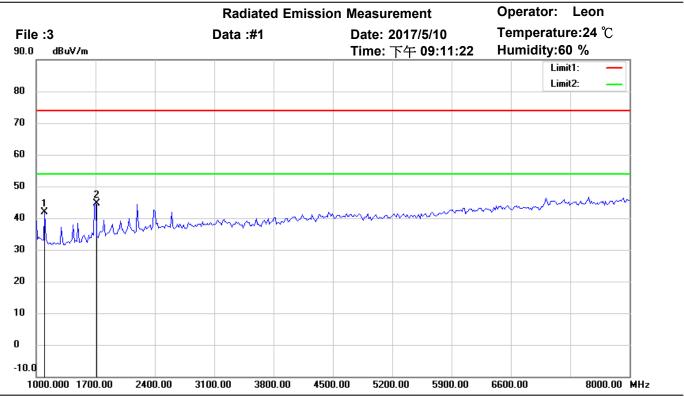

Site: Chamber


Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: RX 2440MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1098.196	50.61	peak	-8.79	41.82	74.00	150	95	-32.18	
*	1701.403	52.09	peak	-7.38	44.71	74.00	150	240	-29.29	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

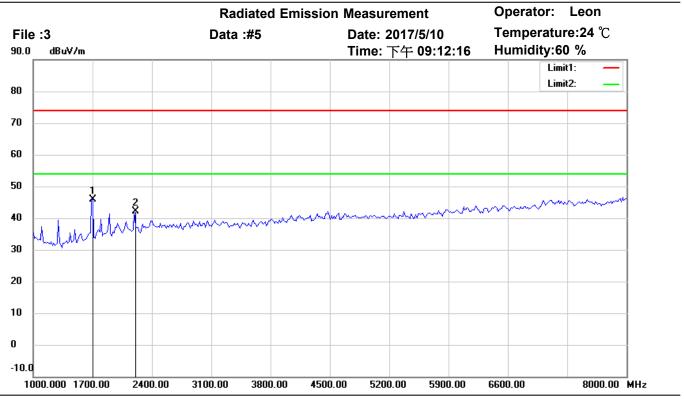

Site: Chamber


Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Vertical

Test Mode: RX 2440MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1687.375	53.37	peak	-7.48	45.89	74.00	150	185	-28.11	
	2192.385	47.42	peak	-5.34	42.08	74.00	105	220	-31.92	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

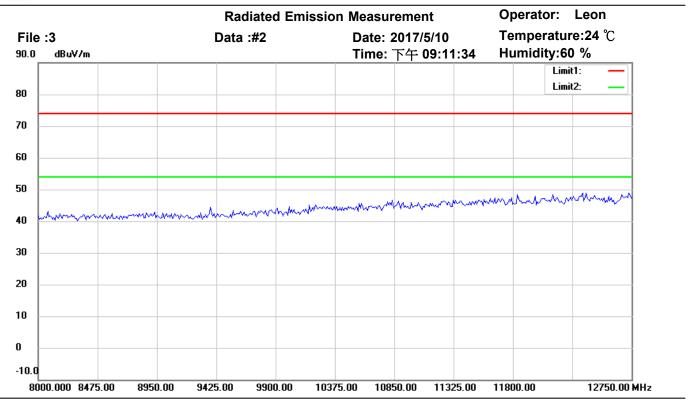

Site: Chamber


Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: RX 2440MHz

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

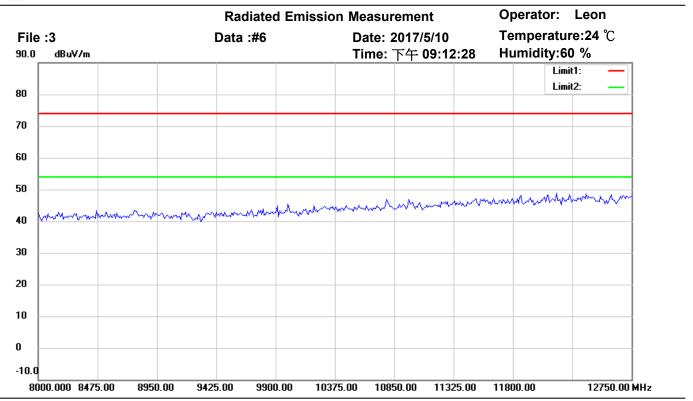

Site: Chamber


Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Vertical

Test Mode: RX 2440MHz

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	l
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

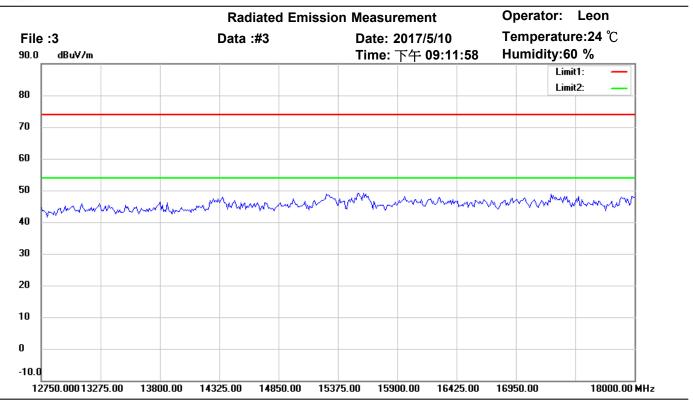

Site: Chamber


Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: RX 2440MHz

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	l
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

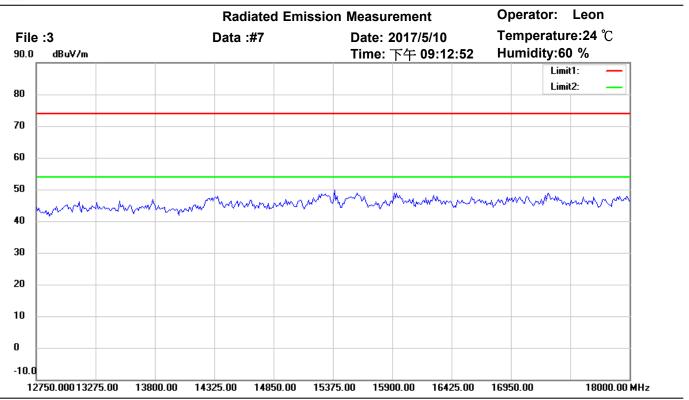

Site: Chamber


Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Vertical

Test Mode: RX 2440MHz

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

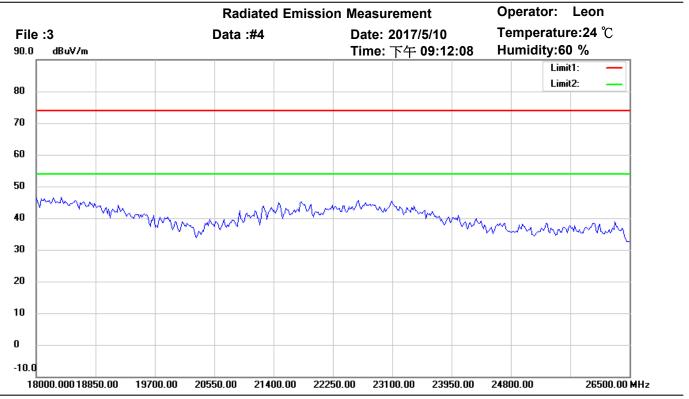

Site: Chamber


Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: RX 2440MHz

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

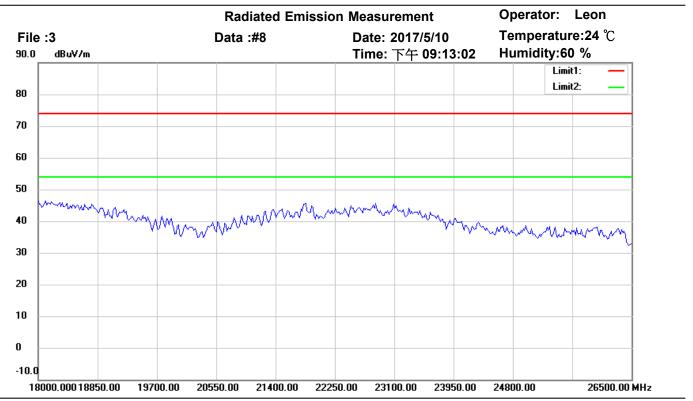

Site: Chamber


Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Vertical

Test Mode: RX 2440MHz

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

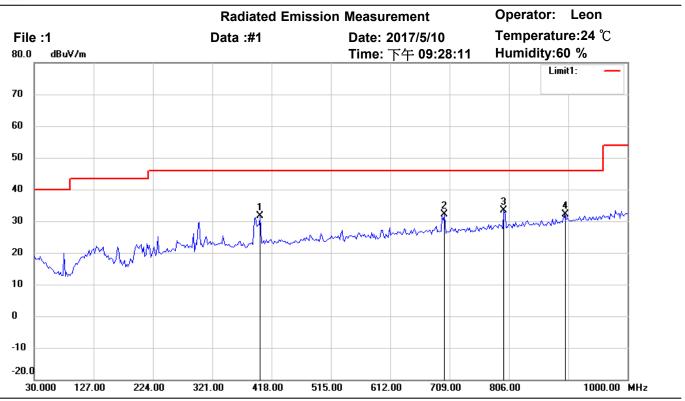

Site: Chamber


Condition: FCC\_part 15 RE-Class B\_30-1000MHz Polarization: Horizontal

Test Mode: RX 2480MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	399.3387	35.19	peak	-3.57	31.62	46.00	100	25	-14.38	
	700.6413	32.39	peak	-0.32	32.07	46.00	100	175	-13.93	
*	797.8357	32.04	peak	1.35	33.39	46.00	100	90	-12.61	
	896.9740	28.89	peak	3.17	32.06	46.00	100	230	-13.94	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

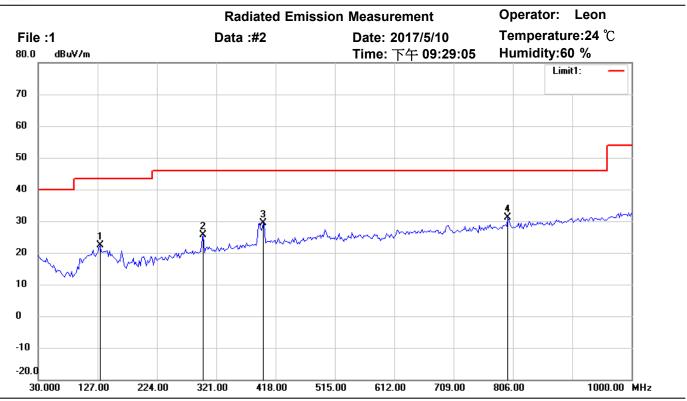

Site: Chamber


Condition: FCC\_part 15 RE-Class B\_30-1000MHz Polarization: Vertical

Test Mode: RX 2480MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	131.0822	29.14	peak	-6.67	22.47	43.50	100	90	-21.03	
	300.2004	31.64	peak	-5.94	25.70	46.00	100	185	-20.30	
	397.3948	33.01	peak	-3.61	29.40	46.00	100	175	-16.60	
*	797.8357	29.88	peak	1.35	31.23	46.00	100	210	-14.77	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

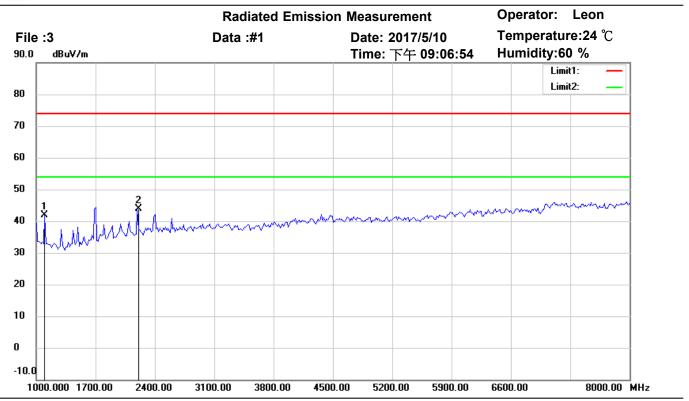

Site: Chamber


Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: RX 2480MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1098.196	50.61	peak	-8.79	41.82	74.00	150	225	-32.18	
*	2192.385	49.25	peak	-5.34	43.91	74.00	150	190	-30.09	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

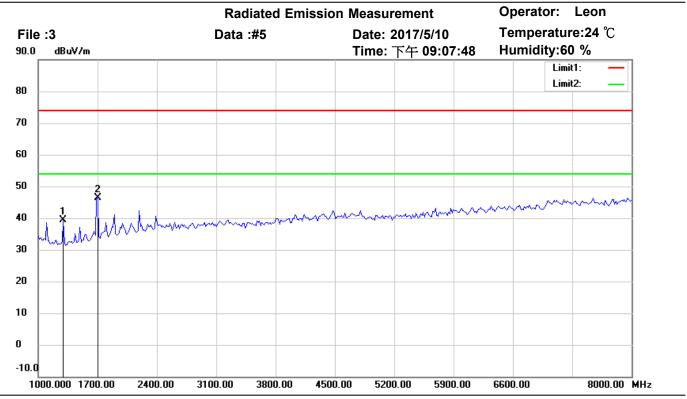

Site: Chamber


Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Vertical

Test Mode: RX 2480MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1294.589	48.48	peak	-9.20	39.28	74.00	150	95	-34.72	
*	1687.375	53.84	peak	-7.48	46.36	74.00	150	135	-27.64	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

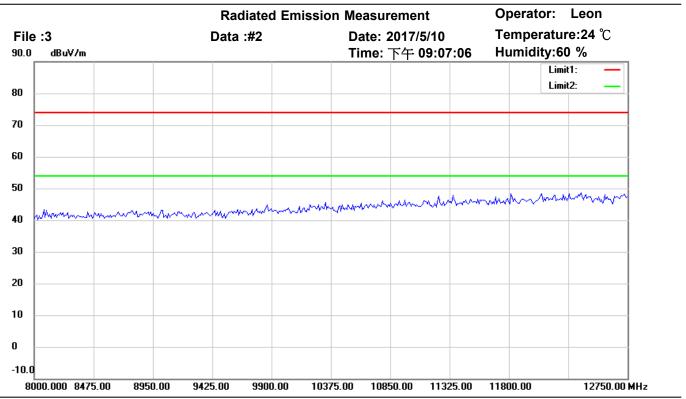

Site: Chamber


Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: RX 2480MHz

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

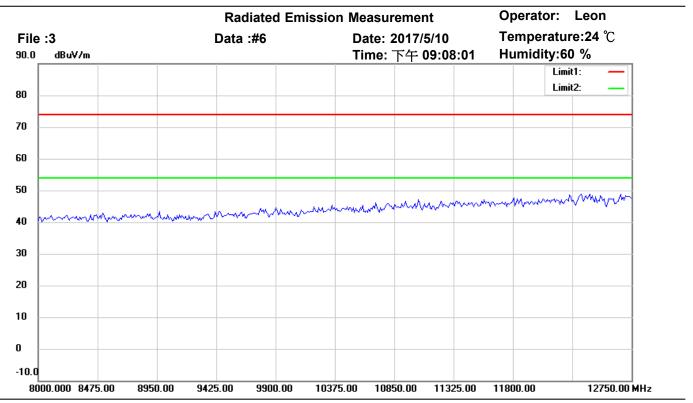

Site: Chamber


Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Vertical

Test Mode: RX 2480MHz

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	l
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

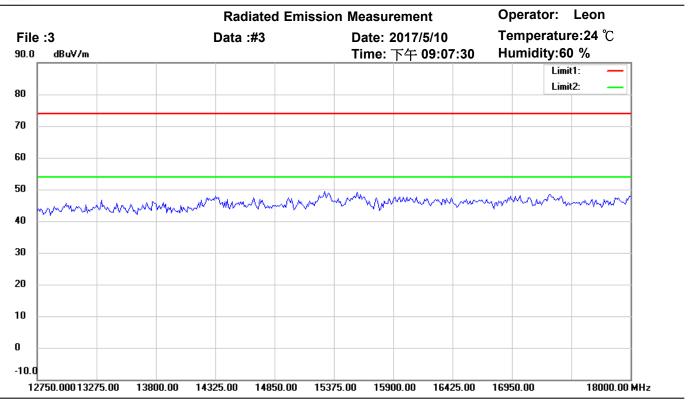

Site: Chamber


Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: RX 2480MHz

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

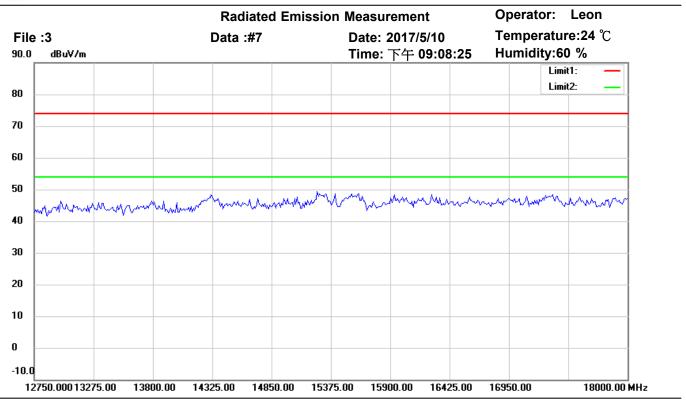

Site: Chamber


Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Vertical

Test Mode: RX 2480MHz

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

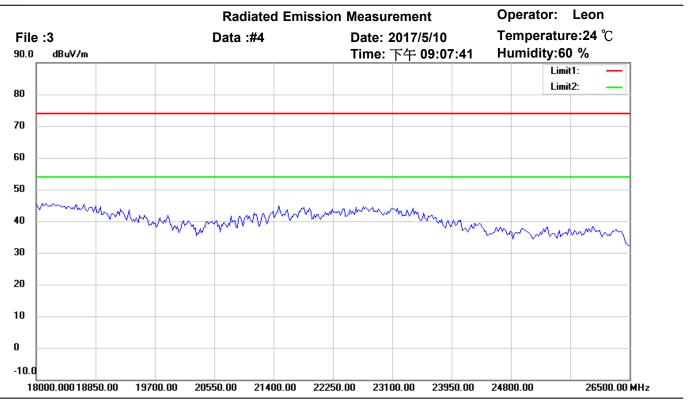

Site: Chamber


Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: RX 2480MHz

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

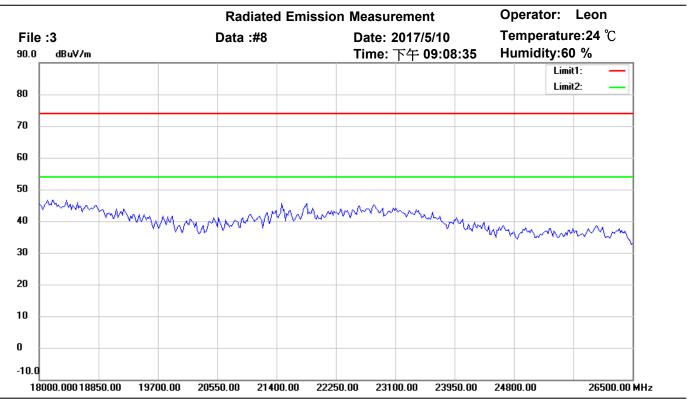

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Vertical

Test Mode: RX 2480MHz

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	