

承 認 書

APPROVAL SHEET

CUSTOMER: 捷易訊科技股份有限公司

CUSTOMER MODEL NO.:

JOYMAX MODEL NO.: IML-611XIPXX-113

DESCRIPTION: 2.4GHz Right Angle Antenna

REV.: 00

DATE.: 2005/01/17

Customer Approval

Joymax Approval



士誼科技事業股份有限公司
JOYMAX ELECTRONICS CO., LTD.

Tel: +886-3-4335698 Fax: +886-3-4335798. 4335799
E-Mail: service@joymax.com.tw

桃園縣中壢市中壢工業區東園二路5號
No.5, Dong Yuan Rd.2, Zhongli Industrial Park,
Zhongli City, Tao Yuan, Taiwan, R.O.C.
[Http://www.joymax.com.tw](http://www.joymax.com.tw)

Index.

Item	Page
1. Antenna specification	1-1
2. Drawing	2-1
3. Test report	
• Electrical test	3-1
4. Connector	
• I-PEX	4-1
5. Cable specification	
• ϕ 1.37	5-1
6. Packing	
• PE袋	
• 紙箱	

Modification History:

Rev.	Date	Content
00	2005/01/17	


Model. IML-611XIPXX-113

Antenna Specifications

- Description
 - 1) This is a right angle antenna. It's useful for the ISM Band.

• Electrical Properties	1) Frequency Range	2.4~2.4835 GHz
	2) Impedance	50 ohm nominal
	3) V.S.W.R.	≤ 2.0
	4) Return Loss	$\leq -10\text{dB}$
	5) Gain	1.5dBi
	6) Polarization	Vertical
	7) Electrical Wavelength	$1/4 \lambda$ Dipole

• Mechanical Properties	1) Cable	$\phi 1.37$
	2) Connector	IPEX
	3) Antenna Cover	Polycarbonate
	4) Antenna Base	Polycarbonate

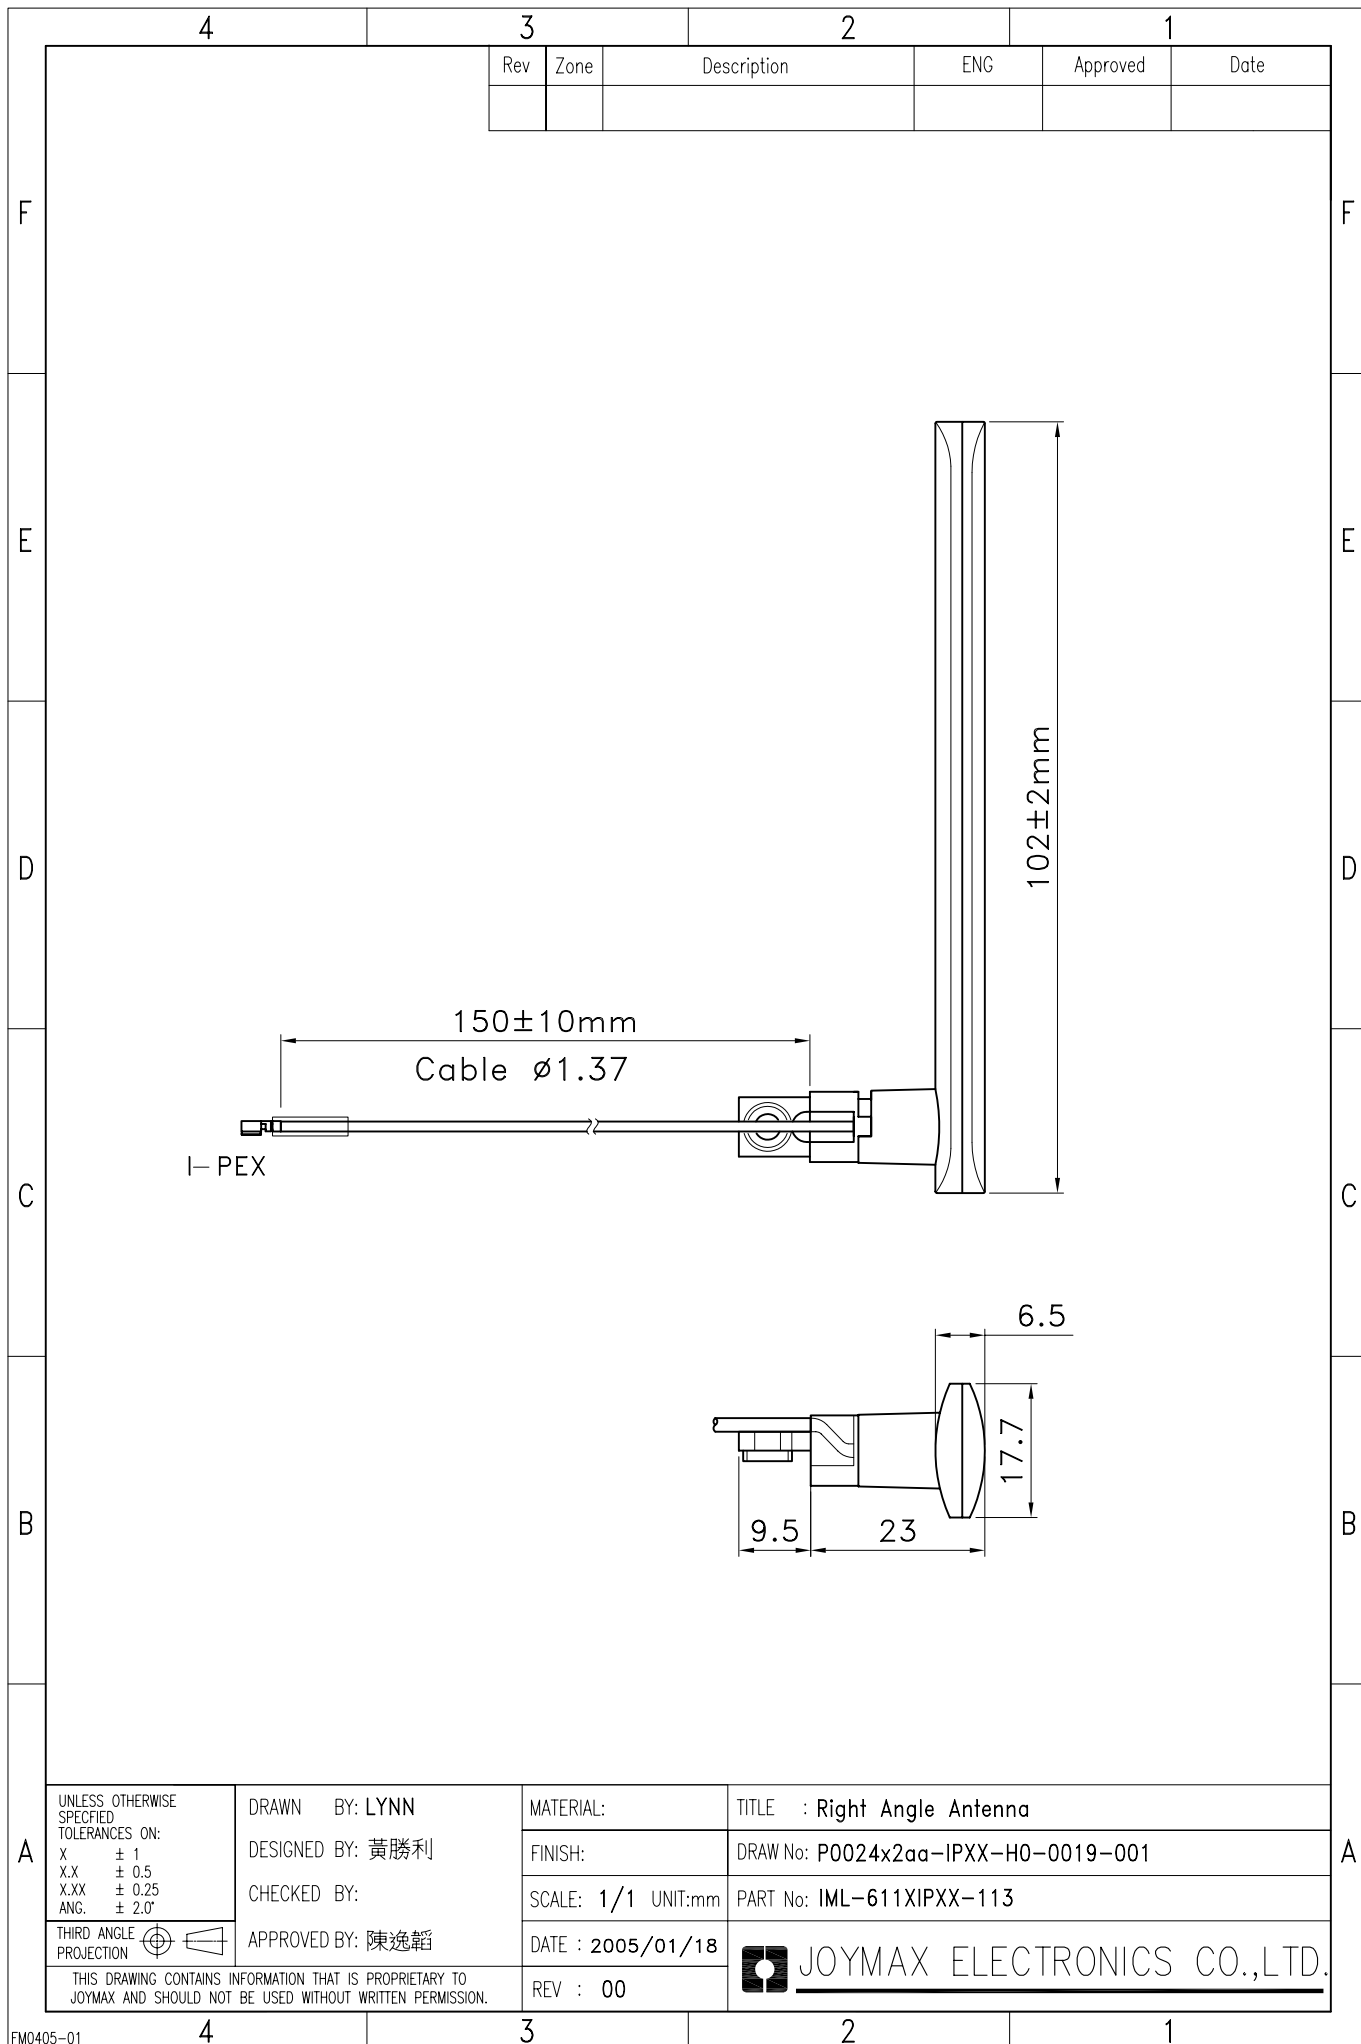


Model. IML-611XIPXX-113

Test Report


Electrical Test

Return loss

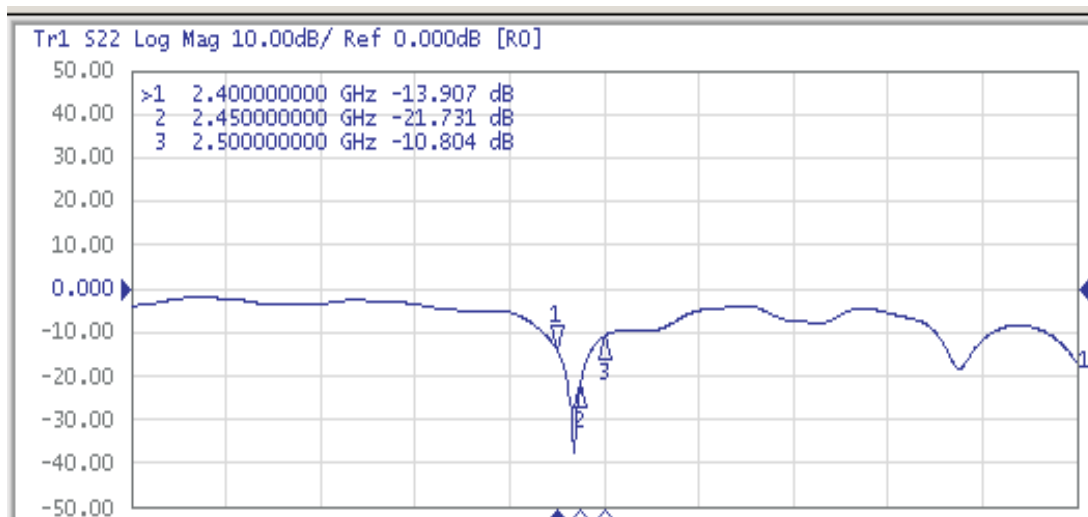

V.S.W.R.



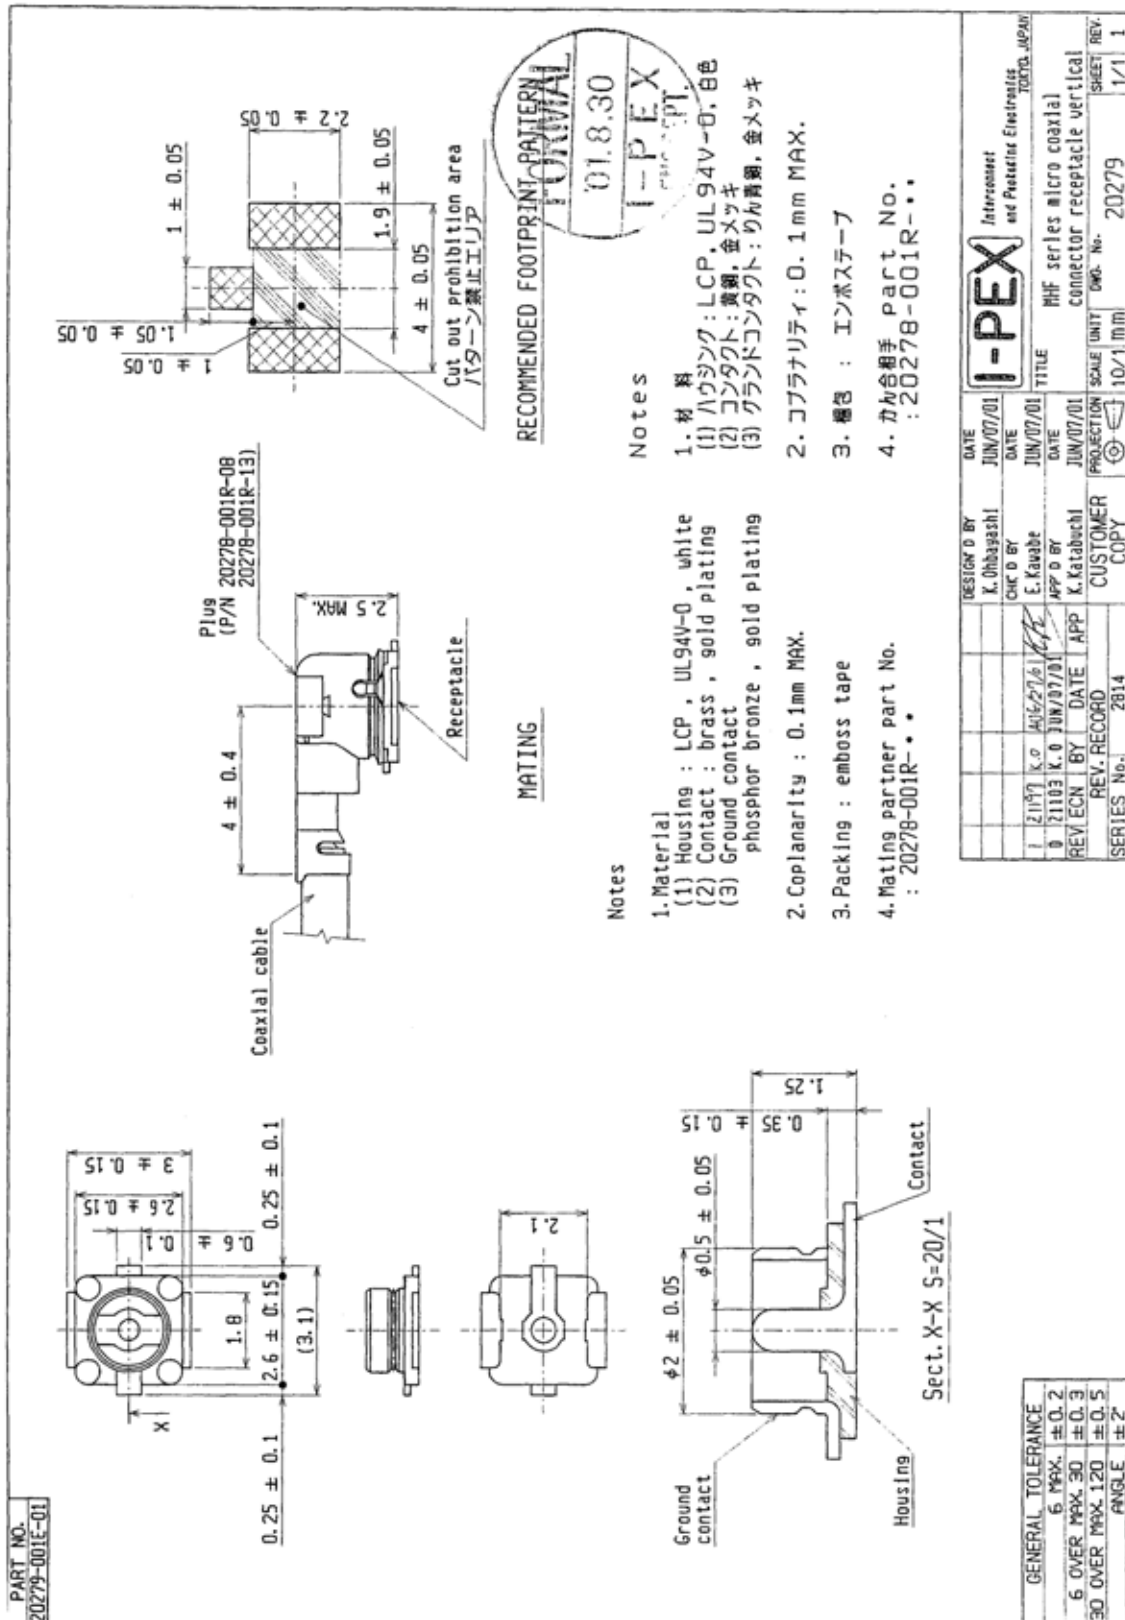

Rev				Change				By				Date			