CZ-190T

藍 芽 耳 機
Bluetooth headset

使用手冊

User's Manual

Welcome

Thank you for purchasing the Bluetooth headset CZ-190T, we hope the headset will bring you a whole new delightful feeling of wireless technology.

Contents

BEFORE YOU BEGIN

Take a moment to familiarize yourself with your CZ-190T Headset.

Charger Jack

Call Button

Volume Down
Volume UP

Ear Hook

Loud Speaker

LED Display

Microphone

(1) CHARGE YOUR HEADSET'S BATTERY

Charge your headset's battery for about 2 hours:

1 Plug the charger into the charger jack on top of the headset. The red indicator light turns on when the battery is charging. It may take up to 1 minute for the light to turn on. When the headset's battery is fully charged (about 2 hours), the red indicator turns off.

2 Unplug the charger from the headset.

Note: Headset is not functional while charging.

(2) START BLUETOOTH FEATURE ON YOUR HANDSET

Your phone's Bluetooth feature is off by default. To use your headset, turn on the Bluetooth feature in your phone.

For most phones:

1 Select **Menu** > **Additional Function** > **Bluetooth**.
2 Select **SWITCH ON**.

Bluetooth feature remains on until you turn it off.

Note: These steps are for most phones. For your phone, see your phone's user's guide.

(3) PAIR YOUR HEADSET
STEP ONE - PUT HEADSET IN PAIRING NODE

Before your can use your headset, you must pair (link) it with your phone.

Call Button

LED Indicator

1 With the headset power off, press and hold the Call button for 3 to 5 seconds until the blue indicator light turns on and flash. (The light will flash when you first press the Call button.)

2 If the indicator light is remain steadily lit, turn off the headset and repeat the step 1.

Note: *To turn off headset, see "Turning On and Off" page.*

(3) PAIR YOUR HEADSET (CONTINUED)
STEP TWO - SET THE PHONE TO LOOK FOR YOUR HEADSET

For most phones:

1 On your phone, select **Menu** > **Additional Function** > **Bluetooth**>
Look for Devices.
The phone lists all Bluetooth devices it finds.

2 Select **CZ-190T**.

3 Select **OK** or **Yes** to pair (link) the device.

4 Enter the passkey: **0000**

5 Select **OK**.

When your headset is successfully paired with your phone, the blue and red indicators will flash simultaneously.

Note: These steps are for most phones. For your phone, see your phone's user's guide.

(4)TEST AND USE

Your phone and headset are now paired and ready to make and receive calls. To confirm they are operating properly, make a call:

1 Place the headset over your ear. See "Wearing the Headset"
2 On your phone, dial the number you want to call and Press the **Send** Key.
3 If your phone and headset are successfully paired, you hear ringing on the headset.

After you have successfully paired your phone and headset, you do not need to repeat these initial setup steps each time you use the headset.
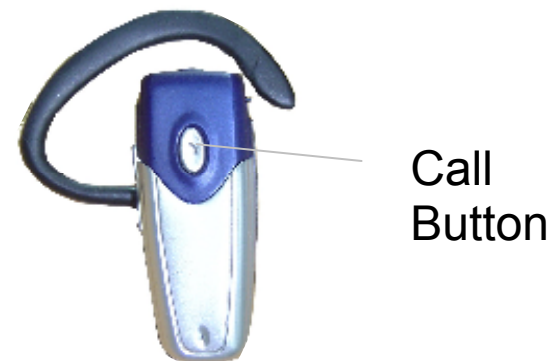
USING YOUR CZ-190T

Features and Functions Guide

TURNING ON AND OFF

To turn your headset on, press and hold the Call button for 3 to 5 seconds until the blue indicator light flashes. Then, release the button.

To turn your headset off, press and hold the Call button for 3 to 5 seconds and then turns off.

To conserve battery power, turn off your headset when you don't plan to use it for a while.

Call Button

WEARING THE HEADSET

1   Open the earhook.

2   Loop the earhook over your ear. Adjust the hook to suit your ear for comfortable.

3   Press the headset to your ear.

MAKING CALLS

Function	Action
Make a voice dial call	Tap the Call button and Speak the name after the tone
Reject a call	Press and hold the two buttons of volume until you hear a beep, then release them.
End a call	Tap the Call button.
Receive a call	Tap the Call button.

Note: Your CZ-190T supports both Handsfree and Headset Profiles. Accessing call functions depends upon which profile your phone supports. See your phone's user's guide for more information.

MAKING CALLS (*CONTINUED*)

Function	Action
Redial last call	Press and hold the two button of volume and then release them at the same time.
Transfer a call from the phone to the headset	Press and hold the two button of volume and then release them at the same time.
Transfer a call from the headset to the phone	Press and hold the two button of volume and then release them at the same time.

INDICATOR LIGHTS

The indicator light provides information about your headset status.

With the Charger Plugged In

Headset Indicator	Headset Status
Red Led On (light steady)	charging in progress
Red Led Off	charging complete

With No Charger Plugged In

Headset Indicator	Headset Status
Off	Power off
Red, blue light flash alternately	Pairing mode (pairing first time)

Headset Indicator	Headset Status
Blue light flash	Pairing successful/power on and paired
Red, blue light flash simultaneously	Connected (on a call)
Blue light Slow pulse	Standby (not on call)

AUDIO TONES

The audio tones provide information about your headset status.

Audio Tone	Headset Status
Music playing when pressing volume button	Adjusting Volume
High tone repeated every 5 sec	Low battery(last for 30 seconds)
Ring tone/Music Playing	Incoming call
Ring tone/Music Playing	Make a phone call
Single high tone	Pairing confirmation
Single low tone	Voice activation
Single high tone	End call

Audio Tone	Headset Status
Single high tone	Power on
Single low tone followed by So-Me-Do notes	Power off

TROUBLESHOOTING

Make sure the blue light on your headset is flashing when your phone is searching for devices.

Make sure your phone is on and the Bluetooth feature is turned on in your phone. If the Bluetooth feature has been turned off or was turned on only temporarily, you may need to restart the Bluetooth feature.

To reset your stumbled Bluetooth headset, charge the headset for a short period.

Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

IMPORTANT NOTE:

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. End users must follow the specific operating instructions for satisfying RF exposure compliance.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

IC statement

Operation is subject to the following two conditions:

1) This device may not cause interference and
2) This device must accept any interference, including interference that
   may cause undesired operation of the device.

IMPORTANT NOTE:
IC Radiation Exposure Statement:
This equipment complies with IC radiation exposure limits set forth for an uncontrolled environment. End users must follow the specific operating instructions for satisfying RF exposure compliance.
This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

This symbol on product means the product should not be disposed with household waste. Please do not dispose of mobile telephones or electric accessories, such as chargers or headsets, with your household waste.