



# FCC PART 18 MEASUREMENT AND TEST REPORT

For

# Jiangxi Elegant Lighting Co., Ltd.

No.731 Xihou street, Guixi City, Jiangxi, China

FCC ID: VGZGYC03E26

Report Type: Original Report		Product Type: CFL
Test Engineer:	Cookies Bu	Coopies. Bu
Report Number:	RSZ0910657	
Report Date:	2009-06-10	
	Lisa Zhu	9-1
Reviewed By:	EMC Engineer	
Prepared By:	Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008	

**Note**: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP\*, NIST, or any agency of the Federal Government. \* This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "\*" (Rev.2)

# **TABLE OF CONTENTS**

GENERAL INFORMATION	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	
Objective	
TEST METHODOLOGY	
TEST FACILITY	3
SYSTEM TEST CONFIGURATION	5
JUSTIFICATION	5
EQUIPMENT MODIFICATIONS	
EXTERNAL I/O CABLE	5
CONFIGURATION OF TEST SETUP	5
BLOCK DIAGRAM OF TEST SETUP	
CONDUCTED EMISSIONS	6
Measurement Uncertainty	6
EUT SETUP	6
EMI Test Receiver Setup	7
TEST EQUIPMENT LIST AND DETAILS	7
Test Procedure	
TEST RESULTS SUMMARY	7
Test Data	
PLOT(S) OF TEST DATA	8
DECLARATION LETTER	11

### **GENERAL INFORMATION**

#### **Product Description for Equipment under Test (EUT)**

The *Jiangxi Elegant Lighting Co., Ltd.*'s model: *GYC03-E26*, or the "EUT" as referred to in this report is a *CFL* which measures approximately: 3.8 cm L x 3.8 cm W x 9.8 cm H, rated input voltage: AC 120V/60Hz.

\*Note: The series products, model GYC03-E26, GYD03-E26, GYG03-E26, we select GYC03-E26 to test, and all these models have the same circuit diagram and PCB layout, only their model names and appearances have differences, which were explained in the attached Declaration Letter.

\* All measurement and test data in this report was gathered from production sample serial number: 0906612 (Assigned by BACL, Shenzhen). The EUT was received on 2009-01-06.

#### **Objective**

The following test report is prepared on behalf of *Jiangxi Elegant Lighting Co., Ltd.* in accordance with Part 2, Subpart J, and Part 18, Subparts A, B and C of the Federal Communication Commissions rules and regulations.

The objective of the manufacturer is to determine compliance with FCC Part 18 limits.

### **Related Submittal(s)/Grant(s)**

No related submittal(s).

#### **Test Methodology**

All measurements contained in this report were conducted with MP-5, FCC Methods of Measurements of Radio Noise Emissions from ISM Equipment, February 1986. All measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

# **Test Facility**

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located in the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 21, 2007. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



The current scope of accreditations can be found at <a href="http://ts.nist.gov/Standards/scopes/2007070.htm">http://ts.nist.gov/Standards/scopes/2007070.htm</a>

# **SYSTEM TEST CONFIGURATION**

# **Justification**

The system was configured for testing in a typical fashion (as normally used by a typical user).


# **Equipment Modifications**

No modifications were made to the unit tested.


# **External I/O Cable**

Cable Description	Length (m)	From Port	То
Unshielded Undetachable AC Cable	1.1	EUT	AC Mains

# **Configuration of Test Setup**



# **Block Diagram of Test Setup**

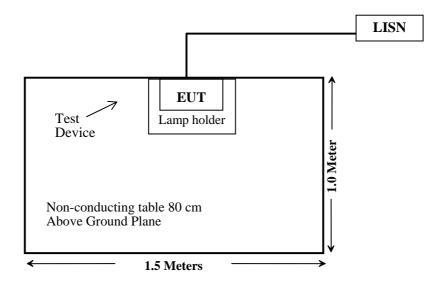


# **CONDUCTED EMISSIONS**

#### **Measurement Uncertainty**

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is  $\pm 2.4$  dB.

# **EUT Setup**

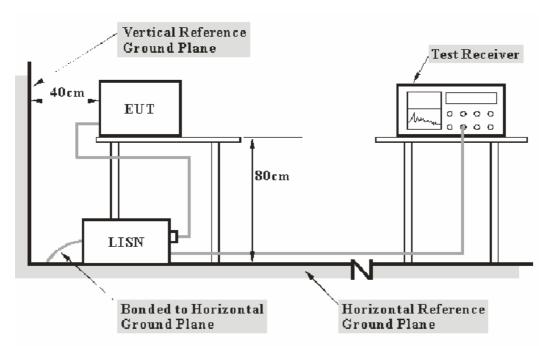

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with MP-5: 1986 measurement procedure. Specification used was with the FCC Part 18 limits.

The EUT was connected to a 120 VAC/ 60Hz power source.

# **EMI Test Receiver Setup**

The EMI test receiver was set to investigate the spectrum from 450 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

# **Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Com-Power	L.I.S.N.	LI-200	12005	N/A	N/A
Com-Power	L.I.S.N.	LI-200	12208	N/A	N/A
Rohde & Schwarz	EMI Test Receiver	ESCS30	830245/006	2008-03-25	2009-03-25
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	892107/021	2008-03-25	2009-03-25

<sup>\*</sup> Com-Power's LISN were used as the supporting equipment.

#### **Test Procedure**

During the conducted emission test, the EUT power cord was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak detection mode.

# **Test Results Summary**

According to the recorded data in following table, the EUT complied with the FCC Part 18, with the worst margin reading of:

10.70 dB at 0.510 MHz in the Line conductor mode.

<sup>\*</sup> Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

# **Test Data**

# **Environmental Conditions**

Temperature:	25 ° C
Relative Humidity:	56 %
<b>ATM Pressure:</b>	100.0 kPa


Testing was performed by Cookies Bu on 2009-02-12.


Test Mode: On

Line Conducted Emissions			FCC Part 18.307		
Frequency (MHz)	Amplitude (dBµV)	Detector (Peak)	Conductor (Line/Neutral)	Limit (dBµV)	Margin (dB)
0.510	37.30	Peak	Line	48.00	10.70
1.485	37.30	Peak	Line	48.00	10.70
1.415	37.10	Peak	Line	48.00	10.90
1.470	37.00	Peak	Neutral	48.00	11.00
0.463	36.80	Peak	Line	48.00	11.20
0.695	36.20	Peak	Line	48.00	11.80
1.390	35.60	Peak	Neutral	48.00	12.40
0.615	35.60	Peak	Neutral	48.00	12.40
0.600	35.60	Peak	Line	48.00	12.40
0.590	35.50	Peak	Neutral	48.00	12.50
1.010	34.80	Peak	Neutral	48.00	13.20
0.965	33.80	Peak	Neutral	48.00	14.20

# Plot(s) of Test Data

Plot(s) of Test Data is presented hereinafter as reference..

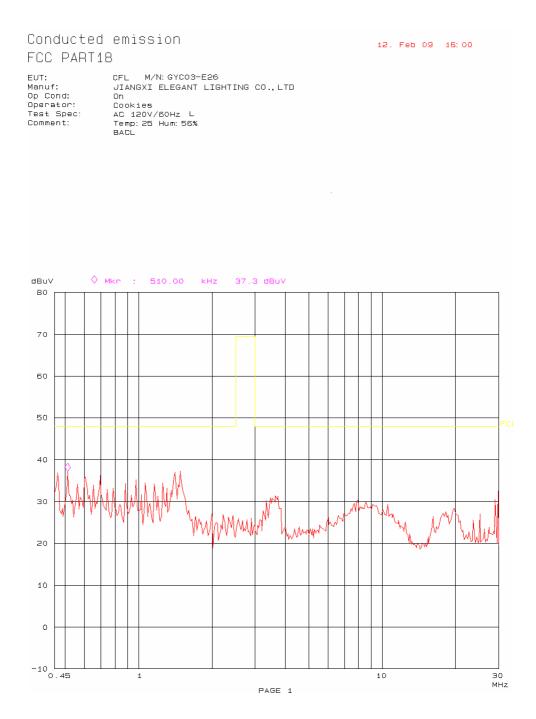

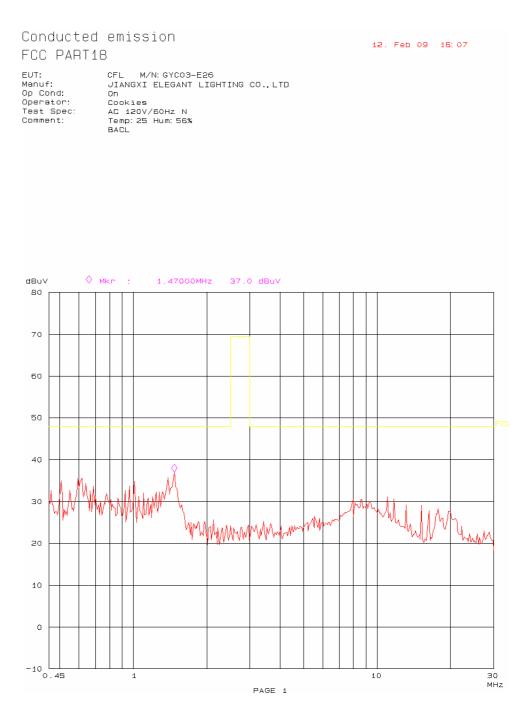

# **DECLARATION LETTER**



#### **Different Declaration**

We, Jiangxi Elegant Lighting Co., Ltd., declare that the CFL, the GYC03-E26 (trade name: GUI YA) and GYD03-E26,GYG03-E26 which have the same circuit diagram, PCB layout in side, and only different in appearance. Thank you!

Date:2009/5/30

Sincerely.



\*\*\*\*\* END OF REPORT \*\*\*\*\*