

TEST REPORT

To:	MAC DUE INTERNATIONAL LTD	To:	~		
Attn:	Cheng	Attn:			
Address:	Unit 2102 Greenfield Tower-Concordia Plaza No.1 Science Museum Road, TSIM SHA TSUI EAST Kowloon, Hong Kong	Address:	æ		
Fax:	+852-26206366	Fax:	·		
E-mail:		E-mail:	(+)		
Folder No.:	BV	CK11SE023MTHS-B			
Factory name:		1221			
Location:		(44)			
Product:		RUGGY WITH MOTIO lodel No.: KD0714M	N		
	e e	Sample No:	(5211)242-0734		
		Test date:	September 6, 2011		
		Test Requeste	d: FCC Part 15 - 2010		
	(22)	Test Method	ANSI C63.4 - 2003		
		FCC ID:	YB91-8M27MHZ		
The results	given in this report are related to the tes	sted specimen of the	described electrical apparatus.		
	: The submitted sample was found to CC				
	Authorized		PARENCE ESCRES MINERALS STATES		
	Detil	for O	ard		
Reviewed by:	Keith Yeung	Approved by: Stever	oved by: Steven Tsang		
Date: Septem	The supplier of the supplier o	Date: September 19, 2011			

BUREAU VERITAS HONG KONG LIMITED – Kowloon Bay Office 1/F Pacific Trade Centre, 2 Kai Hing Road, Kowloon Bay, Kowloon,HONG KONG Tel: +852 2331 0888 Fax: +852 2331 0889 www.cps.bureauveritas.com This report is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. Our report is limited to the test samples identified herein. The results set forth in this report are not necessarily indicative or representative of the statistical quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof. You shall have thirty days from receipt of this report to request additional testing of the samples or to notify us of any errors or omissions relating to our report, provided, however, such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to mise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents

Page 1 of 15



Location of the test laboratory

Radiated and Conducted emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.4 - 2003. An Open Area Test Site and Full Anechoic Chamber (FCC Listed Site, Registration No. 642151) are set up for investigation and located at :

BUREAU VERITAS HONG KONG LIMITED, EMC CENTRE

No. 2106-2107, 21/F., Westin Centre, 26 Hung To Road, Kwun Tong, Kowloon, Hong Kong

List of measuring equipment

Radiated Emission

EQUIPMENT	MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATION DUE	
EMITEST RECEIVER	R&S	ESCI	100379	05-SEP-2012	
LOOP ANTENNA	ETS-LINDGREN	6502	00102266	12-MAY-2012	
BILOG ANTENNA	SCHAFFNER	CBL6112D	25229	01-AUG-2012	
OPEN AREA TEST SITE	BVCPS	N/A	N/A	04-JUL-2012	
ANECHOIC CHAMBER	ALBATROSS	M-CDC	80374004499B	26-OCT-2011	
COAXIAL CABLE	SUHNER	N/A	N/A	19-SEP-2011	

Remarks:-

N/A: Not Applicable or Not Available

The measurement instrumentation uncertainty would be taking into consideration on each of the test result



Equipment Under Test [EUT] Description of Sample:

Model Name: 1:8 TRUGGY WITH MOTION

Model Number: KD0714M

Additional Model No.: KD0714M-A / KD0714M-B / KD0714M-D

Additional Model Information: Declare the Circuit, PCB layout, Electrical parts of the

products are identical to the basic model. Except the outlook.

Rating: 9Vd.c. ("6F22" size battery x 1)

Description of EUT Operation:


The Equipment Under Test (EUT) is a MAC DUE INTERNALIONAL LTD. of Radio Control toy. It is 2 buttons, 1 switch and 1 marble transmitter and operating at 27.145MHz. The EUT continues to transmit while buttons are being pressed, Modulation by IC, and type is pulse modulation.

The transmitter has different control:

- 1. Left button Forward control
- 2. Right button Backward control
- 3. ON/OFF switch ON/OFF control
- 4. Marble Left or Right control

Antenna Requirement (Section 15.203)

The EUT is use of a permanently antenna. The antenna consists of 19cm long metal spring covered with rubber. The antenna is not replaceable or user serviceable. The requirements of S15.203 are met. There are no deviations or exceptions to the specifications. The EUT is use of a permanently antenna.

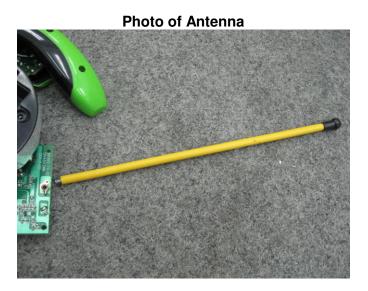

BUREAU VERITAS HONG KONG LIMITED – Kowloon Bay Office 1/F Pacific Trade Centre, 2 Kai Hing Road, Kowloon Bay, Kowloon,HONG KONG Tel: +852 2331 0888 Fax: +852 2331 0889

www.cps.bureauveritas.com

This report is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. Our report is limited to the test samples identified herein. The results set forth in this report are not necessarily indicative or representative of the statistical quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof. You shall have thirty days from receipt of this report to request additional testing of the samples or to notify us of any errors or omissions relating to our report, provided, however, such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



Test Results

Radiated Emissions (Fundamental)

Test Requirement: FCC Part 15 Section 15.227

Test Method: ANSI C63.4
Test Date(s): 2011-09-06

Temperature: 30.0 °C Humidity: 80.0 % Atmospheric Pressure: 100.4 kPa

Mode of Operation: Transmission mode

Tested Voltage: 9Vd.c. ("6F22" size battery x 1)

Test Procedure:


Radiated emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.4 – 2003.

The equipment under test (EUT) was placed on a non-conductive turntable with dimensions of 1.5m x 1m and 0.8m high above the ground. 3m from the EUT, a broadband antenna mounting on the mast received the signal strength. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using new battery. The turntable was rotated to maximize the emission level. The antenna was then moving along the mast from 1m up to 4m until no more higher value was found. Both horizontal and vertical polarization of the antenna were placed and investigated.

For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.

Location: The Roof, Westin Centre, 26 Hung To Road, Kwun Tong, Kowloon, Hong Kong

Test Setup: Open Area Test Site

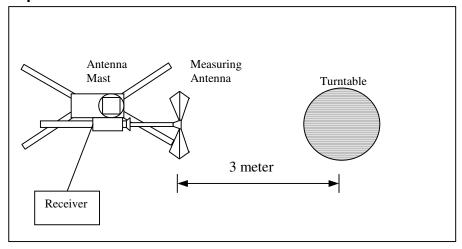

BUREAU VERITAS HONG KONG LIMITED – Kowloon Bay Office 1/F Pacific Trade Centre, 2 Kai Hing Road, Kowloon Bay, Kowloon,HONG KONG Tel: +852 2331 0888 Fax: +852 2331 0889

www.cps.bureauveritas.com

This report is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. Our report is limited to the test samples identified herein. The results set forth in this report are not necessarily indicative or representative of the statistical quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof. You shall have thirty days from receipt of this report to request additional testing of the samples or to notify us of any errors or omissions relating to our report, provided, however, such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.227]:

Frequency Range of	Field Strength of	Field Strength of				
Fundamental	Fundamental Emission	Fundamental Emission				
	[Peak]	[Average]				
[MHz]	[μV/m]	[μV/m]				
26.96 – 27.28	100,000 (100 dBμV/m)	10,000 (80 dBμV/m)				

Measurement Data

Test Result of (Transmission mode): PASS

Detection mode: Peak

Frequency (MHz)	Polarity (H/V) and degree	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dBµV/m)	Limit at 3m (dBμV/m)	Margin (dB)
27.145	V/0°	9.6	49.0	100	-51.0

Detection mode: # Average

Frequency (MHz)	Polarity (H/V) and degree	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dBµV/m)	Limit at 3m (dBμV/m)	Margin (dB)
27.145	V/0°	9.6	**44.7	80	-35.3

[#] For pulse modulated devices and using measuring equipment employing a peak detection mode, properly adjusted for such factor as pulse desensitisation.

**Duty Cycle Correction = 20Log(0.61) =-4.3dB

Note: Field Strength includes Antenna Factor and Cable Loss.

Receiver setting: RBW = 100KHz

VBW = 300KHz

www.cps.bureauveritas.com



Radiated Emissions (9kHz – 1GHz)

Test Requirement: FCC Part 15 Section 15.209

Test Method: ANSI C63.4

Test Date(s): 2011-09-06

30.0 °C Temperature: Humidity: 80.0 % Atmospheric Pressure: 100.4 kPa

Mode of Operation: Transmission mode

Tested Voltage: 9Vd.c. ("6F22" size battery x 1)

Limits for Radiated Emissions [FCC 47 CFR 15.209]:

Frequency Range	Quasi-Peak Limits			
[MHz]	[μV/m]			
1.705-30	300			
30-88	100			
88-216	150			
216-960	200			
Above960	500			



Measurement Data

Test Result of (Transmission mode): PASS

Detection mode: Quasi-Peak

Frequency (MHz)	Polarity (H/V)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dBµV/m)	Limit at 3m (dBµV/m)	Margin (dB)
54.290	Н	6.7	20.4	40.0	-19.6
81.435	Н	7.1	18.5	40.0	-21.5
108.580	Н	12.0	20.7	43.5	-22.8
135.725	Н	12.2	21.3	43.5	-22.2
162.870	Н	10.6	19.8	43.5	-23.7
190.015	Н	9.6	19.5	43.5	-24.0
217.160	Н	9.9	21.9	46.0	-24.1
244.305	Н	13.2	22.2	46.0	-23.8
271.450	Н	13.2	23.0	46.0	-23.0
298.595	Н	14.4	24.2	46.0	-21.8

Frequency (MHz)	Polarity (H/V)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dBµV/m)	Limit at 3m (dBµV/m)	Margin (dB)
54.290	V	6.7	20.7	40.0	-19.3
81.435	V	7.1	18.9	40.0	-21.1
108.580	V	12.0	21.3	43.5	-22.2
135.725	V	12.2	22.0	43.5	-21.5
162.870	V	10.6	20.4	43.5	-23.1
190.015	V	9.6	19.2	43.5	-24.3
217.160	V	9.9	21.7	46.0	-24.3
244.305	V	13.2	22.3	46.0	-23.7
271.450	V	13.2	23.4	46.0	-22.6
298.595	V	14.4	23.8	46.0	-22.2

Note: Field Strength includes Antenna Factor and Cable Loss.

Receiver setting: RBW = 120KHz

VBW = 120KHz



26dB Bandwidth of Fundamental Emission

Test Requirement: FCC 47 CFR 15.227

Test Method: ANSI C63.4:2003 (Section 13.1.7)

Test Date: 2011-09-06

30.0 °C Temperature: Humidity: 80.0% Atmospheric Pressure: 100.4 kPa

Mode of Operation: Transmission mode

Tested Voltage: 9Vd.c. ("6F22" size battery x 1)

Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.


Limits for 26dB Bandwidth of Fundamental Emission:

Frequency	26dB Bandwidth	Limits
[MHz]	[KHz]	[MHz]
27.1456	89.60	within 26.96 - 27.28



Measurement Data:

Test Result of 26dB Bandwidth of Fundamental Emission: PASS

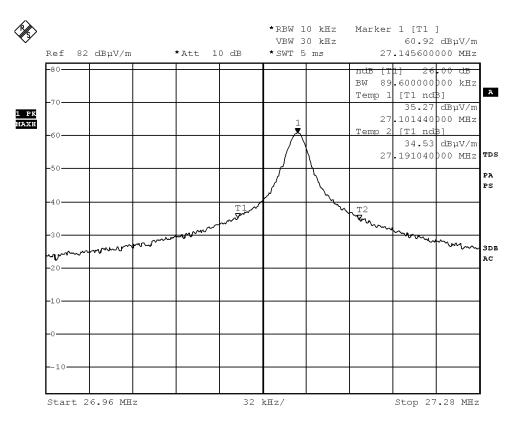

Date: 5.SEP.2011 14:06:21

www.cps.bureauveritas.com

This report is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use



Duty Cycle Correction During 100msec:

Each function key sends a different series of characters, but each packet period (18.7 msec) never exceeds a series of 4 long (1.6msec) and 10 short (0.5msec) pulses. Assuming any combination of short and long pulses maybe obtained due to encoding the worst case transmit duty cycle would be considered (4x1.6msec)+(10x0.5msec) per 18.7msec = 61.0% duty cycle. Figure A through C shows the characteristics of the pulse train for one of these functions.

Remarks:

Duty Cycle Correction = 20Log(0.61) = -4.3dB


The following figures [Figure A to Figure C] show the characteristics of the pulse train for one of these functions.

www.cps.bureauveritas.com


contents.

This report is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or us



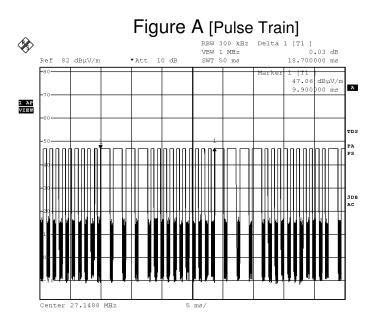

Date: 5.SEP.2011 14:08:41

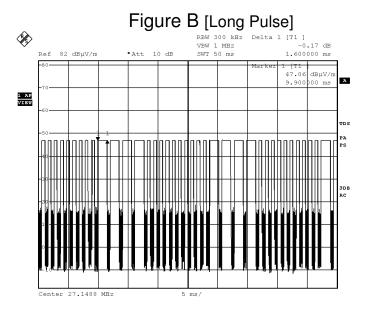


Date: 5.SEP.2011 14:09:19


BUREAU VERITAS HONG KONG LIMITED – Kowloon Bay Office 1/F Pacific Trade Centre, 2 Kai Hing Road, Kowloon Bay, Kowloon,HONG KONG Tel: +852 2331 0888 Fax: +852 2331 0889

www.cps.bureauveritas.com

This report is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. Our report is limited to the test samples identified herein. The results set forth in this report are not necessarily indicative or representative of the statistical quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof. You shall have thirty days from receipt of this report to request additional testing of the samples or to notify us of any errors or omissions relating to our report, provided, however, such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.







Date: 5.SEP.2011 14:09:43

www.cps.bureauveritas.com



Photographs of EUT


Front View of the product



Rear View of the product



Inner Circuit Top View



Inner Circuit Bottom View





Battery compartment



Battery Cover



Front View of the product (Internal)



Rear View of the product (Internal)





Measurement of Radiated Emission Test Set Up



***** End of Report *****