

1-4F, Huafeng Science Park, Xin'an Sixth Road, 82th District, Bao'an,

Shenzhen, China.

Telephone: +86-755-29451282, Fax: +86-755-22639141

Report No.: EBO1411112-E291

Page 1 of 25

TEST REPORT

Applicant: Shenzhen Firstview Electronic Co. Ltd.

Address of Applicant: 3-4/F, Block B, Huafeng 1st Technology Zone Baoan Main

Road, Baoan District, Shenzhen, China

Equipment Under Test (EUT)

Product Name: 8.95 inch Tablet PC

Model No.: VTA089001, VTA089001S, VTA089001E, M8941

FCC ID: YW5VTA089001

Applicable standards: FCC CFR Title 47 Part 15 Subpart B:2013

Date of sample receipt: November 26, 2014

Date of Test: November 26, 2014 To December 5, 2014

Date of report issue: December 5, 2014

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Kevin Yu Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the EBO product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of EBO International Electrical Approvals or testing done by EBO International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by EBO International Electrical Approvals in writing.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: EBO1411112-E291 Page 2 of 25

2 Version

Version No.	Date	Description
00	December 5, 2014	Original

Jason	Date:	December 5, 2014
Project Engineer		
Conyv	<i>Date:</i>	December 5, 2014
	Project Engineer (cury)	Project Engineer



Report No.: EBO1411112-E291 Page 3 of 25

3 Contents

			Page
1	COV	ER PAGE	1
2	VER	SION	2
3	CON	ITENTS	3
4	TES	T SUMMARY	4
5	GEN	ERAL INFORMATION	5
	5.1	CLIENT INFORMATION	5
	5.2	GENERAL DESCRIPTION OF EUT	
	5.3	TEST MODE	
	5.4	TEST FACILITY	6
	5.5	TEST LOCATION	
	5.6	DESCRIPTION OF SUPPORT UNITS	
	5.7	DEVIATION FROM STANDARDS	
	5.8	ABNORMALITIES FROM STANDARD CONDITIONS	
	5.9	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
6	TES	T INSTRUMENTS LIST	8
7	TES	T RESULTS AND MEASUREMENT DATA	9
	7.1	CONDUCTED EMISSIONS	g
	7.2	RADIATED EMISSION	12
8	TES	T SETUP PHOTO	18
9	EUT	CONSTRUCTIONAL DETAILS	20



Report No.: EBO1411112-E291

Page 4 of 25

4 Test Summary

Test Item	Section in CFR 47	Result
Conducted Emission	Part15.107	PASS
Radiated Emissions	Part15.109	PASS

PASS: The EUT complies with the essential requirements in the standard.



Report No.: EBO1411112-E291

Page 5 of 25

5 General Information

5.1 Client Information

Applicant:	Shenzhen Firstview Electronic Co. Ltd.
Address of Applicant:	3-4/F, Block B, Huafeng 1st Technology Zone Baoan Main Road,
	Baoan District, Shenzhen, China
Manufacturer:	Shenzhen Firstview Electronic Co., Ltd.
Address of Manufacturer:	F3-6, Block B, Huafeng 1st Technology Zone, Baoan Main Road,
	Baoan District, Shenzhen, P.R.China

5.2 General Description of EUT

Product Name:	8.95 inch Tablet PC	
Model No.:	VTA089001, VTA089001S, VTA089001E, M8941	
Test Model No.:	VTA089001	
Power supply:	Input: DC 5V, 2000mA from adapter	
	Or	
	DC 3.7V, 5000mAh Li-ion Battery	

5.3 Test mode

Test mode:		
REC mode	Keep the EUT in REC mode	
TF Card playing mode Keep the EUT in TF Card playing mode		
PC mode	Keep the EUT in data exchanging with PC mode	
Test voltage:		
AC 120V/60Hz		



Report No.: EBO1411112-E291

Page 6 of 25

5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• CNAS —Registration No.: CNAS L5775

CNAS has accredited Global United Technology Services Co., Ltd. To ISO/IEC 17025 General Requirements for the competence of testing and calibration laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• FCC —Registration No.: 600491

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, July 20, 2010.

Industry Canada (IC)

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. Has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, June 26, 2013.

5.5 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: 2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District, Shenzhen, China



Report No.: EBO1411112-E291

Page 7 of 25

5.6 Description of Support Units

Manufacturer	Description	Model	Serial Number	FCC Approval
HP	Printer	rinter CB495A 05257893		DoC
Apple	PC	A1278	C1MN99ERDTY3	DoC

5.7 Deviation from Standards

Biconical, log.per. antenna and horn antenna were used instead of dipole antenna. Semi-anechoic Chamber was used as alternation of open air test sites, and all test suites were performed with radiated method in it.

5.8 Abnormalities from Standard Conditions

None.

5.9 Other Information Requested by the Customer

None



Report No.: EBO1411112-E291

Page 8 of 25

6 Test Instruments list

Radia	Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)	
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.0(L)*6.0(W)* 6.0(H)	GTS250	Mar. 29 2014	Mar. 28 2015	
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A	
3	ESU EMI Test Receiver	R&S	ESU26	GTS203	July 01 2014	June 30 2015	
4	BiConiLog Antenna	SCHWARZBECK	VULB9163	GTS214	July 01 2014	June 30 2015	
5	Double -ridged waveguide horn	SCHWARZBECK	9120D	GTS208	June 27 2014	June 26 2015	
6	RF Amplifier	HP	8347A	GTS204	July 01 2014	June 30 2015	
7	Preamplifier	HP	8349B	GTS206	July 01 2014	June 30 2015	
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A	
9	Coaxial cable	GTS	N/A	GTS210	Mar. 29 2014	Mar. 28 2015	
10	Coaxial Cable	GTS	N/A	GTS211	Mar. 29 2014	Mar. 28 2015	
11	Thermo meter	N/A	N/A	GTS256	Mar. 29 2014	Mar. 28 2015	

Con	Conducted Emission:							
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)		
1	Shielding Room	ZhongYu Electron	7.0(L)x3.0(W)x3.0(H)	GTS264	July 01 2014	June 30 2015		
2	EMI Test Receiver	Rohde & Schwarz	ESCS30	GTS223	July 01 2014	June 30 2015		
3	10dB Pulse Limita	Rohde & Schwarz	N/A	GTS224	July 01 2014	June 30 2015		
4	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	July 01 2014	June 30 2015		
5	LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	GTS226	July 01 2014	June 30 2015		
6	Coaxial Cable	GTS	N/A	GTS227	July 01 2014	June 30 2015		
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A		

Gen	General used equipment:							
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)		
1	Barometer	ChangChun	DYM3	GTS257	July 08 2014	July 07 2015		



Report No.: EBO1411112-E291

Page 9 of 25

7 Test Results and Measurement Data

7.1 Conducted Emissions

Test Requirement:	FCC Part15 B Section 15.107				
Test Method:	ANSI C63.4:2003				
Test Frequency Range:	150KHz to 30MHz				
Class / Severity:	Class B				
Receiver setup:	RBW=9KHz, VBW=30KHz, Sv	weep time=auto			
Limit:	Limit (dBuV)				
	Frequency range (MHz)	Average			
	0.15-0.5	56 to 46*			
	0.5-5	56	46		
	5-30	60	50		
Test setup:	* Decreases with the logarithm	n of the frequency.			
	LISN 40cm 80cm Filter AC power Equipment Test table/Insulation plane Remark: EUT Equipment Under Test LISN Line Impedence Stabilization Network Test table height=0.8m				
Test procedure:	 The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2003 on conducted measurement. 				
Test Instruments:	Refer to section 6 for details				
Test mode:	Refer to section 5.3 for details. All of the mode were tested and found the "PC mode" is the worst case. Only the data of worst case was reported.				
Test results:	Pass				




Report No.: EBO1411112-E291

Page 10 of 25

Measurement Data

Test mode: PC mode	LINE	
--------------------	------	--

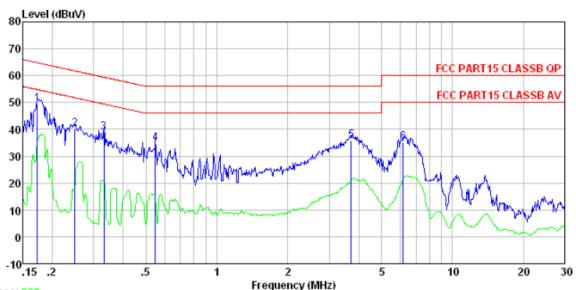

Trace: 268

Site :

: Shielded room

Condition : FCC PART15 CLASSB QP LISN-2013 LINE


,01141	Freq		LISN			Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1 2 3 4 5 6	0.173 0.249 0.332 0.549 3.720 6.186	49. 27 40. 03 38. 64 34. 54 35. 47 34. 89	0.15 0.12 0.11 0.13 0.19 0.23	0.10 0.11 0.15	49. 54 40. 26 38. 85 34. 78 35. 81 35. 28	59.40 56.00 56.00	-21.52	QP QP QP QP



Report No.: EBO1411112-E291

Page 11 of 25



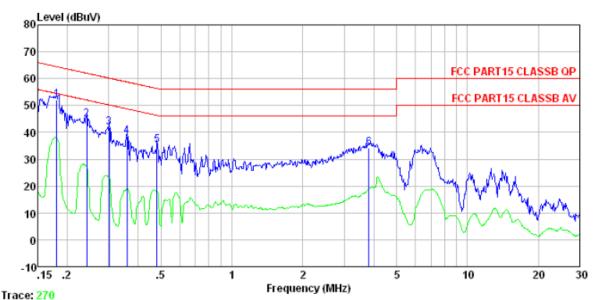

Site

Condition

: Shielded room

: FCC PART15 CLASSB QP LISN-2013 NEUTRAL

MH	z dBuV	dB					
		· ·	dB	dBuV	dBuV	dB	
3 0.30 4 0.36 5 0.48	1 51.97 2 44.65 2 41.48 0 38.32 1 34.95 0 33.93	0.06 0.06 0.06	0.12 0.10 0.10 0.11	44.83 41.64 38.48 35.12	62. 04 60. 19 58. 74 56. 32	-17. 21 -18. 55 -20. 26 -21. 20	QP QP QP QP

Notes:

- 1. An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3. Final Level =Receiver Read level + LISN Factor + Cable Loss
- 4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.



Report No.: EBO1411112-E291

Page 12 of 25


7.2 Radiated Emission

 Tradiated Ellission								
Test Requirement:	FCC Part15 B Section 15.109							
Test Method:	ANSI C63.4:200	03						
Test Frequency Range:	30MHz to 6GHz	7						
Test site:	Measurement D	Distance: 3m	(Semi-Anecho	ic Chambe	r)			
Receiver setup:	_			1				
	Frequency	Detector	RBW	VBW	Remark			
	30MHz- Quasi-peak 1GHz Peak		k 120kHz 1MHz	300kHz	Quasi-peak Value			
	Above 1GHz	ove 1GHz Peak		3MHz	Peak Value			
		Peak	1MHz	10Hz	Average Value			
Limit:	_			, o				
	Freque	-	Limit (dBuV		Remark			
	30MHz-8		40.0		Quasi-peak Value			
	88MHz-2		43.5		Quasi-peak Value			
	216MHz-9	60MHz	46.0	00	Quasi-peak Value			
	960MHz-	·1GHz	54.0	00	Quasi-peak Value			
	Above 1	IGH ₇	54.0	00	Average Value			
	7,5070	0112	74.0	00	Peak Value			
Test Procedure:	 The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna 							
	tower.				· ·			
	3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.							
	4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.							
		-		ak Detect F	unction and Specified			
ocument is issued by the Company su	Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or							



Report No.: EBO1411112-E291

Page 13 of 25

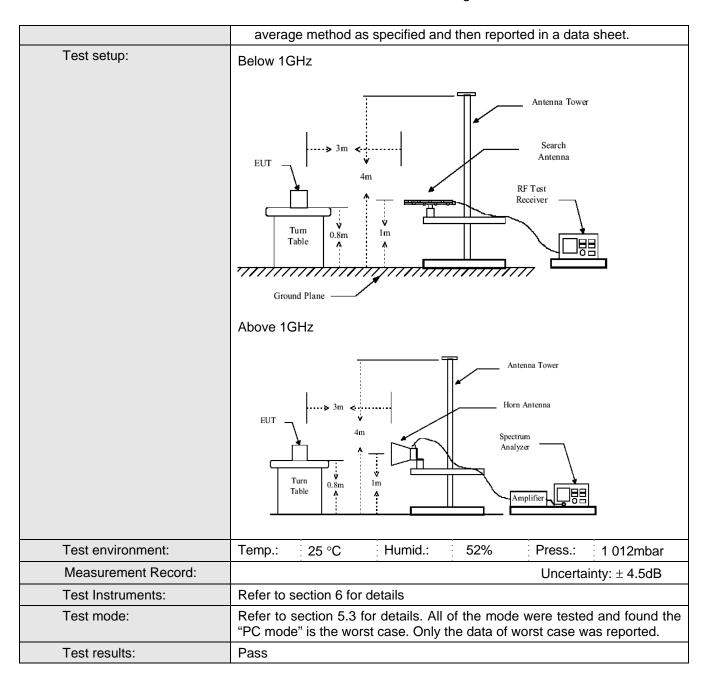

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor




Report No.: EBO1411112-E291

Page 14 of 25

Measurement Data

Below 1GHz

Test mode: PC mode	Ant Pol. Horizontal
--------------------	---------------------

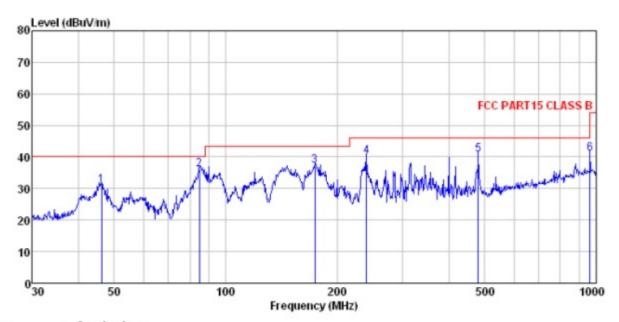


Site		3m char FCC PAI	mber RT15 CLA	ASS B 3	n VULB9	163-2013	M HORIZ	ZONTAL	
	Freq		Antenna Factor				Limit Line	Over Limit	Remark
	MHz	dBu∀	dB/m	dB	d₿	dBuV/m	$\overline{dBuV/m}$	₫B	
1 2	46.178 84.999	46.74	15.48 12.31	0.73	32.00 31.74	30.95	40.00	-9.05 -3.99	-
3	173.814	56.32	11.23	1.71		37.20	43.50	-6.30 -5.93	QP
4 5 6	480.528 962.162	51.19			31.62	40.86	46.00		QP



Report No.: EBO1411112-E291

Page 15 of 25



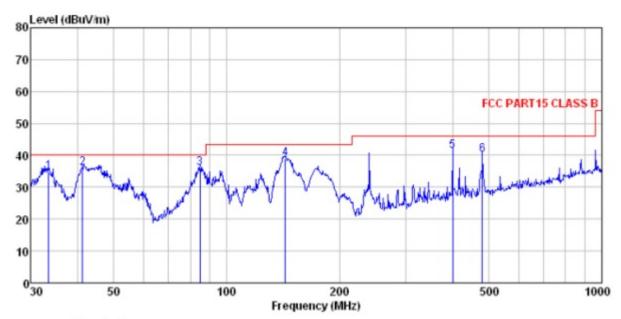

Site Condit	ion :	Read	RT15 CLA Antenna	Cable	n VULB9: Preamp Factor		Limit	Over	Remark
-	MHz	dBu∀	−−dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 2 3 4 5	33.562 41.277 84.999 143.326 400.432 480.528	51.89 51.71 54.40 59.04 53.14 50.55	14. 31 15. 57 12. 31 10. 22 17. 10 18. 07	0.59 0.68 1.07 1.53 2.85 3.22	31.74 31.96 31.89	36.04 38.83 41.20	40.00 40.00 43.50 46.00	-5. 27 -4. 08 -3. 96 -4. 67 -4. 80 -5. 78	QP QP QP QP




Report No.: EBO1411112-E291

Page 16 of 25

Above 1GHz

Test mode: PC mode	Ant Pol. Horizontal
--------------------	---------------------

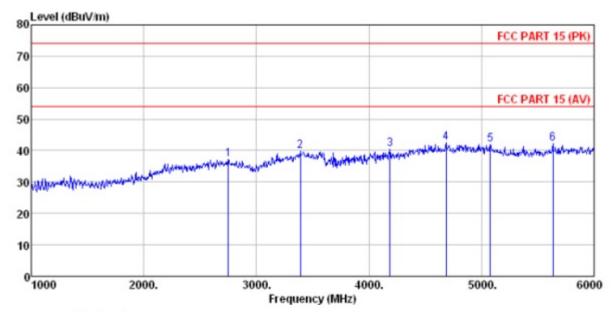


Site : 3m chamber FCC PART 15 (PK) 3m BBHA9120D ANT (>1GHZ) HORIZONTAL Condition Cable Preamp Readântenna Limit 0ver Level Factor Loss Factor Level Line Limit Remark MHz dBuV dB/m ₫B dB dBuV/m dBuV/m 2750.000 74.00 -36.93 Peak 36.71 28.26 5.71 33.61 37.07 2 3390.000 37.35 28.57 6.74 32.87 39.79 74.00 -34.21 Peak 8.04 74.00 -33.68 Peak 74.00 -31.44 Peak 3 4185.000 30.18 31.98 40.32 34.08 4685.000 34.47 8.49 32.03 42.56 4 31.63 5 5080.000 32.22 42.06 74.00 -31.94 Peak 33.39 32.02 8.87 74.00 -31.69 Peak 5635.000 32.60 32.36 9.70 32.35 42.31



Report No.: EBO1411112-E291

Page 17 of 25

Test mode: PC mode Ant Pol. Vertica

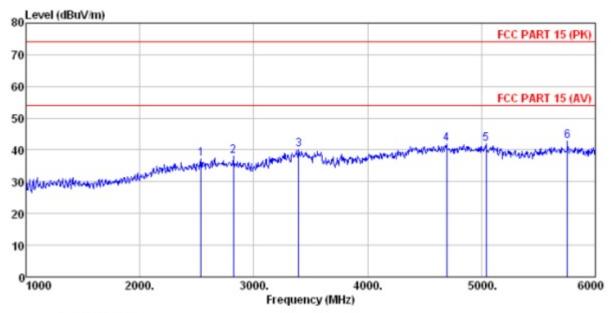

:	3m char	mber						
dition :	FCC PA	RT 15 (F	PK) 3m 1	BBHA9120	OD ANT()	>1GHZ)	VERTICAI	_
	Read	Ant enna	Cable	Preamp		Limit	Over	
Free	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MH2	: dBu∜	dB/m	dB	dB	dBuV/m	dBuV/n	dB	
12.22.27.25.2								2 1
2535.000	37.87	27.60						
2820.000	37.28	28.41	5.78	33.53	37.94	74.00	-36.06	Peak
3395.000	37.54	28.60	6.76	32.87	40.03	74.00	-33.97	Peak
4695.000	33.87	31.65	8.51	32.03	42.00	74.00	-32.00	Peak
5040.000	33.27	31.98	8.83	32.21	41.87	74.00	-32.13	Peak
5755.000	32.65	32.59	9.86	32.27	42.83	74.00	-31.17	Peak
	2535.000 2820.000 3395.000 4695.000 5040.000	### FCC PAI Read Freq Level MHz dBuV	######################################	Hition : FCC PART 15 (PK) 3m 1 ReadAntenna Cable Freq Level Factor Loss MHz dBuV dB/m dB	### FCC PART 15 (PK) 3m BBHA9120 ReadAntenna Cable Preamp Freq Level Factor Loss Factor ###################################	### FCC PART 15 (PK) 3m BBHA9120D ANT (Control of the Pream page o	### Hition : FCC PART 15 (PK) 3m BBHA9120D ANT(>1GHZ) ReadAntenna Cable Preamp Limit Freq Level Factor Loss Factor Level Line MHz dBuV dB/m dB dB dB dBuV/m dBuV/m	### Hition : FCC PART 15 (PK) 3m BBHA9120D ANT(>1GHZ) VERTICAL ReadAntenna Cable Preamp Limit Over Freq Level Factor Loss Factor Level Line Limit ##################################





Report No.: EBO1411112-E291

Page 18 of 25

8 Test Setup Photo

Radiated Emission

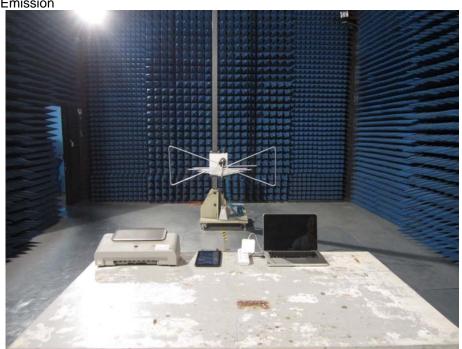

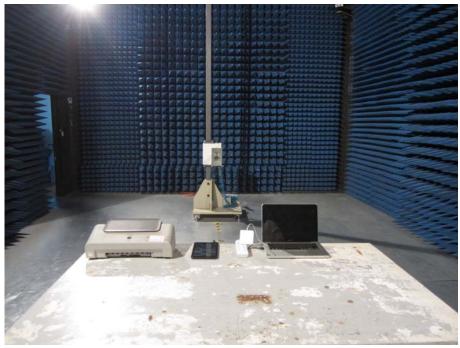



Report No.: EBO1411112-E291

Page 19 of 25

Conducted Emission





Report No.: EBO1411112-E291

Page 20 of 25

9 EUT Constructional Details









Report No.: EBO1411112-E291

Page 21 of 25

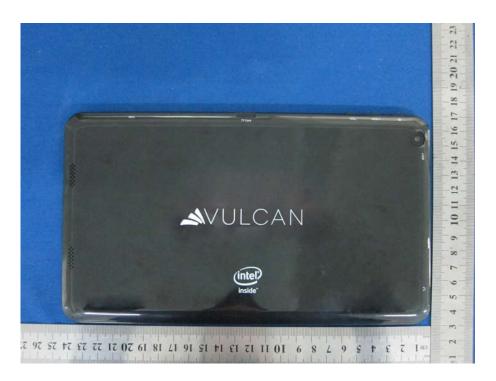


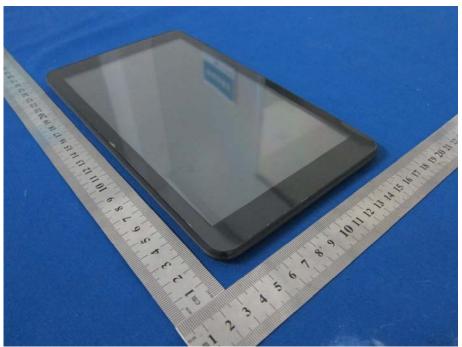



Report No.: EBO1411112-E291

Page 22 of 25

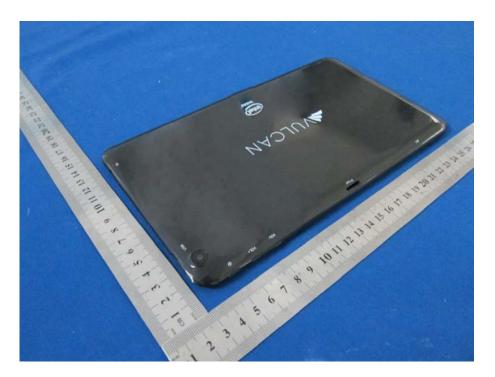






Report No.: EBO1411112-E291

Page 23 of 25



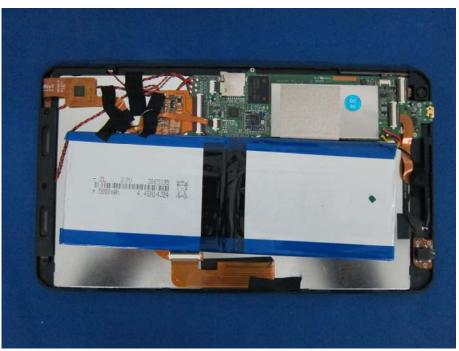




Report No.: EBO1411112-E291

Page 24 of 25



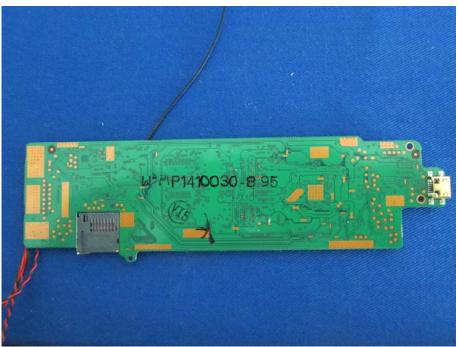



Report No.: EBO1411112-E291

Page 25 of 25



----- End-----