

1-4F, Huafeng Science Park, Xin'an Sixth Road, 82th District, Bao'an,

Shenzhen, China.

Telephone: +86-755-29451282, Fax: +86-755-22639141

Report No.: EBO1410083-E304

Page 1 of 24

TEST REPORT

Applicant: Shenzhen Firstview Electronic Co. Ltd.

Address of Applicant: 3-4/F, Block B, Huafeng 1st Technology Zone Baoan Main

Road, Baoan District, Shenzhen, China

Equipment Under Test (EUT)

Product Name: 7 inch Tablet PC

Model No.: VTA0702, VTA0702E, M720-B

FCC ID: YW5VTA0702

Applicable standards: FCC CFR Title 47 Part 15 Subpart B:2013

Date of sample receipt: October 31, 2014

Date of Test: October 31, 2014 To November 6, 2014

Date of report issue: November 6, 2014

Test Result: PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Kevin Yu Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the EBO product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of EBO International Electrical Approvals or testing done by EBO International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by EBO International Electrical Approvals in writing.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: EBO1410083-E304 Page 2 of 24

2 Version

Version No.	Date	Description
00	November 6, 2014	Original

Prepared By:	Jason	Date:	November 6, 2014
	Project Engineer		
Check By:	Canyo	Date:	November 6, 2014
	Reviewer		



Report No.: EBO1410083-E304 Page 3 of 24

3 Contents

		Page
1 C	COVER PAGE	1
2 V	/ERSION	2
3 C	CONTENTS	3
4 T	EST SUMMARY	4
5 6	GENERAL INFORMATION	5
5.1	CLIENT INFORMATION	5
5.2	GENERAL DESCRIPTION OF EUT	5
5.3	TEST MODE	
5.4	TEST FACILITY	
5.5	TEST LOCATION	
5.6 5.7	DESCRIPTION OF SUPPORT UNITS	
5.8	ABNORMALITIES FROM STANDARD CONDITIONS	
5.9	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
6 T	EST INSTRUMENTS LIST	
7 T	EST RESULTS AND MEASUREMENT DATA	9
7.1	CONDUCTED EMISSIONS	9
7.2	RADIATED EMISSION	12
8 T	EST SETUP PHOTO	18
9 E	EUT CONSTRUCTIONAL DETAILS	20



Report No.: EBO1410083-E304

Page 4 of 24

4 Test Summary

Test Item	Section in CFR 47	Result
Conducted Emission	Part15.107	PASS
Radiated Emissions	Part15.109	PASS

PASS: The EUT complies with the essential requirements in the standard.



Report No.: EBO1410083-E304

Page 5 of 24

5 General Information

5.1 Client Information

Applicant:	Shenzhen Firstview Electronic Co. Ltd.
Address of Applicant:	3-4/F, Block B, Huafeng 1st Technology Zone Baoan Main Road, Baoan
	District, Shenzhen, China
Manufacturer:	Shenzhen Firstview Electronic Co. Ltd.
Address of Manufacturer:	3-4/F, Block B, Huafeng 1st Technology Zone Baoan Main Road, Baoan
	District, Shenzhen, China

5.2 General Description of EUT

Product Name:	7 inch Tablet PC
Model No.:	VTA0702, VTA0702E, M720-B
Reamrk:	The product 7 inch Tablet PC(Model:VTA0702, FCC ID:YW5VTA0702)
	is electrically identical with the product 7 inch Tablet PC(Model:VTA07
	01, FCC ID:YW5VTA0701).
	In that case, the data of VTA0702 is same to the data of VTA0701.
Power supply:	Adapter:
	Model:K-E30501500U1
	Input:100-240V~,50/60Hz, 0.35A max
	Output: 5V, 1500mA
	Or
	DC 3.7V Li-ion Battery

5.3 Test mode

Test mode:	
REC mode	Keep the EUT in REC mode
TF Card playing mode	Keep the EUT in TF Card playing mode
PC mode	Keep the EUT in data exchanging with PC mode
Test voltage:	
AC 120V/60Hz	



Report No.: EBO1410083-E304

Page 6 of 24

5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• CNAS —Registration No.: CNAS L5775

CNAS has accredited Global United Technology Services Co., Ltd. To ISO/IEC 17025 General Requirements for the competence of testing and calibration laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• FCC —Registration No.: 600491

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, July 20, 2010.

Industry Canada (IC)

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. Has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, June 26, 2013.

5.5 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: 2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District, Shenzhen, China



Report No.: EBO1410083-E304

Page 7 of 24

5.6 Description of Support Units

Manufacturer	Description	Model	Serial Number	FCC Approval
HP	Printer	CB495A	05257893	DoC
Apple	PC	A1278	C1MN99ERDTY3	DoC

5.7 Deviation from Standards

Biconical, log.per. antenna and horn antenna were used instead of dipole antenna. Semi-anechoic Chamber was used as alternation of open air test sites, and all test suites were performed with radiated method in it.

5.8 Abnormalities from Standard Conditions

None.

5.9 Other Information Requested by the Customer

None



Report No.: EBO1410083-E304

Page 8 of 24

6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.0(L)*6.0(W)* 6.0(H)	GTS250	Mar. 29 2014	Mar. 28 2015
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	ESU EMI Test Receiver	R&S	ESU26	GTS203	July 01 2014	June 30 2015
4	BiConiLog Antenna	SCHWARZBECK	VULB9163	GTS214	July 01 2014	June 30 2015
5	Double -ridged waveguide horn	SCHWARZBECK	9120D	GTS208	June 27 2014	June 26 2015
6	RF Amplifier	HP	8347A	GTS204	July 01 2014	June 30 2015
7	Preamplifier	HP	8349B	GTS206	July 01 2014	June 30 2015
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
9	Coaxial cable	GTS	N/A	GTS210	Mar. 29 2014	Mar. 28 2015
10	Coaxial Cable	GTS	N/A	GTS211	Mar. 29 2014	Mar. 28 2015
11	Thermo meter	N/A	N/A	GTS256	Mar. 29 2014	Mar. 28 2015

Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.0(L)x3.0(W)x3.0(H)	GTS264	July 01 2014	June 30 2015
2	EMI Test Receiver	Rohde & Schwarz	ESCS30	GTS223	July 01 2014	June 30 2015
3	10dB Pulse Limita	Rohde & Schwarz	N/A	GTS224	July 01 2014	June 30 2015
4	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	July 01 2014	June 30 2015
5	LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	GTS226	July 01 2014	June 30 2015
6	Coaxial Cable	GTS	N/A	GTS227	July 01 2014	June 30 2015
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A

Gen	General used equipment:					
Item Test Equipment Manufacturer Model No. ' '						Cal.Due date (mm-dd-yy)
1	Barometer	ChangChun	DYM3	GTS257	July 08 2014	July 07 2015



Report No.: EBO1410083-E304

Page 9 of 24

7 Test Results and Measurement Data

7.1 Conducted Emissions

Test Requirement:	FCC Part15 B Section 15.107			
Test Method:	ANSI C63.4:2003			
Test Frequency Range:	150KHz to 30MHz			
Class / Severity:	Class B			
Receiver setup:	RBW=9KHz, VBW=30KHz, Sv	weep time=auto		
Limit:	Frequency range (MHz)	Limit (d	BuV)	
	Quasi-peak Averag			
	0.15-0.5	66 to 56*	56 to 46*	
	0.5-5 5-30	56 60	46 50	
	* Decreases with the logarithm		50	
Test setup:	Reference Plane	Tor are frequency:		
	AUX Equipment Test table/Insulation plane Remark: EUT: Equipment Under Test LISN: Line Impedence Stabilization Network Test table height=0.8m			
Test procedure:	 The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a 			
	LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).			
	3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2003 on conducted measurement.			
Test Instruments:	Refer to section 6 for details			
Test mode:	Refer to section 5.3 for details. All of the mode were tested and found the "PC mode" is the worst case. Only the data of worst case was reported.			
Test results:	Pass			




Report No.: EBO1410083-E304

Page 10 of 24

Measurement Data



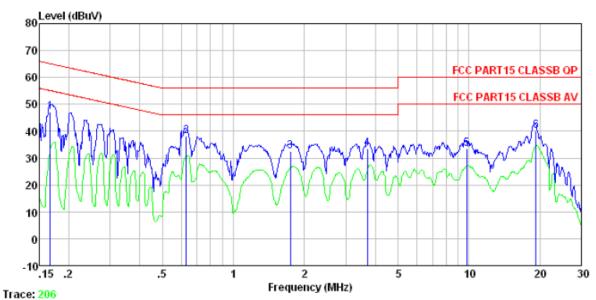

Condition : FCC PART15 CLASSB QP LISN-2013 LINE

Test Engineer: Mike


	Freq		LISN Factor				Over Limit	Remark	
	MHz	dBuV	dB	dB	dBuV	dBuV	dB		
1 2 3 4 5	1.744 3.700	38. 04 32. 24 33. 19	0.13	0.14 0.15	38. 30 32. 50 33. 53	56.00 56.00 56.00	-17.70 -23.50 -22.47	QP QP QP	



Report No.: EBO1410083-E304

Page 11 of 24



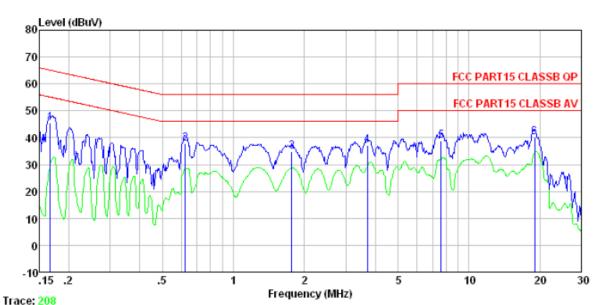

Condition

: FCC PART15 CLASSB QP LISN-2013 NEUTRAL

	Freq		Factor			Limit	Over Limit	Remark
	MHz	dBu₹	dB	dB	dBuV	dBuV	dB	
1		45.18		0.12				
2	0.624	37.71	0.07	0.12	37.90	56.00	-18.10	QP
3	1.772	34.59	0.09	0.14	34.82	56.00	-21.18	QP
4	3.700	36.84	0.14	0.15	37.13	56.00	-18.87	QP
5	7.606	38.46	0.19	0.18	38.83	60.00	-21.17	QP
6				0.22				

Notes:

- 1. An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3. Final Level =Receiver Read level + LISN Factor + Cable Loss
- 4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.



Report No.: EBO1410083-E304


Page 12 of 24

7.2 Radiated Emission

Test Requirement:	FCC Part15 B Section 15.109						
Test Method:	ANSI C63.4:200	03					
Test Frequency Range:	30MHz to 6GHz	<u>z</u>					
Test site:	Measurement D	Distance: 3m	(Semi-Anecho	ic Chambe	r)		
Receiver setup:							
-	Frequency	Detector	RBW	VBW	Remark		
	30MHz- 1GHz	Quasi-peal	k 120kHz	300kHz	Quasi-peak Value		
	Above 1GHz	Above 1GHz Peak Peak		3MHz	Peak Value		
	Peak Peak		1MHz	10Hz	Average Value		
Limit:					T		
	Freque	ency	Limit (dBuV	/m @3m)	Remark		
	30MHz-8	88MHz	40.0	00	Quasi-peak Value		
	88MHz-2	16MHz	43.5	50	Quasi-peak Value		
	216MHz-9	60MHz	46.0	00	Quasi-peak Value		
	960MHz-	-1GHz	54.0	00	Quasi-peak Value		
	Above 1	ICH z	54.0	00	Average Value		
	Above	IGHZ	74.0	00	Peak Value		
Test Procedure:	ground at a 3	3 meter camb e position of	er. The table the highest ra	was rotated diation.	0.8 meters above the 1 360 degrees to		
					ble-height antenna		
	ground to de	termine the need to the desired the desire	naximum valu	e of the field	r meters above the d strength. Both are set to make the		
	and then the antenna was tuned to			sion, the EUT was arranged to its worst case tuned to heights from 1 meter to 4 meters ned from 0 degrees to 360 degrees to find the			
	5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.						
	6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or						



Report No.: EBO1410083-E304

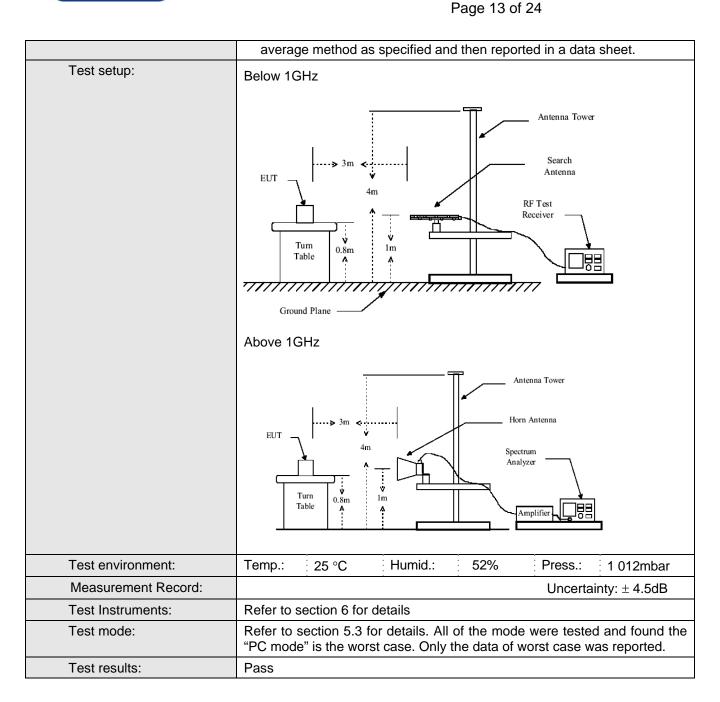

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor




Report No.: EBO1410083-E304

Page 14 of 24

Measurement Data

Below 1GHz

Test mode: PC mode	Ant Pol. Horizontal
--------------------	---------------------

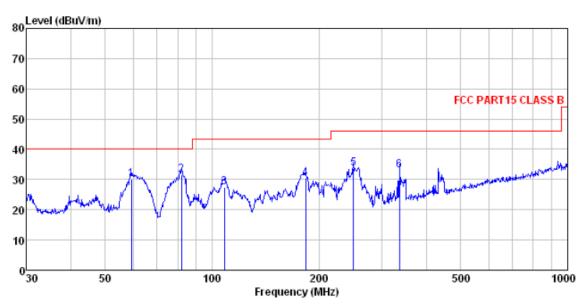

Site

: 3m chamber : FCC PART15 CLASS B 3m VULB9163-2013M HORIZONTAL Condition

Test Mode : PC mode Test Engineer: Qing

3

4

5


ReadAnt enna Cable Preamp Over Limit Loss Factor Level Freq Level Factor Line Limit Remark MHz dB/m 碅 dB dBuV/m dBuV/m 40.00 -9.88 QP 40.00 -8.45 QP 0.85 31.94 31.75 59.232 46.47 14.74 30.12 82.071 50.97 11.28 31.55 1.05 27.41 43.5614.39 31.80 43.50 -16.09 QP 108.267 1.26 43.50 -13.05 QP 183.201 48.87 11.92 1.75 32.09 30.45 49.75 2.12 2.55 249.425 14.07 32.16 33.78 46.00 -12.22 QP 336.035 46.71 15.99 32.07 33.18 46.00 -12.82 QP



Report No.: EBO1410083-E304

Page 15 of 24



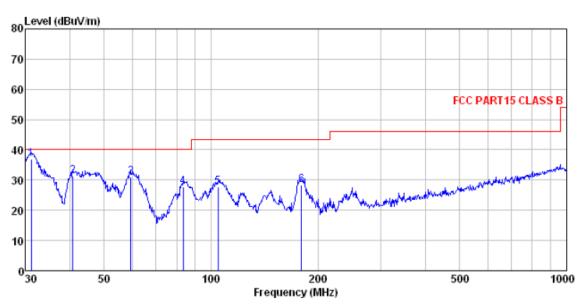

Site : 3m chamber

: FCC PART15 CLASS B 3m VULB9163-2013M VERTICAL : PC mode Condition

Test Mode

Test Engineer: Qing

	Freq		Antenna Factor					Over Limit	Remark
	MHz	dBu∀	dB/m	₫B	₫B	dBuV/m	dBuV/m	₫B	
1 2 3 4 5	31. 180 40. 845 59. 441 83. 522 104. 536 179. 386	47.28 46.57 43.53	14.73 11.87 14.73	0.86 1.06 1.23	32.05 31.94	30.93 27.75 27.71	40.00 40.00 40.00 43.50	-8.73 -9.07 -12.25 -15.79	QP QP QP QP




Report No.: EBO1410083-E304

Page 16 of 24

Above 1GHz

Test mode: PC mode	Ant Pol. Horizontal
--------------------	---------------------

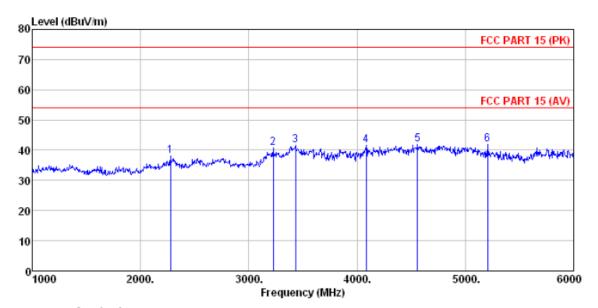

Site : 3m chamber

: FCC PART 15 (PK) 3m BBHA9120D ANT (>1GHZ) HORIZONTAL Condition

Test Mode : PC mode


est	Engineer:		Int enna	Cable	Preamn		Limit	Over	
	Freq		Factor						Remark
	MHz	dBu∜	dB/m	dB	dB	dBuV/m	dBuV/m	<u>dB</u>	
1 2 3 4 5 6	2275.000 3225.000 3430.000 4085.000 4560.000 5205.000	34.13	28.72 29.86 31.44	7.95 8.39	33.06 32.83 32.09 31.96	38.06 40.72 41.58 41.51 42.00 41.97	74.00 74.00 74.00 74.00	-32.42 -32.49 -32.00	Peak Peak Peak Peak



Report No.: EBO1410083-E304

Page 17 of 24

Test mode: PC mode	Ant Pol. Vertical
--------------------	-------------------

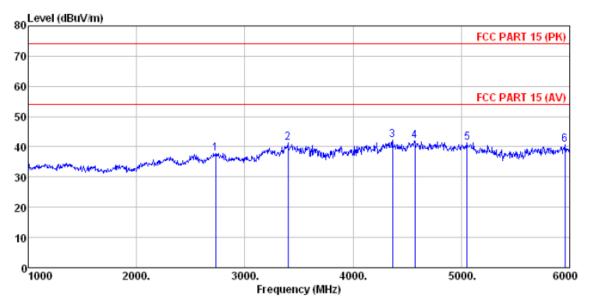

Site : 3m chamber

Condition : FCC PART 15 (PK) 3m BBHA9120D ANT (>1GHZ) VERTICAL

Test Mode : PC mode

Test Engineer: Qing

	Freq		intenna Factor				Limit Line	Over Limit	Remark
	MHz	dBu∀	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 2 3 4 5 6	2730.000 3400.000 4365.000 4570.000 5055.000 5955.000	34.97 34.11 32.83	28. 21 28. 60 30. 97 31. 47 32. 00 32. 84	8.22 8.40 8.85	32.87 31.87 31.97 32.21	42.29 42.01 41.47	74.00 74.00 74.00 74.00	-32.70 -31.71 -31.99	Peak Peak Peak Peak



Report No.: EBO1410083-E304

Page 18 of 24

8 Test Setup Photo

Radiated Emission







Report No.: EBO1410083-E304

Page 19 of 24

Conducted Emission





Report No.: EBO1410083-E304

Page 20 of 24

9 EUT Constructional Details







Report No.: EBO1410083-E304

Page 21 of 24







Report No.: EBO1410083-E304

Page 22 of 24









Report No.: EBO1410083-E304

Page 23 of 24

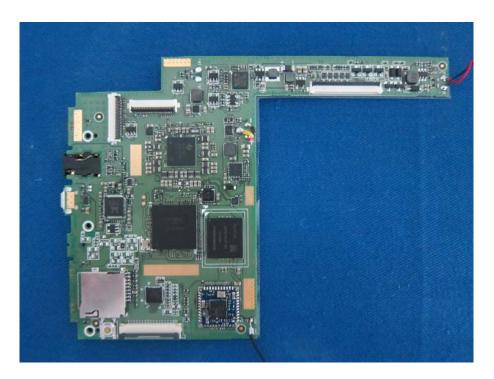

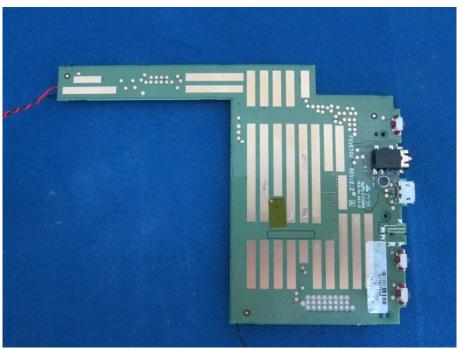



Report No.: EBO1410083-E304

Page 24 of 24



----- End-----