



1.6 User Manual





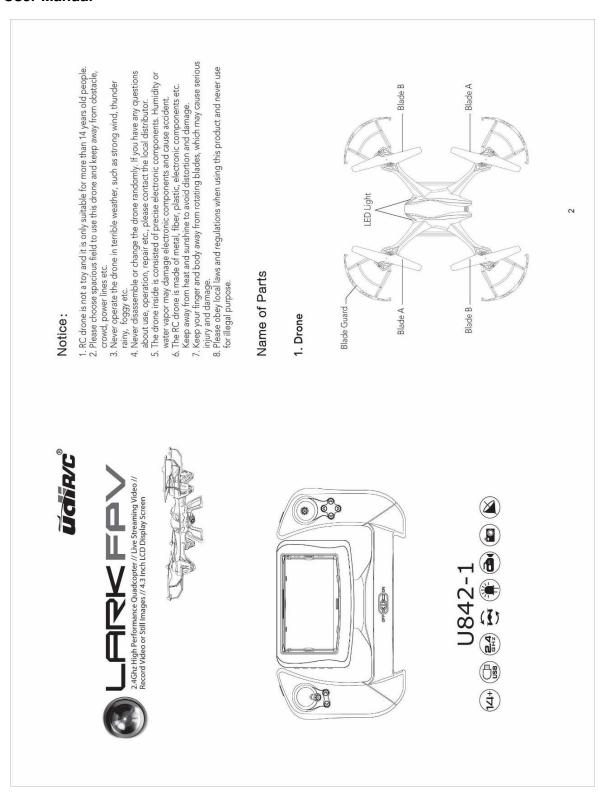

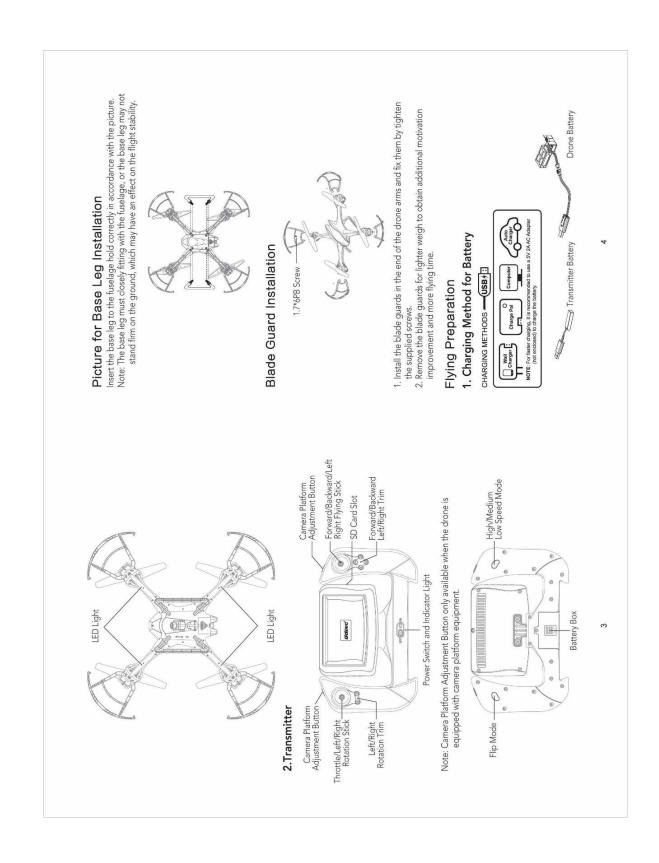

2. Battery Charging Instruction

2. Press the battery box buckle at the tail of the drone and then pull it out.

* When charging the drone battery, the USB indicator light is red and turns to

green when fully charged. When charging the transmitter battery, the USB indicator light is red and turns

to green when fully charged.

The charging time of the drone battery is about 150minutes, while the charging time of the transmitter battery is about 70minutes.

sound of "di---di" to alarm. At this time please land the drone as soon as possible If the drone battery is low when flying, the drone LED light flashes and the transmitter will issue constantly sound of "di-di"to alarm. At this time please land the drone as soon as possible, or the drone may crash suddenly for low battery. * If the transmitter battery is low when flying, the transmitter will issue constantly and replace the battery, or the drone may out of control

Press and Pull Out

3. Connect the battery plug with the drone plug.

3. Notice for Battery

Turn off the drone switch first when finished flying and then take out the battery

Charge the battery after the battery surface cooling down.

* Keep away from heat and put the battery in dry place when the battery is not

Never put the battery with metal product to avoid short circle. being used for a long time.

Put the battery and charger on the ground and keep away from flammable when Stop using the battery if the battery swell up, damaged or seriously heating etc.

charging to avoid accident.

LiPo Battery Disposal & Recycling

Please contact local environmental or waste agency or the supplier of your model or your nearest Li-Po battery recycling center. Wasted batteries must not be placed with household trash.

Flying Operation:


Picture 1-2). The indicator light flashes slowly, which indicates the transmitter . Turn on the transmitter switch and its indicator light starts to flash quickly. Push the left Throttle Stick to utmost and then to the lowest position (see enters code pairing search




9

horizontal position to calibrate the gyro. The transmitter issues sound of "di do di"about three seconds later, which indicates successful code pairing and the 4. Insert the micro SD card to the camera slot of the drone bottom and then turn on the power switch and the LED light starts to flash. Put the drone on the LED light keeps bright.




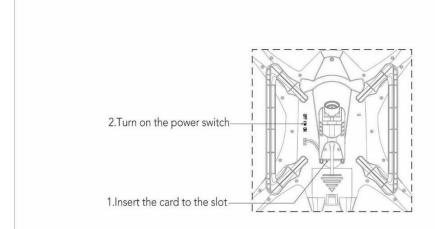

5. Keep the throttle stick on the lowest position and push the right stick to bottom right (see Picture 3). The drone LED light flashes quickly and the drone is calibrating. Later the LED light keeps bright, which indicates successful calibration.




Operation Instruction of Camera Pairing operation of camera and transmitter






1. Press "UP" button for about 6 seconds till the pairing menu appears.



2. Press "PAIR" button and a 5 seconds countdown appears on the screen and then enters pairing search. The video menu will appear after successful pairing. Meanwhile, the transmitter will remember its paired camera automatically. Next time you need not to pair again unless you need to pair the transmitter with other camera. Restart the transmitter and repeat step 1 and step 2.

Notice: Never touch the throttle stick in the progress of pairing or screen adjustment to avoid the drone up flying suddenly and cause accident.

Operation of Video Recording




After successful pairing, the screen will enter video menu and show a green SD card icon at the top, which indicates the SD card had inserted to the camera (or the SD card icon will appear in red and flash if the card fail to insert to the camera). To record video, press the "REC" button on the side of the transmitter screen to start recording. At the same time, the "REC" icon will flash to show that video is being recorded. Press the "REC" button again to stop recording and the video will store in the SD card.

Tip: The screen will show a "FULL" icon if the card is full storage and no more video can be stored in the card.



Operation for Picture Taking



Press SNAP Button and the "JPG" Icon will flash briefly, and then the picture will be stored in the SD card automatically.

Adjust the Screen Brightness



Press "UP" or "DOWN" button to adjust the screen brightness.

View Stored Video and Picture



Take out the micro SD card from the camera and insert to the card slot in the right side of the display screen. A white SD card icon will show on the screen. Press "VIEW" Button to view the file.

6

Delete Office File Delete Office File Offi

Press "UP" or "DOWN" button to choose a video file or picture file and then press "OK" button to select a file. Press "UP" or "DOWN" button to choose a video or picture, and then press "OK" button to play.

Note: Except above view method, you can insert the SD card to a card reader and then connect it with a computer USB port to play the video or picture.

Delete File

Press "DEL" button to delete file directly when viewing the video or picture. Or press "UP" or "Down" button to select a video or picture after entering the video

or "DOWN" button and then press "OK" button to delete the file. Or choose "NO" then press "OK" to return.

. Choose "YES"by "Up"

DEL XXXXXXX ?

or picture file, and the screen will appear

Flying Control

1. Up/Down Flying Control




 \Rightarrow

Push the Throttle Stick to up and the drone goes up as well; Push the throttle stick to down and the drone goes down as well.


Note: Push the throttle stick slowly at first time flying in case of suddenly rising

of the drone and cause accident.
Warning: Never turn off the transmitter power when flying, which may cause the drone out of control and cause accident.



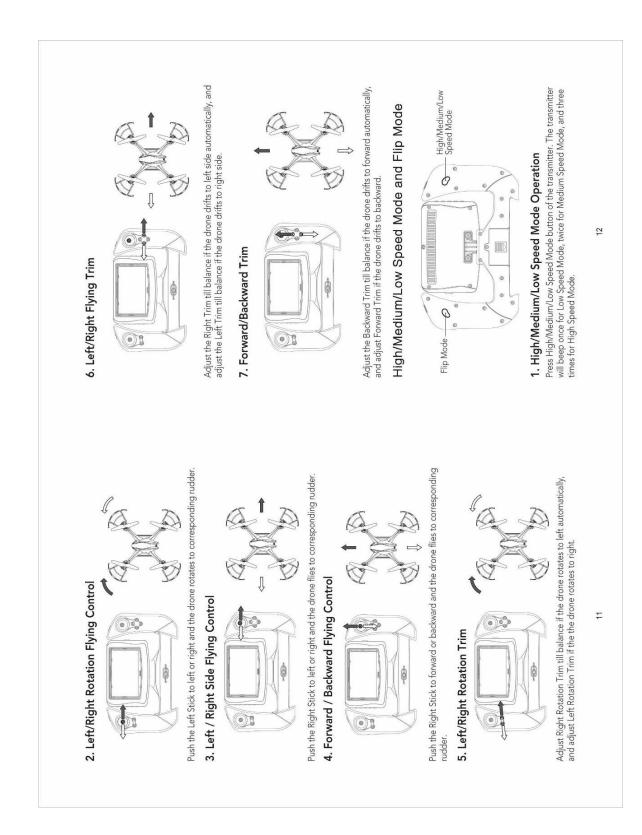



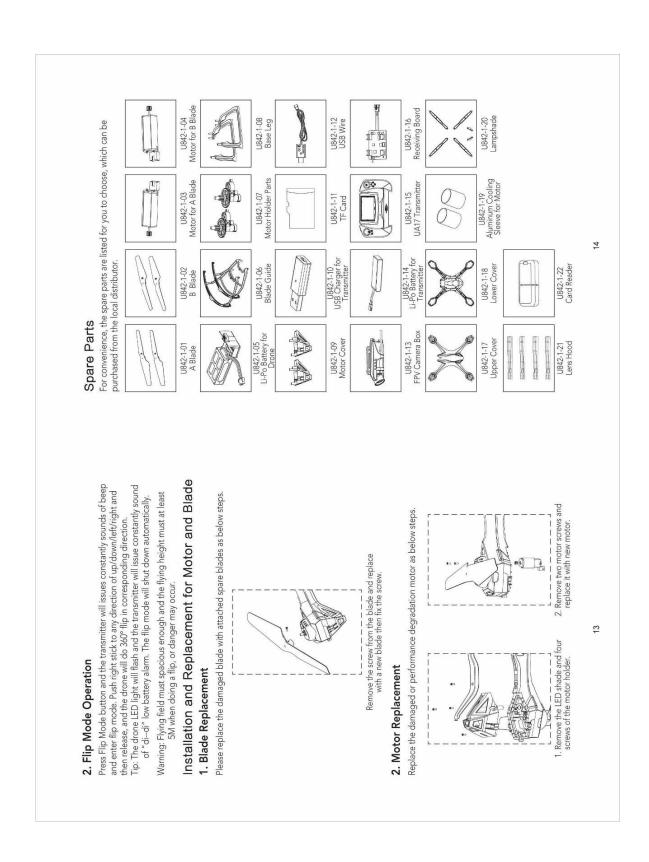



FCC Statement:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:(1) This device may not cause harmful interference, and(2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- -Reorient or relocate the receiving antenna.
- -Increase the separation between the equipment and receiver.
- —Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- -Consult the dealer or an experienced radio/TV technician for help.