

2/F., Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.

Telephone: (852) 2173 8888 Facsimile: (852) 2785 5487

www.intertek.com

## **TEST REPORT**

Report No.: 19060057HKG-001

Fotorama (Hong Kong) Limited

Application For Certification (Original Grant)

FCC ID: ZNK3083A

Transceiver

Prepared and Checked by:

Approved by:

Signed On File Chan Cheuk Hei, Henry Assistant Engineer

Wong Kwok Yeung, Kenneth Senior Lead Engineer Date: June 19, 2019

Intertek's standard Terms and Conditions can be obtained at our website http://www.intertek.com/terms/.

The test report only allows to be revised within the retention period unless further standard or the requirement was noticed.

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.





## **GENERAL INFORMATION**

Grantee: Fotorama (Hong Kong) Limited
Grantee Address: Room 7, 10/F., Peninsula Centre,

67 Mody Road, Tsim Sha Tsui East,

Hong Kong.

 Contact Person:
 Chan Kin Shu

 Tel:
 (852)3690 2890

 Fax:
 (852)2434 9403

e-mail: N/A

Manufacturer: Fotorama (Hong Kong) Limited
Room 7, 10/F., Peninsula Centre,
67 Mody Road, Tsim Sha Tsui East,

Hong Kong.

Brand Name: RC Polaris MRZR D4

**Model:** 3084

Type of EUT: Transceiver

**Description of EUT:**RC Polaris MRZR D4

Serial Number: N/A

FCC ID: ZNK3083A

Date of Sample Submitted: June 03, 2019

**Date of Test:** June 03, 2019 to June 13, 2019

**Report No.:** 19060057HKG-001 **Report Date:** June 19, 2019

**Environmental Conditions:** Temperature: +10 to 40°C

Humidity: 10 to 90%

**Conclusion:** Test was conducted by client submitted sample. The submitted

sample as received complied with the 47 CFR Part 15 Certification.



## **SUMMARY OF TEST RESULT**

Test Specification	Reference	Results
Radiated Emission	15.249, 15.209	Pass
Radiated Emission on the Bandedge		
Radiated Emission in Restricted Bands	15.205	Pass

The equipment under test is found to be complying with the following standards: FCC Part 15, October 1, 2017 Edition

Note: 1. The EUT uses a permanently attached antenna which, in accordance to section 15.203, is considered sufficient to comply with the pervisions of this section.

2. Pursuant to FCC part 15 Section 15.215(c), the 20 dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over excepted variations in temperature and supply voltage were considered.



# **TABLE OF CONTENTS**

1.0	GEN	ERAL DESCRIPTION	5
	1.1	Product Description	5
	1.2	Related Submittal(s) Grants	5
	1.3	Test Methodology	5
	1.4	Test Facility	5
2.0	SYST	TEM TEST CONFIGURATION	6
	2.1	Justification	6
	2.2	EUT Exercising Software	6
	2.3	Special Accessories	6
	2.4	Measurement Uncertainty	6
	2.5	Support Equipment List and Description	6
3.0	EMIS	SSION RESULTS	7
	3.1	Field Strength Calculation	7
	3.2	Radiated Emission Configuration Photograph	8
	3.3	Radiated Emission Data	8
4.0	EQU	IPMENT PHOTOGRAPHS	12
5.0	PRO	DUCT LABELLING	12
6.0	TECH	HNICAL SPECIFICATIONS	12
7.0	INST	RUCTION MANUAL	12
8.0	MISO	CELLANEOUS INFORMATION	13
	8.1	Radiated Emission on the Bandedge	
	8.2	Discussion of Pulse Desensitization	13
	8.3	Emissions Test Procedures	14
9.0	CON	FIDENTIALITY REQUEST	17
10.0	EOU	IIDMENIT LIST	17



## 1.0 GENERAL DESCRIPTION

## 1.1 Product Description

The Equipment Under Test (EUT), is a portable 2.4GHz Transceiver (Car Unit) for a RC car. The operation frequency range is between 2405MHz and 2473MHz with following 8 channels used.

Channel	Frequency (MHz)
0	2405
1	2415
2	2427
3	2437
4	2440
5	2445
6	2450
7	2473

The EUT is powered by NI-cd AA 700mAh 6V battery. After switching on the EUT, the car will be moved forward or backward and turned left and right based on the switches pressed in the controller.

Antenna Type: Internal, Integral

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

#### 1.2 Related Submittal(s) Grants

This is a single application for certification of a transceiver.

The transceiver of corresponding controller (with FCC ID: ZNK3081B) has been authorized by Certification procedure.

## 1.3 Test Methodology

Radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). All radiated measurements were performed in an 3m Chamber. Preliminary scans were performed in the 3m Chamber only to determine worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "Justification Section" of this Application.

## 1.4 Test Facility

The 3m Chamber facility used to collect the radiated data is located at Workshop No. 3, G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Sha Tin, N.T., Hong Kong. This test facility and site measurement data have been placed on file with the FCC.



## 2.0 SYSTEM TEST CONFIGURATION

#### 2.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.10 (2013).

The device was powered by fully charged DC 6.0V (1 x 6.0V NI-cd AA 700mAh battery).

For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Exhibit 3.0.

The unit was operated standalone and placed in the center of the turntable.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was mounted to a plastic stand if necessary and placed on the wooden turntable, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

## 2.2 EUT Exercising Software

There was no special software to exercise the device. Once the unit is powered up, it transmits the RF signal continuously.

#### 2.3 Special Accessories

There are no special accessories necessary for compliance of this product.

## 2.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

#### 2.5 Support Equipment List and Description

N/A.



## 3.0 EMISSION RESULTS

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

#### 3.1 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any), Average Factor (optional) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CF - AG - AV

where  $FS = Field Strength in dB\mu V/m$ 

RA = Receiver Amplitude (including preamplifier) in  $dB\mu V$ 

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB AG = Amplifier Gain in dB AV = Average Factor in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows:

FS = RR + LF

where  $FS = Field Strength in dB\mu V/m$ 

RR = RA - AG - AV in  $dB\mu V$ 

LF = CF + AF in dB

Assume a receiver reading of 52.0 dB $\mu$ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB are added. The amplifier gain of 29 dB and average factor of 5 dB are subtracted, giving a field strength of 27 dB $\mu$ V/m. This value in dB $\mu$ V/m was converted to its corresponding level in  $\mu$ V/m.

 $RA = 52.0 dB\mu V/m$ 

 $AF = 7.4 \ dB \qquad \qquad RR = 18.0 \ dB \mu V$   $CF = 1.6 \ dB \qquad \qquad LF = 9.0 \ dB$ 

AG = 29.0 dB AV = 5.0 dBFS = RR + LF

 $FS = 18 + 9 = 27 \, dB\mu V/m$ 

Level in  $\mu$ V/m = Common Antilogarithm [(27 dB $\mu$ V/m)/20] = 22.4  $\mu$ V/m



## 3.2 Radiated Emission Configuration Photograph

The worst case in radiated emission was found at 4880 MHz

For electronic filing, the worst case radiated emission configuration photographs are saved with filename: radiated photos.pdf.

## 3.3 Radiated Emission Data

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgment: Passed by 5.6 dB



## **RADIATED EMISSIONS**

Model: 3084

Date of Test: June 13, 2019

Worst-Case Operating Mode: Transmitting

Table 1
Pursuant to FCC Part 15 Section 15.249 Requirement

#### **Lowest Channel**

					Net at		
			Pre-Amp	Antenna	3m -	Average Limit	
Polari-	Frequency	Reading	Gain	Factor	Average	at 3m	Margin
zation	(MHz)	(dBµV)	(dB)	(dB)	(dBµV/m)	(dBµV/m)	(dB)
Н	2405.000	76.0	33	29.4	72.4	94.0	-21.6
Н	2400.000	41.9	33	29.4	38.3	54.0	-15.7
Н	4810.000	37.8	33	34.9	39.7	54.0	-14.3
Н	7215.000	28.0	33	37.9	32.9	54.0	-21.1
Н	9620.000	24.2	33	40.4	31.6	54.0	-22.4
Н	12025.000	23.8	33	40.5	31.3	54.0	-22.7
Н	14430.000	22.8	33	40.0	29.8	54.0	-24.2

Polari-	Frequency	Reading	Pre-Amp Gain	Antenna Factor	Net at 3m - Peak	Peak Limit at 3m	Margin
zation	(MHz)	(dBµV)	(dB)	(dB)	(dBµV/m)	(dBµV/m)	(dB)
Н	2405.000	98.6	33	29.4	95.0	114.0	-19.0
Н	2400.000	70.2	33	29.4	66.6	74.0	-7.4
Н	4810.000	56.7	33	34.9	58.6	74.0	-15.4
Н	7215.000	46.9	33	37.9	51.8	74.0	-22.2
Н	9620.000	43.1	33	40.4	50.5	74.0	-23.5
Н	12025.000	42.7	33	40.5	50.2	74.0	-23.8
Н	14430.000	41.7	33	40.0	48.7	74.0	-25.3

NOTES: 1. Peak Detector Data unless otherwise stated.

- 2. Average detector is applied according to ANSI C63.10.
- 3. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
- 4. Negative sign in the column shows value below limit.
- 5. Horn antenna is used for the emission over 1000MHz.
- 6. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
- 7. Measurement Uncertainty is ±5.3dB at a level of confidence of 95%.



Model: 3084

Date of Test: June 13, 2019

Worst-Case Operating Mode: Transmitting

Table 2 **Pursuant to FCC Part 15 Section 15.249 Requirement** 

#### Middle Channel

					Net at		
			Pre-Amp	Antenna	3m -	Average Limit	
Polari-	Frequency	Reading	Gain	Factor	Average	at 3m	Margin
zation	(MHz)	(dBµV)	(dB)	(dB)	(dBµV/m)	(dBµV/m)	(dB)
Н	2440.000	77.9	33	29.4	74.3	94.0	-19.7
Н	4880.000	46.6	33	34.9	48.5	54.0	-5.6
Н	7320.000	37.7	33	37.9	42.6	54.0	-11.4
Н	9760.000	33.0	33	40.4	40.4	54.0	-13.6
Н	12200.000	32.7	33	40.5	40.2	54.0	-13.8
Н	14640.000	33.2	33	38.4	38.6	54.0	-15.4

			Pre-Amp	Antenna	Net at	Peak Limit	
Polari-	Frequency	Reading	Gain	Factor	3m - Peak	at 3m	Margin
zation	(MHz)	(dBµV)	(dB)	(dB)	(dBµV/m)	(dBµV/m)	(dB)
Н	2440.000	100.3	33	29.4	96.7	114.0	-17.3
Н	4880.000	57.6	33	34.9	59.5	74.0	-14.5
Н	7320.000	48.7	33	37.9	53.6	74.0	-20.4
Н	9760.000	44.0	33	40.4	51.4	74.0	-22.6
Н	12200.000	43.7	33	40.5	51.2	74.0	-22.8
Н	14640.000	44.2	33	38.4	49.6	74.0	-24.4

NOTES: 1. Peak Detector Data unless otherwise stated.

- 2. Average detector is applied according to ANSI C63.10.
- 3. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
- 4. Negative sign in the column shows value below limit.
- 5. Horn antenna is used for the emission over 1000MHz.
- 6. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
- 7. Measurement Uncertainty is ±5.3dB at a level of confidence of 95%.



Model: 3084

Date of Test: June 13, 2019

Worst-Case Operating Mode: Transmitting

Table 3 **Pursuant to FCC Part 15 Section 15.249 Requirement** 

## **Highest Channel**

inginest v	on an in en						
					Net at		
			Pre-Amp	Antenna	3m -	Average Limit	
Polari-	Frequency	Reading	Gain	Factor	Average	at 3m	Margin
zation	(MHz)	(dBµV)	(dB)	(dB)	(dBµV/m)	$(dB\mu V/m)$	(dB)
Н	2473.000	79.7	33	29.4	76.1	94.0	-17.9
Н	2483.500	42.9	33	29.4	39.3	54.0	-14.7
Н	4946.000	44.9	33	34.9	46.8	54.0	-7.2
Н	7419.000	38.4	33	37.9	43.3	54.0	-10.7
Н	9892.000	33.7	33	40.4	41.1	54.0	-12.9
Н	12365.000	32.9	33	40.5	40.4	54.0	-13.6
Н	14838.000	33.4	33	38.4	38.8	54.0	-15.2

			Pre-Amp	Antenna	Net at	Peak Limit	
Polari-	Frequency	Reading	Gain	Factor	3m - Peak	at 3m	Margin
zation	(MHz)	(dBµV)	(dB)	(dB)	(dBµV/m)	(dBµV/m)	(dB)
Н	2473.000	100.9	33	29.4	97.3	114.0	-16.7
Н	2483.500	68.8	33	29.4	65.2	74.0	-8.8
Н	4946.000	54.5	33	34.9	56.4	74.0	-17.7
Н	7419.000	47.9	33	37.9	52.8	74.0	-21.2
Н	9892.000	43.3	33	40.4	50.7	74.0	-23.3
Н	12365.000	42.5	33	40.5	50.0	74.0	-24.1
Н	14838.000	42.9	33	38.4	48.3	74.0	-25.7

NOTES: 1. Peak Detector Data unless otherwise stated.

- 2. Average detector is applied according to ANSI C63.10.
- 3. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
- 4. Negative sign in the column shows value below limit.
- 5. Horn antenna is used for the emission over 1000MHz.
- 6. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
- 7. Measurement Uncertainty is ±5.3dB at a level of confidence of 95%.



## 4.0 EQUIPMENT PHOTOGRAPHS

For electronic filing, the photographs are saved with filename: external photos.pdf and internal photos.pdf.

## 5.0 PRODUCT LABELLING

For electronics filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

## 6.0 TECHNICAL SPECIFICATIONS

For electronic filing, the block diagram and schematic of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.

## 7.0 INSTRUCTION MANUAL

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.



## 8.0 MISCELLANEOUS INFORMATION

The miscellaneous information includes details of the test procedure and measured bandwidth.

## 8.1 Radiated Emission on the Bandedge

The emission bandage data are shown on the above data table 1 & 3 respectively.

Emissions radiated outside of the specified frequency bands, except harmonics, are attenuated by 50dB below the level of the fundamental or to the general radiated emissions limits in Section 15.209, whichever is the lesser attenuation, which meet the requirement of part 15.249(d).

#### 8.2 Discussion of Pulse Desensitization

Pulse desensitivity is not applicable for this device. Since the transmitter transmits the RF signal continuously.



## 8.3 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services Hong Kong Ltd. in the measurements of transmitter operating under the Part 15, Subpart C rules.

The transmitting equipment under test (EUT) is placed on a wooden turntable which is four feet in diameter and approximately 0.8m in height above the ground plane for emission measurement at or below 1GHz and 1.5m in height above the ground plane for emission measurement above 1GHz. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjusted through all three orthogonal axis to obtain maximum emission levels. The antenna height and polarization are also varied during the testing to search for maximum signal levels. The height of the antenna is varied from one to four meters.

Detector function for radiated emissions is in peak mode. Average readings, when required, are taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in Exhibit 8.3.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.



#### 8.3 Emissions Test Procedures (cont'd)

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.

Conducted measurements were made as described in ANSI C63.10 (2013).


The IF bandwidth used for measurement of radiated signal strength was 100 kHz or greater when frequency is below 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. A discussion of whether pulse desensitivity is applicable to this unit is included in this report (See Exhibit 8.1). Above 1000 MHz, a resolution bandwidth of 3 MHz is used.

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the forbidden bands and above 1 GHz, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, unless otherwise reported. Measurements taken at a closer distance are so marked.




## 8.3.1 Radiated Emission Test Setup

The figure below shows the test setup, which is utilized to make these measurements.

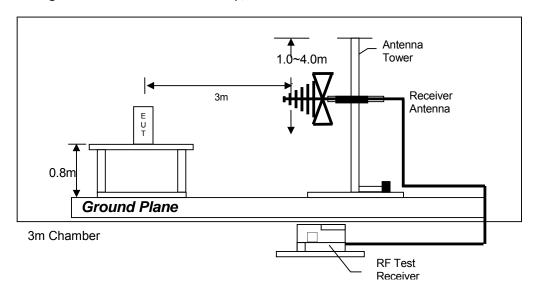

Test setup of radiated emissions up to 1GHz

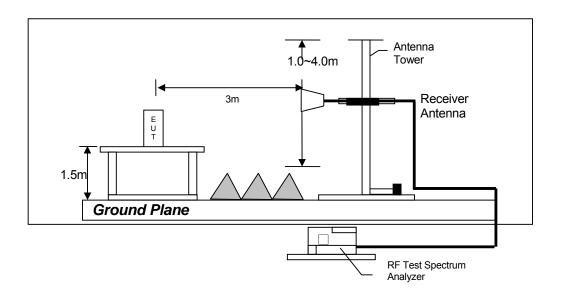

Test setup of radiated emissions above 1GHz



# 9.0 CONFIDENTIALITY REQUEST

For electronic filing, a preliminary copy of the confidentiality request is saved with filename: request.pdf.

# **10.0 EQUIPMENT LIST**

## 1) Radiated Emissions Test

Equipment	EMI Test Receiver	Spectrum Analyzer	Biconical Antenna
Registration No.	EW-3156	EW-2425	EW-0571
Manufacturer	ROHDESCHWARZ	ROHDESCHWARZ	EMCO
Model No.	ESR26	FSP3	3104C
Calibration Date	November 18, 2018	August 17, 2018	February 27, 2018
Calibration Due Date	November 18, 2019	August 17, 2019	August 27, 2019

Equipment	Log Periodic Antenna	Double Ridged Guide Antenna	14m Double Shield RF Cable (20MHz - 6GHz)
Registration No.	EW-0447	EW-1133	EW-2074
Manufacturer	EMCO	EMCO	RADIALL
Model No.	3148	3115	Nm-RG142-
Calibration Date	January 17, 2018	November 29 2018	March 31, 2019
Calibration Due Date	July 17, 2019	May 29, 2020	March 31, 2020

Equipment	RF Cable 14m (1GHz to 26.5GHz)	Horn Antenna (14GHz - 40GHz)
Registration No.	EW-2781	EW-1679
Manufacturer	GREATBILLION	SCHWARZBECK
Model No.	SMA m/SHF5MPU	BBHA9170
	/SMA m ra14m,26G	
Calibration Date	October 27, 2018	September 25, 2018
Calibration Due Date	October 27, 2019	September 25, 2019

## 2) Bandwidth Measurement

Equipment	Spectrum Analyzer
Registration No.	EW-2425
Manufacturer	R&S
Model No.	FSP3
Calibration Date	August 17, 2018
Calibration Due Date	August 17, 2019

## **END OF TEST REPORT**