


////ALPINE

SERVICE MANUAL

4 CHANNEL + MONO POWER AMPLIFIER

The signal pattern on P.W.Boards cannot cooperate with the Schematic Diagram.

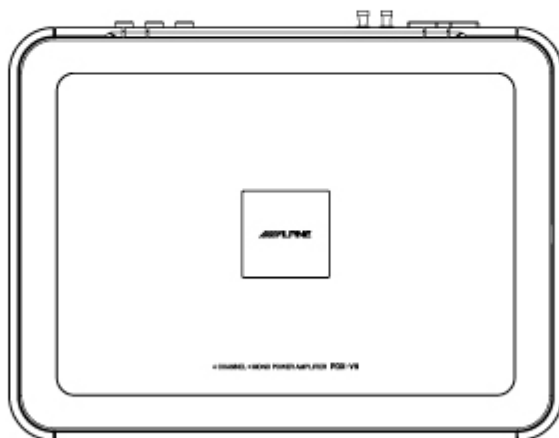

3 / 12-A
T0111100110

PDX-V9

<Cautions for Safe Repair Work>

The following cautions will prevent accidents in the workplace and will ensure safe products.

*The symbols indicate caution is needed to prevent injuries and damage to property.

The symbols and their meanings follow.

 Warning	If you ignore this symbol and handle the product incorrectly or unsafely, serious injury or death may result.
 Caution	If you ignore this symbol and handle the product incorrectly or unsafely, injury or only material damage may result.

*The following symbols indicate two levels of cautions.

 When you see this symbol, you have to be very careful.	
 When you see this symbol, you have to follow the instructions there.	

Warning

 Do not look squarely into the laser light coming from the pickup. You may lose your sight.	 Fuse Caution Always use a designated fuse. Use of an incorrect fuse may result in a fire.
--	---

Caution


 Do not allow wiring to be caught in the screw/chassis. If wiring is caught in the screw/chassis, it may cause a short circuit, resulting in a fire.	 Battery Caution Use the designated battery. Confirm the correct polarity and install the battery. An incorrect battery or an improperly inserted or seated battery may result in a fire.
---	---

 High Temperature Caution Touching the heat sink may cause severe burns.	 Designated Parts Caution Look up the part list and ensure designated parts are used to prevent accidents.
---	--

 Reverse Power Supply Connections or Misconnections Caution Reverse power supply connections or misconnections may cause ignition problems and smoke may result.	 Wiring Caution Ensure that the wiring is correct to prevent problems with ignition/braking.
---	--

 Soldering Caution Hot solder from solder splash may cause severe burns.	 Wear Gloves Wear gloves to prevent electrical shock from the end face of the metal.
---	--

Packing Method View

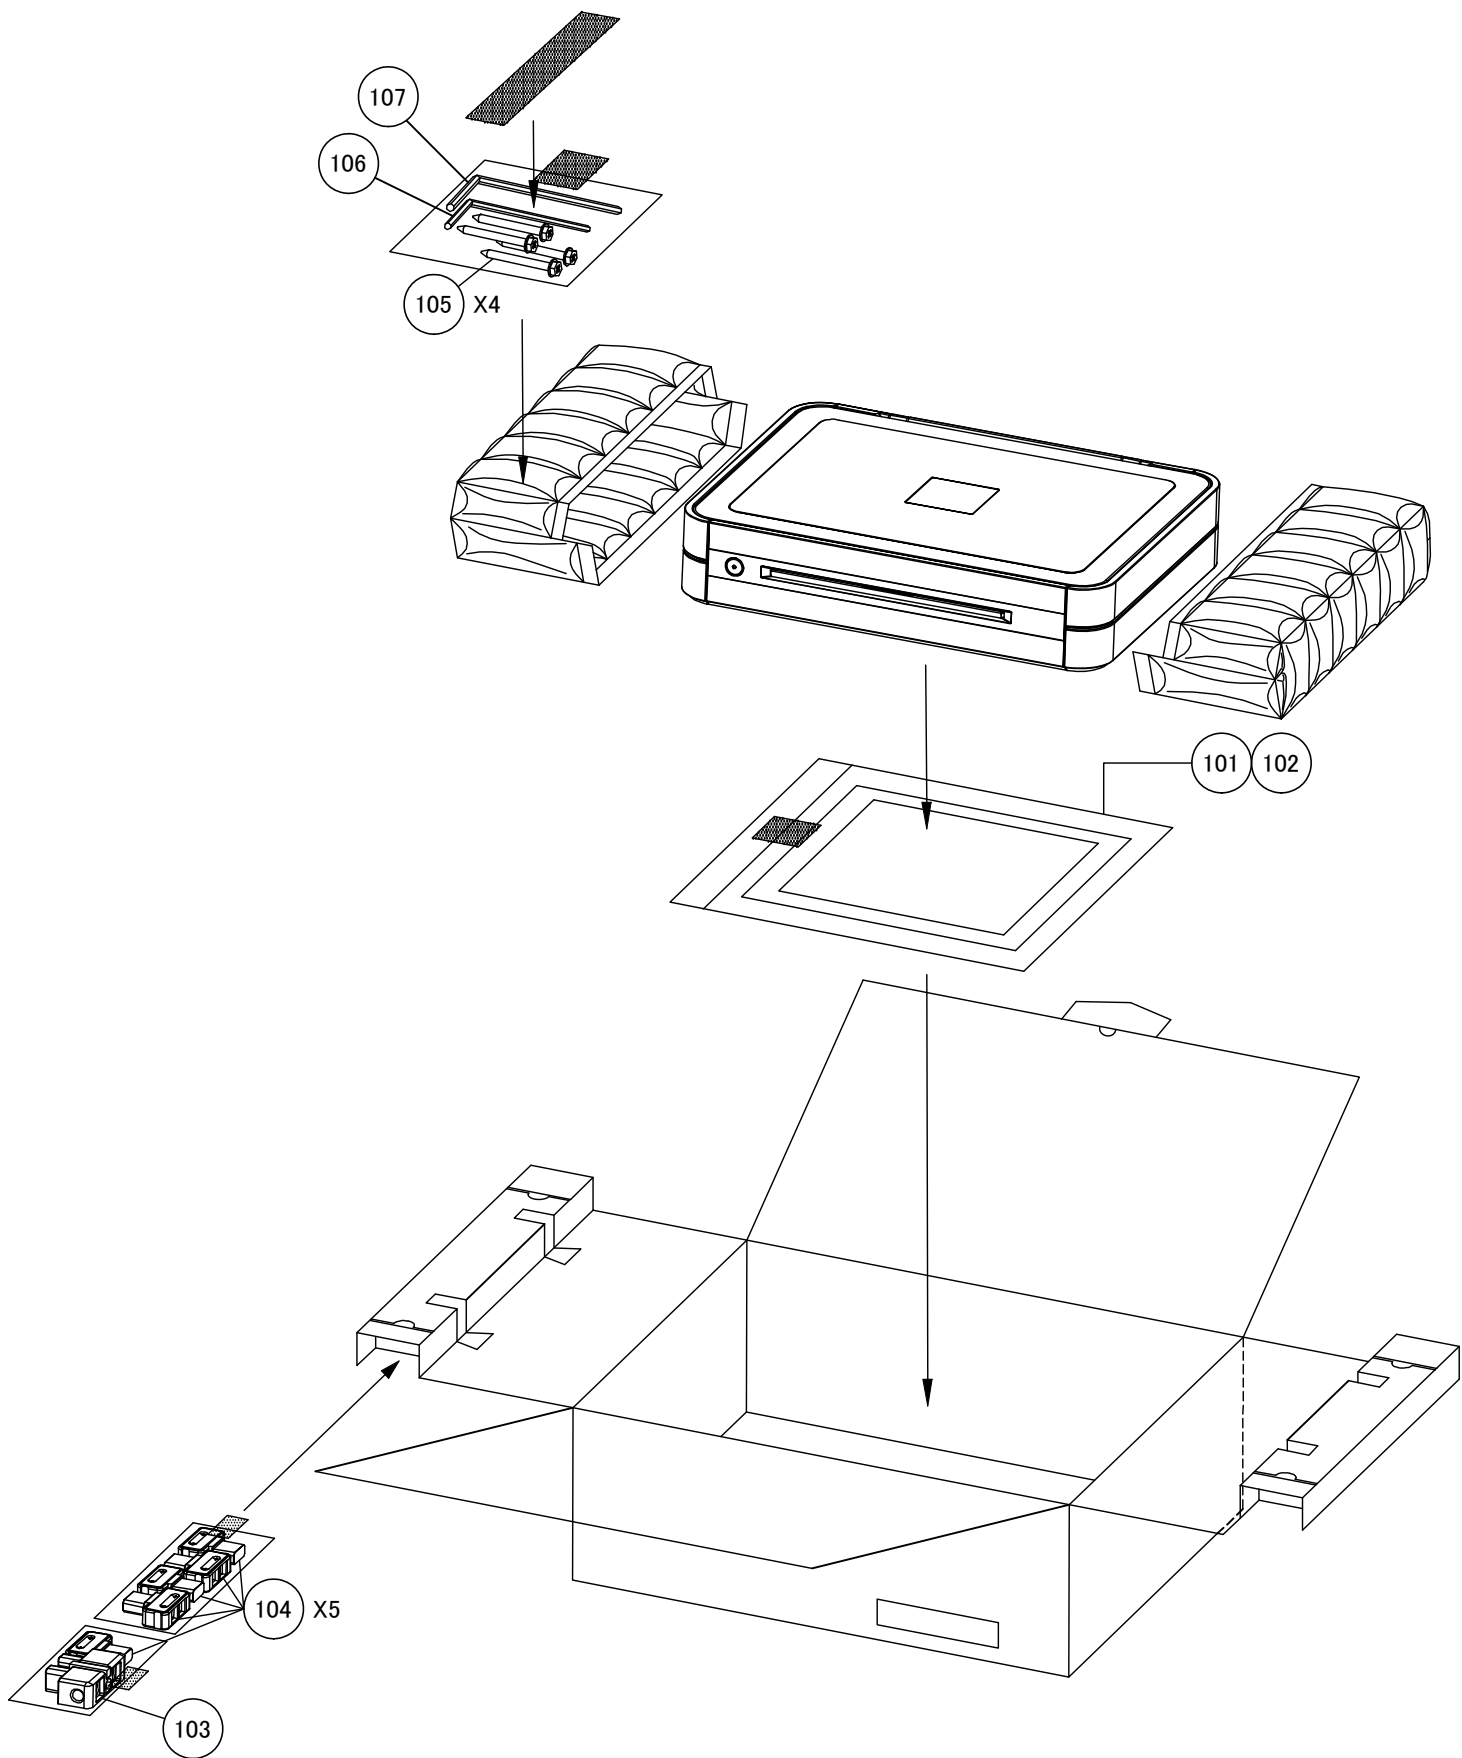

	<u>101</u>	68-21057Z20	MANUAL,OWNER'S
\$1	<u>102</u>	68-21057Z21	MANUAL,OWNER'S (I/G/S)
	<u>103</u>	09E41475S01	CONN,P-PLUG
	<u>104</u>	09E41474S01	CONN,SPK-PLUG
	<u>105</u>	03E41472S01	SCR,M4X36(HW)(BLK)
	<u>106</u>	03E36691S01	WRENCH,2X2.3
	<u>107</u>	47E35195S01	WRENCH,4X4.6

Mark Model Code

#1 PDX-V9(North American) Only,

\$1 PDX-V9(European) Only,

%1 PDX-V9(General Foreign) Only,


Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

#####

Extension Cable

*Always connect the Extension Cable when making checks of voltage and repair.

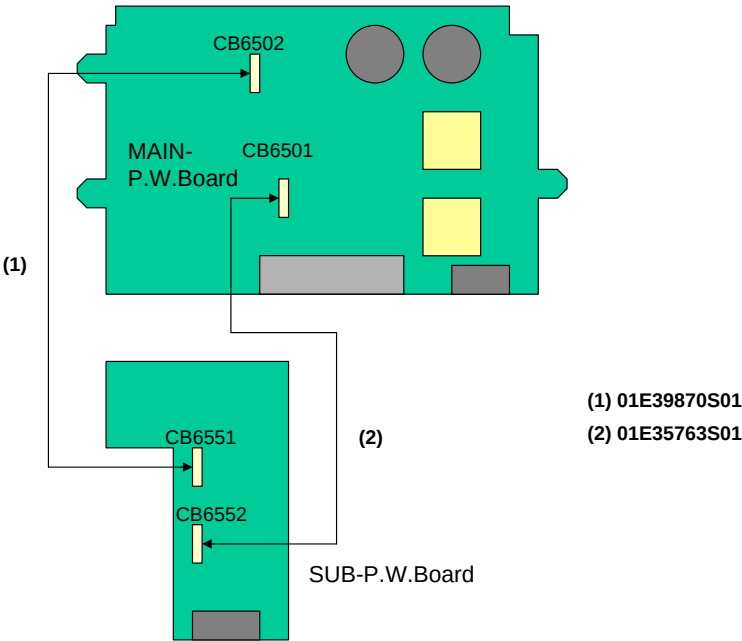


Specifications


Power Output	[Full-range]	
	(1) 20Hz, 4ohm, 1.0% T.H.D. (14.4V)	100W
	100Hz, 4ohm, 1.0% T.H.D. (14.4V)	100W
	(2) 20Hz, 2ohm, 1.0% T.H.D. (14.4V)	100W
	100Hz, 2ohm, 1.0% T.H.D. (14.4V)	100W
	[MONO]	
	(1) 20Hz, 4ohm, 1.0% T.H.D. (14.4V)	500W
	100Hz, 4ohm, 1.0% T.H.D. (14.4V)	500W
	(2) 20Hz, 2ohm, 1.0% T.H.D. (14.4V)	500W
	100Hz, 2ohm, 1.0% T.H.D. (14.4V)	500W
T.H.D. (100Hz)	[Full-range]	
	(1) 10W/4ohm (14.4V)	0.010%
	(2) 100W/4ohm (14.4V)	0.06%
	(3) 100W/2ohm (14.4V)	0.10%
	[MONO]	
	(1) 10W/4ohm (14.4V)	0.012%
	(2) 500W/4ohm (14.4V)	0.10%
	(3) 500W/2ohm (14.4V)	0.12%
Residual Noise (Input Short, VR: MIN)	[Full-range]	
	(1) NON-FILTER	5.0mV
	(2) 22kHz LPF + IHF-A	80uV
	[MONO]	
	(1) NON-FILTER	5.0mV
	(2) 22kHz LPF + IHF-A	80uV
S/N Ratio (VR: MIN)	[Full-range]	
	(1) Ref. Output 1W/4ohm, CEA-2006	88dB
	(2) Ref. Output 100W/4ohm	108dB
	[MONO]	
	(1) Ref. Output 1W/4ohm, CEA-2006	88dB
	(2) Ref. Output 500W/4ohm	115dB
Frequency Response	[Full-range]	
	(1) Ref. Output 1W/4ohm, 100Hz	10Hz : -0.5±2dB
		100kHz : -3.0±2dB
	[MONO]	
	(1) Ref. Output 1W/4ohm, 100Hz	10Hz : -0.5±2dB
600Hz : -3.0±2dB		
Output Offset Voltage (No Signal)		± 150mV
Input Sensitivity	[Full-range]	
	(1) Ref. Output 100W/4ohm, 100Hz	VR: MAX : 0.15V±2dB
		VR: CEN : 0.75V±2dB
		VR: MIN : 3.6V±2dB
	[MONO]	
	(1) Ref. Output 500W/4ohm, 100Hz	VR: MAX : 0.06V±2dB
VR: CEN : 0.35V±2dB		
VR: MIN : 3.7V±2dB		
LPF/HPF Characteristic	[Full-range] (HPF) (Ref. Output 1W/4ohm, 100Hz)	
	(1) VR MAX (600Hz Position) at 600Hz	-3.0±2dB
	(2) VR MIN (30Hz Position) at 30Hz	-3.0±2dB
	[MONO] (Ref. Output 1W/4ohm, 50Hz)	
	(1) VR MIN (50Hz Position) at 50Hz	-3.0±2dB
Subsonic Filter Characteristic	[MONO] (Ref. Output 1W/4ohm, 50Hz)	
	(1) VR MAX at 30Hz	-3.0±2dB

Remote Bass Control : 0dB ~ -20dB (CH5)	(1) Remote bass control unit max.	-0.0±2dB
	(2) Remote bass control unit min.	-20.0±3dB
Remote On Voltage		6.4V±1.0V
Current Consumption	(1) Idling Current (No input)	2.5A
	(2) 1% T.H.D., 2ohm Load (100Hz)	150A
	(3) Remote Current Drain (No signal)	0.33mA±0.2mA
	(4) Back Up Current Drain (No signal)	1.2mA
Input Impedance (Reference)		10k~50kohm
Fuse Requirement		40A(Peak) x 2 (For Battery Line)
Power Source		DC14.4V (11~16V)
Dimensions (W x H x D)		257 x 50.8 x 192mm
Weight		2.7kg


NOTE : Due to Continuing product improvement, specifications and designs are subject to change without notice.

Block Diagram

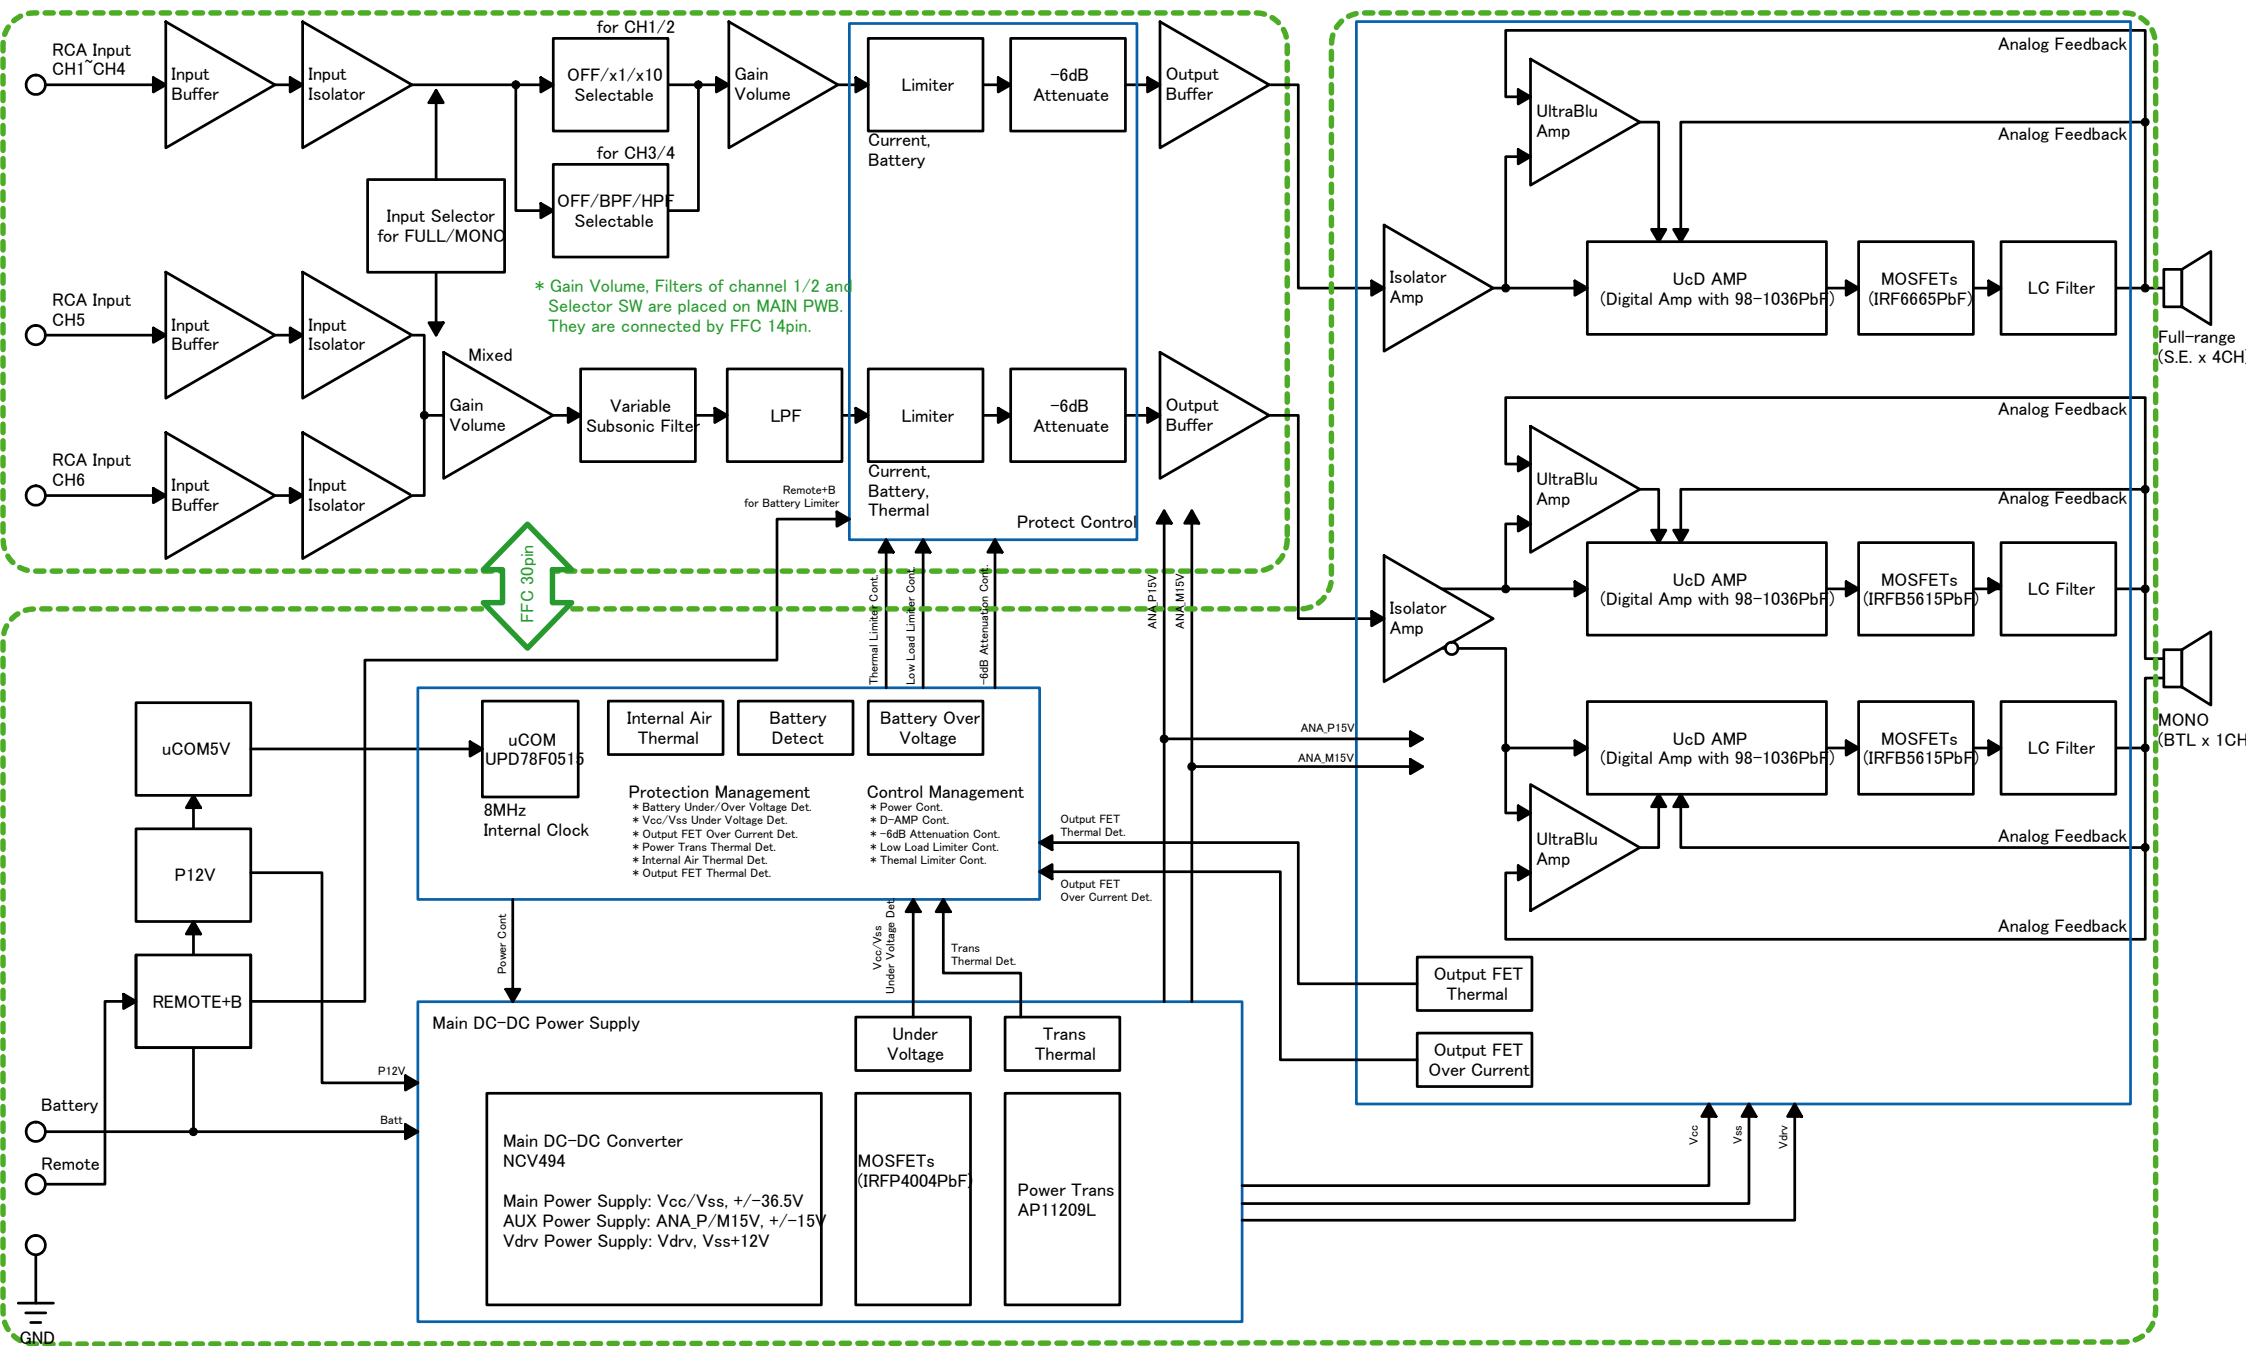


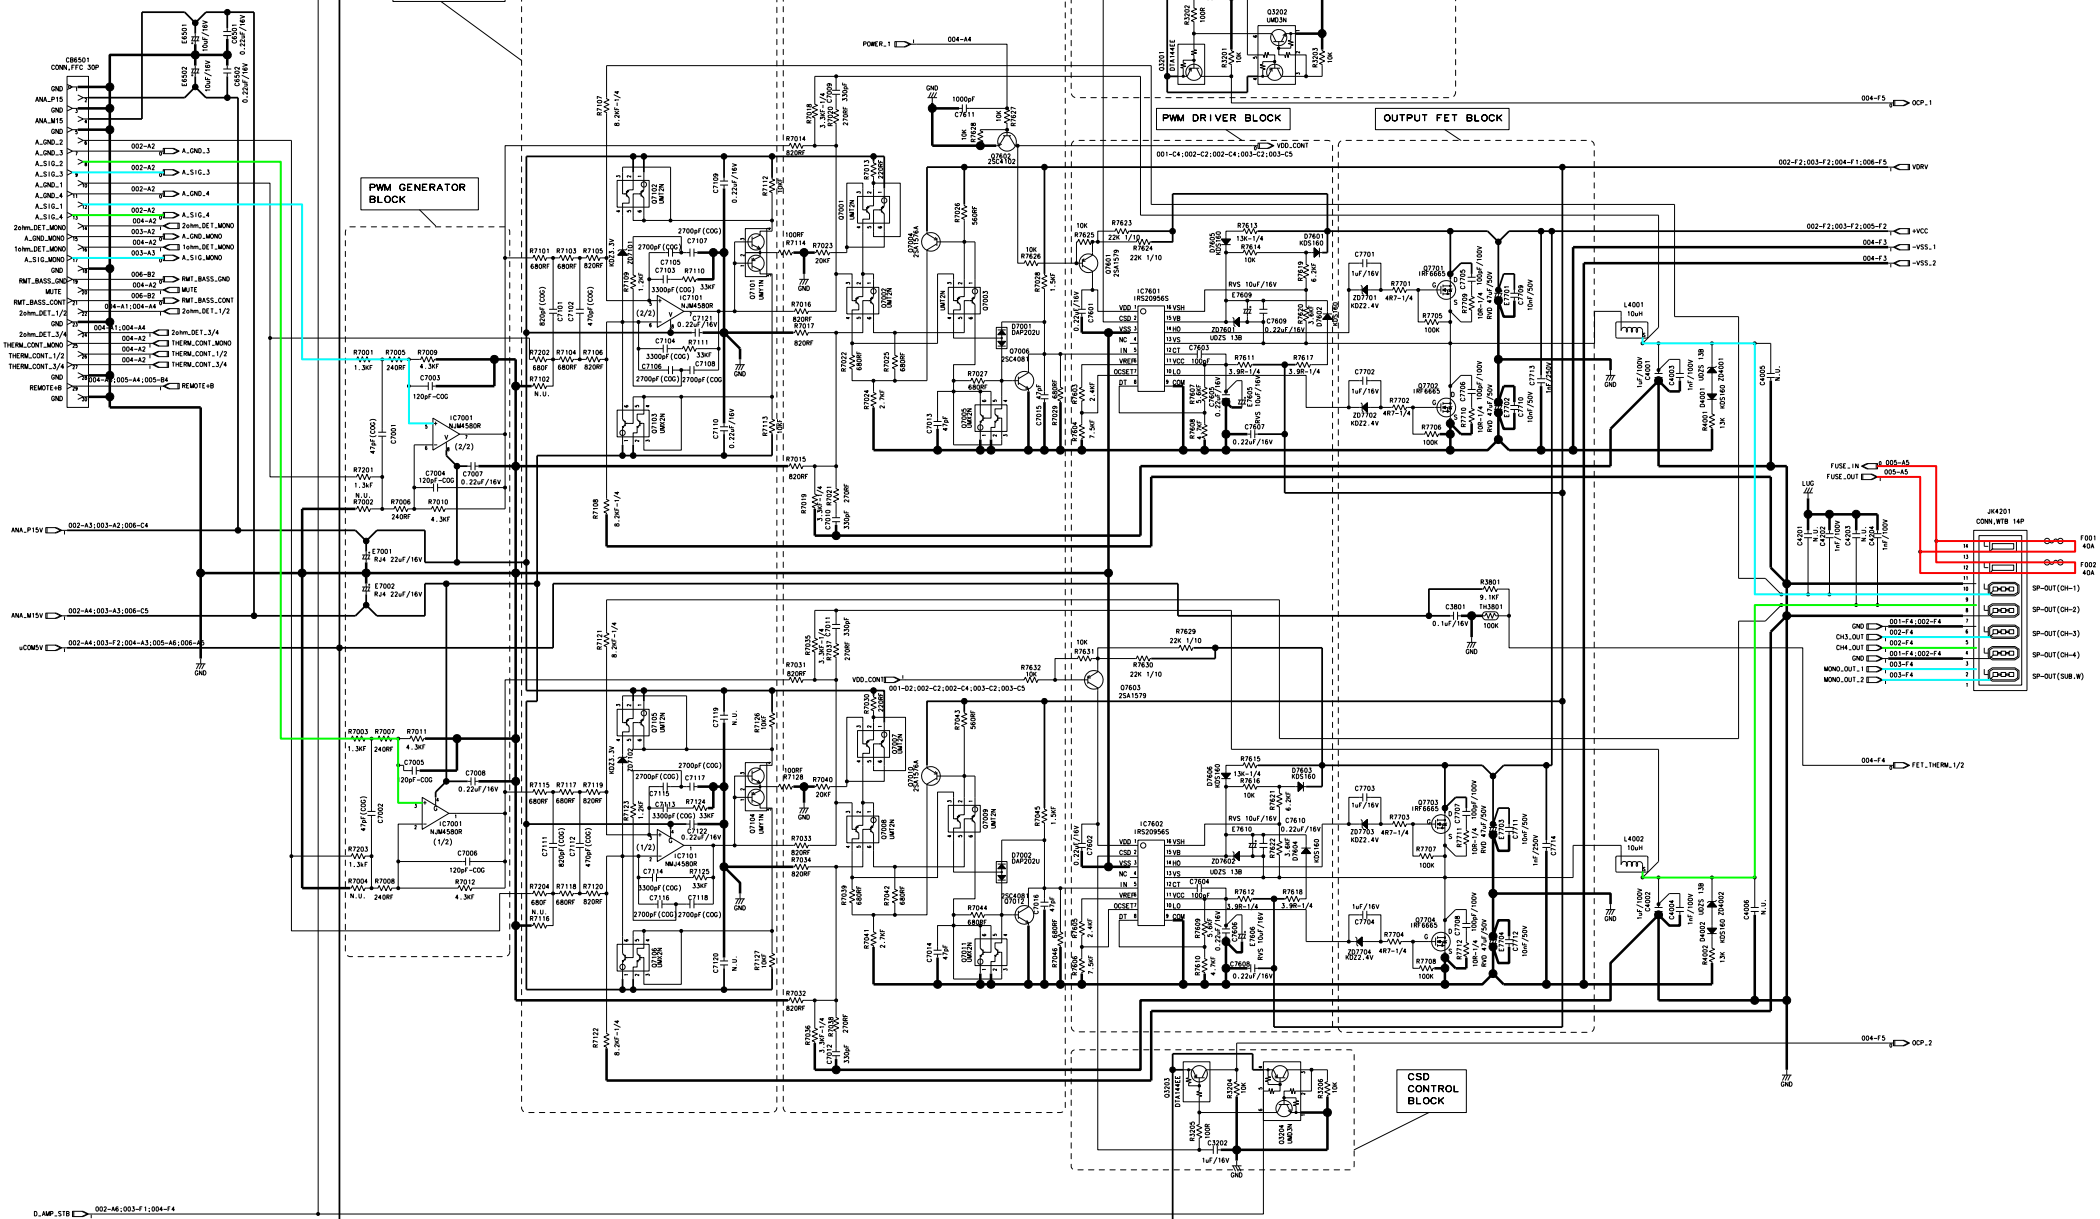

NOTE:N.U.is Not Used Parts.



NOTE:N.U.is Not Used Parts.

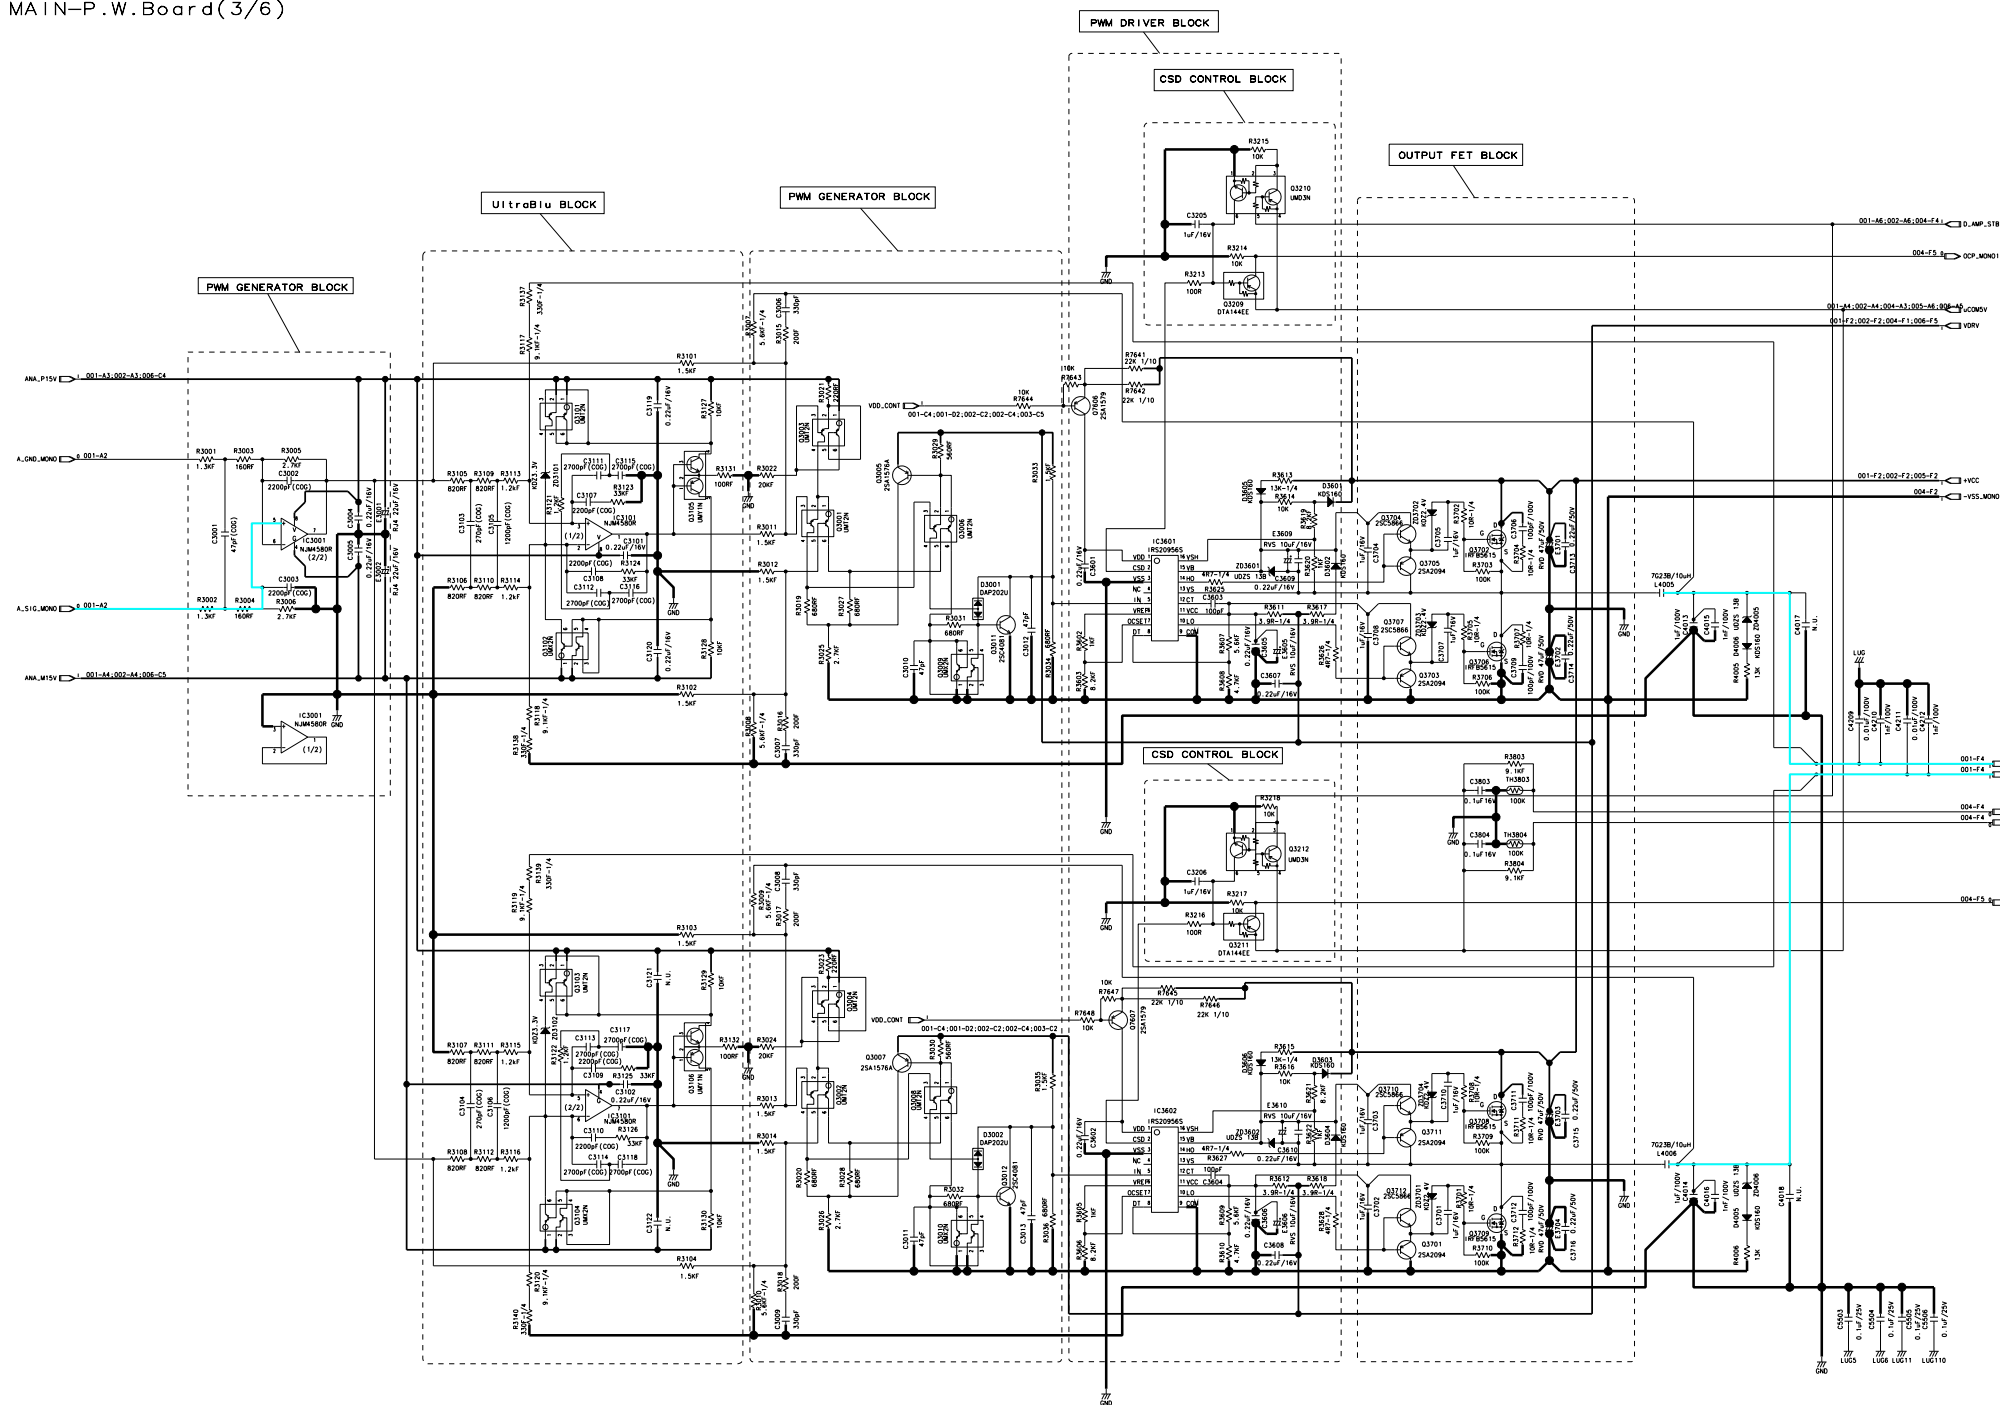

NOTE:N.U.is Not Used Parts.



NOTE:N.U.is Not Used Parts.






A	B	C	D	E	F
---	---	---	---	---	---




1

LED-P.W.Board




NOTE:N.U.is Not Used Parts.

Orange Color Pattern:Component Side Pattern
Blue Color Pattern:Foil Side Pattern

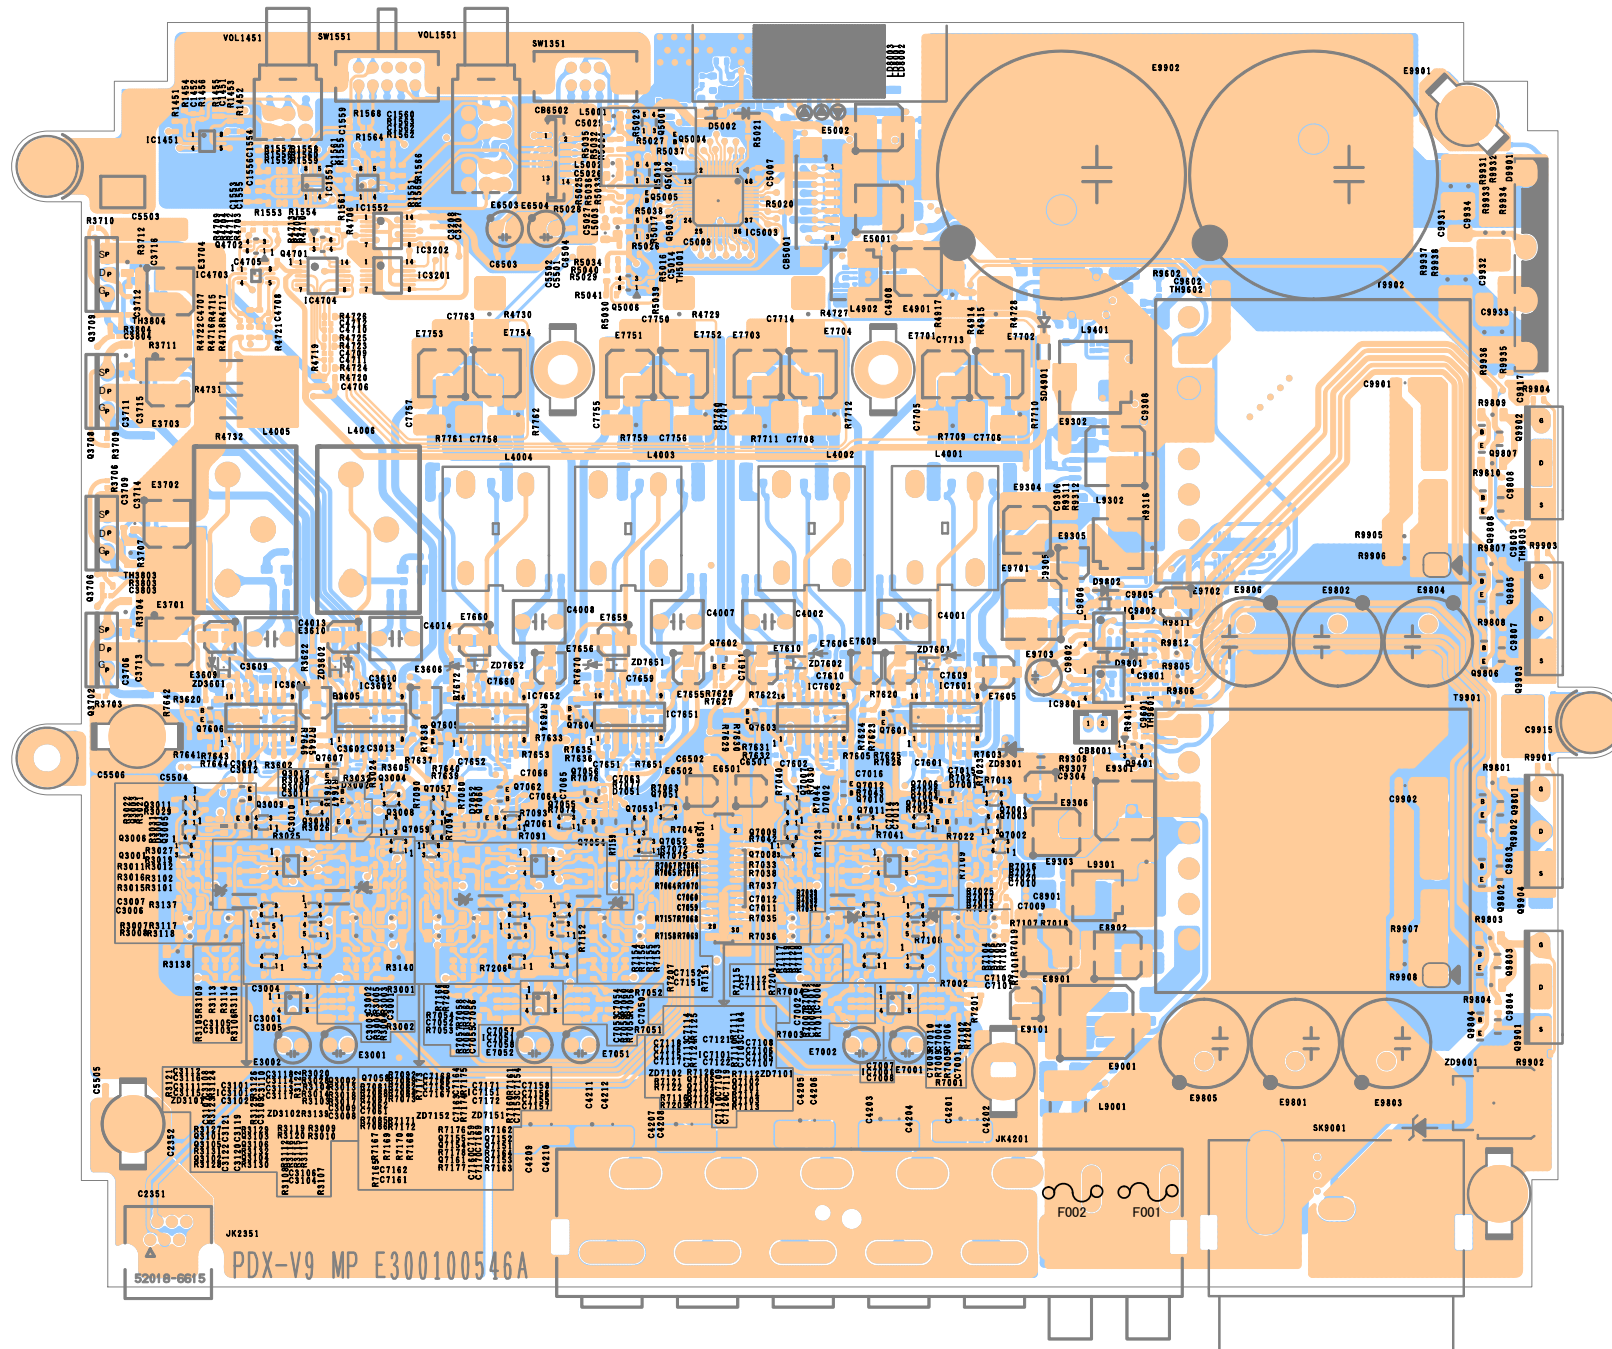


Blue Color Pattern: Foil Side Pattern

SUB-P.W.Board

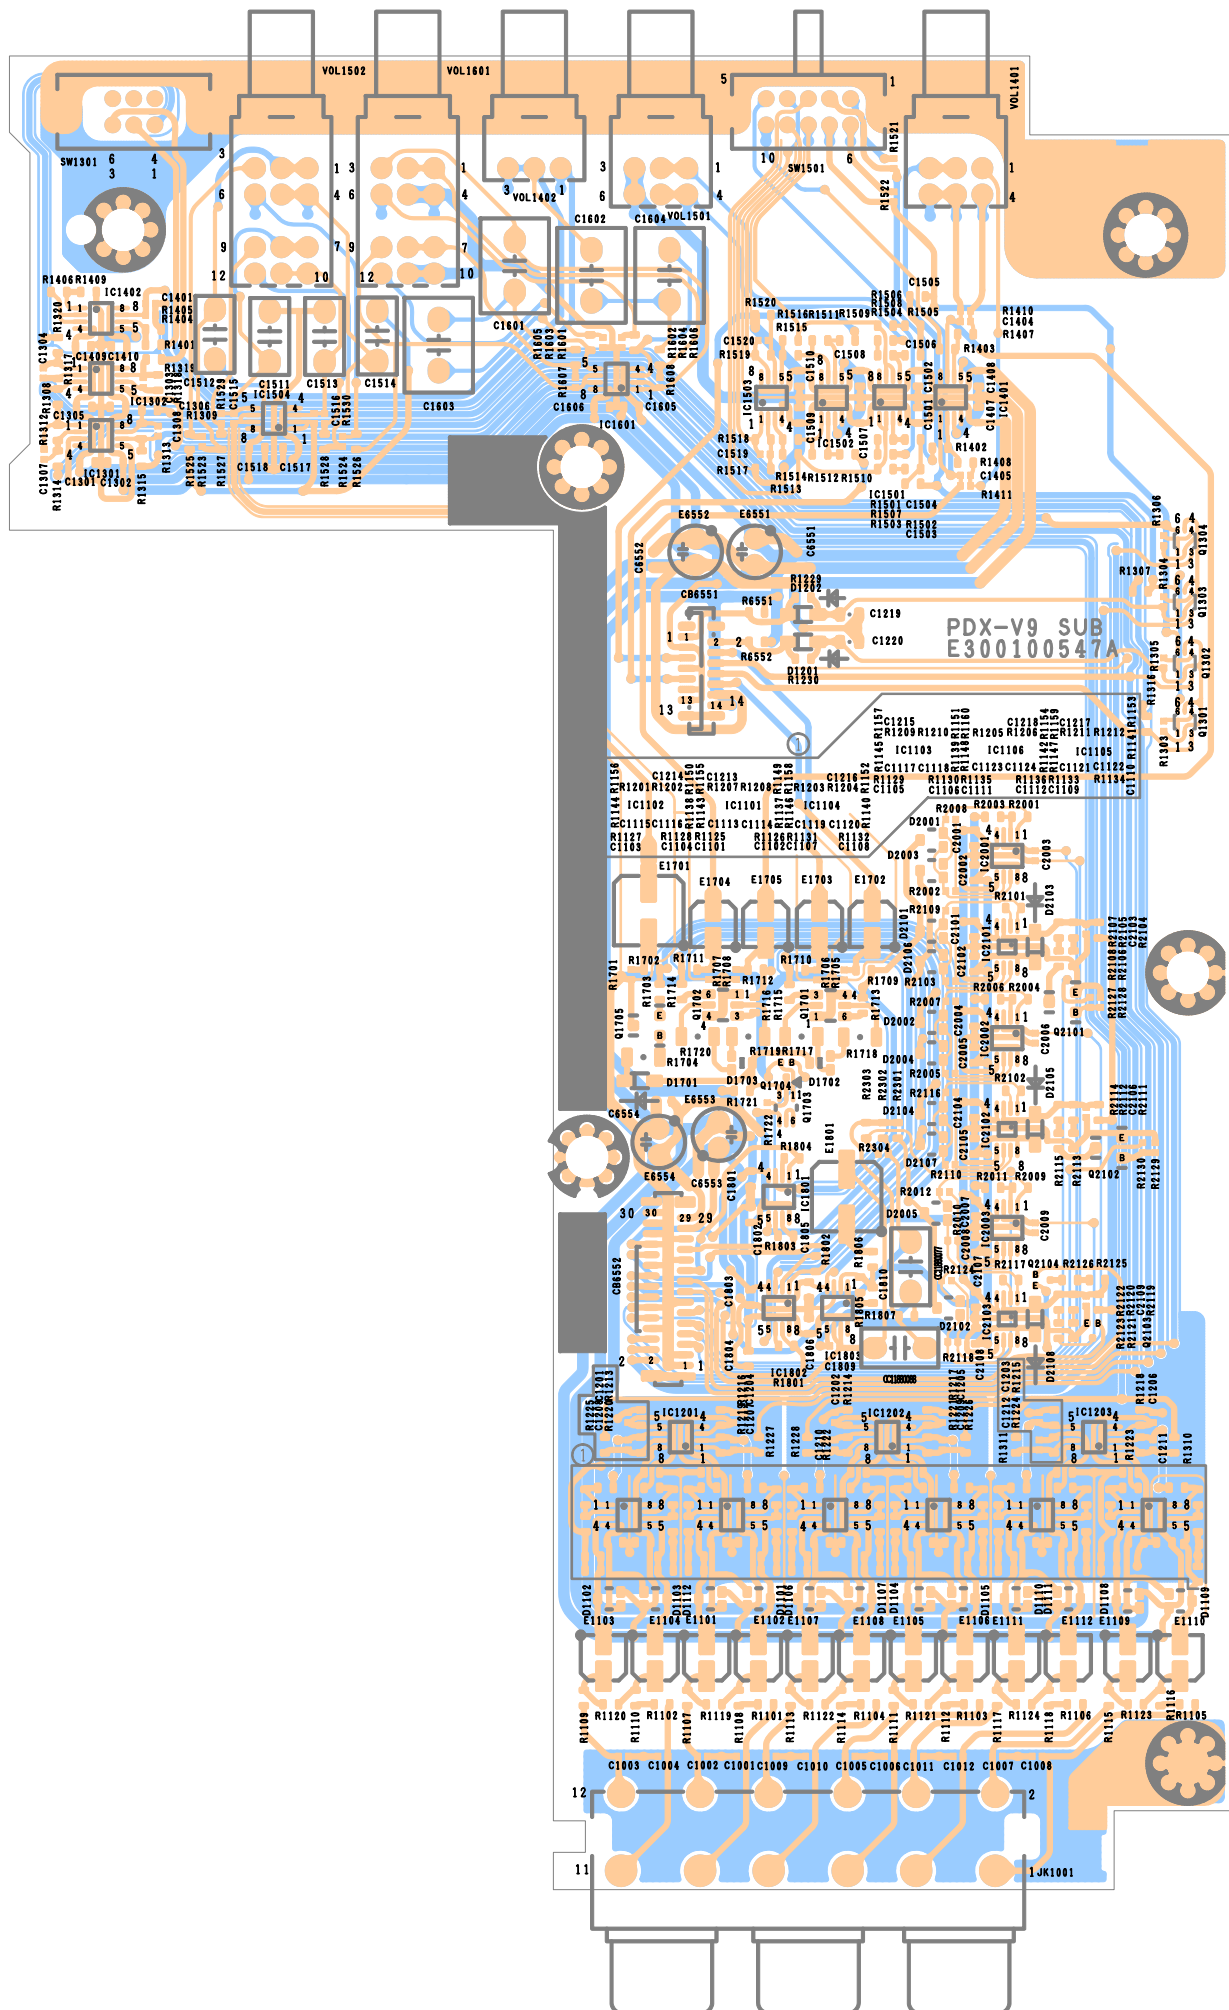


Orange Color Pattern:Component Side Pattern

SUB-P.W.Board

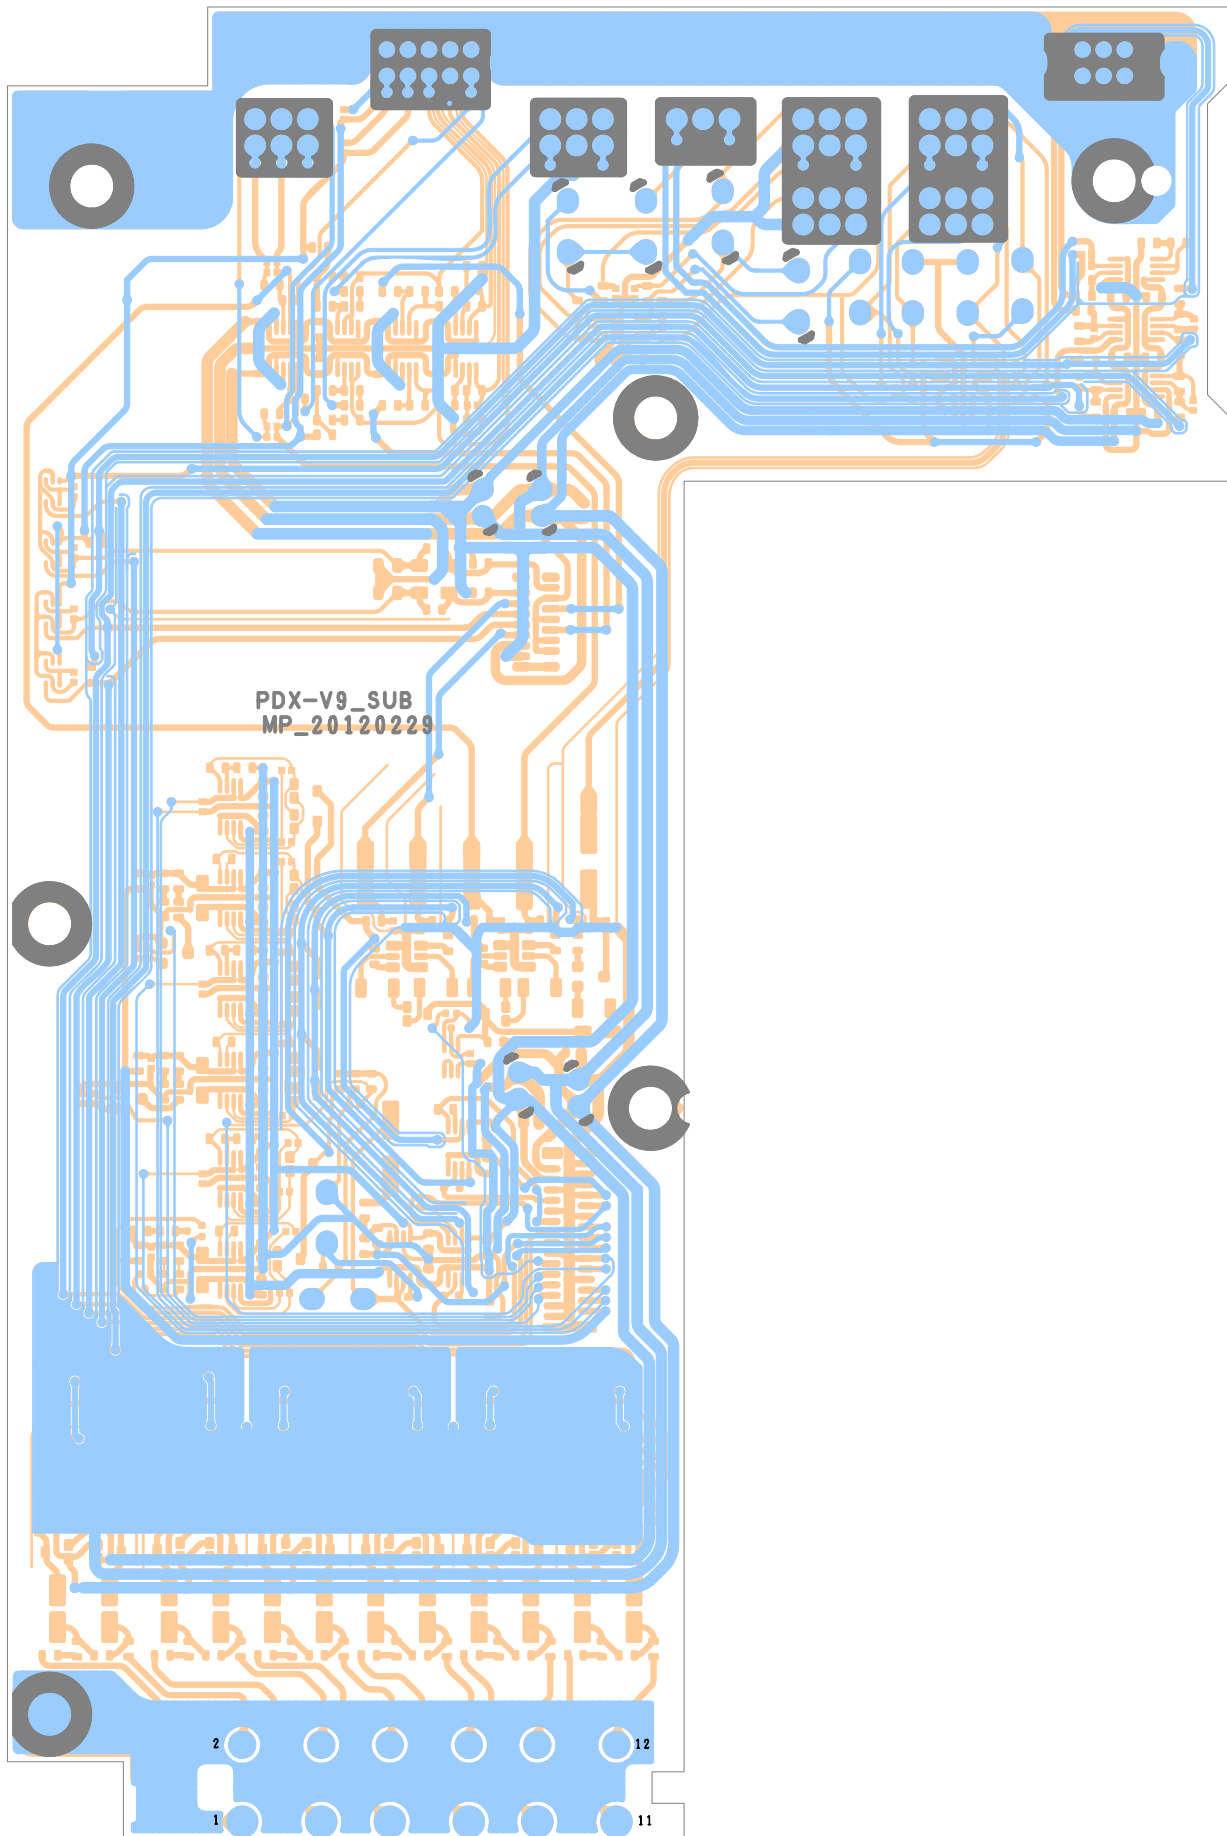


Orange Color Pattern:Component Side Pattern

LED-P.W.Board

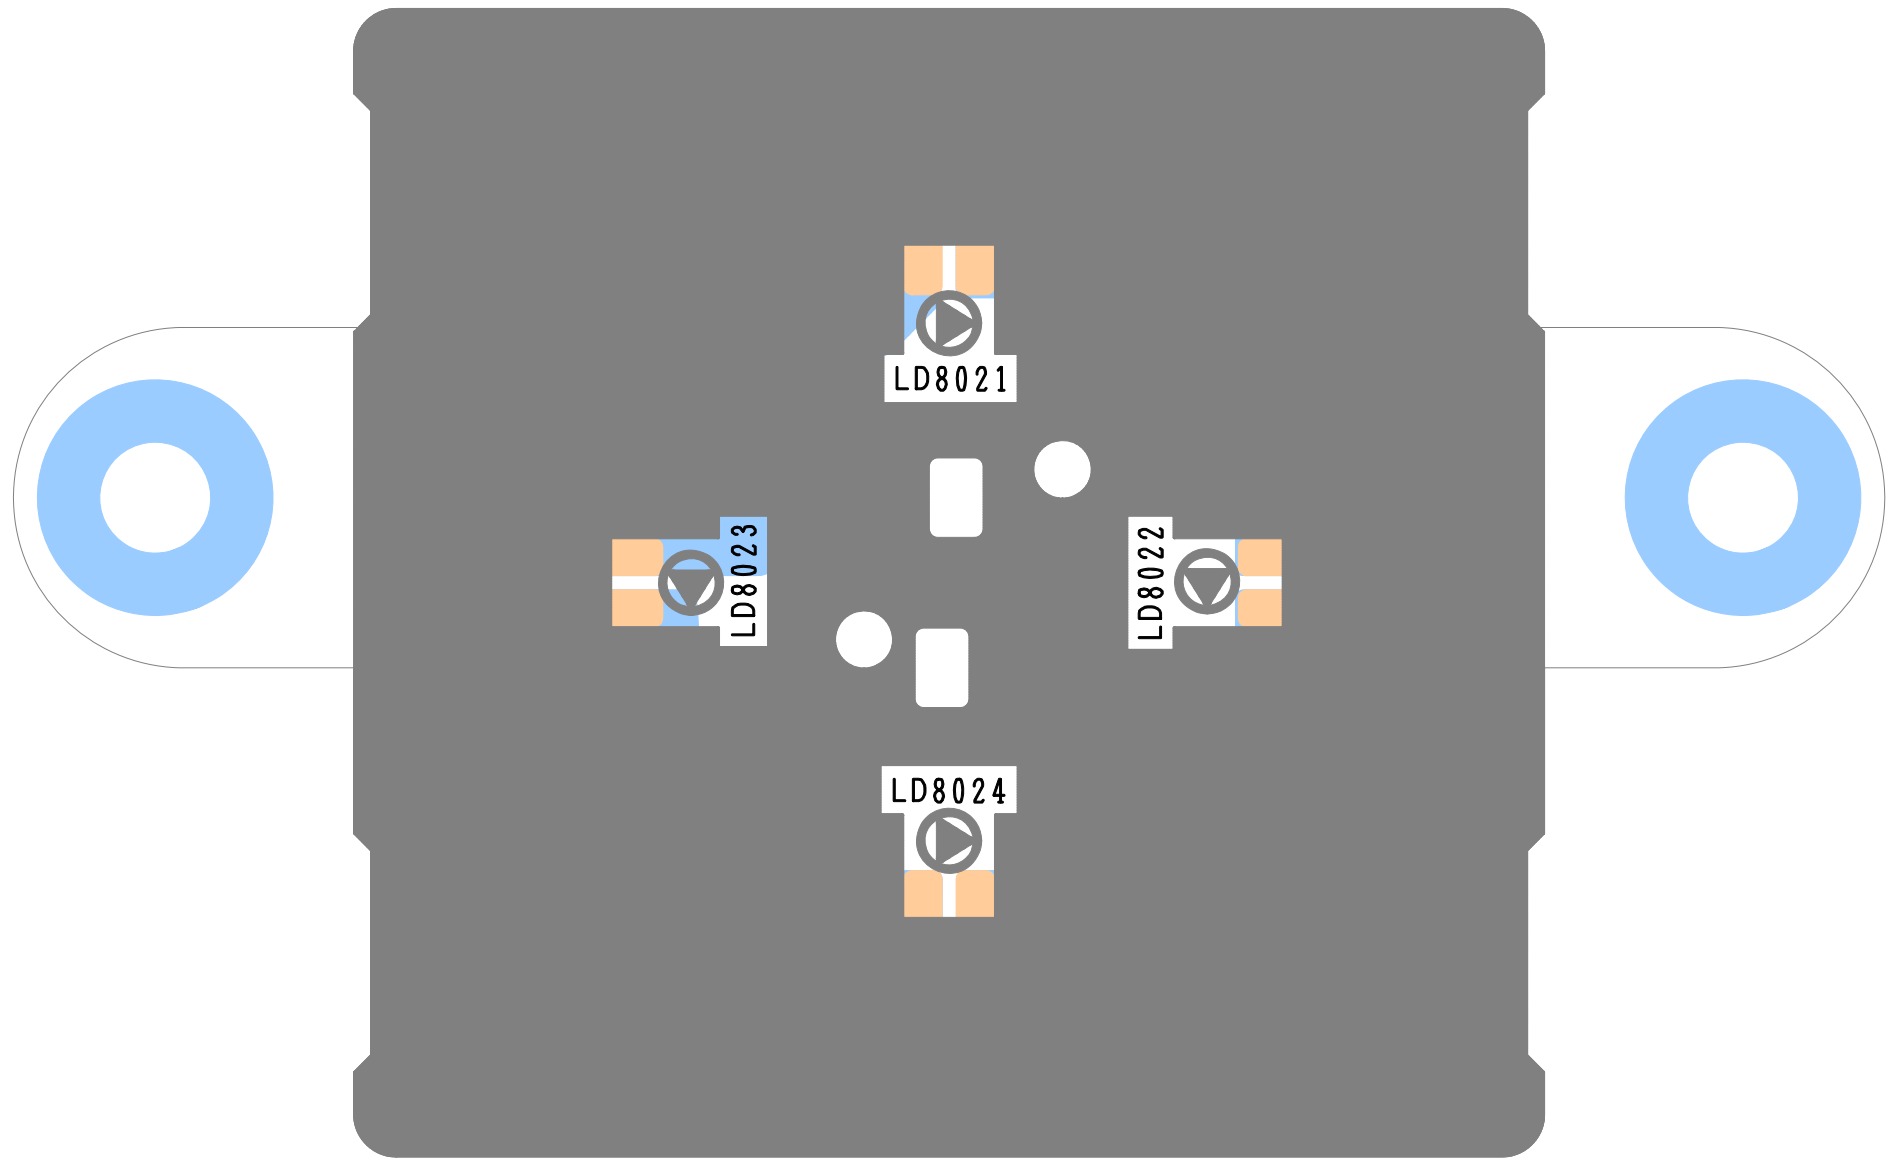

Orange Color Pattern:Component Side Pattern
Blue Color Pattern:Foil Side Pattern

LED-P.W.Board

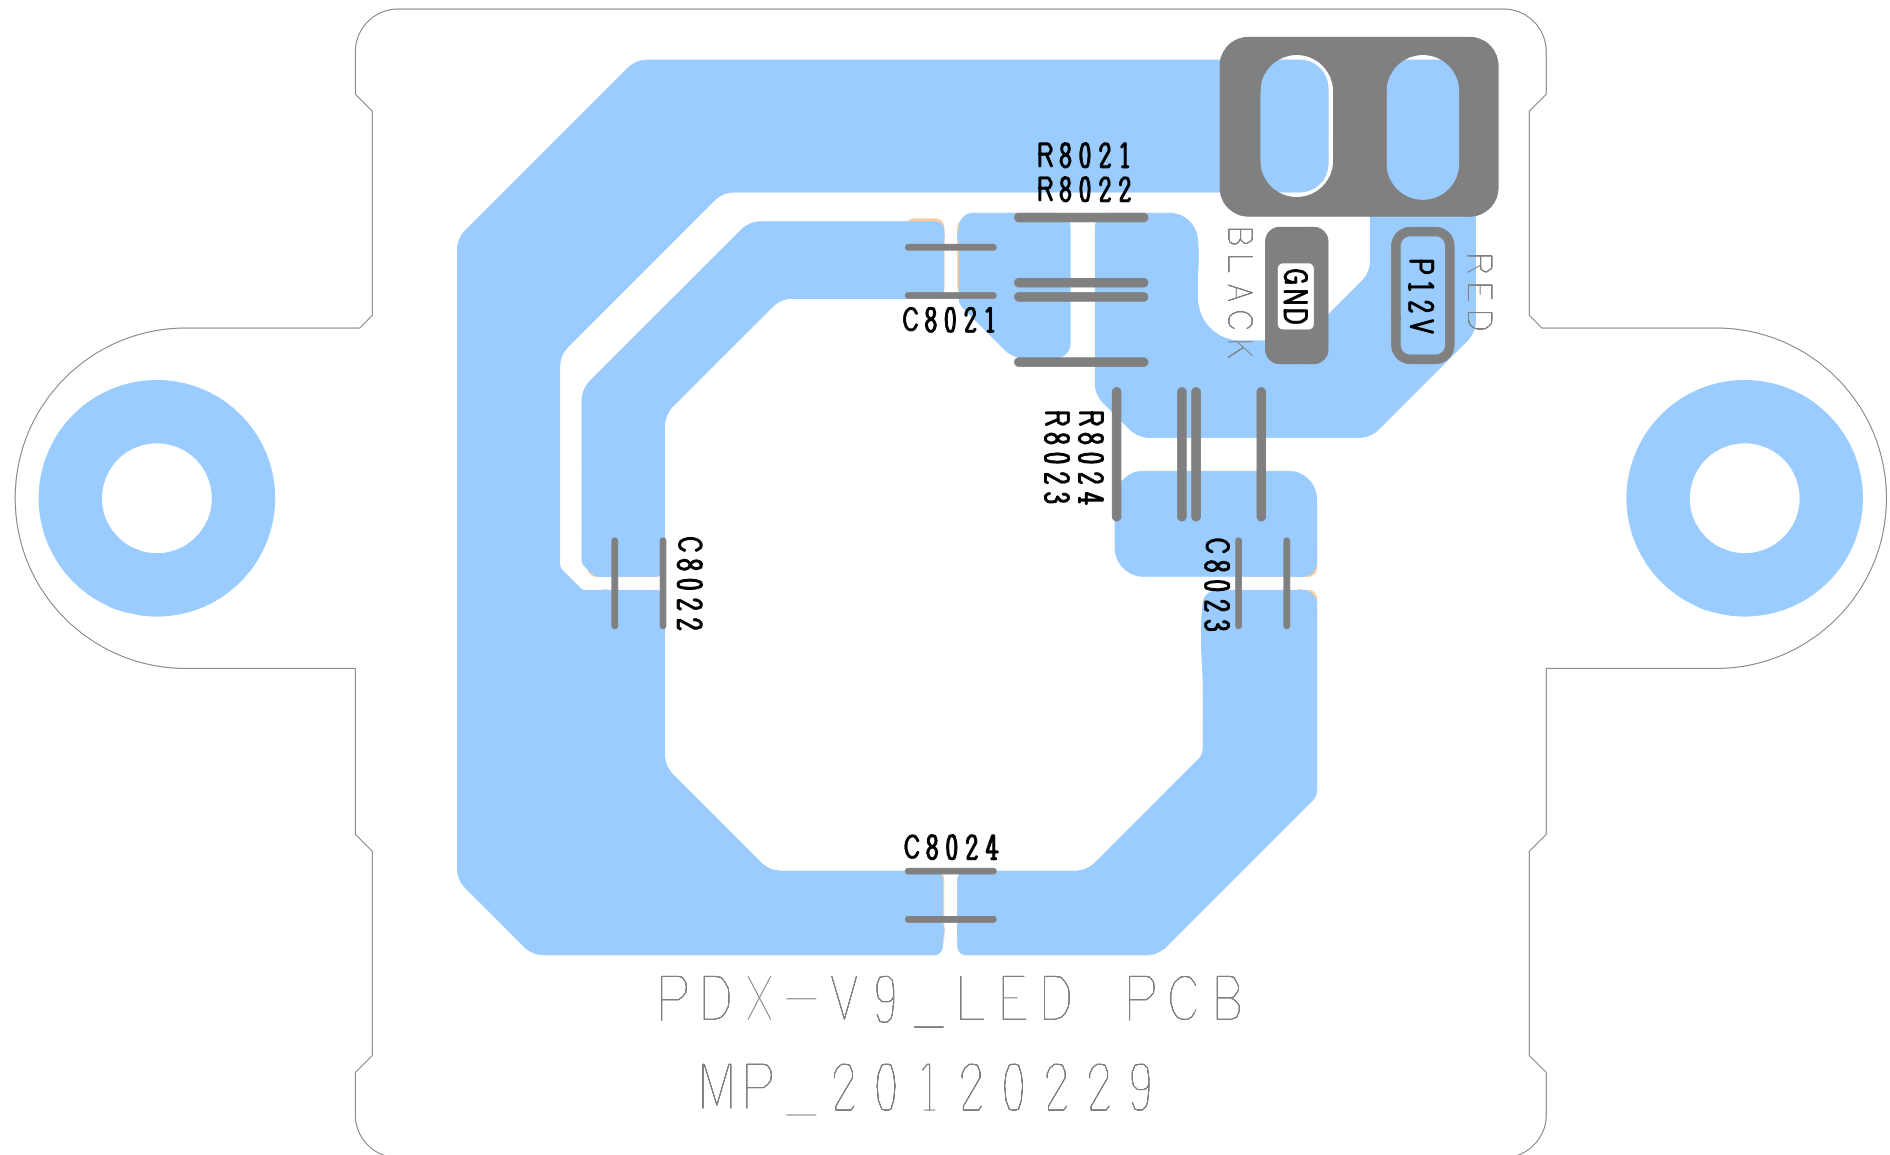

Orange Color Pattern:Component Side Pattern
Blue Color Pattern:Foil Side Pattern

Terminal Voltage of IC/TR

REF NO.	1	2	3
IC5001	5.00	0.00	11.30
IC8901	19.27	0.00	11.97

REF NO.	1	2	3	4	5
IC5002	8.20	8.20	0.00	0.00	4.17
IC5004	0.00	5.32	0.00	0.00	0.00

REF NO.	1	2	3	4	5	6	7	8
IC1101	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.53
IC1102	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.53
IC1103	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.53
IC1104	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.53
IC1105	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.53
IC1106	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.53
IC1201	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.53
IC1202	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.53
IC1203	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.53
IC1301	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.53
IC1302	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.53
IC1401	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.53
IC1402	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.53
IC1451	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.53
IC1501	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.53
IC1502	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.53
IC1503	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.53
IC1504	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.53
IC1551	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.53
IC1552	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.53
IC1601	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.53
IC1801	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.53
IC1802	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.53
IC1803	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.53
IC2001	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.53
IC2002	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.53
IC2003	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.53
IC2101	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.53
IC2102	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.53
IC2103	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.53
IC3001	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.53
IC3101	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.53
IC4703	4.98	-47.70	-47.70	-47.80	-47.70	-47.70	4.98	-35.90
IC4902	-41.90	-29.30	-45.60	-48.10	-34.90	-48.10	-41.00	0.00
IC7001	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.53
IC7051	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.53
IC7101	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.53
IC7151	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.53
IC9401	-2.20	0.00	-21.30	-21.75	-20.18	-2.30	-2.30	-2.30
IC9702	0.00	0.00	0.00	0.00	0.00	0.00	0.00	12.01
IC9801	11.97	5.01	5.00	0.00	5.60	7.12	12.12	18.11
IC9802	11.98	5.03	5.04	0.00	5.60	7.12	12.12	18.11

REF NO.	1	2	3	4	5	6	7	8
IC3201	0.00	0.00	0.00	0.00	0.00	4.99	0.00	4.99
	9	10	11	12	13	14		
	4.99	0.00	4.99	4.99	0.00	4.99		

REF NO.	1	2	3	4	5	6	7	8
IC3202	0.00	4.99	4.99	4.99	0.00	4.99	0.00	4.99
	9	10	11	12	13	14		
	4.99	0.00	4.99	4.99	0.00	4.99		

REF NO.	1	2	3	4	5	6	7	8
IC4704	4.98	4.98	-35.90	-47.70	-47.70	-47.70	-47.70	-47.70
	9	10	11	12	13	14		
	-47.70	-47.70	-47.70	-47.70	4.98	4.98		

REF NO.	1	2	3	4	5	6	7	8
IC3601	10.28	9.90	0.00	0.00	-45.70	-42.70	-44.00	-42.50
	9	10	11	12	13	14	15	16
	-47.90	-42.60	-36.00	-35.90	-0.70	-3.78	3.10	0.00

REF NO.	1	2	3	4	5	6	7	8
IC3602	10.28	9.90	0.00	0.00	-45.70	-42.70	-44.00	-42.50
	9	10	11	12	13	14	15	16
	-47.90	-42.60	-36.00	-35.90	-0.70	-3.78	3.10	0.00

REF NO.	1	2	3	4	5	6	7	8
IC7601	10.28	9.90	0.00	0.00	-45.70	-42.70	-44.00	-42.50
	9	10	11	12	13	14	15	16
	-47.90	-42.60	-36.00	-35.90	-0.70	-3.78	3.10	0.00

REF NO.	1	2	3	4	5	6	7	8
IC7602	10.28	9.90	0.00	0.00	-45.70	-42.70	-44.00	-42.50
	9	10	11	12	13	14	15	16
	-47.90	-42.60	-36.00	-35.90	-0.70	-3.78	3.10	0.00

REF NO.	1	2	3	4	5	6	7	8
IC7651	10.28	9.90	0.00	0.00	-45.70	-42.70	-44.00	-42.50
	9	10	11	12	13	14	15	16
	-47.90	-42.60	-36.00	-35.90	-0.70	-3.78	3.10	0.00

REF NO.	1	2	3	4	5	6	7	8
IC7652	10.28	9.90	0.00	0.00	-45.70	-42.70	-44.00	-42.50
	9	10	11	12	13	14	15	16
	-47.90	-42.60	-36.00	-35.90	-0.70	-3.78	3.10	0.00

REF NO.	1	2	3	4	5	6	7	8
IC9701	0.66	3.22	0	0	1.62	3.51	0	11.37
	9	10	11	12	13	14	15	16
	4.97	5	11.96	11.96	5.06	5.06	5.06	0

REF NO.	1	2	3	4	5	6	7	8
IC5003	4.92	0.00	4.92	0.00	4.92	4.92	4.92	0.00
	9	10	11	12	13	14	15	16
	4.87	0.00	4.92	4.82	0.00	4.92	4.92	4.92
	17	18	19	20	21	22	23	24
	4.92	4.86	0.00	4.92	4.92	4.92	4.92	0.00
	25	26	27	28	29	30	31	32
	4.45	4.40	4.40	4.40	4.40	4.40	4.40	4.40
	33	34	35	36	37	38	39	40
	4.92	4.92	4.92	4.91	4.92	4.90	4.90	4.92
	41	42	43	44	45	46	47	48
	-	4.92	0.00	0.00	0.00	2.48	0.00	4.92

REF NO.	E	C	B

REF NO.	E	C	B

Q1704	0.00	0.00	4.98
Q1705	0.00	0.00	-0.59
Q2101	0.00	1.44	0.00
Q2102	0.00	1.44	0.00
Q2103	0.00	3.90	0.00
Q2104	0.00	3.90	0.00
Q3005	-35.80	-37.20	-36.50
Q3007	-35.80	-37.20	-36.50
Q3011	-47.80	-45.60	-47.30
Q3012	-47.80	-45.60	-47.30
Q3201	9.88	0.00	4.90
Q3203	9.88	0.00	4.90
Q3205	9.88	0.00	4.90
Q3207	9.88	0.00	4.90
Q3209	9.88	0.00	4.90
Q3211	9.88	0.00	4.90
Q3701	-42.50	-48.00	-42.70
Q3703	-42.50	-48.00	-42.70
Q3704	-3.60	3.06	-3.70
Q3705	-3.50	-0.70	3.70
Q3707	-42.60	-36.10	-42.70
Q3710	-3.52	3.14	-3.69
Q3711	-3.50	-0.70	3.70
Q3712	-42.50	-36.10	-42.70
Q5004	0.00	1.38	0.00
Q5005	0.00	1.38	0.00
Q7004	-35.80	-37.20	-36.50
Q7006	-47.80	-45.60	-47.30
Q7010	-35.80	-37.20	-36.50
Q7012	-47.80	-45.60	-47.30
Q7054	-35.80	-37.20	-36.50
Q7056	-47.80	-45.60	-47.30
Q7060	-35.80	-37.20	-36.50
Q7062	-47.80	-45.60	-47.30

Q7601	10.20	10.20	9.56
Q7602	0.00	0.00	0.70
Q7603	10.20	10.20	9.56
Q7604	10.20	10.20	9.56
Q7605	10.20	10.20	9.56
Q7606	10.20	10.20	9.56
Q7607	10.20	10.20	9.56
Q8001	0.00	0.00	4.94
Q8002	0.00	10.50	0.00
Q9101	0.00	0.00	0.70
Q9102	14.32	14.31	13.57
Q9306	15.67	22.10	16.21
Q9307	-15.59	-22.10	-16.11
Q9404	-2.30	0.00	-1.70
Q9405	0.00	0.00	7.40
Q9406	14.32	14.31	13.57
Q9501	0.00	4.98	0.00
Q9502	0.00	-48.00	-47.30
Q9503	0.00	0.00	0.72
Q9504	0.00	0.70	0.00
Q9505	-48.10	-47.40	-47.40
Q9701	5.04	0.00	5.00
Q9702	0.00	2.20	0.00
Q9703	0.00	0.00	2.20
Q9704	4.98	4.98	0.00
Q9705	0.00	0.00	2.20
Q9801	12.15	18.01	12.08
Q9802	12.00	7.11	12.00
Q9803	5.71	11.97	5.64
Q9804	5.58	0.00	5.64
Q9805	12.17	18.11	12.12
Q9806	12.00	7.12	12.00
Q9807	5.69	11.97	5.64
Q9808	5.57	0.00	5.64

REF NO.	G	D	S
Q3702	3.00	47.90	-0.70
Q3706	-43.70	-0.70	-47.80
Q3708	3.10	47.90	-0.60
Q3709	-43.80	0.00	-47.80
Q7701	2.27	48.00	-0.70
Q7702	-44.70	-0.70	-48.00
Q7703	2.27	48.00	-0.70
Q7704	-44.70	-0.70	-48.00

REF NO.	G	D	S
Q7751	2.27	48.00	-0.70
Q7752	-44.70	-0.70	-48.00
Q7753	2.27	48.00	-0.70
Q7754	-44.70	-0.70	-48.00
Q9901	5.60	7.12	0.00
Q9902	5.60	7.12	0.00
Q9903	12.12	14.31	7.12
Q9904	12.12	14.31	7.12

REF NO.	1	2	3	4	5
Q3105	-7.00	-7.39	-7.07	15.80	-15.95
Q3106	-7.00	-7.39	-7.07	15.80	-15.95
Q5001	4.99	4.40	4.99	4.99	0.00
Q5002	4.99	4.40	4.99	4.99	0.00
Q5003	4.99	4.40	4.99	4.99	0.00
Q7101	-7.00	-7.39	-7.07	15.80	-15.95
Q7104	-7.00	-7.39	-7.07	15.80	-15.95
Q7151	-7.00	-7.39	-7.07	15.80	-15.95
Q7154	-7.00	-7.39	-7.07	15.80	-15.95


REF NO.	1	2	3	4	5	6
Q1301	0.00	15.80	0.00	0.00	15.60	0.00
Q1302	0.00	15.80	0.00	0.00	15.60	0.00
Q1303	-13.88	-15.30	0.00	-13.90	-15.30	0.00

Q1304	-13.88	-15.30	0.00	-13.90	-15.30	0.00
Q1701	0.00	-0.40	0.00	0.00	-0.40	0.00
Q1702	0.00	-0.40	0.00	0.00	-0.40	0.00
Q1703	0.00	0.00	-15.40	15.70	15.70	15.70
Q3001	0.50	0.50	0.00	-36.30	0.00	-36.40
Q3002	0.50	0.50	0.00	-36.30	0.00	-36.40
Q3003	15.50	14.90	14.40	0.50	15.00	14.40
Q3004	15.50	14.90	14.40	0.50	15.00	14.40
Q3006	-36.50	-36.50	-36.30	-46.90	-36.40	-47.30
Q3008	-36.50	-36.50	-36.30	-46.90	-36.40	-47.30
Q3009	-47.80	-47.90	-47.30	-47.30	-47.30	-47.30
Q3010	-47.80	-47.90	-47.30	-47.30	-47.30	-47.30
Q3101	15.76	15.77	15.64	-13.84	15.71	15.73
Q3102	-15.70	-15.70	-14.90	-14.90	-14.90	-15.52
Q3103	15.76	15.77	15.64	-13.84	15.71	15.73
Q3104	-15.70	-15.70	-14.90	-14.90	-14.90	-15.52
Q3202	0.00	0.00	0.00	4.90	4.90	9.88
Q3204	0.00	0.00	0.00	4.90	4.90	9.88
Q3206	0.00	0.00	0.00	4.90	4.90	9.88
Q3208	0.00	0.00	0.00	4.90	4.90	9.88
Q3210	0.00	0.00	0.00	4.90	4.90	9.88
Q3212	0.00	0.00	0.00	4.90	4.90	9.88
Q4701	4.97	4.98	0.00	4.97	4.98	0.00
Q4702	4.97	4.98	0.00	4.97	4.98	0.00
Q5006	0.00	0.00	3.80	0.00	0.00	3.80
Q7001	15.50	14.90	14.40	0.50	15.00	14.40
Q7002	0.50	0.50	0.00	-36.30	0.00	-36.40
Q7003	-36.50	-36.50	-36.30	-46.90	-36.40	-47.30
Q7005	-47.80	-47.90	-47.30	-47.30	-47.30	-47.30
Q7007	15.50	14.90	14.40	0.50	15.00	14.40
Q7008	0.50	0.50	0.00	-36.30	0.00	-36.40
Q7009	-36.50	-36.50	-36.30	-46.90	-36.40	-47.30
Q7011	-47.80	-47.90	-47.30	-47.30	-47.30	-47.30
Q7051	15.50	14.90	14.40	0.50	15.00	14.40
Q7052	0.50	0.50	0.00	-36.30	0.00	-36.40
Q7053	-36.50	-36.50	-36.30	-46.90	-36.40	-47.30
Q7055	-47.80	-47.90	-47.30	-47.30	-47.30	-47.30
Q7057	15.50	14.90	14.40	0.50	15.00	14.40
Q7058	0.50	0.50	0.00	-36.30	0.00	-36.40
Q7059	-36.50	-36.50	-36.30	-46.90	-36.40	-47.30
Q7061	-47.80	-47.90	-47.30	-47.30	-47.30	-47.30
Q7102	15.76	15.77	15.64	-13.84	15.71	15.73
Q7103	-15.70	-15.70	-14.90	-14.90	-14.90	-15.52
Q7105	15.76	15.77	15.64	-13.84	15.71	15.73
Q7106	-15.70	-15.70	-14.90	-14.90	-14.90	-15.52
Q7152	15.76	15.77	15.64	-13.84	15.71	15.73
Q7153	-15.70	-15.70	-14.90	-14.90	-14.90	-15.52
Q7155	15.76	15.77	15.64	-13.84	15.71	15.73
Q7161	-15.70	-15.70	-14.90	-14.90	-14.90	-15.52
Q9401	0.00	4.89	0.00	0.00	0.00	0.00
Q9706	0.00	4.90	11.30	11.90	0.00	0.00

[Measuring Conditions]

1. Power Supply Voltage : DC 14.4V
2. Measuring Meter : Digital Multi Voltmeter
3. Measuring Point Reference : Between GND (DC)
4. Measuring Condition : No Signal Input

Exploded View (Cabinet)

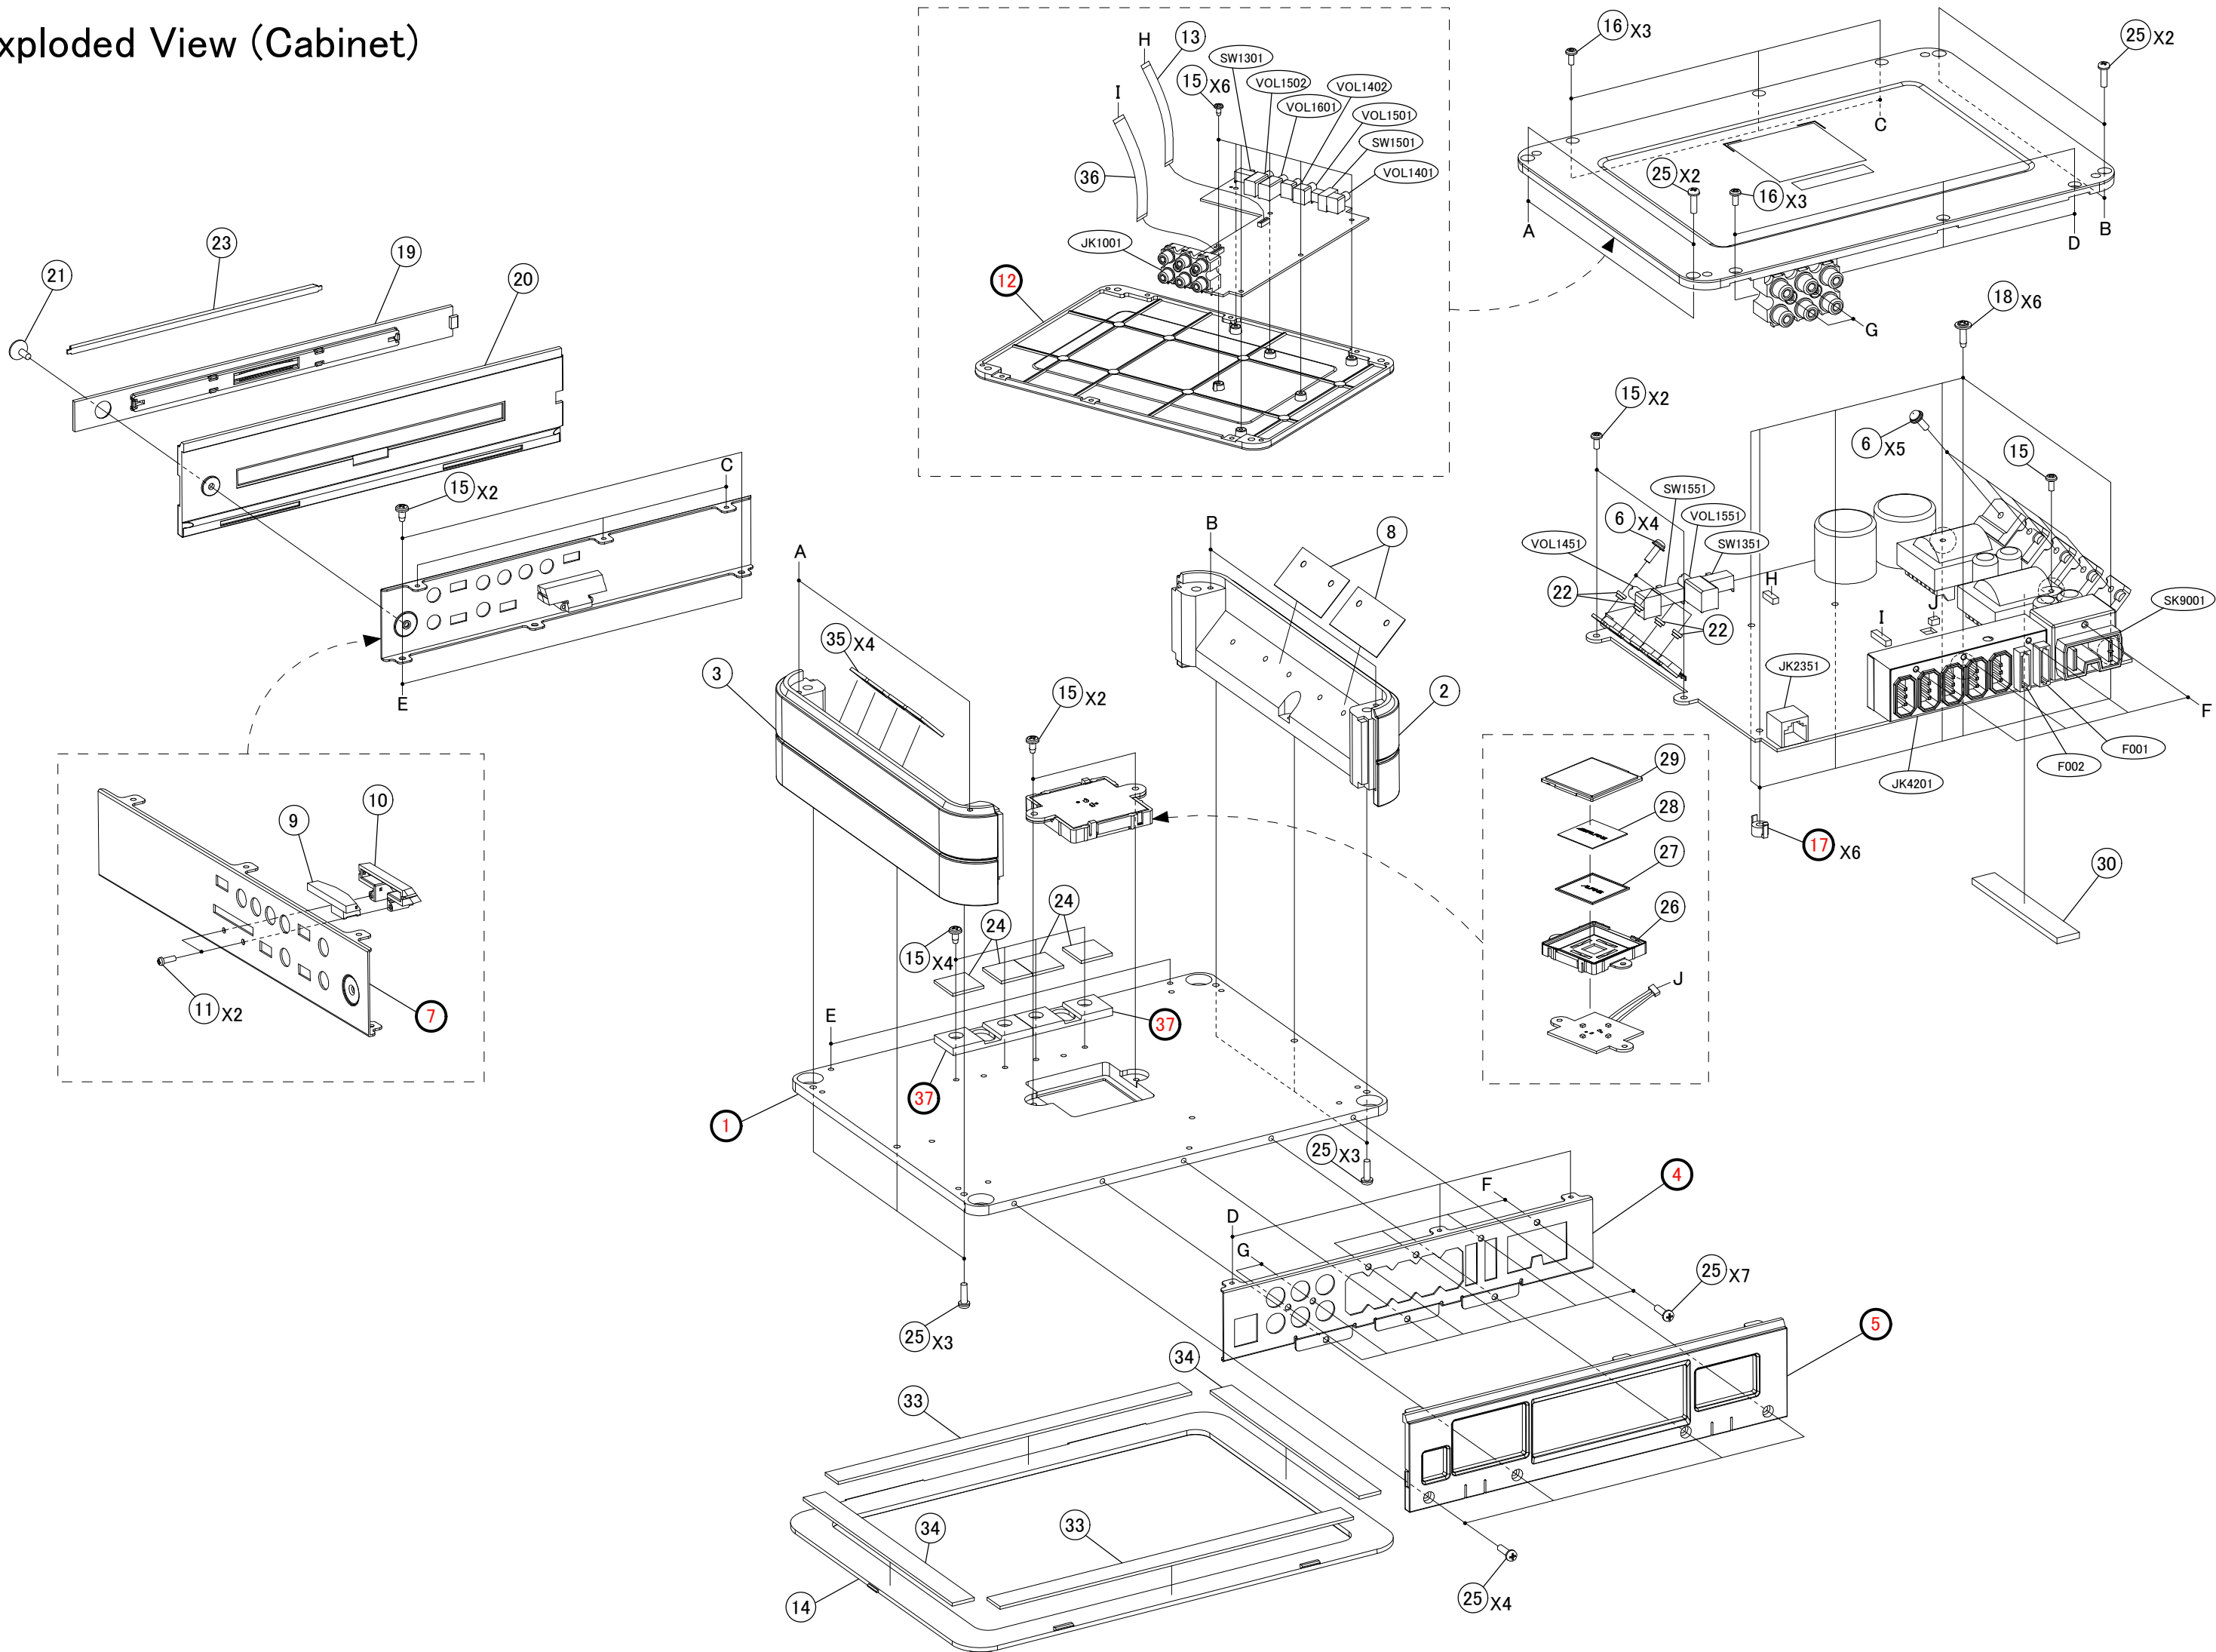

	1	-----	HEAT,SINK MAIN
	2	13E42975S01	SIDE PANEL R
	3	13E42974S01	SIDE PANEL L
	4	-----	CHAS,REAR
	5	-----	COVER,REAR
	6	03E37973S01	SCR,M3X12(WS)
	7	-----	CHAS,FRONT
	8	14E42978S01	INS,SILPAD
	9	34E41467S01	IND,COVER DOOR
	10	09E41464S01	HOLDER,IND
	11	03E39164S01	SCR,M2X6(P)(BLK)
	12	-----	COVER,BOTTOM
	13	30E40380S01	CABLE,FLAT 14P
	14	15E41453S01	COVER,STACKING
	15	03E38671S01	SCR,M3X6(B)
	16	03E40129S01	SCR,M2.6X6(B)(BLK)
	17	-----	SUPPORT,PWB
	18	03E39165S01	SCR,M3X11(WP)(WHT)
	19	33E41455S01	PLATE,COVER DOOR
	20	15E41452S01	COVER,DOOR
	21	03E39505S01	SCR,M3X10(F)(BLK)
	22	48E42990S01	TR,PMAL205A
	23	34E41473S01	IND,PLATE COVER DOOR
	24	14E42150S01	INS,GAPPAD-FET
	25	03E38698S01	SCR,M3X8(P)(BLK)
	26	09E41463S01	HOLDER,LED-TOP
	27	61E41457S01	LENS,LED
	28	33E41456S01	PLATE,LENS
	29	33E41454S01	PLATE,SCALE-TOP
	30	14E42977S01	INS,GAP PAD
	33	75E41465S01	CUSHION,CR SPONGE
	34	75E41466S01	CUSHION,CR SPONGE
	35	14E42976S01	Aluminium oxide wafer
	36	30E42989S01	CABLE,FLAT 30P
	37	-----	HEATSINK,SUB
	F001	65E43007S01	FUSE,40A
	F002	65E43007S01	FUSE,40A
	JK1001	09E42973S01	CONN,RCA 6P
	JK2351	09E42970S01	CONN,JACK 6P
	JK4201	09E42971S01	CONN,WTB 14P
	SK9001	09E41446S01	CONN,P-CON
	SW1301	40E41432S01	SW,SLIDE SK-22D15-G6
	SW1351	40E41432S01	SW,SLIDE SK-22D15-G6
	SW1501	40E40956S01	SW,SLIDE SK-23D55-G6
	SW1551	40E40956S01	SW,SLIDE SK-23D55-G6
	VOL1401	18E41507S01	VOL,ROTARY 50KX2
	VOL1402	18E41439S01	VOL,ROTARY 50KX1
	VOL1451	18E41507S01	VOL,ROTARY 50KX2
	VOL1501	18E42201S01	VOL,ROTARY 50KX2
	VOL1502	18E42155S01	VOL,ROTARY 20KX4
	VOL1551	18E42979S01	VOL,ROTARY 50KX4
	VOL1601	18E42980S01	VOL,ROTARY 100KX4

Mark Model Code

#1 PDX-V9(North American) Only,

\$1 PDX-V9(European) Only,

%1 PDX-V9(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

#####

MAIN-P.W.Board			C1451	08E42323S01	CAP,CER. 22pF/50V
MAIN-P.W.Board			C1452	08E42323S01	CAP,CER. 22pF/50V
MAIN-P.W.Board			C1453	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C1454	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C1551	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C1552	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C1553	08E38540S01	CAP,CER. 0.15uF/16V
MAIN-P.W.Board			C1554	08E38540S01	CAP,CER. 0.15uF/16V
MAIN-P.W.Board			C1555	08E38540S01	CAP,CER. 0.15uF/16V
MAIN-P.W.Board			C1556	08E38540S01	CAP,CER. 0.15uF/16V
MAIN-P.W.Board			C1557	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C1558	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C1559	08E37266S01	CAP,CER. 0.015uF/50V
MAIN-P.W.Board			C1560	08E37266S01	CAP,CER. 0.015uF/50V
MAIN-P.W.Board			C1561	08E37266S01	CAP,CER. 0.015uF/50V
MAIN-P.W.Board			C1562	08E37266S01	CAP,CER. 0.015uF/50V
MAIN-P.W.Board			C2351	08E42139S01	CAP,CER.100pF/50V
MAIN-P.W.Board			C2352	08E41395S01	CAP,CER.1500pF/50V
MAIN-P.W.Board			C3001	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C3002	08E41392S01	CAP,CER.2200pF/50V
MAIN-P.W.Board			C3003	08E41392S01	CAP,CER.2200pF/50V
MAIN-P.W.Board			C3004	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C3005	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C3006	08E41029S01	CAP,CER. 330pF/50V
MAIN-P.W.Board			C3007	08E41029S01	CAP,CER. 330pF/50V
MAIN-P.W.Board			C3008	08E41029S01	CAP,CER. 330pF/50V
MAIN-P.W.Board			C3009	08E41029S01	CAP,CER. 330pF/50V
MAIN-P.W.Board			C3010	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C3011	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C3012	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C3013	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C3101	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C3102	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C3103	08E38105S01	CAP,CER. 270pF/50V
MAIN-P.W.Board			C3104	08E38105S01	CAP,CER. 270pF/50V
MAIN-P.W.Board			C3105	08E41393S01	CAP,CER.1200pF/50V
MAIN-P.W.Board			C3106	08E41393S01	CAP,CER.1200pF/50V
MAIN-P.W.Board			C3107	08E41392S01	CAP,CER.2200pF/50V
MAIN-P.W.Board			C3108	08E41392S01	CAP,CER.2200pF/50V
MAIN-P.W.Board			C3109	08E41392S01	CAP,CER.2200pF/50V
MAIN-P.W.Board			C3110	08E41392S01	CAP,CER.2200pF/50V
MAIN-P.W.Board			C3111	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C3112	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C3113	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C3114	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C3115	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C3116	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C3117	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C3118	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C3119	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C3120	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C3201	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C3202	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C3203	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C3204	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C3205	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C3206	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C3207	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C3208	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C3601	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C3602	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C3603	08E36470S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C3604	08E36470S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C3605	08E36114S01	CAP,CER. 0.22uF/16V

MAIN-P.W.Board		C3606	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board		C3607	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board		C3608	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board		C3609	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board		C3610	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board		C3701	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board		C3702	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board		C3703	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board		C3704	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board		C3705	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board		C3706	08E42963S01	CAP,CER.100pF/100V
MAIN-P.W.Board		C3707	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board		C3708	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board		C3709	08E42963S01	CAP,CER.100pF/100V
MAIN-P.W.Board		C3710	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board		C3711	08E42963S01	CAP,CER.100pF/100V
MAIN-P.W.Board		C3712	08E42963S01	CAP,CER.100pF/100V
MAIN-P.W.Board		C3713	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C3714	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C3715	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C3716	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C3801	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board		C3802	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board		C3803	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board		C3804	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board		C4001	08E42962S01	CAP,FILM 1.0uF/100V
MAIN-P.W.Board		C4002	08E42962S01	CAP,FILM 1.0uF/100V
MAIN-P.W.Board		C4003	08E42189S01	CAP,CER. 1000pF/100V
MAIN-P.W.Board		C4004	08E42189S01	CAP,CER. 1000pF/100V
MAIN-P.W.Board		C4007	08E42962S01	CAP,FILM 1.0uF/100V
MAIN-P.W.Board		C4008	08E42962S01	CAP,FILM 1.0uF/100V
MAIN-P.W.Board		C4009	08E42189S01	CAP,CER. 1000pF/100V
MAIN-P.W.Board		C4010	08E42189S01	CAP,CER. 1000pF/100V
MAIN-P.W.Board		C4013	08E42962S01	CAP,FILM 1.0uF/100V
MAIN-P.W.Board		C4014	08E42962S01	CAP,FILM 1.0uF/100V
MAIN-P.W.Board		C4015	08E42189S01	CAP,CER. 1000pF/100V
MAIN-P.W.Board		C4016	08E42189S01	CAP,CER. 1000pF/100V
MAIN-P.W.Board		C4202	08E42189S01	CAP,CER. 1000pF/100V
MAIN-P.W.Board		C4204	08E42189S01	CAP,CER. 1000pF/100V
MAIN-P.W.Board		C4206	08E42189S01	CAP,CER. 1000pF/100V
MAIN-P.W.Board		C4208	08E42189S01	CAP,CER. 1000pF/100V
MAIN-P.W.Board		C4209	08E39662S01	CAP,CER. 0.01uF/100V
MAIN-P.W.Board		C4210	08E42189S01	CAP,CER. 1000pF/100V
MAIN-P.W.Board		C4211	08E39662S01	CAP,CER. 0.01uF/100V
MAIN-P.W.Board		C4212	08E42189S01	CAP,CER. 1000pF/100V
MAIN-P.W.Board		C4705	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board		C4706	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board		C4707	08E42417S01	CAP,CER. 1500pF/50V
MAIN-P.W.Board		C4708	08E42417S01	CAP,CER. 1500pF/50V
MAIN-P.W.Board		C4709	08E42417S01	CAP,CER. 1500pF/50V
MAIN-P.W.Board		C4710	08E42417S01	CAP,CER. 1500pF/50V
MAIN-P.W.Board		C4711	08E42417S01	CAP,CER. 1500pF/50V
MAIN-P.W.Board		C4712	08E42417S01	CAP,CER. 1500pF/50V
MAIN-P.W.Board		C4905	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board		C4906	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board		C4907	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C4908	08E40363S01	CAP,CER. 2.2uF/16V
MAIN-P.W.Board		C4909	08E34594S01	CAP,CER. 3300pF/50V
MAIN-P.W.Board		C4910	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board		C4911	08E42196S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board		C5001	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board		C5002	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board		C5003	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board		C5004	08E42965S01	CAP,CER. 22nF/16V

MAIN-P.W.Board		C5005	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board		C5006	08E42325S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board		C5007	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board		C5008	08E41391S01	CAP,CER. 0.47uF/25V
MAIN-P.W.Board		C5009	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board		C5010	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board		C5011	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board		C5012	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board		C5013	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board		C5014	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board		C5015	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board		C5016	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board		C5017	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board		C5018	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board		C5019	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board		C5020	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board		C5021	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board		C5022	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board		C5023	08E42324S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board		C5024	08E42139S01	CAP,CER.100pF/50V
MAIN-P.W.Board		C5025	08E40853S01	CAP,CER. 4.7uF/10V
MAIN-P.W.Board		C5026	08E40853S01	CAP,CER. 4.7uF/10V
MAIN-P.W.Board		C5027	08E40853S01	CAP,CER. 4.7uF/10V
MAIN-P.W.Board		C5028	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board		C5501	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board		C5502	08E41031S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board		C5503	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board		C5504	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board		C5505	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board		C5506	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board		C6501	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board		C6502	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board		C6503	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board		C6504	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board		C7001	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board		C7002	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board		C7003	08E37268S01	CAP,CER. 120pF/50V
MAIN-P.W.Board		C7004	08E37268S01	CAP,CER. 120pF/50V
MAIN-P.W.Board		C7005	08E37268S01	CAP,CER. 120pF/50V
MAIN-P.W.Board		C7006	08E37268S01	CAP,CER. 120pF/50V
MAIN-P.W.Board		C7007	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board		C7008	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board		C7009	08E41029S01	CAP,CER. 330pF/50V
MAIN-P.W.Board		C7010	08E41029S01	CAP,CER. 330pF/50V
MAIN-P.W.Board		C7011	08E41029S01	CAP,CER. 330pF/50V
MAIN-P.W.Board		C7012	08E41029S01	CAP,CER. 330pF/50V
MAIN-P.W.Board		C7013	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board		C7014	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board		C7015	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board		C7016	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board		C7050	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board		C7052	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board		C7053	08E37268S01	CAP,CER. 120pF/50V
MAIN-P.W.Board		C7054	08E37268S01	CAP,CER. 120pF/50V
MAIN-P.W.Board		C7055	08E37268S01	CAP,CER. 120pF/50V
MAIN-P.W.Board		C7056	08E37268S01	CAP,CER. 120pF/50V
MAIN-P.W.Board		C7057	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board		C7058	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board		C7059	08E41029S01	CAP,CER. 330pF/50V
MAIN-P.W.Board		C7060	08E41029S01	CAP,CER. 330pF/50V
MAIN-P.W.Board		C7061	08E41029S01	CAP,CER. 330pF/50V
MAIN-P.W.Board		C7062	08E41029S01	CAP,CER. 330pF/50V
MAIN-P.W.Board		C7063	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board		C7064	08E39649S01	CAP,CER. 47pF/50V

MAIN-P.W.Board			C7065	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C7066	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C7101	08E38046S01	CAP,CER. 820pF/50V
MAIN-P.W.Board			C7102	08E37151S01	CAP,CER. 470pF/50V
MAIN-P.W.Board			C7103	08E41389S01	CAP,CER. 3300pF/50V
MAIN-P.W.Board			C7104	08E41389S01	CAP,CER. 3300pF/50V
MAIN-P.W.Board			C7105	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C7106	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C7107	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C7108	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C7109	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C7110	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C7111	08E38046S01	CAP,CER. 820pF/50V
MAIN-P.W.Board			C7112	08E37151S01	CAP,CER. 470pF/50V
MAIN-P.W.Board			C7113	08E41389S01	CAP,CER. 3300pF/50V
MAIN-P.W.Board			C7114	08E41389S01	CAP,CER. 3300pF/50V
MAIN-P.W.Board			C7115	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C7116	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C7117	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C7118	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C7121	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C7122	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C7151	08E38046S01	CAP,CER. 820pF/50V
MAIN-P.W.Board			C7152	08E37151S01	CAP,CER. 470pF/50V
MAIN-P.W.Board			C7153	08E41389S01	CAP,CER. 3300pF/50V
MAIN-P.W.Board			C7154	08E41389S01	CAP,CER. 3300pF/50V
MAIN-P.W.Board			C7155	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C7156	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C7157	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C7158	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C7159	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C7160	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C7161	08E38046S01	CAP,CER. 820pF/50V
MAIN-P.W.Board			C7162	08E37151S01	CAP,CER. 470pF/50V
MAIN-P.W.Board			C7163	08E41389S01	CAP,CER. 3300pF/50V
MAIN-P.W.Board			C7164	08E41389S01	CAP,CER. 3300pF/50V
MAIN-P.W.Board			C7165	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C7166	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C7167	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C7168	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C7171	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C7172	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C7601	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C7602	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C7603	08E36470S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C7604	08E36470S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C7605	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C7606	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C7607	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C7608	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C7609	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C7610	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C7611	08E42196S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C7651	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C7652	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C7653	08E36470S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C7654	08E36470S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C7655	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C7656	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C7657	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C7658	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C7659	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C7660	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C7701	08E41036S01	CAP,CER. 1uF/16V

MAIN-P.W.Board		C7702	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board		C7703	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board		C7704	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board		C7705	08E42963S01	CAP,CER.100pF/100V
MAIN-P.W.Board		C7706	08E42963S01	CAP,CER.100pF/100V
MAIN-P.W.Board		C7707	08E42963S01	CAP,CER.100pF/100V
MAIN-P.W.Board		C7708	08E42963S01	CAP,CER.100pF/100V
MAIN-P.W.Board		C7709	08E41023S01	CAP,CER 10nF/50V
MAIN-P.W.Board		C7710	08E41023S01	CAP,CER 10nF/50V
MAIN-P.W.Board		C7711	08E41023S01	CAP,CER 10nF/50V
MAIN-P.W.Board		C7712	08E41023S01	CAP,CER 10nF/50V
MAIN-P.W.Board		C7713	08E42188S01	CAP,CER. 1000pF/250V
MAIN-P.W.Board		C7714	08E42188S01	CAP,CER. 1000pF/250V
MAIN-P.W.Board		C7750	08E42188S01	CAP,CER. 1000pF/250V
MAIN-P.W.Board		C7751	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board		C7752	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board		C7753	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board		C7754	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board		C7755	08E42963S01	CAP,CER.100pF/100V
MAIN-P.W.Board		C7756	08E42963S01	CAP,CER.100pF/100V
MAIN-P.W.Board		C7757	08E42963S01	CAP,CER.100pF/100V
MAIN-P.W.Board		C7758	08E42963S01	CAP,CER.100pF/100V
MAIN-P.W.Board		C7759	08E41023S01	CAP,CER 10nF/50V
MAIN-P.W.Board		C7760	08E41023S01	CAP,CER 10nF/50V
MAIN-P.W.Board		C7761	08E41023S01	CAP,CER 10nF/50V
MAIN-P.W.Board		C7762	08E41023S01	CAP,CER 10nF/50V
MAIN-P.W.Board		C7763	08E42188S01	CAP,CER. 1000pF/250V
MAIN-P.W.Board		C8001	08E37118S01	CAP,CER. 220pF/50V
MAIN-P.W.Board		C8002	08E37118S01	CAP,CER. 220pF/50V
MAIN-P.W.Board		C8003	08E37118S01	CAP,CER. 220pF/50V
MAIN-P.W.Board		C8901	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C8902	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board		C9001	08E39106S01	CAP,CER.100pF/500V
MAIN-P.W.Board		C9002	08E39106S01	CAP,CER.100pF/500V
MAIN-P.W.Board		C9003	08E41035S01	CAP,CER. 0.01uF/630V
MAIN-P.W.Board		C9101	08E41031S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board		C9303	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board		C9304	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board		C9305	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board		C9306	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board		C9307	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C9308	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C9401	08E42964S01	CAP,CER. 270pF/50V
MAIN-P.W.Board		C9402	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C9403	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C9404	08E42325S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board		C9601	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board		C9602	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board		C9603	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board		C9701	08E41031S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board		C9702	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board		C9703	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board		C9704	08E41390S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board		C9705	08E42966S01	CAP,CER. 470nF/50V
MAIN-P.W.Board		C9706	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board		C9707	08E42196S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board		C9708	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board		C9719	08E42196S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board		C9725	08E42196S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board		C9726	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board		C9801	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board		C9802	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board		C9803	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board		C9804	08E36114S01	CAP,CER. 0.22uF/16V

MAIN-P.W.Board		C9805	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board		C9806	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board		C9807	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board		C9808	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board		C9901	08E41023S01	CAP,CER 10nF/50V
MAIN-P.W.Board		C9902	08E41023S01	CAP,CER 10nF/50V
MAIN-P.W.Board		C9908	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C9909	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C9915	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board		C9917	08E41395S01	CAP,CER.1500pF/50V
MAIN-P.W.Board		C9918	08E41392S01	CAP,CER.2200pF/50V
MAIN-P.W.Board		C9929	08E41392S01	CAP,CER.2200pF/50V
MAIN-P.W.Board		C9931	08E42188S01	CAP,CER. 1000pF/250V
MAIN-P.W.Board		C9932	08E42188S01	CAP,CER. 1000pF/250V
MAIN-P.W.Board		C9933	08E42188S01	CAP,CER. 1000pF/250V
MAIN-P.W.Board		C9934	08E42188S01	CAP,CER. 1000pF/250V
MAIN-P.W.Board		CB6501	09E42112S01	CONN,FFC 30P
MAIN-P.W.Board		CB6502	09E42235S01	CONN,FFC 14P
MAIN-P.W.Board		CB8001	09E41441S01	CONN,WTB 2P
MAIN-P.W.Board		D3001	48E41411S01	DIODE,DAP202U
MAIN-P.W.Board		D3002	48E41411S01	DIODE,DAP202U
MAIN-P.W.Board		D3601	48E40918S01	DIODE,KDS160
MAIN-P.W.Board		D3602	48E40918S01	DIODE,KDS160
MAIN-P.W.Board		D3603	48E40918S01	DIODE,KDS160
MAIN-P.W.Board		D3604	48E40918S01	DIODE,KDS160
MAIN-P.W.Board		D3605	48E40918S01	DIODE,KDS160
MAIN-P.W.Board		D3606	48E40918S01	DIODE,KDS160
MAIN-P.W.Board		D4001	48E40918S01	DIODE,KDS160
MAIN-P.W.Board		D4002	48E40918S01	DIODE,KDS160
MAIN-P.W.Board		D4003	48E40918S01	DIODE,KDS160
MAIN-P.W.Board		D4004	48E40918S01	DIODE,KDS160
MAIN-P.W.Board		D4005	48E40918S01	DIODE,KDS160
MAIN-P.W.Board		D4006	48E40918S01	DIODE,KDS160
MAIN-P.W.Board		D5001	48E40918S01	DIODE,KDS160
MAIN-P.W.Board		D5002	48E40918S01	DIODE,KDS160
MAIN-P.W.Board		D7001	48E41411S01	DIODE,DAP202U
MAIN-P.W.Board		D7002	48E41411S01	DIODE,DAP202U
MAIN-P.W.Board		D7051	48E41411S01	DIODE,DAP202U
MAIN-P.W.Board		D7052	48E41411S01	DIODE,DAP202U
MAIN-P.W.Board		D7601	48E40918S01	DIODE,KDS160
MAIN-P.W.Board		D7602	48E40918S01	DIODE,KDS160
MAIN-P.W.Board		D7603	48E40918S01	DIODE,KDS160
MAIN-P.W.Board		D7604	48E40918S01	DIODE,KDS160
MAIN-P.W.Board		D7605	48E40918S01	DIODE,KDS160
MAIN-P.W.Board		D7606	48E40918S01	DIODE,KDS160
MAIN-P.W.Board		D7651	48E40918S01	DIODE,KDS160
MAIN-P.W.Board		D7652	48E40918S01	DIODE,KDS160
MAIN-P.W.Board		D7653	48E40918S01	DIODE,KDS160
MAIN-P.W.Board		D7654	48E40918S01	DIODE,KDS160
MAIN-P.W.Board		D7655	48E40918S01	DIODE,KDS160
MAIN-P.W.Board		D7656	48E40918S01	DIODE,KDS160
MAIN-P.W.Board		D9501	48E38547S01	DIODE,DAN202U
MAIN-P.W.Board		D9502	48E41046S01	DIODE,1SS355
MAIN-P.W.Board		D9801	48E40918S01	DIODE,KDS160
MAIN-P.W.Board		D9802	48E40918S01	DIODE,KDS160
MAIN-P.W.Board		D9901	48E41410S01	DIODE,D30XBN20
MAIN-P.W.Board		E3001	23E41398S01	CAP,ELY.22uF/16V
MAIN-P.W.Board		E3002	23E41398S01	CAP,ELY.22uF/16V
MAIN-P.W.Board		E3605	23E40766S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E3606	23E40766S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E3609	23E40766S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E3610	23E40766S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E3701	23E42983S01	CAP,ELY.47uF/50V
MAIN-P.W.Board		E3702	23E42983S01	CAP,ELY.47uF/50V

MAIN-P.W.Board		E3703	23E42983S01	CAP,ELY.47uF/50V
MAIN-P.W.Board		E3704	23E42983S01	CAP,ELY.47uF/50V
MAIN-P.W.Board		E4901	23E39871S01	CAP,ELY. 100uF/16V
MAIN-P.W.Board		E5001	23E41397S01	CAP,ELY.47uF/16V
MAIN-P.W.Board		E5002	23E42985S01	CAP,ELY.22uF/16V
MAIN-P.W.Board		E6501	23E40766S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E6502	23E40766S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E6503	23E41398S01	CAP,ELY.22uF/16V
MAIN-P.W.Board		E6504	23E41398S01	CAP,ELY.22uF/16V
MAIN-P.W.Board		E7001	23E41398S01	CAP,ELY.22uF/16V
MAIN-P.W.Board		E7002	23E41398S01	CAP,ELY.22uF/16V
MAIN-P.W.Board		E7051	23E41398S01	CAP,ELY.22uF/16V
MAIN-P.W.Board		E7052	23E41398S01	CAP,ELY.22uF/16V
MAIN-P.W.Board		E7605	23E40766S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E7606	23E40766S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E7609	23E40766S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E7610	23E40766S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E7655	23E40766S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E7656	23E40766S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E7659	23E40766S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E7660	23E40766S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E7701	23E42983S01	CAP,ELY.47uF/50V
MAIN-P.W.Board		E7702	23E42983S01	CAP,ELY.47uF/50V
MAIN-P.W.Board		E7703	23E42983S01	CAP,ELY.47uF/50V
MAIN-P.W.Board		E7704	23E42983S01	CAP,ELY.47uF/50V
MAIN-P.W.Board		E7751	23E42983S01	CAP,ELY.47uF/50V
MAIN-P.W.Board		E7752	23E42983S01	CAP,ELY.47uF/50V
MAIN-P.W.Board		E7753	23E42983S01	CAP,ELY.47uF/50V
MAIN-P.W.Board		E7754	23E42983S01	CAP,ELY.47uF/50V
MAIN-P.W.Board		E8901	23E39866S01	CAP,ELY. 100uF/25V
MAIN-P.W.Board		E8902	23E41397S01	CAP,ELY.47uF/16V
MAIN-P.W.Board		E9001	23E39865S01	CAP,ELY. 470uF/25V
MAIN-P.W.Board		E9101	23E40767S01	CAP,ELY.2.2uF/50V
MAIN-P.W.Board		E9301	23E42331S01	CAP,ELY.330uF/25V
MAIN-P.W.Board		E9302	23E42331S01	CAP,ELY.330uF/25V
MAIN-P.W.Board		E9303	23E39871S01	CAP,ELY. 100uF/16V
MAIN-P.W.Board		E9304	23E39871S01	CAP,ELY. 100uF/16V
MAIN-P.W.Board		E9305	23E42982S01	CAP,ELY.3.3uF/50V
MAIN-P.W.Board		E9306	23E42982S01	CAP,ELY.3.3uF/50V
MAIN-P.W.Board		E9701	23E40333S01	CAP,ELY. 330uF/10V
MAIN-P.W.Board		E9702	23E42984S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E9703	23E40761S01	CAP,ELY.33uF/16V
MAIN-P.W.Board		E9801	23E42796S01	CAP,ELY.2200uF/25V
MAIN-P.W.Board		E9802	23E42796S01	CAP,ELY.2200uF/25V
MAIN-P.W.Board		E9803	23E42796S01	CAP,ELY.2200uF/25V
MAIN-P.W.Board		E9804	23E42796S01	CAP,ELY.2200uF/25V
MAIN-P.W.Board		E9805	23E42796S01	CAP,ELY.2200uF/25V
MAIN-P.W.Board		E9806	23E42796S01	CAP,ELY.2200uF/25V
MAIN-P.W.Board		E9901	23E41494S01	CAP,ELY. 8200uF/50V
MAIN-P.W.Board		E9902	23E41494S01	CAP,ELY. 8200uF/50V
MAIN-P.W.Board		F001	65E43007S01	FUSE,40A
MAIN-P.W.Board		F002	65E43007S01	FUSE,40A
MAIN-P.W.Board		F9901	65E41480S01	FUSE,20A
MAIN-P.W.Board		F9902	65E41480S01	FUSE,20A
MAIN-P.W.Board		F9903	65E41480S01	FUSE,20A
MAIN-P.W.Board		F9904	65E41480S01	FUSE,20A
MAIN-P.W.Board		F9905	65E41480S01	FUSE,20A
MAIN-P.W.Board		F9906	65E41480S01	FUSE,20A
MAIN-P.W.Board		F9907	65E41480S01	FUSE,20A
MAIN-P.W.Board		F9908	65E41480S01	FUSE,20A
MAIN-P.W.Board		F9909	65E41480S01	FUSE,20A
MAIN-P.W.Board		F9910	65E41480S01	FUSE,20A
MAIN-P.W.Board		IC1451	51E42366S01	IC,NJM4580R
MAIN-P.W.Board		IC1551	51E42366S01	IC,NJM4580R

MAIN-P.W.Board		IC1552	51E42366S01	IC,NJM4580R
MAIN-P.W.Board		IC3001	51E42366S01	IC,NJM4580R
MAIN-P.W.Board		IC3101	51E42366S01	IC,NJM4580R
MAIN-P.W.Board		IC3201	51E40342S01	IC,74VHC00MTCX
MAIN-P.W.Board		IC3202	51E40342S01	IC,74VHC00MTCX
MAIN-P.W.Board		IC3601	51E41426S01	IC,98-1036TR
MAIN-P.W.Board		IC3602	51E41426S01	IC,98-1036TR
MAIN-P.W.Board		IC4703	51E39597S01	IC,BA2903FVM
MAIN-P.W.Board		IC4704	51E39596S01	IC,BA2901FV
MAIN-P.W.Board		IC4902	51E43006S01	IC,LM5008SD
MAIN-P.W.Board		IC5001	51E36474S01	IC,NJM78L05UA
MAIN-P.W.Board		IC5002	51E39139S01	IC,BD5243G
MAIN-P.W.Board		IC5003	51E43004S01	IC,UPD78F0515AGAA
MAIN-P.W.Board		IC5004	51E43005S01	IC,BD5260G
MAIN-P.W.Board		IC7001	51E42366S01	IC,NJM4580R
MAIN-P.W.Board		IC7051	51E42366S01	IC,NJM4580R
MAIN-P.W.Board		IC7101	51E42366S01	IC,NJM4580R
MAIN-P.W.Board		IC7151	51E42366S01	IC,NJM4580R
MAIN-P.W.Board		IC7601	51E41426S01	IC,98-1036TR
MAIN-P.W.Board		IC7602	51E41426S01	IC,98-1036TR
MAIN-P.W.Board		IC7651	51E41426S01	IC,98-1036TR
MAIN-P.W.Board		IC7652	51E41426S01	IC,98-1036TR
MAIN-P.W.Board		IC8901	51E41428S01	IC,BAJ2CC0FP
MAIN-P.W.Board		IC9401	51E36642S01	IC,NJM2360AM
MAIN-P.W.Board		IC9701	51E39585S01	IC,NCV494BDR2G
MAIN-P.W.Board		IC9702	51E39597S01	IC,BA2903FVM
MAIN-P.W.Board		IC9801	51E41427S01	IC,LM5109B
MAIN-P.W.Board		IC9802	51E41427S01	IC,LM5109B
MAIN-P.W.Board		JK2351	09E42970S01	CONN,JACK 6P
MAIN-P.W.Board		JK4201	09E42971S01	CONN,WTB 14P
MAIN-P.W.Board		L4001	24E42986S01	COIL,IND. 10uH
MAIN-P.W.Board		L4002	24E42986S01	COIL,IND. 10uH
MAIN-P.W.Board		L4003	24E42986S01	COIL,IND. 10uH
MAIN-P.W.Board		L4004	24E42986S01	COIL,IND. 10uH
MAIN-P.W.Board		L4005	24E42987S01	COIL,7G23B /10uH
MAIN-P.W.Board		L4006	24E42987S01	COIL,7G23B /10uH
MAIN-P.W.Board		L4902	24E42370S01	COIL,IND. 220uH
MAIN-P.W.Board		L5001	24E39739S01	COIL,IND. 10uH
MAIN-P.W.Board		L5002	24E39739S01	COIL,IND. 10uH
MAIN-P.W.Board		L5003	24E39739S01	COIL,IND. 10uH
MAIN-P.W.Board		L9001	24E41435S01	COIL,IND. 47uH
MAIN-P.W.Board		L9101	24E39739S01	COIL,IND. 10uH
MAIN-P.W.Board		L9301	24E42369S01	COIL,IND. 470uH
MAIN-P.W.Board		L9302	24E42369S01	COIL,IND. 470uH
MAIN-P.W.Board		L9401	24E42988S01	COIL,IND. 220uH
MAIN-P.W.Board		LD8001	48E41405S01	LED,SML512BC5T BLUE
MAIN-P.W.Board		LD8002	48E41405S01	LED,SML512BC5T BLUE
MAIN-P.W.Board		LD8003	48E41406S01	LED,SML-512UW RED
MAIN-P.W.Board		Q3001	48E41424S01	TR,UMT2N
MAIN-P.W.Board		Q3002	48E41424S01	TR,UMT2N
MAIN-P.W.Board		Q3003	48E41424S01	TR,UMT2N
MAIN-P.W.Board		Q3004	48E41424S01	TR,UMT2N
MAIN-P.W.Board		Q3005	48E39356S01	TR,2SA1576A
MAIN-P.W.Board		Q3006	48E41424S01	TR,UMT2N
MAIN-P.W.Board		Q3007	48E39356S01	TR,2SA1576A
MAIN-P.W.Board		Q3008	48E41424S01	TR,UMT2N
MAIN-P.W.Board		Q3009	48E41422S01	TR,UMX2N
MAIN-P.W.Board		Q3010	48E41422S01	TR,UMX2N
MAIN-P.W.Board		Q3011	48E37898S01	TR,2SC4081R
MAIN-P.W.Board		Q3012	48E37898S01	TR,2SC4081R
MAIN-P.W.Board		Q3101	48E41424S01	TR,UMT2N
MAIN-P.W.Board		Q3102	48E41422S01	TR,UMX2N
MAIN-P.W.Board		Q3103	48E41424S01	TR,UMT2N
MAIN-P.W.Board		Q3104	48E41422S01	TR,UMX2N

MAIN-P.W.Board		Q3105	48E41423S01	TR,UMY1N
MAIN-P.W.Board		Q3106	48E41423S01	TR,UMY1N
MAIN-P.W.Board		Q3201	48E40770S01	TR,DTA144EE
MAIN-P.W.Board		Q3202	48E43003S01	TR,UMD3N
MAIN-P.W.Board		Q3203	48E40770S01	TR,DTA144EE
MAIN-P.W.Board		Q3204	48E43003S01	TR,UMD3N
MAIN-P.W.Board		Q3205	48E40770S01	TR,DTA144EE
MAIN-P.W.Board		Q3206	48E43003S01	TR,UMD3N
MAIN-P.W.Board		Q3207	48E40770S01	TR,DTA144EE
MAIN-P.W.Board		Q3208	48E43003S01	TR,UMD3N
MAIN-P.W.Board		Q3209	48E40770S01	TR,DTA144EE
MAIN-P.W.Board		Q3210	48E43003S01	TR,UMD3N
MAIN-P.W.Board		Q3211	48E40770S01	TR,DTA144EE
MAIN-P.W.Board		Q3212	48E43003S01	TR,UMD3N
MAIN-P.W.Board		Q3701	48E41419S01	TR,2SA2094
MAIN-P.W.Board		Q3702	48E41416S01	FET,IRFB5615
MAIN-P.W.Board		Q3703	48E41419S01	TR,2SA2094
MAIN-P.W.Board		Q3704	48E41418S01	TR,2SC5866
MAIN-P.W.Board		Q3705	48E41419S01	TR,2SA2094
MAIN-P.W.Board		Q3706	48E41416S01	FET,IRFB5615
MAIN-P.W.Board		Q3707	48E41418S01	TR,2SC5866
MAIN-P.W.Board		Q3708	48E41416S01	FET,IRFB5615
MAIN-P.W.Board		Q3709	48E41416S01	FET,IRFB5615
MAIN-P.W.Board		Q3710	48E41418S01	TR,2SC5866
MAIN-P.W.Board		Q3711	48E41419S01	TR,2SA2094
MAIN-P.W.Board		Q3712	48E41418S01	TR,2SC5866
MAIN-P.W.Board		Q4701	48E42995S01	TR,UMB2N
MAIN-P.W.Board		Q4702	48E42995S01	TR,UMB2N
MAIN-P.W.Board		Q5001	48E41423S01	TR,UMY1N
MAIN-P.W.Board		Q5002	48E41423S01	TR,UMY1N
MAIN-P.W.Board		Q5003	48E41423S01	TR,UMY1N
MAIN-P.W.Board		Q5004	48E37188S01	TR,DTC144EE
MAIN-P.W.Board		Q5005	48E37188S01	TR,DTC144EE
MAIN-P.W.Board		Q5006	48E42994S01	TR,UMH11N
MAIN-P.W.Board		Q7001	48E41424S01	TR,UMT2N
MAIN-P.W.Board		Q7002	48E41424S01	TR,UMT2N
MAIN-P.W.Board		Q7003	48E41424S01	TR,UMT2N
MAIN-P.W.Board		Q7004	48E39356S01	TR,2SA1576A
MAIN-P.W.Board		Q7005	48E41422S01	TR,UMX2N
MAIN-P.W.Board		Q7006	48E37898S01	TR,2SC4081R
MAIN-P.W.Board		Q7007	48E41424S01	TR,UMT2N
MAIN-P.W.Board		Q7008	48E41424S01	TR,UMT2N
MAIN-P.W.Board		Q7009	48E41424S01	TR,UMT2N
MAIN-P.W.Board		Q7010	48E39356S01	TR,2SA1576A
MAIN-P.W.Board		Q7011	48E41422S01	TR,UMX2N
MAIN-P.W.Board		Q7012	48E37898S01	TR,2SC4081R
MAIN-P.W.Board		Q7051	48E41424S01	TR,UMT2N
MAIN-P.W.Board		Q7052	48E41424S01	TR,UMT2N
MAIN-P.W.Board		Q7053	48E41424S01	TR,UMT2N
MAIN-P.W.Board		Q7054	48E39356S01	TR,2SA1576A
MAIN-P.W.Board		Q7055	48E41422S01	TR,UMX2N
MAIN-P.W.Board		Q7056	48E37898S01	TR,2SC4081R
MAIN-P.W.Board		Q7057	48E41424S01	TR,UMT2N
MAIN-P.W.Board		Q7058	48E41424S01	TR,UMT2N
MAIN-P.W.Board		Q7059	48E41424S01	TR,UMT2N
MAIN-P.W.Board		Q7060	48E39356S01	TR,2SA1576A
MAIN-P.W.Board		Q7061	48E41422S01	TR,UMX2N
MAIN-P.W.Board		Q7062	48E37898S01	TR,2SC4081R
MAIN-P.W.Board		Q7101	48E41423S01	TR,UMY1N
MAIN-P.W.Board		Q7102	48E41424S01	TR,UMT2N
MAIN-P.W.Board		Q7103	48E41422S01	TR,UMX2N
MAIN-P.W.Board		Q7104	48E41423S01	TR,UMY1N
MAIN-P.W.Board		Q7105	48E41424S01	TR,UMT2N
MAIN-P.W.Board		Q7106	48E41422S01	TR,UMX2N

MAIN-P.W.Board		Q7151	48E41423S01	TR,UMY1N
MAIN-P.W.Board		Q7152	48E41424S01	TR,UMT2N
MAIN-P.W.Board		Q7153	48E41422S01	TR,UMX2N
MAIN-P.W.Board		Q7154	48E41423S01	TR,UMY1N
MAIN-P.W.Board		Q7155	48E41424S01	TR,UMT2N
MAIN-P.W.Board		Q7161	48E41422S01	TR,UMX2N
MAIN-P.W.Board		Q7601	48E39882S01	TR,2SA1579
MAIN-P.W.Board		Q7602	48E39883S01	TR,2SC4102
MAIN-P.W.Board		Q7603	48E39882S01	TR,2SA1579
MAIN-P.W.Board		Q7604	48E39882S01	TR,2SA1579
MAIN-P.W.Board		Q7605	48E39882S01	TR,2SA1579
MAIN-P.W.Board		Q7606	48E39882S01	TR,2SA1579
MAIN-P.W.Board		Q7607	48E39882S01	TR,2SA1579
MAIN-P.W.Board		Q7701	48E42169S01	FET,IRF6665TR
MAIN-P.W.Board		Q7702	48E42169S01	FET,IRF6665TR
MAIN-P.W.Board		Q7703	48E42169S01	FET,IRF6665TR
MAIN-P.W.Board		Q7704	48E42169S01	FET,IRF6665TR
MAIN-P.W.Board		Q7751	48E42169S01	FET,IRF6665TR
MAIN-P.W.Board		Q7752	48E42169S01	FET,IRF6665TR
MAIN-P.W.Board		Q7753	48E42169S01	FET,IRF6665TR
MAIN-P.W.Board		Q7754	48E42169S01	FET,IRF6665TR
MAIN-P.W.Board		Q8001	48E40340S01	TR,DTC143XKA
MAIN-P.W.Board		Q8002	48E40340S01	TR,DTC143XKA
MAIN-P.W.Board		Q9101	48E41051S01	TR,2SC2412K
MAIN-P.W.Board		Q9102	48E42998S01	TR,KTB1260
MAIN-P.W.Board		Q9306	48E43000S01	TR,KTC5103D
MAIN-P.W.Board		Q9307	48E42999S01	TR,KTA1385D
MAIN-P.W.Board		Q9401	48E42994S01	TR,UMH11N
MAIN-P.W.Board		Q9404	48E42435S01	TR,2SC4672
MAIN-P.W.Board		Q9405	48E37898S01	TR,2SC4081R
MAIN-P.W.Board		Q9406	48E42998S01	TR,KTB1260
MAIN-P.W.Board		Q9501	48E41051S01	TR,2SC2412K
MAIN-P.W.Board		Q9502	48E41051S01	TR,2SC2412K
MAIN-P.W.Board		Q9503	48E41051S01	TR,2SC2412K
MAIN-P.W.Board		Q9504	48E37898S01	TR,2SC4081R
MAIN-P.W.Board		Q9505	48E37898S01	TR,2SC4081R
MAIN-P.W.Board		Q9701	48E40769S01	TR,DTA124EE
MAIN-P.W.Board		Q9702	48E37188S01	TR,DTC144EE
MAIN-P.W.Board		Q9703	48E37097S01	TR,DTC114EE
MAIN-P.W.Board		Q9704	48E37893S01	TR,DTA114EE
MAIN-P.W.Board		Q9705	48E37097S01	TR,DTC114EE
MAIN-P.W.Board		Q9706	48E43003S01	TR,UMD3N
MAIN-P.W.Board		Q9801	48E41418S01	TR,2SC5866
MAIN-P.W.Board		Q9802	48E41419S01	TR,2SA2094
MAIN-P.W.Board		Q9803	48E41418S01	TR,2SC5866
MAIN-P.W.Board		Q9804	48E41419S01	TR,2SA2094
MAIN-P.W.Board		Q9805	48E41418S01	TR,2SC5866
MAIN-P.W.Board		Q9806	48E41419S01	TR,2SA2094
MAIN-P.W.Board		Q9807	48E41418S01	TR,2SC5866
MAIN-P.W.Board		Q9808	48E41419S01	TR,2SA2094
MAIN-P.W.Board		Q9901	48E41417S01	FET,IRFP4004
MAIN-P.W.Board		Q9902	48E41417S01	FET,IRFP4004
MAIN-P.W.Board		Q9903	48E41417S01	FET,IRFP4004
MAIN-P.W.Board		Q9904	48E41417S01	FET,IRFP4004
MAIN-P.W.Board		R1451	06E37105S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board		R1452	06E37105S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board		R1453	06E37224S01	RES,CF. 2K-1/16W
MAIN-P.W.Board		R1454	06E37224S01	RES,CF. 2K-1/16W
MAIN-P.W.Board		R1455	06E42134S01	RES,CF. 1M-1/16W
MAIN-P.W.Board		R1456	06E42134S01	RES,CF. 1M-1/16W
MAIN-P.W.Board		R1551	06E40553S01	RES,CF. 2.4K-1/16
MAIN-P.W.Board		R1552	06E40553S01	RES,CF. 2.4K-1/16
MAIN-P.W.Board		R1553	06E38535S01	RES,CF. 18K-1/16W
MAIN-P.W.Board		R1554	06E41016S01	RES,CF. 0-1/16W

MAIN-P.W.Board		R1555	06E38535S01	RES,CF. 18K-1/16W
MAIN-P.W.Board		R1556	06E40553S01	RES,CF. 2.4K-1/16
MAIN-P.W.Board		R1557	06E38535S01	RES,CF. 18K-1/16W
MAIN-P.W.Board		R1558	06E41016S01	RES,CF. 0-1/16W
MAIN-P.W.Board		R1559	06E37227S01	RES,CF. 1K-1/16W
MAIN-P.W.Board		R1560	06E37227S01	RES,CF. 1K-1/16W
MAIN-P.W.Board		R1561	06E41016S01	RES,CF. 0-1/16W
MAIN-P.W.Board		R1562	06E40553S01	RES,CF. 2.4K-1/16
MAIN-P.W.Board		R1563	06E38535S01	RES,CF. 18K-1/16W
MAIN-P.W.Board		R1564	06E41016S01	RES,CF. 0-1/16W
MAIN-P.W.Board		R1565	06E37227S01	RES,CF. 1K-1/16W
MAIN-P.W.Board		R1566	06E37227S01	RES,CF. 1K-1/16W
MAIN-P.W.Board		R1567	06E42134S01	RES,CF. 1M-1/16W
MAIN-P.W.Board		R1568	06E42134S01	RES,CF. 1M-1/16W
MAIN-P.W.Board		R3001	06E35163S01	RES,CF 132-F-1/16-CP
MAIN-P.W.Board		R3002	06E35163S01	RES,CF 132-F-1/16-CP
MAIN-P.W.Board		R3003	06E42954S01	RES,CF. 160-1/16W
MAIN-P.W.Board		R3004	06E42954S01	RES,CF. 160-1/16W
MAIN-P.W.Board		R3005	06E37170S01	RES,CF. 2.7K-1/16W
MAIN-P.W.Board		R3006	06E37170S01	RES,CF. 2.7K-1/16W
MAIN-P.W.Board		R3007	06E35133S01	RES,CF. 5.6K-1/4W
MAIN-P.W.Board		R3008	06E35133S01	RES,CF. 5.6K-1/4W
MAIN-P.W.Board		R3009	06E35133S01	RES,CF. 5.6K-1/4W
MAIN-P.W.Board		R3010	06E35133S01	RES,CF. 5.6K-1/4W
MAIN-P.W.Board		R3011	06E37225S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board		R3012	06E37225S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board		R3013	06E37225S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board		R3014	06E37225S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board		R3015	06E40733S01	RES,CF. 200-1/16W
MAIN-P.W.Board		R3016	06E40733S01	RES,CF. 200-1/16W
MAIN-P.W.Board		R3017	06E40733S01	RES,CF. 200-1/16W
MAIN-P.W.Board		R3018	06E40733S01	RES,CF. 200-1/16W
MAIN-P.W.Board		R3019	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board		R3020	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board		R3021	06E41376S01	RES,CF. 220-1/16W
MAIN-P.W.Board		R3022	06E42953S01	RES,CF. 20K-1/16W
MAIN-P.W.Board		R3023	06E41376S01	RES,CF. 220-1/16W
MAIN-P.W.Board		R3024	06E42953S01	RES,CF. 20K-1/16W
MAIN-P.W.Board		R3025	06E37170S01	RES,CF. 2.7K-1/16W
MAIN-P.W.Board		R3026	06E37170S01	RES,CF. 2.7K-1/16W
MAIN-P.W.Board		R3027	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board		R3028	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board		R3029	06E42183S01	RES,CF. 560-1/16W
MAIN-P.W.Board		R3030	06E42183S01	RES,CF. 560-1/16W
MAIN-P.W.Board		R3031	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board		R3032	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board		R3033	06E37225S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board		R3034	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board		R3035	06E37225S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board		R3036	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board		R3101	06E37225S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board		R3102	06E37225S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board		R3103	06E37225S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board		R3104	06E37225S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board		R3105	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R3106	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R3107	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R3108	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R3109	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R3110	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R3111	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R3112	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R3113	06E37226S01	RES,CF. 1.2K-1/16W
MAIN-P.W.Board		R3114	06E37226S01	RES,CF. 1.2K-1/16W

MAIN-P.W.Board		R3115	06E37226S01	RES,CF. 1.2K-1/16W
MAIN-P.W.Board		R3116	06E37226S01	RES,CF. 1.2K-1/16W
MAIN-P.W.Board		R3117	06E42958S01	RES,CF. 9.1K-1/4W
MAIN-P.W.Board		R3118	06E42958S01	RES,CF. 9.1K-1/4W
MAIN-P.W.Board		R3119	06E42958S01	RES,CF. 9.1K-1/4W
MAIN-P.W.Board		R3120	06E42958S01	RES,CF. 9.1K-1/4W
MAIN-P.W.Board		R3121	06E37226S01	RES,CF. 1.2K-1/16W
MAIN-P.W.Board		R3122	06E37226S01	RES,CF. 1.2K-1/16W
MAIN-P.W.Board		R3123	06E35404S01	RES,CF 333-F-1/16-CP
MAIN-P.W.Board		R3124	06E35404S01	RES,CF 333-F-1/16-CP
MAIN-P.W.Board		R3125	06E35404S01	RES,CF 333-F-1/16-CP
MAIN-P.W.Board		R3126	06E35404S01	RES,CF 333-F-1/16-CP
MAIN-P.W.Board		R3127	06E37110S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R3128	06E37110S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R3129	06E37110S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R3130	06E37110S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R3131	06E37229S01	RES,CF. 100-1/16W
MAIN-P.W.Board		R3132	06E37229S01	RES,CF. 100-1/16W
MAIN-P.W.Board		R3137	06E40751S01	RES,CF. 330-1/4W
MAIN-P.W.Board		R3138	06E40751S01	RES,CF. 330-1/4W
MAIN-P.W.Board		R3139	06E40751S01	RES,CF. 330-1/4W
MAIN-P.W.Board		R3140	06E40751S01	RES,CF. 330-1/4W
MAIN-P.W.Board		R3201	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R3202	06E40992S01	RES,CF. 100-1/16W
MAIN-P.W.Board		R3203	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R3204	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R3205	06E40992S01	RES,CF. 100-1/16W
MAIN-P.W.Board		R3206	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R3207	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R3208	06E40992S01	RES,CF. 100-1/16W
MAIN-P.W.Board		R3209	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R3210	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R3211	06E40992S01	RES,CF. 100-1/16W
MAIN-P.W.Board		R3212	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R3213	06E40992S01	RES,CF. 100-1/16W
MAIN-P.W.Board		R3214	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R3215	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R3216	06E40992S01	RES,CF. 100-1/16W
MAIN-P.W.Board		R3217	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R3218	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R3602	06E37227S01	RES,CF. 1K-1/16W
MAIN-P.W.Board		R3603	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board		R3605	06E37227S01	RES,CF. 1K-1/16W
MAIN-P.W.Board		R3606	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board		R3607	06E37093S01	RES,CF. 5.6K-1/16W
MAIN-P.W.Board		R3608	06E37109S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board		R3609	06E37093S01	RES,CF. 5.6K-1/16W
MAIN-P.W.Board		R3610	06E37109S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board		R3611	06E31833S01	RES,CF 3R9-J-1/4-CP
MAIN-P.W.Board		R3612	06E31833S01	RES,CF 3R9-J-1/4-CP
MAIN-P.W.Board		R3613	06E39637S01	RES,CF. 13K-1/4W
MAIN-P.W.Board		R3614	06E41005S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R3615	06E39637S01	RES,CF. 13K-1/4W
MAIN-P.W.Board		R3616	06E41005S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R3617	06E31833S01	RES,CF 3R9-J-1/4-CP
MAIN-P.W.Board		R3618	06E31833S01	RES,CF 3R9-J-1/4-CP
MAIN-P.W.Board		R3619	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board		R3620	06E37227S01	RES,CF. 1K-1/16W
MAIN-P.W.Board		R3621	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board		R3622	06E37227S01	RES,CF. 1K-1/16W
MAIN-P.W.Board		R3625	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board		R3626	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board		R3627	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board		R3628	06E41388S01	RES,CF. 4.7-1/4W

MAIN-P.W.Board		R3701	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R3702	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R3703	06E42133S01	RES,CF. 100K-1/16W
MAIN-P.W.Board		R3704	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R3705	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R3706	06E42133S01	RES,CF. 100K-1/16W
MAIN-P.W.Board		R3707	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R3708	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R3709	06E42133S01	RES,CF. 100K-1/16W
MAIN-P.W.Board		R3710	06E42133S01	RES,CF. 100K-1/16W
MAIN-P.W.Board		R3711	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R3712	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R3801	06E40743S01	RES,CF. 9.1K-1/16W
MAIN-P.W.Board		R3802	06E40743S01	RES,CF. 9.1K-1/16W
MAIN-P.W.Board		R3803	06E40743S01	RES,CF. 9.1K-1/16W
MAIN-P.W.Board		R3804	06E40743S01	RES,CF. 9.1K-1/16W
MAIN-P.W.Board		R4001	06E37100S01	RES,CF. 13K-1/16W
MAIN-P.W.Board		R4002	06E37100S01	RES,CF. 13K-1/16W
MAIN-P.W.Board		R4003	06E37100S01	RES,CF. 13K-1/16W
MAIN-P.W.Board		R4004	06E37100S01	RES,CF. 13K-1/16W
MAIN-P.W.Board		R4005	06E37100S01	RES,CF. 13K-1/16W
MAIN-P.W.Board		R4006	06E37100S01	RES,CF. 13K-1/16W
MAIN-P.W.Board		R4703	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R4704	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R4705	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R4706	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R4709	06E42283S01	RES,CF. 22K-1/16W
MAIN-P.W.Board		R4710	06E42283S01	RES,CF. 22K-1/16W
MAIN-P.W.Board		R4712	06E42283S01	RES,CF. 22K-1/16W
MAIN-P.W.Board		R4713	06E42283S01	RES,CF. 22K-1/16W
MAIN-P.W.Board		R4715	06E40746S01	RES,CF. 75K-1/16W
MAIN-P.W.Board		R4716	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board		R4717	06E40746S01	RES,CF. 75K-1/16W
MAIN-P.W.Board		R4719	06E42297S01	RES,CF. 100K-1/10W
MAIN-P.W.Board		R4720	06E42955S01	RES,CF. 360-1/16W
MAIN-P.W.Board		R4721	06E41005S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R4722	06E41005S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R4723	06E41005S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R4724	06E41005S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R4725	06E41005S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R4726	06E41005S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R4727	06E42956S01	RES,CF. 0.005-1W
MAIN-P.W.Board		R4728	06E42956S01	RES,CF. 0.005-1W
MAIN-P.W.Board		R4729	06E42956S01	RES,CF. 0.005-1W
MAIN-P.W.Board		R4730	06E42956S01	RES,CF. 0.005-1W
MAIN-P.W.Board		R4731	06E42957S01	RES,CF. 0.01-2W
MAIN-P.W.Board		R4732	06E42957S01	RES,CF. 0.01-2W
MAIN-P.W.Board		R4910	06E35394S01	RES,CF. 180K-1/16W
MAIN-P.W.Board		R4911	06E37165S01	RES,CF. 3.9K-1/16W
MAIN-P.W.Board		R4912	06E37227S01	RES,CF. 1K-1/16W
MAIN-P.W.Board		R4913	06E41014S01	RES,CF 330K-1/16-CP
MAIN-P.W.Board		R4914	06E41015S01	RES,CF. 1M-1/16W
MAIN-P.W.Board		R4915	06E41015S01	RES,CF. 1M-1/16W
MAIN-P.W.Board		R4916	06E35394S01	RES,CF. 180K-1/16W
MAIN-P.W.Board		R4917	06E38407S01	RES,CF. 1.2K-1/4W
MAIN-P.W.Board		R5001	06E37109S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board		R5002	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board		R5003	06E37262S01	RES,CF. 470-1/16W
MAIN-P.W.Board		R5004	06E42959S01	RES,CF. 5.1K-1/16W
MAIN-P.W.Board		R5005	06E42288S01	RES,CF. 470-1/16W
MAIN-P.W.Board		R5006	06E37275S01	RES,CF. 3K-1/16W
MAIN-P.W.Board		R5007	06E37109S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board		R5009	06E41016S01	RES,CF. 0-1/16W
MAIN-P.W.Board		R5011	06E42132S01	RES,CF. 10K-1/16W

MAIN-P.W.Board		R5012	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R5013	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R5014	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R5015	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R5016	06E40743S01	RES,CF. 9.1K-1/16W
MAIN-P.W.Board		R5017	06E42952S01	RES,CF. 510-1/16W
MAIN-P.W.Board		R5018	06E42952S01	RES,CF. 510-1/16W
MAIN-P.W.Board		R5019	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R5020	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R5021	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R5022	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R5023	06E42952S01	RES,CF. 510-1/16W
MAIN-P.W.Board		R5024	06E42953S01	RES,CF. 20K-1/16W
MAIN-P.W.Board		R5025	06E42953S01	RES,CF. 20K-1/16W
MAIN-P.W.Board		R5026	06E42953S01	RES,CF. 20K-1/16W
MAIN-P.W.Board		R5027	06E37111S01	RES,CF. 27K-1/16W
MAIN-P.W.Board		R5028	06E37111S01	RES,CF. 27K-1/16W
MAIN-P.W.Board		R5029	06E40553S01	RES,CF. 2.4K-1/16
MAIN-P.W.Board		R5030	06E37225S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board		R5031	06E37252S01	RES,CF. 22K-1/16W
MAIN-P.W.Board		R5032	06E35404S01	RES,CF 333-F-1/16-CP
MAIN-P.W.Board		R5033	06E35404S01	RES,CF 333-F-1/16-CP
MAIN-P.W.Board		R5034	06E37111S01	RES,CF. 27K-1/16W
MAIN-P.W.Board		R5035	06E37224S01	RES,CF. 2K-1/16W
MAIN-P.W.Board		R5036	06E37224S01	RES,CF. 2K-1/16W
MAIN-P.W.Board		R5037	06E37109S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board		R5038	06E37109S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board		R5039	06E37165S01	RES,CF. 3.9K-1/16W
MAIN-P.W.Board		R5040	06E37111S01	RES,CF. 27K-1/16W
MAIN-P.W.Board		R5041	06E41375S01	RES,CF. 150-1/16W
MAIN-P.W.Board		R7001	06E35163S01	RES,CF 132-F-1/16-CP
MAIN-P.W.Board		R7003	06E35163S01	RES,CF 132-F-1/16-CP
MAIN-P.W.Board		R7005	06E41513S01	RES,CF. 240-1/16W
MAIN-P.W.Board		R7006	06E41513S01	RES,CF. 240-1/16W
MAIN-P.W.Board		R7007	06E41513S01	RES,CF. 240-1/16W
MAIN-P.W.Board		R7008	06E41513S01	RES,CF. 240-1/16W
MAIN-P.W.Board		R7009	06E35242S01	RES,CF. 4.3K-1/16W
MAIN-P.W.Board		R7010	06E35242S01	RES,CF. 4.3K-1/16W
MAIN-P.W.Board		R7011	06E35242S01	RES,CF. 4.3K-1/16W
MAIN-P.W.Board		R7012	06E35242S01	RES,CF. 4.3K-1/16W
MAIN-P.W.Board		R7013	06E41376S01	RES,CF. 220-1/16W
MAIN-P.W.Board		R7014	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R7015	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R7016	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R7017	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R7018	06E42400S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board		R7019	06E42400S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board		R7020	06E41377S01	RES,CF. 270-1/16W
MAIN-P.W.Board		R7021	06E41377S01	RES,CF. 270-1/16W
MAIN-P.W.Board		R7022	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board		R7023	06E42953S01	RES,CF. 20K-1/16W
MAIN-P.W.Board		R7024	06E37170S01	RES,CF. 2.7K-1/16W
MAIN-P.W.Board		R7025	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board		R7026	06E42183S01	RES,CF. 560-1/16W
MAIN-P.W.Board		R7027	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board		R7028	06E37225S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board		R7029	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board		R7030	06E41376S01	RES,CF. 220-1/16W
MAIN-P.W.Board		R7031	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R7032	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R7033	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R7034	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R7035	06E42400S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board		R7036	06E42400S01	RES,CF. 3.3K-1/4W

MAIN-P.W.Board		R7037	06E41377S01	RES,CF. 270-1/16W
MAIN-P.W.Board		R7038	06E41377S01	RES,CF. 270-1/16W
MAIN-P.W.Board		R7039	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board		R7040	06E42953S01	RES,CF. 20K-1/16W
MAIN-P.W.Board		R7041	06E37170S01	RES,CF. 2.7K-1/16W
MAIN-P.W.Board		R7042	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board		R7043	06E42183S01	RES,CF. 560-1/16W
MAIN-P.W.Board		R7044	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board		R7045	06E37225S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board		R7046	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board		R7047	06E42953S01	RES,CF. 20K-1/16W
MAIN-P.W.Board		R7051	06E35163S01	RES,CF 132-F-1/16-CP
MAIN-P.W.Board		R7052	06E35163S01	RES,CF 132-F-1/16-CP
MAIN-P.W.Board		R7053	06E35163S01	RES,CF 132-F-1/16-CP
MAIN-P.W.Board		R7054	06E35163S01	RES,CF 132-F-1/16-CP
MAIN-P.W.Board		R7055	06E41513S01	RES,CF. 240-1/16W
MAIN-P.W.Board		R7056	06E41513S01	RES,CF. 240-1/16W
MAIN-P.W.Board		R7057	06E41513S01	RES,CF. 240-1/16W
MAIN-P.W.Board		R7058	06E41513S01	RES,CF. 240-1/16W
MAIN-P.W.Board		R7059	06E35242S01	RES,CF. 4.3K-1/16W
MAIN-P.W.Board		R7060	06E35242S01	RES,CF. 4.3K-1/16W
MAIN-P.W.Board		R7061	06E35242S01	RES,CF. 4.3K-1/16W
MAIN-P.W.Board		R7062	06E35242S01	RES,CF. 4.3K-1/16W
MAIN-P.W.Board		R7063	06E41376S01	RES,CF. 220-1/16W
MAIN-P.W.Board		R7064	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R7065	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R7066	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R7067	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R7068	06E42400S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board		R7069	06E42400S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board		R7070	06E41377S01	RES,CF. 270-1/16W
MAIN-P.W.Board		R7071	06E41377S01	RES,CF. 270-1/16W
MAIN-P.W.Board		R7072	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board		R7073	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R7074	06E37170S01	RES,CF. 2.7K-1/16W
MAIN-P.W.Board		R7075	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board		R7076	06E42183S01	RES,CF. 560-1/16W
MAIN-P.W.Board		R7077	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board		R7078	06E37225S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board		R7079	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board		R7080	06E41376S01	RES,CF. 220-1/16W
MAIN-P.W.Board		R7081	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R7082	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R7084	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R7085	06E42400S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board		R7086	06E42400S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board		R7087	06E41377S01	RES,CF. 270-1/16W
MAIN-P.W.Board		R7088	06E41377S01	RES,CF. 270-1/16W
MAIN-P.W.Board		R7089	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board		R7090	06E42953S01	RES,CF. 20K-1/16W
MAIN-P.W.Board		R7091	06E37170S01	RES,CF. 2.7K-1/16W
MAIN-P.W.Board		R7092	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board		R7093	06E42183S01	RES,CF. 560-1/16W
MAIN-P.W.Board		R7094	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board		R7095	06E37225S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board		R7096	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board		R7101	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board		R7103	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board		R7104	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board		R7105	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R7106	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R7107	06E38536S01	RES,CF. 8.2K-1/4W
MAIN-P.W.Board		R7108	06E38536S01	RES,CF. 8.2K-1/4W
MAIN-P.W.Board		R7109	06E37226S01	RES,CF. 1.2K-1/16W

MAIN-P.W.Board		R7110	06E35404S01	RES,CF 333-F-1/16-CP
MAIN-P.W.Board		R7111	06E35404S01	RES,CF 333-F-1/16-CP
MAIN-P.W.Board		R7112	06E37110S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R7113	06E37110S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R7114	06E37229S01	RES,CF. 100-1/16W
MAIN-P.W.Board		R7115	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board		R7117	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board		R7118	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board		R7119	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R7120	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R7121	06E38536S01	RES,CF. 8.2K-1/4W
MAIN-P.W.Board		R7122	06E38536S01	RES,CF. 8.2K-1/4W
MAIN-P.W.Board		R7123	06E37226S01	RES,CF. 1.2K-1/16W
MAIN-P.W.Board		R7124	06E35404S01	RES,CF 333-F-1/16-CP
MAIN-P.W.Board		R7125	06E35404S01	RES,CF 333-F-1/16-CP
MAIN-P.W.Board		R7126	06E37110S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R7127	06E37110S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R7128	06E37229S01	RES,CF. 100-1/16W
MAIN-P.W.Board		R7151	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board		R7153	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board		R7154	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board		R7155	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R7156	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R7157	06E38536S01	RES,CF. 8.2K-1/4W
MAIN-P.W.Board		R7158	06E38536S01	RES,CF. 8.2K-1/4W
MAIN-P.W.Board		R7159	06E37226S01	RES,CF. 1.2K-1/16W
MAIN-P.W.Board		R7160	06E35404S01	RES,CF 333-F-1/16-CP
MAIN-P.W.Board		R7161	06E35404S01	RES,CF 333-F-1/16-CP
MAIN-P.W.Board		R7162	06E37110S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R7163	06E37110S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R7164	06E37229S01	RES,CF. 100-1/16W
MAIN-P.W.Board		R7165	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board		R7167	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board		R7168	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board		R7169	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R7170	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R7171	06E38536S01	RES,CF. 8.2K-1/4W
MAIN-P.W.Board		R7172	06E38536S01	RES,CF. 8.2K-1/4W
MAIN-P.W.Board		R7173	06E37226S01	RES,CF. 1.2K-1/16W
MAIN-P.W.Board		R7174	06E35404S01	RES,CF 333-F-1/16-CP
MAIN-P.W.Board		R7175	06E35404S01	RES,CF 333-F-1/16-CP
MAIN-P.W.Board		R7176	06E37110S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R7177	06E37110S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R7178	06E37229S01	RES,CF. 100-1/16W
MAIN-P.W.Board		R7201	06E35163S01	RES,CF 132-F-1/16-CP
MAIN-P.W.Board		R7202	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board		R7203	06E35163S01	RES,CF 132-F-1/16-CP
MAIN-P.W.Board		R7204	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board		R7207	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board		R7208	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board		R7603	06E40553S01	RES,CF. 2.4K-1/16
MAIN-P.W.Board		R7604	06E40742S01	RES,CF. 7.5K-1/16W
MAIN-P.W.Board		R7605	06E40553S01	RES,CF. 2.4K-1/16
MAIN-P.W.Board		R7606	06E40742S01	RES,CF. 7.5K-1/16W
MAIN-P.W.Board		R7607	06E37093S01	RES,CF. 5.6K-1/16W
MAIN-P.W.Board		R7608	06E37109S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board		R7609	06E37093S01	RES,CF. 5.6K-1/16W
MAIN-P.W.Board		R7610	06E37109S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board		R7611	06E31833S01	RES,CF 3R9-J-1/4-CP
MAIN-P.W.Board		R7612	06E31833S01	RES,CF 3R9-J-1/4-CP
MAIN-P.W.Board		R7613	06E39637S01	RES,CF. 13K-1/4W
MAIN-P.W.Board		R7614	06E41005S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R7615	06E39637S01	RES,CF. 13K-1/4W
MAIN-P.W.Board		R7616	06E41005S01	RES,CF. 10K-1/16W

MAIN-P.W.Board		R7617	06E31833S01	RES,CF 3R9-J-1/4-CP
MAIN-P.W.Board		R7618	06E31833S01	RES,CF 3R9-J-1/4-CP
MAIN-P.W.Board		R7619	06E35290S01	RES,CF. 6.2K-1/16W
MAIN-P.W.Board		R7620	06E41486S01	RES,CF. 3.6K-1/16W
MAIN-P.W.Board		R7621	06E35290S01	RES,CF. 6.2K-1/16W
MAIN-P.W.Board		R7622	06E41486S01	RES,CF. 3.6K-1/16W
MAIN-P.W.Board		R7623	06E40841S01	RES,CF. 22K-1/10W
MAIN-P.W.Board		R7624	06E40841S01	RES,CF. 22K-1/10W
MAIN-P.W.Board		R7625	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R7626	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R7627	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R7628	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R7629	06E40841S01	RES,CF. 22K-1/10W
MAIN-P.W.Board		R7630	06E40841S01	RES,CF. 22K-1/10W
MAIN-P.W.Board		R7631	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R7632	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R7633	06E40841S01	RES,CF. 22K-1/10W
MAIN-P.W.Board		R7634	06E40841S01	RES,CF. 22K-1/10W
MAIN-P.W.Board		R7635	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R7636	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R7637	06E40841S01	RES,CF. 22K-1/10W
MAIN-P.W.Board		R7638	06E40841S01	RES,CF. 22K-1/10W
MAIN-P.W.Board		R7639	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R7640	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R7641	06E40841S01	RES,CF. 22K-1/10W
MAIN-P.W.Board		R7642	06E40841S01	RES,CF. 22K-1/10W
MAIN-P.W.Board		R7643	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R7644	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R7645	06E40841S01	RES,CF. 22K-1/10W
MAIN-P.W.Board		R7646	06E40841S01	RES,CF. 22K-1/10W
MAIN-P.W.Board		R7647	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R7648	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R7651	06E40553S01	RES,CF. 2.4K-1/16
MAIN-P.W.Board		R7652	06E40742S01	RES,CF. 7.5K-1/16W
MAIN-P.W.Board		R7653	06E40553S01	RES,CF. 2.4K-1/16
MAIN-P.W.Board		R7654	06E40742S01	RES,CF. 7.5K-1/16W
MAIN-P.W.Board		R7657	06E37093S01	RES,CF. 5.6K-1/16W
MAIN-P.W.Board		R7658	06E37109S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board		R7659	06E37093S01	RES,CF. 5.6K-1/16W
MAIN-P.W.Board		R7660	06E37109S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board		R7661	06E31833S01	RES,CF 3R9-J-1/4-CP
MAIN-P.W.Board		R7662	06E31833S01	RES,CF 3R9-J-1/4-CP
MAIN-P.W.Board		R7663	06E39637S01	RES,CF. 13K-1/4W
MAIN-P.W.Board		R7664	06E41005S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R7665	06E39637S01	RES,CF. 13K-1/4W
MAIN-P.W.Board		R7666	06E41005S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R7667	06E31833S01	RES,CF 3R9-J-1/4-CP
MAIN-P.W.Board		R7668	06E31833S01	RES,CF 3R9-J-1/4-CP
MAIN-P.W.Board		R7669	06E35290S01	RES,CF. 6.2K-1/16W
MAIN-P.W.Board		R7670	06E41486S01	RES,CF. 3.6K-1/16W
MAIN-P.W.Board		R7671	06E35290S01	RES,CF. 6.2K-1/16W
MAIN-P.W.Board		R7672	06E41486S01	RES,CF. 3.6K-1/16W
MAIN-P.W.Board		R7701	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board		R7702	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board		R7703	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board		R7704	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board		R7705	06E42133S01	RES,CF. 100K-1/16W
MAIN-P.W.Board		R7706	06E42133S01	RES,CF. 100K-1/16W
MAIN-P.W.Board		R7707	06E42133S01	RES,CF. 100K-1/16W
MAIN-P.W.Board		R7708	06E42133S01	RES,CF. 100K-1/16W
MAIN-P.W.Board		R7709	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R7710	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R7711	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R7712	06E37280S01	RES,CF. 10-1/4W

MAIN-P.W.Board		R7751	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board		R7752	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board		R7753	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board		R7754	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board		R7755	06E42133S01	RES,CF. 100K-1/16W
MAIN-P.W.Board		R7756	06E42133S01	RES,CF. 100K-1/16W
MAIN-P.W.Board		R7757	06E42133S01	RES,CF. 100K-1/16W
MAIN-P.W.Board		R7758	06E42133S01	RES,CF. 100K-1/16W
MAIN-P.W.Board		R7759	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R7760	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R7761	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R7762	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R9101	06E36581S01	RES,CF. 30K-1/4W
MAIN-P.W.Board		R9102	06E41009S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R9103	06E35365S01	RES,CF. 2.2K-1/4W
MAIN-P.W.Board		R9104	06E35365S01	RES,CF. 2.2K-1/4W
MAIN-P.W.Board		R9105	06E36102S01	RES,CF. 30K-1/16W
MAIN-P.W.Board		R9106	06E35365S01	RES,CF. 2.2K-1/4W
MAIN-P.W.Board		R9107	06E35365S01	RES,CF. 2.2K-1/4W
MAIN-P.W.Board		R9305	06E31151S01	RES,CF. 1.3K-J-1/16
MAIN-P.W.Board		R9306	06E31151S01	RES,CF. 1.3K-J-1/16
MAIN-P.W.Board		R9307	06E41015S01	RES,CF. 1M-1/16W
MAIN-P.W.Board		R9308	06E41015S01	RES,CF. 1M-1/16W
MAIN-P.W.Board		R9309	06E31151S01	RES,CF. 1.3K-J-1/16
MAIN-P.W.Board		R9310	06E31151S01	RES,CF. 1.3K-J-1/16
MAIN-P.W.Board		R9311	06E41015S01	RES,CF. 1M-1/16W
MAIN-P.W.Board		R9312	06E41015S01	RES,CF. 1M-1/16W
MAIN-P.W.Board		R9401	06E40977S01	RES,CF. 10-1/16W
MAIN-P.W.Board		R9402	06E37275S01	RES,CF. 3K-1/16W
MAIN-P.W.Board		R9403	06E37264S01	RES,CF. 39K-1/16W
MAIN-P.W.Board		R9404	06E34592S01	RES,CF 161-J-1/16-CP
MAIN-P.W.Board		R9405	06E42960S01	RES,CF. 0.39-1/4W
MAIN-P.W.Board		R9406	06E36102S01	RES,CF. 30K-1/16W
MAIN-P.W.Board		R9407	06E35522S01	RES,CF. 1.6K-1/4W
MAIN-P.W.Board		R9408	06E35522S01	RES,CF. 1.6K-1/4W
MAIN-P.W.Board		R9409	06E41009S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R9410	06E36102S01	RES,CF. 30K-1/16W
MAIN-P.W.Board		R9411	06E40840S01	RES,CF. 10K-1/10W
MAIN-P.W.Board		R9501	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board		R9502	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R9503	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R9504	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R9505	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R9506	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R9507	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R9508	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R9509	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R9510	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R9511	06E42402S01	RES,CF. 1K-1/16W
MAIN-P.W.Board		R9513	06E42402S01	RES,CF. 1K-1/16W
MAIN-P.W.Board		R9601	06E40743S01	RES,CF. 9.1K-1/16W
MAIN-P.W.Board		R9602	06E40743S01	RES,CF. 9.1K-1/16W
MAIN-P.W.Board		R9604	06E40743S01	RES,CF. 9.1K-1/16W
MAIN-P.W.Board		R9701	06E41005S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R9702	06E36584S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R9703	06E37167S01	RES,CF. 2.2K-1/16W
MAIN-P.W.Board		R9704	06E37224S01	RES,CF. 2K-1/16W
MAIN-P.W.Board		R9705	06E41016S01	RES,CF. 0-1/16W
MAIN-P.W.Board		R9706	06E37226S01	RES,CF. 1.2K-1/16W
MAIN-P.W.Board		R9707	06E37170S01	RES,CF. 2.7K-1/16W
MAIN-P.W.Board		R9708	06E37165S01	RES,CF. 3.9K-1/16W
MAIN-P.W.Board		R9709	06E41376S01	RES,CF. 220-1/16W
MAIN-P.W.Board		R9710	06E40733S01	RES,CF. 200-1/16W
MAIN-P.W.Board		R9711	06E40327S01	RES,CF. 56K-1/16W

MAIN-P.W.Board		R9712	06E40327S01	RES,CF. 56K-1/16W
MAIN-P.W.Board		R9713	06E36660S01	RES,CF. 20K-1/16W
MAIN-P.W.Board		R9714	06E31808S01	RES,CF. 360K-1/16W
MAIN-P.W.Board		R9715	06E40988S01	RES,CF. 1K-1/4W
MAIN-P.W.Board		R9716	06E40988S01	RES,CF. 1K-1/4W
MAIN-P.W.Board		R9717	06E40330S01	RES,CF. 150K-1/16W
MAIN-P.W.Board		R9719	06E37110S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R9720	06E37110S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R9721	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R9722	06E37225S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board		R9723	06E40999S01	RES,CF. 1K-1/16W
MAIN-P.W.Board		R9724	06E37224S01	RES,CF. 2K-1/16W
MAIN-P.W.Board		R9725	06E37110S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R9726	06E37109S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board		R9727	06E41016S01	RES,CF. 0-1/16W
MAIN-P.W.Board		R9729	06E35242S01	RES,CF. 4.3K-1/16W
MAIN-P.W.Board		R9801	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R9802	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R9803	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R9804	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R9805	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R9806	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R9807	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R9808	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R9809	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R9810	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R9811	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R9812	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R9901	06E41011S01	RES,CF. 100K-1/16W
MAIN-P.W.Board		R9902	06E41011S01	RES,CF. 100K-1/16W
MAIN-P.W.Board		R9903	06E41011S01	RES,CF. 100K-1/16W
MAIN-P.W.Board		R9904	06E41011S01	RES,CF. 100K-1/16W
MAIN-P.W.Board		R9905	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R9906	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R9907	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R9908	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R9911	06E41011S01	RES,CF. 100K-1/16W
MAIN-P.W.Board		R9912	06E41011S01	RES,CF. 100K-1/16W
MAIN-P.W.Board		R9913	06E41011S01	RES,CF. 100K-1/16W
MAIN-P.W.Board		R9914	06E41011S01	RES,CF. 100K-1/16W
MAIN-P.W.Board		R9919	06E40979S01	RES,CF. 22-1/16W
MAIN-P.W.Board		R9920	06E40979S01	RES,CF. 22-1/16W
MAIN-P.W.Board		R9931	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R9933	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R9935	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R9937	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board		SD4901	48E40860S01	DIO,SHOTTKY @RB160M
MAIN-P.W.Board		SD4903	48E40860S01	DIO,SHOTTKY @RB160M
MAIN-P.W.Board		SD5001	48E39121S01	DIODE,GN1D
MAIN-P.W.Board		SD8901	48E40860S01	DIO,SHOTTKY @RB160M
MAIN-P.W.Board		SD9101	48E39121S01	DIODE,GN1D
MAIN-P.W.Board		SD9302	48E40860S01	DIO,SHOTTKY @RB160M
MAIN-P.W.Board		SD9303	48E40860S01	DIO,SHOTTKY @RB160M
MAIN-P.W.Board		SD9305	48E40860S01	DIO,SHOTTKY @RB160M
MAIN-P.W.Board		SD9306	48E40860S01	DIO,SHOTTKY @RB160M
MAIN-P.W.Board		SD9401	48E40860S01	DIO,SHOTTKY @RB160M
MAIN-P.W.Board		SD9402	48E40860S01	DIO,SHOTTKY @RB160M
MAIN-P.W.Board		SD9901	48E40860S01	DIO,SHOTTKY @RB160M
MAIN-P.W.Board		SK9001	09E41446S01	CONN,P-CON
MAIN-P.W.Board		SW1351	40E41432S01	SW,SLIDE SK-22D15-G6
MAIN-P.W.Board		SW1551	40E40956S01	SW,SLIDE SK-23D55-G6
MAIN-P.W.Board		T9901	48E42991S01	TRANS,POWER AP11209L
MAIN-P.W.Board		T9902	48E42991S01	TRANS,POWER AP11209L
MAIN-P.W.Board		TH3801	48E42173S01	THERMISTOR,100K

MAIN-P.W.Board		TH3802	48E42173S01	THERMISTOR,100K
MAIN-P.W.Board		TH3803	48E42173S01	THERMISTOR,100K
MAIN-P.W.Board		TH3804	48E42173S01	THERMISTOR,100K
MAIN-P.W.Board		TH5001	48E42173S01	THERMISTOR,100K
MAIN-P.W.Board		TH9601	48E42173S01	THERMISTOR,100K
MAIN-P.W.Board		TH9602	48E42173S01	THERMISTOR,100K
MAIN-P.W.Board		TH9603	48E42173S01	THERMISTOR,100K
MAIN-P.W.Board		VOL1451	18E41507S01	VOL,ROTARY 50KX2
MAIN-P.W.Board		VOL1551	18E42979S01	VOL,ROTARY 50KX4
MAIN-P.W.Board		ZD3101	48E42992S01	DIODE,ZENER KDZ3.3V
MAIN-P.W.Board		ZD3102	48E42992S01	DIODE,ZENER KDZ3.3V
MAIN-P.W.Board		ZD3601	48E42997S01	DIODE,ZENER UDZS13B
MAIN-P.W.Board		ZD3602	48E42997S01	DIODE,ZENER UDZS13B
MAIN-P.W.Board		ZD3701	48E41497S01	DIO,ZENER Z02W2.4V
MAIN-P.W.Board		ZD3702	48E41497S01	DIO,ZENER Z02W2.4V
MAIN-P.W.Board		ZD3703	48E41497S01	DIO,ZENER Z02W2.4V
MAIN-P.W.Board		ZD3704	48E41497S01	DIO,ZENER Z02W2.4V
MAIN-P.W.Board		ZD4001	48E42997S01	DIODE,ZENER UDZS13B
MAIN-P.W.Board		ZD4002	48E42997S01	DIODE,ZENER UDZS13B
MAIN-P.W.Board		ZD4003	48E42997S01	DIODE,ZENER UDZS13B
MAIN-P.W.Board		ZD4004	48E42997S01	DIODE,ZENER UDZS13B
MAIN-P.W.Board		ZD4005	48E42997S01	DIODE,ZENER UDZS13B
MAIN-P.W.Board		ZD4006	48E42997S01	DIODE,ZENER UDZS13B
MAIN-P.W.Board		ZD5001	48E39118S01	DIODE,ZENER HZK15-2L
MAIN-P.W.Board		ZD7101	48E42992S01	DIODE,ZENER KDZ3.3V
MAIN-P.W.Board		ZD7102	48E42992S01	DIODE,ZENER KDZ3.3V
MAIN-P.W.Board		ZD7151	48E42992S01	DIODE,ZENER KDZ3.3V
MAIN-P.W.Board		ZD7152	48E42992S01	DIODE,ZENER KDZ3.3V
MAIN-P.W.Board		ZD7601	48E42997S01	DIODE,ZENER UDZS13B
MAIN-P.W.Board		ZD7602	48E42997S01	DIODE,ZENER UDZS13B
MAIN-P.W.Board		ZD7651	48E42997S01	DIODE,ZENER UDZS13B
MAIN-P.W.Board		ZD7652	48E42997S01	DIODE,ZENER UDZS13B
MAIN-P.W.Board		ZD7701	48E41497S01	DIO,ZENER Z02W2.4V
MAIN-P.W.Board		ZD7702	48E41497S01	DIO,ZENER Z02W2.4V
MAIN-P.W.Board		ZD7703	48E41497S01	DIO,ZENER Z02W2.4V
MAIN-P.W.Board		ZD7704	48E41497S01	DIO,ZENER Z02W2.4V
MAIN-P.W.Board		ZD7751	48E41497S01	DIO,ZENER Z02W2.4V
MAIN-P.W.Board		ZD7752	48E41497S01	DIO,ZENER Z02W2.4V
MAIN-P.W.Board		ZD7753	48E41497S01	DIO,ZENER Z02W2.4V
MAIN-P.W.Board		ZD7754	48E41497S01	DIO,ZENER Z02W2.4V
MAIN-P.W.Board		ZD9001	48E41047S01	DIO,ZENER Z5W27V
MAIN-P.W.Board		ZD9101	48E39101S01	DIODE,ZENER HZK6A1L
MAIN-P.W.Board		ZD9301	48E39118S01	DIODE,ZENER HZK15-2L
MAIN-P.W.Board		ZD9302	48E39118S01	DIODE,ZENER HZK15-2L
MAIN-P.W.Board		ZD9501	48E39119S01	DIODE,ZENER HZK16-1L
MAIN-P.W.Board		ZD9502	48E39119S01	DIODE,ZENER HZK16-1L
MAIN-P.W.Board		ZD9503	48E42996S01	DIODE,ZENER HZK30-1L
MAIN-P.W.Board		ZD9504	48E42996S01	DIODE,ZENER HZK30-1L
MAIN-P.W.Board		ZD9505	48E42996S01	DIODE,ZENER HZK30-1L
MAIN-P.W.Board		ZD9506	48E42996S01	DIODE,ZENER HZK30-1L
SUB-P.W.Board		C1001	08E42139S01	CAP,CER.100pF/50V
SUB-P.W.Board		C1002	08E42139S01	CAP,CER.100pF/50V
SUB-P.W.Board		C1003	08E42139S01	CAP,CER.100pF/50V
SUB-P.W.Board		C1004	08E42139S01	CAP,CER.100pF/50V
SUB-P.W.Board		C1005	08E42139S01	CAP,CER.100pF/50V
SUB-P.W.Board		C1006	08E42139S01	CAP,CER.100pF/50V
SUB-P.W.Board		C1007	08E42139S01	CAP,CER.100pF/50V
SUB-P.W.Board		C1008	08E42139S01	CAP,CER.100pF/50V
SUB-P.W.Board		C1009	08E42139S01	CAP,CER.100pF/50V
SUB-P.W.Board		C1010	08E42139S01	CAP,CER.100pF/50V
SUB-P.W.Board		C1011	08E42139S01	CAP,CER.100pF/50V
SUB-P.W.Board		C1012	08E42139S01	CAP,CER.100pF/50V
SUB-P.W.Board		C1109	08E37118S01	CAP,CER. 220pF/50V
SUB-P.W.Board		C1110	08E37118S01	CAP,CER. 220pF/50V

SUB-P.W.Board		C1111	08E37118S01	CAP,CER. 220pF/50V
SUB-P.W.Board		C1112	08E37118S01	CAP,CER. 220pF/50V
SUB-P.W.Board		C1113	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C1114	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C1115	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C1116	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C1117	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C1118	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C1119	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C1120	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C1121	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C1122	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C1123	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C1124	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C1201	08E42323S01	CAP,CER. 22pF/50V
SUB-P.W.Board		C1202	08E42323S01	CAP,CER. 22pF/50V
SUB-P.W.Board		C1203	08E42323S01	CAP,CER. 22pF/50V
SUB-P.W.Board		C1204	08E42323S01	CAP,CER. 22pF/50V
SUB-P.W.Board		C1205	08E42323S01	CAP,CER. 22pF/50V
SUB-P.W.Board		C1206	08E42323S01	CAP,CER. 22pF/50V
SUB-P.W.Board		C1207	08E42323S01	CAP,CER. 22pF/50V
SUB-P.W.Board		C1208	08E42323S01	CAP,CER. 22pF/50V
SUB-P.W.Board		C1209	08E42323S01	CAP,CER. 22pF/50V
SUB-P.W.Board		C1210	08E42323S01	CAP,CER. 22pF/50V
SUB-P.W.Board		C1211	08E42323S01	CAP,CER. 22pF/50V
SUB-P.W.Board		C1212	08E42323S01	CAP,CER. 22pF/50V
SUB-P.W.Board		C1213	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C1214	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C1215	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C1216	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C1217	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C1218	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C1219	08E42969S01	CAP,CER.1uF/25V
SUB-P.W.Board		C1220	08E42969S01	CAP,CER.1uF/25V
SUB-P.W.Board		C1301	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C1302	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C1303	08E42323S01	CAP,CER. 22pF/50V
SUB-P.W.Board		C1304	08E42323S01	CAP,CER. 22pF/50V
SUB-P.W.Board		C1305	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C1306	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C1307	08E42323S01	CAP,CER. 22pF/50V
SUB-P.W.Board		C1308	08E42323S01	CAP,CER. 22pF/50V
SUB-P.W.Board		C1401	08E42323S01	CAP,CER. 22pF/50V
SUB-P.W.Board		C1404	08E42323S01	CAP,CER. 22pF/50V
SUB-P.W.Board		C1405	08E42323S01	CAP,CER. 22pF/50V
SUB-P.W.Board		C1407	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C1408	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C1409	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C1410	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C1501	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C1502	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C1503	08E38540S01	CAP,CER. 0.15uF/16V
SUB-P.W.Board		C1504	08E38540S01	CAP,CER. 0.15uF/16V
SUB-P.W.Board		C1505	08E38540S01	CAP,CER. 0.15uF/16V
SUB-P.W.Board		C1506	08E38540S01	CAP,CER. 0.15uF/16V
SUB-P.W.Board		C1507	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C1508	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C1509	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C1510	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C1511	08E42116S01	CAP,FILM 47nF/63V
SUB-P.W.Board		C1512	08E42967S01	CAP,FILM 0.33uF/63V
SUB-P.W.Board		C1513	08E42118S01	CAP,FILM 150nF/63V
SUB-P.W.Board		C1514	08E42118S01	CAP,FILM 150nF/63V
SUB-P.W.Board		C1515	08E42323S01	CAP,CER. 22pF/50V

SUB-P.W.Board		C1516	08E42323S01	CAP,CER. 22pF/50V
SUB-P.W.Board		C1517	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C1518	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C1519	08E42323S01	CAP,CER. 22pF/50V
SUB-P.W.Board		C1520	08E42323S01	CAP,CER. 22pF/50V
SUB-P.W.Board		C1601	08E42968S01	CAP,FILM 1.5uF/50V
SUB-P.W.Board		C1602	08E42968S01	CAP,FILM 1.5uF/50V
SUB-P.W.Board		C1603	08E42968S01	CAP,FILM 1.5uF/50V
SUB-P.W.Board		C1604	08E42968S01	CAP,FILM 1.5uF/50V
SUB-P.W.Board		C1605	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C1606	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C1801	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C1802	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C1803	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C1804	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C1805	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C1806	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C1807	08E42117S01	CAP,FILM 68nF/63V
SUB-P.W.Board		C1808	08E42118S01	CAP,FILM 150nF/63V
SUB-P.W.Board		C1809	08E42323S01	CAP,CER. 22pF/50V
SUB-P.W.Board		C1810	08E36680S01	CAP,CER. 1000pF/50V
SUB-P.W.Board		C2001	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C2002	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C2003	08E42325S01	CAP,CER. 0.01uF/50V
SUB-P.W.Board		C2004	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C2005	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C2006	08E42325S01	CAP,CER. 0.01uF/50V
SUB-P.W.Board		C2007	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C2008	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C2009	08E42325S01	CAP,CER. 0.01uF/50V
SUB-P.W.Board		C2101	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C2102	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C2103	08E42325S01	CAP,CER. 0.01uF/50V
SUB-P.W.Board		C2104	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C2105	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C2106	08E42325S01	CAP,CER. 0.01uF/50V
SUB-P.W.Board		C2107	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C2108	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C2109	08E42325S01	CAP,CER. 0.01uF/50V
SUB-P.W.Board		C6551	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C6552	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C6553	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C6554	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		CB6551	09E42235S01	CONN,FFC 14P
SUB-P.W.Board		CB6552	09E42112S01	CONN,FFC 30P
SUB-P.W.Board		D1101	48E42526S01	DIODE,DAN217U
SUB-P.W.Board		D1102	48E42526S01	DIODE,DAN217U
SUB-P.W.Board		D1103	48E42526S01	DIODE,DAN217U
SUB-P.W.Board		D1104	48E42526S01	DIODE,DAN217U
SUB-P.W.Board		D1105	48E42526S01	DIODE,DAN217U
SUB-P.W.Board		D1106	48E42526S01	DIODE,DAN217U
SUB-P.W.Board		D1107	48E42526S01	DIODE,DAN217U
SUB-P.W.Board		D1108	48E42526S01	DIODE,DAN217U
SUB-P.W.Board		D1109	48E42526S01	DIODE,DAN217U
SUB-P.W.Board		D1110	48E42526S01	DIODE,DAN217U
SUB-P.W.Board		D1111	48E42526S01	DIODE,DAN217U
SUB-P.W.Board		D1112	48E42526S01	DIODE,DAN217U
SUB-P.W.Board		D1201	48E40918S01	DIODE,KDS160
SUB-P.W.Board		D1202	48E40918S01	DIODE,KDS160
SUB-P.W.Board		D1701	48E40918S01	DIODE,KDS160
SUB-P.W.Board		D1702	48E41411S01	DIODE,DAP202U
SUB-P.W.Board		D1703	48E41411S01	DIODE,DAP202U
SUB-P.W.Board		D2001	48E42526S01	DIODE,DAN217U
SUB-P.W.Board		D2002	48E42526S01	DIODE,DAN217U

SUB-P.W.Board		D2003	48E42526S01	DIODE,DAN217U
SUB-P.W.Board		D2004	48E42526S01	DIODE,DAN217U
SUB-P.W.Board		D2005	48E42526S01	DIODE,DAN217U
SUB-P.W.Board		D2101	48E42526S01	DIODE,DAN217U
SUB-P.W.Board		D2102	48E42526S01	DIODE,DAN217U
SUB-P.W.Board		D2103	48E40918S01	DIODE,KDS160
SUB-P.W.Board		D2104	48E42526S01	DIODE,DAN217U
SUB-P.W.Board		D2105	48E40918S01	DIODE,KDS160
SUB-P.W.Board		D2106	48E42526S01	DIODE,DAN217U
SUB-P.W.Board		D2107	48E42526S01	DIODE,DAN217U
SUB-P.W.Board		D2108	48E40918S01	DIODE,KDS160
SUB-P.W.Board		E1101	23E39767S01	CAP,ELY. 1uF/50V
SUB-P.W.Board		E1102	23E39767S01	CAP,ELY. 1uF/50V
SUB-P.W.Board		E1103	23E39767S01	CAP,ELY. 1uF/50V
SUB-P.W.Board		E1104	23E39767S01	CAP,ELY. 1uF/50V
SUB-P.W.Board		E1105	23E39767S01	CAP,ELY. 1uF/50V
SUB-P.W.Board		E1106	23E39767S01	CAP,ELY. 1uF/50V
SUB-P.W.Board		E1107	23E39767S01	CAP,ELY. 1uF/50V
SUB-P.W.Board		E1108	23E39767S01	CAP,ELY. 1uF/50V
SUB-P.W.Board		E1109	23E39766S01	CAP,ELY. 2.2uF/50V
SUB-P.W.Board		E1110	23E39766S01	CAP,ELY. 2.2uF/50V
SUB-P.W.Board		E1111	23E39766S01	CAP,ELY. 2.2uF/50V
SUB-P.W.Board		E1112	23E39766S01	CAP,ELY. 2.2uF/50V
SUB-P.W.Board		E1701	23E42985S01	CAP,ELY.22uF/16V
SUB-P.W.Board		E1702	23E39769S01	CAP,ELY. 10uF/16V
SUB-P.W.Board		E1703	23E39769S01	CAP,ELY. 10uF/16V
SUB-P.W.Board		E1704	23E39769S01	CAP,ELY. 10uF/16V
SUB-P.W.Board		E1705	23E39769S01	CAP,ELY. 10uF/16V
SUB-P.W.Board		E1801	23E42985S01	CAP,ELY.22uF/16V
SUB-P.W.Board		E6551	23E41398S01	CAP,ELY.22uF/16V
SUB-P.W.Board		E6552	23E41398S01	CAP,ELY.22uF/16V
SUB-P.W.Board		E6553	23E41398S01	CAP,ELY.22uF/16V
SUB-P.W.Board		E6554	23E41398S01	CAP,ELY.22uF/16V
SUB-P.W.Board		IC1101	51E42366S01	IC,NJM4580R
SUB-P.W.Board		IC1102	51E42366S01	IC,NJM4580R
SUB-P.W.Board		IC1103	51E42366S01	IC,NJM4580R
SUB-P.W.Board		IC1104	51E42366S01	IC,NJM4580R
SUB-P.W.Board		IC1105	51E42366S01	IC,NJM4580R
SUB-P.W.Board		IC1106	51E42366S01	IC,NJM4580R
SUB-P.W.Board		IC1201	51E42366S01	IC,NJM4580R
SUB-P.W.Board		IC1202	51E42366S01	IC,NJM4580R
SUB-P.W.Board		IC1203	51E42366S01	IC,NJM4580R
SUB-P.W.Board		IC1301	51E42366S01	IC,NJM4580R
SUB-P.W.Board		IC1302	51E42366S01	IC,NJM4580R
SUB-P.W.Board		IC1401	51E42366S01	IC,NJM4580R
SUB-P.W.Board		IC1402	51E42366S01	IC,NJM4580R
SUB-P.W.Board		IC1501	51E42366S01	IC,NJM4580R
SUB-P.W.Board		IC1502	51E42366S01	IC,NJM4580R
SUB-P.W.Board		IC1503	51E42366S01	IC,NJM4580R
SUB-P.W.Board		IC1504	51E42366S01	IC,NJM4580R
SUB-P.W.Board		IC1601	51E42366S01	IC,NJM4580R
SUB-P.W.Board		IC1801	51E42366S01	IC,NJM4580R
SUB-P.W.Board		IC1802	51E42366S01	IC,NJM4580R
SUB-P.W.Board		IC1803	51E42366S01	IC,NJM4580R
SUB-P.W.Board		IC2001	51E39598S01	IC,BA4560RFVM
SUB-P.W.Board		IC2002	51E39598S01	IC,BA4560RFVM
SUB-P.W.Board		IC2003	51E39598S01	IC,BA4560RFVM
SUB-P.W.Board		IC2101	51E39598S01	IC,BA4560RFVM
SUB-P.W.Board		IC2102	51E39598S01	IC,BA4560RFVM
SUB-P.W.Board		IC2103	51E39598S01	IC,BA4560RFVM
SUB-P.W.Board		JK1001	09E42973S01	CONN,RCA 6P
SUB-P.W.Board		Q1301	48E43002S01	TR,UM6K31N
SUB-P.W.Board		Q1302	48E43002S01	TR,UM6K31N
SUB-P.W.Board		Q1303	48E43002S01	TR,UM6K31N

SUB-P.W.Board		Q1304	48E43002S01	TR,UM6K31N
SUB-P.W.Board		Q1701	48E42172S01	TR,IMX25
SUB-P.W.Board		Q1702	48E42172S01	TR,IMX25
SUB-P.W.Board		Q1703	48E43003S01	TR,UMD3N
SUB-P.W.Board		Q1704	48E37188S01	TR,DTC144EE
SUB-P.W.Board		Q1705	48E39389S01	TR,KTC2875
SUB-P.W.Board		Q2101	48E41051S01	TR,2SC2412K
SUB-P.W.Board		Q2102	48E41051S01	TR,2SC2412K
SUB-P.W.Board		Q2103	48E37188S01	TR,DTC144EE
SUB-P.W.Board		Q2104	48E37188S01	TR,DTC144EE
SUB-P.W.Board		R1101	06E36561S01	RES,CF. 120-1/16W
SUB-P.W.Board		R1102	06E36561S01	RES,CF. 120-1/16W
SUB-P.W.Board		R1103	06E36561S01	RES,CF. 120-1/16W
SUB-P.W.Board		R1104	06E36561S01	RES,CF. 120-1/16W
SUB-P.W.Board		R1105	06E36561S01	RES,CF. 120-1/16W
SUB-P.W.Board		R1106	06E36561S01	RES,CF. 120-1/16W
SUB-P.W.Board		R1107	06E37227S01	RES,CF. 1K-1/16W
SUB-P.W.Board		R1108	06E37226S01	RES,CF. 1.2K-1/16W
SUB-P.W.Board		R1109	06E37227S01	RES,CF. 1K-1/16W
SUB-P.W.Board		R1110	06E37226S01	RES,CF. 1.2K-1/16W
SUB-P.W.Board		R1111	06E37227S01	RES,CF. 1K-1/16W
SUB-P.W.Board		R1112	06E37226S01	RES,CF. 1.2K-1/16W
SUB-P.W.Board		R1113	06E37227S01	RES,CF. 1K-1/16W
SUB-P.W.Board		R1114	06E37226S01	RES,CF. 1.2K-1/16W
SUB-P.W.Board		R1115	06E37227S01	RES,CF. 1K-1/16W
SUB-P.W.Board		R1116	06E37226S01	RES,CF. 1.2K-1/16W
SUB-P.W.Board		R1117	06E37227S01	RES,CF. 1K-1/16W
SUB-P.W.Board		R1118	06E37226S01	RES,CF. 1.2K-1/16W
SUB-P.W.Board		R1119	06E37252S01	RES,CF. 22K-1/16W
SUB-P.W.Board		R1120	06E37252S01	RES,CF. 22K-1/16W
SUB-P.W.Board		R1121	06E37252S01	RES,CF. 22K-1/16W
SUB-P.W.Board		R1122	06E37252S01	RES,CF. 22K-1/16W
SUB-P.W.Board		R1123	06E37252S01	RES,CF. 22K-1/16W
SUB-P.W.Board		R1124	06E37252S01	RES,CF. 22K-1/16W
SUB-P.W.Board		R1125	06E38591S01	RES,CF. 1M-1/16W
SUB-P.W.Board		R1126	06E38591S01	RES,CF. 1M-1/16W
SUB-P.W.Board		R1127	06E38591S01	RES,CF. 1M-1/16W
SUB-P.W.Board		R1128	06E38591S01	RES,CF. 1M-1/16W
SUB-P.W.Board		R1129	06E38591S01	RES,CF. 1M-1/16W
SUB-P.W.Board		R1130	06E38591S01	RES,CF. 1M-1/16W
SUB-P.W.Board		R1131	06E38591S01	RES,CF. 1M-1/16W
SUB-P.W.Board		R1132	06E38591S01	RES,CF. 1M-1/16W
SUB-P.W.Board		R1133	06E38591S01	RES,CF. 1M-1/16W
SUB-P.W.Board		R1134	06E38591S01	RES,CF. 1M-1/16W
SUB-P.W.Board		R1135	06E38591S01	RES,CF. 1M-1/16W
SUB-P.W.Board		R1136	06E38591S01	RES,CF. 1M-1/16W
SUB-P.W.Board		R1149	06E37227S01	RES,CF. 1K-1/16W
SUB-P.W.Board		R1150	06E37227S01	RES,CF. 1K-1/16W
SUB-P.W.Board		R1151	06E37227S01	RES,CF. 1K-1/16W
SUB-P.W.Board		R1152	06E37227S01	RES,CF. 1K-1/16W
SUB-P.W.Board		R1153	06E37227S01	RES,CF. 1K-1/16W
SUB-P.W.Board		R1154	06E37227S01	RES,CF. 1K-1/16W
SUB-P.W.Board		R1155	06E37227S01	RES,CF. 1K-1/16W
SUB-P.W.Board		R1156	06E37227S01	RES,CF. 1K-1/16W
SUB-P.W.Board		R1157	06E37227S01	RES,CF. 1K-1/16W
SUB-P.W.Board		R1158	06E37227S01	RES,CF. 1K-1/16W
SUB-P.W.Board		R1159	06E37227S01	RES,CF. 1K-1/16W
SUB-P.W.Board		R1160	06E37227S01	RES,CF. 1K-1/16W
SUB-P.W.Board		R1201	06E42961S01	RES,CF. 18K-1/16W
SUB-P.W.Board		R1202	06E42961S01	RES,CF. 18K-1/16W
SUB-P.W.Board		R1203	06E42961S01	RES,CF. 18K-1/16W
SUB-P.W.Board		R1204	06E42961S01	RES,CF. 18K-1/16W
SUB-P.W.Board		R1205	06E38535S01	RES,CF. 18K-1/16W
SUB-P.W.Board		R1206	06E38535S01	RES,CF. 18K-1/16W

SUB-P.W.Board		R1207	06E42961S01	RES,CF. 18K-1/16W
SUB-P.W.Board		R1208	06E42961S01	RES,CF. 18K-1/16W
SUB-P.W.Board		R1209	06E42961S01	RES,CF. 18K-1/16W
SUB-P.W.Board		R1210	06E42961S01	RES,CF. 18K-1/16W
SUB-P.W.Board		R1211	06E38535S01	RES,CF. 18K-1/16W
SUB-P.W.Board		R1212	06E38535S01	RES,CF. 18K-1/16W
SUB-P.W.Board		R1213	06E42961S01	RES,CF. 18K-1/16W
SUB-P.W.Board		R1214	06E42961S01	RES,CF. 18K-1/16W
SUB-P.W.Board		R1215	06E38535S01	RES,CF. 18K-1/16W
SUB-P.W.Board		R1216	06E42961S01	RES,CF. 18K-1/16W
SUB-P.W.Board		R1217	06E42961S01	RES,CF. 18K-1/16W
SUB-P.W.Board		R1218	06E38535S01	RES,CF. 18K-1/16W
SUB-P.W.Board		R1219	06E42961S01	RES,CF. 18K-1/16W
SUB-P.W.Board		R1220	06E42961S01	RES,CF. 18K-1/16W
SUB-P.W.Board		R1221	06E42961S01	RES,CF. 18K-1/16W
SUB-P.W.Board		R1222	06E42961S01	RES,CF. 18K-1/16W
SUB-P.W.Board		R1223	06E38535S01	RES,CF. 18K-1/16W
SUB-P.W.Board		R1224	06E38535S01	RES,CF. 18K-1/16W
SUB-P.W.Board		R1225	06E40977S01	RES,CF. 10-1/16W
SUB-P.W.Board		R1226	06E40977S01	RES,CF. 10-1/16W
SUB-P.W.Board		R1227	06E40977S01	RES,CF. 10-1/16W
SUB-P.W.Board		R1228	06E40977S01	RES,CF. 10-1/16W
SUB-P.W.Board		R1229	06E42297S01	RES,CF. 100K-1/10W
SUB-P.W.Board		R1230	06E42297S01	RES,CF. 100K-1/10W
SUB-P.W.Board		R1303	06E42385S01	RES,CF. 470K-1/16W
SUB-P.W.Board		R1304	06E42385S01	RES,CF. 470K-1/16W
SUB-P.W.Board		R1305	06E42385S01	RES,CF. 470K-1/16W
SUB-P.W.Board		R1306	06E42385S01	RES,CF. 470K-1/16W
SUB-P.W.Board		R1307	06E37110S01	RES,CF. 10K-1/16W
SUB-P.W.Board		R1308	06E37110S01	RES,CF. 10K-1/16W
SUB-P.W.Board		R1309	06E37110S01	RES,CF. 10K-1/16W
SUB-P.W.Board		R1310	06E37110S01	RES,CF. 10K-1/16W
SUB-P.W.Board		R1311	06E37110S01	RES,CF. 10K-1/16W
SUB-P.W.Board		R1312	06E37110S01	RES,CF. 10K-1/16W
SUB-P.W.Board		R1313	06E37110S01	RES,CF. 10K-1/16W
SUB-P.W.Board		R1314	06E37110S01	RES,CF. 10K-1/16W
SUB-P.W.Board		R1315	06E37110S01	RES,CF. 10K-1/16W
SUB-P.W.Board		R1316	06E37110S01	RES,CF. 10K-1/16W
SUB-P.W.Board		R1317	06E37227S01	RES,CF. 1K-1/16W
SUB-P.W.Board		R1318	06E37227S01	RES,CF. 1K-1/16W
SUB-P.W.Board		R1319	06E40977S01	RES,CF. 10-1/16W
SUB-P.W.Board		R1320	06E40977S01	RES,CF. 10-1/16W
SUB-P.W.Board		R1401	06E35163S01	RES,CF 132-F-1/16-CP
SUB-P.W.Board		R1402	06E37105S01	RES,CF. 3.3K-1/16W
SUB-P.W.Board		R1403	06E37105S01	RES,CF. 3.3K-1/16W
SUB-P.W.Board		R1404	06E34155S01	RES,CF. 750-1/16W
SUB-P.W.Board		R1405	06E42134S01	RES,CF. 1M-1/16W
SUB-P.W.Board		R1406	06E41005S01	RES,CF. 10K-1/16W
SUB-P.W.Board		R1407	06E37224S01	RES,CF. 2K-1/16W
SUB-P.W.Board		R1408	06E37224S01	RES,CF. 2K-1/16W
SUB-P.W.Board		R1409	06E35388S01	RES,CF. 24K-1/16W
SUB-P.W.Board		R1410	06E42134S01	RES,CF. 1M-1/16W
SUB-P.W.Board		R1411	06E42134S01	RES,CF. 1M-1/16W
SUB-P.W.Board		R1501	06E40553S01	RES,CF. 2.4K-1/16
SUB-P.W.Board		R1502	06E38535S01	RES,CF. 18K-1/16W
SUB-P.W.Board		R1503	06E41016S01	RES,CF. 0-1/16W
SUB-P.W.Board		R1504	06E40553S01	RES,CF. 2.4K-1/16
SUB-P.W.Board		R1505	06E38535S01	RES,CF. 18K-1/16W
SUB-P.W.Board		R1506	06E41016S01	RES,CF. 0-1/16W
SUB-P.W.Board		R1507	06E37227S01	RES,CF. 1K-1/16W
SUB-P.W.Board		R1508	06E37227S01	RES,CF. 1K-1/16W
SUB-P.W.Board		R1509	06E37110S01	RES,CF. 10K-1/16W
SUB-P.W.Board		R1510	06E37110S01	RES,CF. 10K-1/16W
SUB-P.W.Board		R1511	06E37110S01	RES,CF. 10K-1/16W

SUB-P.W.Board		R1512	06E37110S01	RES,CF. 10K-1/16W
SUB-P.W.Board		R1513	06E37110S01	RES,CF. 10K-1/16W
SUB-P.W.Board		R1514	06E37110S01	RES,CF. 10K-1/16W
SUB-P.W.Board		R1515	06E37110S01	RES,CF. 10K-1/16W
SUB-P.W.Board		R1516	06E37110S01	RES,CF. 10K-1/16W
SUB-P.W.Board		R1517	06E37110S01	RES,CF. 10K-1/16W
SUB-P.W.Board		R1518	06E37110S01	RES,CF. 10K-1/16W
SUB-P.W.Board		R1519	06E37110S01	RES,CF. 10K-1/16W
SUB-P.W.Board		R1520	06E37110S01	RES,CF. 10K-1/16W
SUB-P.W.Board		R1521	06E42134S01	RES,CF. 1M-1/16W
SUB-P.W.Board		R1522	06E42134S01	RES,CF. 1M-1/16W
SUB-P.W.Board		R1523	06E42134S01	RES,CF. 1M-1/16W
SUB-P.W.Board		R1524	06E42134S01	RES,CF. 1M-1/16W
SUB-P.W.Board		R1525	06E40552S01	RES,CF. 1.6K-1/16
SUB-P.W.Board		R1526	06E37169S01	RES,CF. 1.8K-1/16W
SUB-P.W.Board		R1527	06E35240S01	RES,CF. 2.2K-1/16W
SUB-P.W.Board		R1528	06E37169S01	RES,CF. 1.8K-1/16W
SUB-P.W.Board		R1529	06E42134S01	RES,CF. 1M-1/16W
SUB-P.W.Board		R1530	06E42134S01	RES,CF. 1M-1/16W
SUB-P.W.Board		R1601	06E42134S01	RES,CF. 1M-1/16W
SUB-P.W.Board		R1602	06E42134S01	RES,CF. 1M-1/16W
SUB-P.W.Board		R1603	06E37093S01	RES,CF. 5.6K-1/16W
SUB-P.W.Board		R1604	06E37093S01	RES,CF. 5.6K-1/16W
SUB-P.W.Board		R1605	06E40553S01	RES,CF. 2.4K-1/16
SUB-P.W.Board		R1606	06E40553S01	RES,CF. 2.4K-1/16
SUB-P.W.Board		R1607	06E42134S01	RES,CF. 1M-1/16W
SUB-P.W.Board		R1608	06E42134S01	RES,CF. 1M-1/16W
SUB-P.W.Board		R1701	06E42132S01	RES,CF. 10K-1/16W
SUB-P.W.Board		R1702	06E37225S01	RES,CF. 1.5K-1/16W
SUB-P.W.Board		R1703	06E41016S01	RES,CF. 0-1/16W
SUB-P.W.Board		R1704	06E35367S01	RES,CF. 5.6K-1/4W
SUB-P.W.Board		R1705	06E42132S01	RES,CF. 10K-1/16W
SUB-P.W.Board		R1706	06E42132S01	RES,CF. 10K-1/16W
SUB-P.W.Board		R1707	06E42132S01	RES,CF. 10K-1/16W
SUB-P.W.Board		R1708	06E42132S01	RES,CF. 10K-1/16W
SUB-P.W.Board		R1709	06E37226S01	RES,CF. 1.2K-1/16W
SUB-P.W.Board		R1710	06E37226S01	RES,CF. 1.2K-1/16W
SUB-P.W.Board		R1711	06E37226S01	RES,CF. 1.2K-1/16W
SUB-P.W.Board		R1712	06E37226S01	RES,CF. 1.2K-1/16W
SUB-P.W.Board		R1713	06E41016S01	RES,CF. 0-1/16W
SUB-P.W.Board		R1714	06E41016S01	RES,CF. 0-1/16W
SUB-P.W.Board		R1715	06E41016S01	RES,CF. 0-1/16W
SUB-P.W.Board		R1716	06E41016S01	RES,CF. 0-1/16W
SUB-P.W.Board		R1717	06E35367S01	RES,CF. 5.6K-1/4W
SUB-P.W.Board		R1718	06E35367S01	RES,CF. 5.6K-1/4W
SUB-P.W.Board		R1719	06E35367S01	RES,CF. 5.6K-1/4W
SUB-P.W.Board		R1720	06E35367S01	RES,CF. 5.6K-1/4W
SUB-P.W.Board		R1721	06E41011S01	RES,CF. 100K-1/16W
SUB-P.W.Board		R1722	06E42132S01	RES,CF. 10K-1/16W
SUB-P.W.Board		R1801	06E37226S01	RES,CF. 1.2K-1/16W
SUB-P.W.Board		R1802	06E37226S01	RES,CF. 1.2K-1/16W
SUB-P.W.Board		R1803	06E37226S01	RES,CF. 1.2K-1/16W
SUB-P.W.Board		R1804	06E37226S01	RES,CF. 1.2K-1/16W
SUB-P.W.Board		R1805	06E37110S01	RES,CF. 10K-1/16W
SUB-P.W.Board		R1806	06E37110S01	RES,CF. 10K-1/16W
SUB-P.W.Board		R1807	06E37225S01	RES,CF. 1.5K-1/16W
SUB-P.W.Board		R2001	06E37109S01	RES,CF. 4.7K-1/16W
SUB-P.W.Board		R2002	06E42287S01	RES,CF. 47K-1/16W
SUB-P.W.Board		R2004	06E37109S01	RES,CF. 4.7K-1/16W
SUB-P.W.Board		R2005	06E42287S01	RES,CF. 47K-1/16W
SUB-P.W.Board		R2007	06E42287S01	RES,CF. 47K-1/16W
SUB-P.W.Board		R2008	06E42287S01	RES,CF. 47K-1/16W
SUB-P.W.Board		R2009	06E37109S01	RES,CF. 4.7K-1/16W
SUB-P.W.Board		R2010	06E42287S01	RES,CF. 47K-1/16W

SUB-P.W.Board		R2012	06E42287S01	RES,CF. 47K-1/16W
SUB-P.W.Board		R2101	06E37227S01	RES,CF. 1K-1/16W
SUB-P.W.Board		R2102	06E37227S01	RES,CF. 1K-1/16W
SUB-P.W.Board		R2103	06E42287S01	RES,CF. 47K-1/16W
SUB-P.W.Board		R2104	06E38592S01	RES,CF. 16K-1/16W
SUB-P.W.Board		R2105	06E37105S01	RES,CF. 3.3K-1/16W
SUB-P.W.Board		R2106	06E34170S01	RES,CF. 430-1/16W
SUB-P.W.Board		R2107	06E35291S01	RES,CF. 6.8K-1/16W
SUB-P.W.Board		R2108	06E41377S01	RES,CF. 270-1/16W
SUB-P.W.Board		R2109	06E42287S01	RES,CF. 47K-1/16W
SUB-P.W.Board		R2110	06E42287S01	RES,CF. 47K-1/16W
SUB-P.W.Board		R2111	06E38592S01	RES,CF. 16K-1/16W
SUB-P.W.Board		R2112	06E37105S01	RES,CF. 3.3K-1/16W
SUB-P.W.Board		R2113	06E34170S01	RES,CF. 430-1/16W
SUB-P.W.Board		R2114	06E35291S01	RES,CF. 6.8K-1/16W
SUB-P.W.Board		R2115	06E41377S01	RES,CF. 270-1/16W
SUB-P.W.Board		R2116	06E42287S01	RES,CF. 47K-1/16W
SUB-P.W.Board		R2117	06E37227S01	RES,CF. 1K-1/16W
SUB-P.W.Board		R2118	06E42287S01	RES,CF. 47K-1/16W
SUB-P.W.Board		R2119	06E38592S01	RES,CF. 16K-1/16W
SUB-P.W.Board		R2120	06E37105S01	RES,CF. 3.3K-1/16W
SUB-P.W.Board		R2121	06E40733S01	RES,CF. 200-1/16W
SUB-P.W.Board		R2122	06E35290S01	RES,CF. 6.2K-1/16W
SUB-P.W.Board		R2123	06E42183S01	RES,CF. 560-1/16W
SUB-P.W.Board		R2124	06E42287S01	RES,CF. 47K-1/16W
SUB-P.W.Board		R2125	06E41513S01	RES,CF. 240-1/16W
SUB-P.W.Board		R2126	06E41374S01	RES,CF. 110-1/16W
SUB-P.W.Board		R2127	06E42132S01	RES,CF. 10K-1/16W
SUB-P.W.Board		R2128	06E42132S01	RES,CF. 10K-1/16W
SUB-P.W.Board		R2129	06E42132S01	RES,CF. 10K-1/16W
SUB-P.W.Board		R2130	06E42132S01	RES,CF. 10K-1/16W
SUB-P.W.Board		R2301	06E41016S01	RES,CF. 0-1/16W
SUB-P.W.Board		R2302	06E41382S01	RES,CF. 51K-1/16W
SUB-P.W.Board		R2303	06E41375S01	RES,CF. 150-1/16W
SUB-P.W.Board		R2304	06E42134S01	RES,CF. 1M-1/16W
SUB-P.W.Board		R6551	06E42297S01	RES,CF. 100K-1/10W
SUB-P.W.Board		R6552	06E42297S01	RES,CF. 100K-1/10W
MAIN-P.W.Board		R8001	06E41387S01	RES,CF. 680-1/4W
MAIN-P.W.Board		R8003	06E39850S01	RES,CF. 2K-1/4W
MAIN-P.W.Board		R8004	06E40750S01	RES,CF. 1.1K-1/4W
SUB-P.W.Board		SW1301	40E41432S01	SW,SLIDE SK-22D15-G6
SUB-P.W.Board		SW1501	40E40956S01	SW,SLIDE SK-23D55-G6
SUB-P.W.Board		VOL1401	18E41507S01	VOL,ROTARY 50KX2
SUB-P.W.Board		VOL1402	18E41439S01	VOL,ROTARY 50KX1
SUB-P.W.Board		VOL1501	18E42201S01	VOL,ROTARY 50KX2
SUB-P.W.Board		VOL1502	18E42155S01	VOL,ROTARY 20KX4
SUB-P.W.Board		VOL1601	18E42980S01	VOL,ROTARY 100KX4
LED-P.W.Board		C8021	08E40754S01	CAP,CER.180pF/50V
LED-P.W.Board		C8022	08E40754S01	CAP,CER.180pF/50V
LED-P.W.Board		C8023	08E40754S01	CAP,CER.180pF/50V
LED-P.W.Board		C8024	08E40754S01	CAP,CER.180pF/50V
LED-P.W.Board		LD8021	48E41405S01	LED,SML512BC5T BLUE
LED-P.W.Board		LD8022	48E41405S01	LED,SML512BC5T BLUE
LED-P.W.Board		LD8023	48E41405S01	LED,SML512BC5T BLUE
LED-P.W.Board		LD8024	48E41405S01	LED,SML512BC5T BLUE
LED-P.W.Board		R8022	06E38034S01	RES,CF. 1K-1/4W
LED-P.W.Board		R8024	06E38034S01	RES,CF. 1K-1/4W
Miscellaneous		CH8001	01E41447S01	CONN,ASSY 2P

Mark Model Code

#1 PDX-V9(North American) Only,

\$1 PDX-V9(European) Only,

%1 PDX-V9(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

#####