

To.: DATE: 20 . . .

RoHS Halogen Free

# **SPECIFICATION**

PRODUCT: STARCAP

MODEL: DCS series

WRITTEN	CHECKED	APPROVED
ame	Langer Acker 32 30900 Wedemar Germany	1 1

## KORCHIP CORP.

KORCHIP B/D, 359, Manan-ro, Manan-gu, Anyang-si, Gyeonggi-do, KOREA

TEL: 82 - 31 - 361 - 8000 FAX: 82 - 31 - 361 - 8080





# Index

Page No.	ITEM	etc.				
1	Cover Page					
2	Index					
3	Revision History					
3	Manufacturer Information					
	1. Scope					
4	2. Part Number System					
4	3. Photo					
	4. General Specifications					
5-7	5. Product Construction and Dimension					
8	6. Reliability Specifications					
9	7. Packing Specifications					
10	8. Labeling Standards  Langer Acker 32 (+49) 5130 / 58642-0					
11	9. Measuring Method of Characteristics info@amec-gmbh.de www.amec-gmbh.de					
12	10. Mounting					
13-14	11. Cautions for Use					
15	12. Environmental Management					





# **Revision History**

No.	Documentation	Check	Description of Revision	Approval	Date
1	S.E. Kim (R&D)	K.B. Chung (Q.A.)	Initial Release	B.I. Lim (R&D)	May 12, 2014
2	S.E. Kim (R&D)	K.B. Chung (Q.A.)	HF(Halogen Free) Updated	B.I. Lim (R&D)	Jul. 24, 2014
	0	me	30900 Wedemark info@am	0 / 58642-0 ec-gmbh.de	
			Germany www.am	ec-gmbh.de	

# Manufacturer Information

Manufacturer : Korchip Corporation

Location : KORCHIP B/D, 359, Manan-ro, Manan-gu, Anyang-si, Gyeonggi-do,

**KOREA** 

Tel. : +82-31-361-8000

Fax. : +82-31-361-8080





### 1. Scope

This specification applies to STARCAP(Electric Double Layer Capacitor), submitted to specified customer in cover page.

## 2. Part Number System

① Series Name: DC(Coin type double layer capacitor), S(Small size)

② Rated Voltage: 5.5VDC

③ Capacitance : 0.47 F (474 = 47  $\times$  10<sup>+4</sup> uF)

4 Terminal Type : V-type

⑤ Pb-Free

### 3. Photo



V-TYPE H-TYPE C-TYPE


### 4. General Specifications

ITEMS	DCS5R5473(104)	DCS5R5224(334)	DCS5R5474
Rated Voltage	5.5 VDC	5.5 VDC	5.5 VDC
Operating Temp.	-25 ~ +70 ℃	-25 ~ +70 ℃	-25 ~ +70 ℃
Capacitance	0.047(0.10) F	0.22(0.33) F	0.47 F
Capacitance Tolerance	-20 ~ 80 %	-20 ~ 80 %	-20 ~ 80 %
Equivalent Series Resistance (ESR)	Less than $120\Omega$	Less than 75Ω	Less than 50Ω
Leakage Current (LC, 30min.)	Less than 200μA	Less than 330μA	Less than 500μA





## 5. Product Construction And Dimension (V-type)

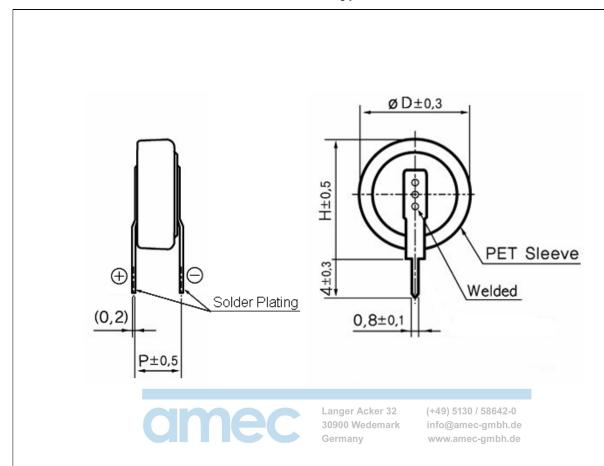


Dort No.	Dimensions (mm)				
Part No.	ØD	Н	Р		
DCS5R5473VF	11.5	12.5	5.0		
DCS5R5104VF	11.5	12.5	5.0		
DCS5R5224VF	11.5	12.5	5.0		
DCS5R5334VF	11.5	12.5	5.0		
DCS5R5474VF	11.5	12.5	5.0		





# 5. Product Construction And Dimension (H-type)

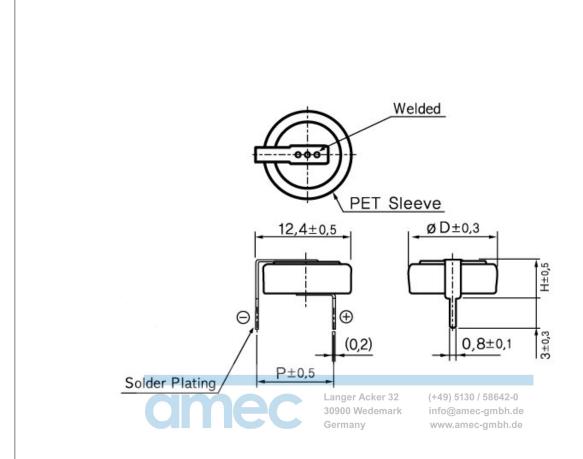


Part No.	Di	mensions (mr	nm)			
	ØD	Н	Р			
DCS5R5473HF	11.5	5.5	10.0			
DCS5R5104HF	11.5	5.5	10.0			
DCS5R5224HF	11.5	5.5	10.0			
DCS5R5334HF	11.5	5.5	10.0			
DCS5R5474HF	11.5	5.5	10.0			





## 5. Product Construction And Dimension (C-type)

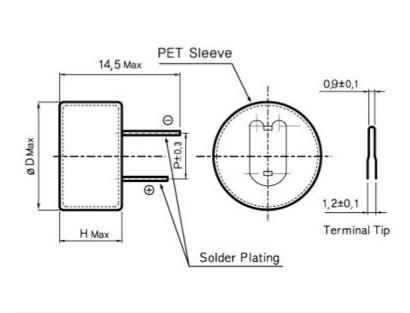



Langer Acker 32 (+49) 5130 / 58642-0 30900 Wedemark info@amec-gmbh.de www.amec-gmbh.de

Dort No.	Di	mensions (mm)			
Part No.	ØD	Н	Р		
DCS5R5473CF	13.5	7.0	5.0		
DCS5R5104CF	13.5	7.0	5.0		
DCS5R5224CF	13.5	7.0	5.0		
DCS5R5334CF	13.5	7.0	5.0		
DCS5R5474CF	13.5	7.0	5.0		





# 6. Reliability Specifications

Item		Specification	Test Condition (JISC5102)		
	Capacitance Change ESR	Step 2	Within ± 30% of Initial Value 5Times or less than	Measure electrical characteristics after	
	Capacitance Change		Initial Value Within ± 30% of Initial Value	exposing STARCAP Capacitor to each temperature atmosphere for one(1) hour	
Temperature	ESR	Step 4	4Times or less than Initial Value	Step Temperature	
Characteristics	LC(30min.)		4Times or less than Initial Value	1 20±2℃ 2 -25±2℃	
	Capacitance Change		Within ± 10% of Initial Value	3 20±2°C	
	ESR Change	Step	Within ± 10% of Initial Value	4 70±2℃ 5 20±2℃	
	LC Change (30min.)	5	Within ± 10% of Initial Value	2012 0	
	Capacitar Change		± 30% of Initial Value	Temp. : 40±2℃	
Humidity	ESR		3Times or less than Spec. Value	Humidity: 90 ~ 95%RH	
Resistance	LC(30min.)		2Times or less than Spec. Value	Time: 240±8 Hours  No Voltage Applied	
	Appearar	nce	No Marked Defect		
Self Discharge Characteristics	Voltage		Langer Acker 3 30900 Wedema Germany More than 4.2Vdc	Charging 513 Voltage: 5.5Vdc  Condition Current: 50 <sup>mA</sup> Charge Time: 24 Hours  Self Duration: 24 Hours  Discharge Temp.: Less than 25°C  Condition Humidity: Less than 70%RH	
	Capacitar	nce	Spec. Value		
Vibration	ESR		Spec. Value	Amplitude: 1.5mm Frequency: 10 ~ 55Hz Direction: X, Y, Z 3 Directions	
Resistance	LC(30min.)		Spec. Value	Direction: X, Y, Z 3 Directions Test Time: 6 Hours	
	Appearar	ice	No Marked Defect	rest time . O flours	
Terminal Strength	- Appearar	nce	Terminals shall not be	Load 1kg , 10±1 Sec.	
Terminal Bend Strength	rippourur		separated	Load 1kg , Angle 90° , 1Cycle	
	Capacitar Change		Within ± 30% of Initial Value	Temp. : 70±2℃	
Endurance	ESR		4Times or less than Initial Value	Test Time : 1,000(+24,-0) Hours	
	LC(30mir	า.)	Spec. Value	Applied Voltage : 5.5Vdc	
	Appearar		No Marked Defect		
	Capacitar Change		Within ± 30% of Initial Value	Temp. : 25±2℃	
Cycle Characteristics	ESR		4Times or less than Initial Value	Cycle No. : 10,000 Charge Voltage : 5.5Vdc	
	LC(30mir	າ.)	Spec. Value	Resistance : 100Ω, Time : 9min.	
	Appearar	nce	No Marked Defect	Discharge Resistance:100Ω, Time:1min.	






# 7. Packing Specifications

5	Quantity (PCS)			Size (W × L × H mm)		_
Part No.	Vinyl Bag	Inner Box	Outer Box	Inner Box	Outer Box	Туре
DCS5R5473(V,H)	500	2,000	4,000	240×220×100	460×260×125	Bulk
DCS5R5104(V,H)	500	2,000	4,000	240×220×100	460×260×125	Bulk
DCS5R5224(V,H)	500	2,000	4,000	240×220×100	460×260×125	Bulk
DCS5R5334(V,H)	500	2,000	4,000	240×220×100	460×260×125	Bulk
DCS5R5474(V,H)	500	2,000	4,000	240×220×100	460×260×125	Bulk
DCS5R5473(C)	500	1,500	3,000	240×220×100	460×260×125	Bulk
DCS5R5104(C)	500	1,500	3,000	240×220×100	460×260×125	Bulk
DCS5R5224(C)	500	1,500	3,000	240×220×100	460×260×125	Bulk
DCS5R5334(C)	500	1,500	Langer Acker 39,000 den Germany	, ,	<sup>m</sup> 460×260×125	Bulk
DCS5R5474(C)	500	1,500	3,000	240×220×100	460×260×125	Bulk





### 8. Labeling Standards

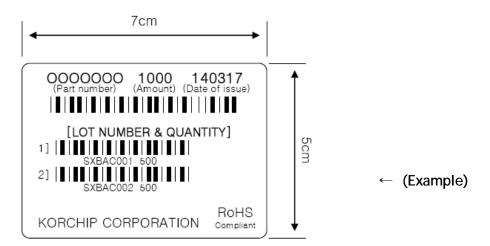

Lot No. System

- ① Product Code: S (STARCAP)
- Langer Acker 32 (+49) 5130 / 58642-0
- Troduct code : 5 (STAKCAL)
- ② Production Year Code: X (2013), Y (2014), X (2015)... info@amec-gmbh.de www.amec-gmbh.de
- ③ Factory Identification Code : B (Factory 2)
- 4 Production Month Code :  $\underline{A}$  (Jan.), B (Feb.), ..., J (Oct.), K (Nov.), L (Dec.)
- 6 Lot Issuing Serial Code : 001 (First lot of a specific day), 002 (Second lot of a specific day), 003 (Third lot of a specific day)...






### 9. Measuring Method Of Characteristics


# 1) Charge the STARCAP with constant current $50\pm0.1\text{mA}$ to the voltage of V1(=4.4V) for 30 min.

- 2) Discharge the STARCAP with constant current(A)  $2\pm0.1\text{mA}$ to the voltage of V2(=2.2V) while measure the discharge time(T).
- 3) Calculate capacitance using the following formula.

Capacitance




 $C = A(Ampere) \times T \sec / (V_1 - V_g)V [F]$ 



Resistance

- Measure ESR by the LCR meter. (Frequency: 1kHz Bias Voltage: 0+0.05V) 30900 Wedemark or info@amec-gmbh.de
  - Calculate ESR using the following formula. www.amec-gmbh.de

**Equivalent Series** (ESR @1kHz)



$$R[\Omega] = V[V] / I[A]$$
 \*  $i[MA] = I[A] \times 10^{-3}$ 


R : Internal resistance(ESR)  $[\Omega]$ 

V: Measured voltage between terminals [V]

i : Current 1mA(A.C.)

- 1) Apply  $5.0\pm0.1V$  to the STARCAP.(E<sub>0</sub>)
- 2) Measure  $V_R$  after  $30\pm0.5$  min.
- 3) Calculate current using the following formula.

Leakage Current



$$LC = (V_R/R_C) \times 10^3 \text{ [mA]}$$

V<sub>R</sub> = Measured value

 $R_C = 100 \Omega (0.1F \sim 0.47F)$ 

1000 \(\Omega\) (0.047F)

The STARCAP should be shorted before each measurement as follows;

Capacitance: 60 min., ESR: 15 min., LC: 15 min.






### 10. Mounting

When you solder STARCAP to a printed circuit board, excessive thermal stress could cause the STARCAP's electrical characteristics to deteriorate, compromise the integrity of the seal or cause the electrolyte to leak due to increased internal pressure.

### ① Recommended condition of flow soldering



② Recommended condition of manual soldering 32

(+49) 5130 / 58642-0 30900 Wedemark info@amec-gmbh.de

- Soldering Tip Temp. :  $350\,^{\circ}\mathrm{C}$  or less  $_{\mathrm{Germany}}^{\mathrm{30000\ we}}$ 

www.amec-gmbh.de

- Soldering Time: 3 sec. or less

- Times: Three times or less at intervals of 9 sec. or more

\* Do not touch the metal case of STARCAP with a soldering iron.

- 3 It is not allowed to go through reflow (IR, Atmosphere heating methods etc.) process.
- 4 The terminals are plated for good solderability. Rasping terminals may damage the plating layer and degrade the solderability.

Do not apply a large force to the terminals. Otherwise, they may break or come off or the STARCAP characteristics may be deteriorated.





#### 11. Cautions for Use

Please be careful for following points when you use STARCAP.

1) Do not apply more than rated voltage.

If you apply more than rated voltage, STARCAP's electrolyte will be decomposed and its ESR increase. At the worst, it may be broken.

2) Do not use STARCAP for ripple absorption.

### 3) Polarity

Please mount it in accordance with its polarity.

4) Operating temperature and life


Generally, STARCAP has a lower leakage current, longer back-up time and longer life in the low temperature i.e. the room temperature. But it has a higher leakage current, shorter back-up time and shorter life in the high temperature.

Please design to keep STARCAP away from catorific parts5130 / 58642-0 info@amec-gmbh.de www.amec-gmbh.de www.amec-gmbh.de

### 5) Cleaning

Some detergent or high temperature drying causes deterioration of STARCAP. If you wash STARCAP, Consult us.

6) Following figure shows the general back-up circuit.



D: Diode to prevent the reverse current

R: Resistor to control the charging current

#### 7) Short-circuit STARCAP

DO NOT short-circuit between terminals of STARCAP without resistor.





### 8) Storage

In long term storage, please store STARCAP in following condition;

① TEMP. : 15 ~ 35 ℃

2 HUMIDITY: 45 ~ 75 %RH

- ③ Non-dust, non-acidic and/or non-alkaline atmosphere
- ④ Avoid direct sun light, strong magnetic field Storage period limit is one(1) year when a STARCAP is stored in the above condition. Storage in improper condition may cause some damage on terminal surface or on outer tube of STARCAP.
- 9) Do not disassemble STARCAP. It contains electrolyte.
- Over-rated voltage may be applied to a single STARCAP in series connection due to the deviation of capacitance and ESR of each STARCAP. Please inform us if you are using STARCAP in series connection and please design so as not to apply over-rated voltage to each STARCAP, and use STARCAPs from same lot.

  30900 Wedemark (+49) 5130 / 58642-0 info@amec-gmbh.de

www.amec-gmbh.de

11) The tips of STARCAP terminals are very sharp. Please handle with care.





# 12. Environmental Management

All STARCAP products are RoHS compliant, Halogen Free and environment friendly.

Series	RoHS directive (Pb, Cr+6, Hg, Cd, PBB,PBDE)	ELV directive (Pb, Cr+6, Hg, Cd)	PVC	Halogen Flame Retardant Free (CI, Br)	etc.
DCS	N.D.	N.D.	N.D.	N.D.	

<sup>\*</sup> N.D.: Not detected

