
BOTTOM SIDE, scale 4.5 : 1, 60 parts to place. Black: part outlines and references (Fab layer); blue-grey: legend; grey: mask openings (lands).

Seen from the back: finger 2 is at the lower RIGHT. Card coordinates of the placement file are NOT mirrored (x as seen from the front).

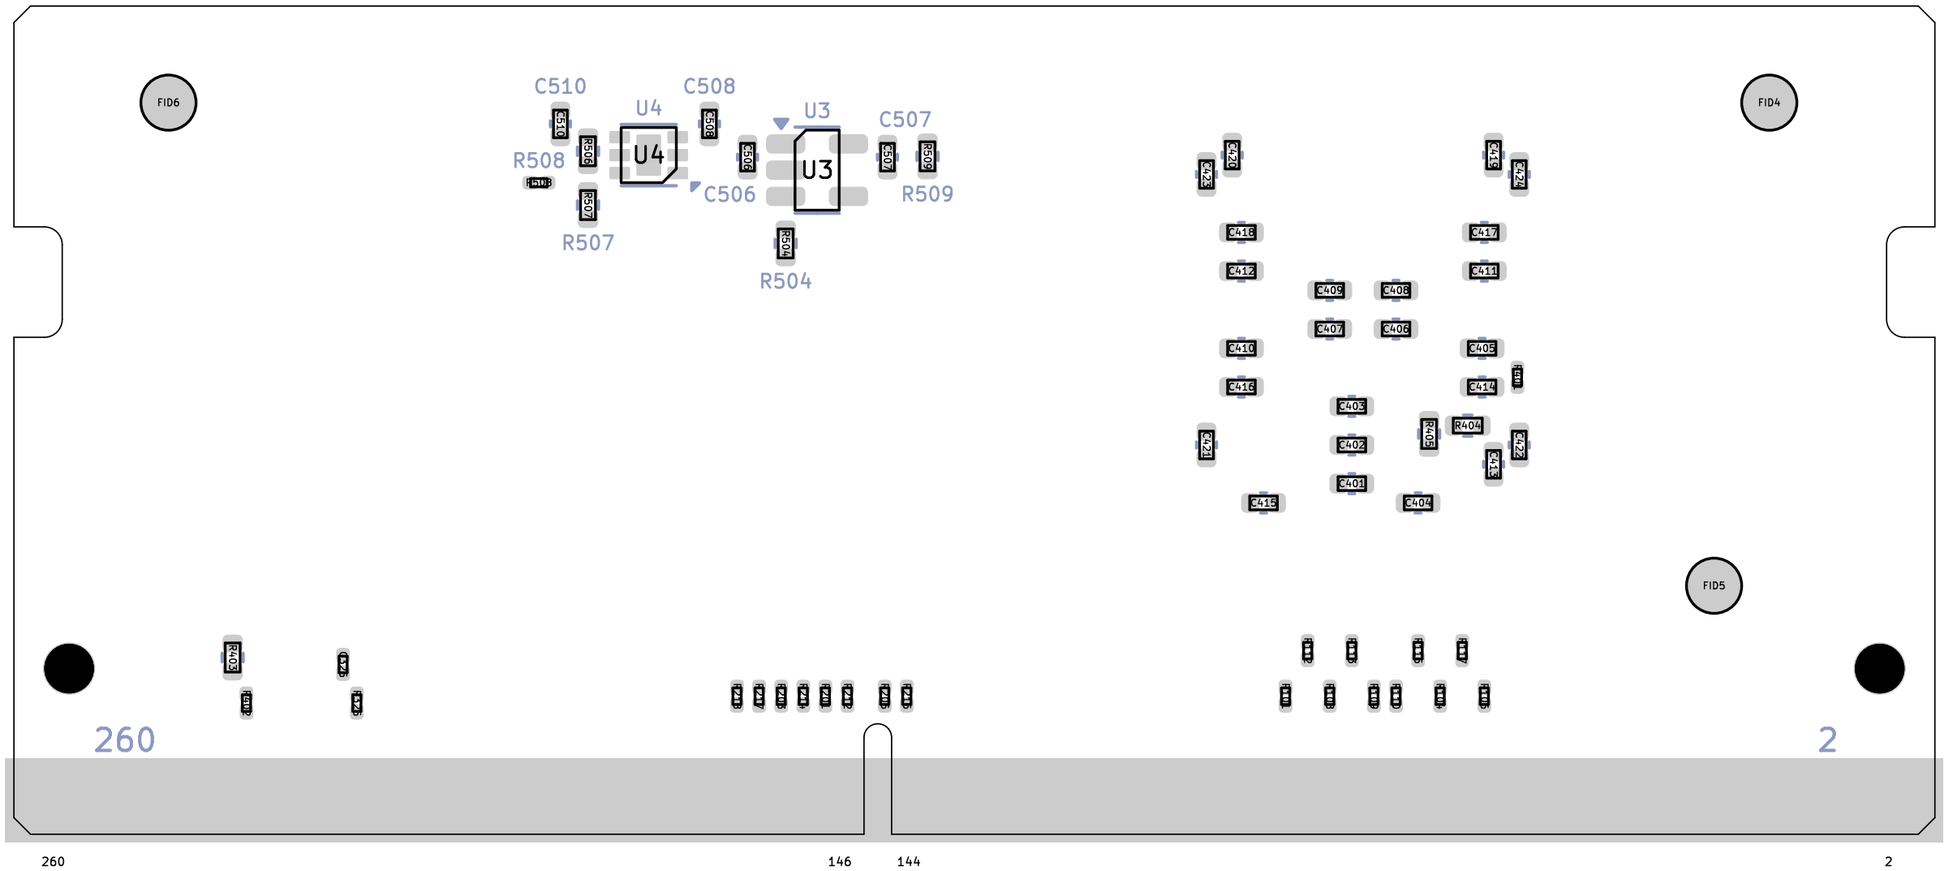

No polarised two-terminal part. ICs: pin 1 as drawn on the Fab outline (chamfered corner). No paste on the fingers, the test pads and the fiducials. Stencil 0.10 mm. Fiducials: 3 per face (FID1-3 top, FID4-6 bottom).

Item	Qty	Value	Footprint	MPN	References on this face
1	1	100n	C_0201_0603Metric	CL03A104KQ3NNNC	C325
2	2	1u	C_0402_1005Metric	CL05A105KP5NNNC	C506 C507
4	26	4u7	C_0402_1005Metric	CL05A475MP5NRNC	C401 C402 C403 C404 C405 C406 C407 C408 C409 C410 C411 C412 C413 C414 C415 C416 C417 C418 C419 C420 C421 C422 C423 C424 C508 C510
7	5	91R	R_0201_0603Metric	RC0201FR-0791RL	R101 R104 R106 R109 R110
8	1	33R	R_0201_0603Metric	RC0201FR-0733RL	R108
9	4	68R	R_0201_0603Metric	RC0201FR-0768RL	R112 R113 R115 R117
10	1	100R	R_0201_0603Metric	RC0201FR-07100RL	R402
11	4	240R	R_0201_0603Metric	RC0201FR-07240RL	R201 R203 R206 R401
12	5	150R	R_0201_0603Metric	RC0201FR-07150RL	R212 R214 R215 R217 R218
13	1	39R	R_0201_0603Metric	RC0201FR-0739RL	R325
16	1	1k	R_0402_1005Metric	RC0402FR-071KL	R403
17	3	10k	R_0402_1005Metric	RC0402FR-0710KL	R404 R405 R507
20	2	47k	R_0402_1005Metric	RC0402FR-0747KL	R504 R509
21	1	2k49	R_0402_1005Metric	RC0402FR-072K49L	R506
22	1	22R	R_0201_0603Metric	RC0201FR-0722RL	R508
25	1	TLV70018	TSOT-23-5	TLV70018DDCR	U3
26	1	MIC47050	MLF-6-1EP_2x2mm_P0.65mm_EP0.8x1.4m	MIC47050YML-TR	U4

LPDDR5-CMD-TESTBED ZCU104 R0.2

ASSEMBLY DRAWING: BOTTOM (back), seen from the back

lpddr5-testbed.kicad_pcb sheet 1 of 1 dimensions in mm do not scale

board file SHA-256 ad7fe7fb7fc2977633b94e019d2710f9...