
TOP SIDE, scale 4.5 : 1, 59 parts to place. Black: part outlines and references (Fab layer); blue-grey: legend; grey: mask openings (lands).

Pin 1 of the card (finger 1) is at the lower LEFT; U1 ball A1 is marked by the legend corner.

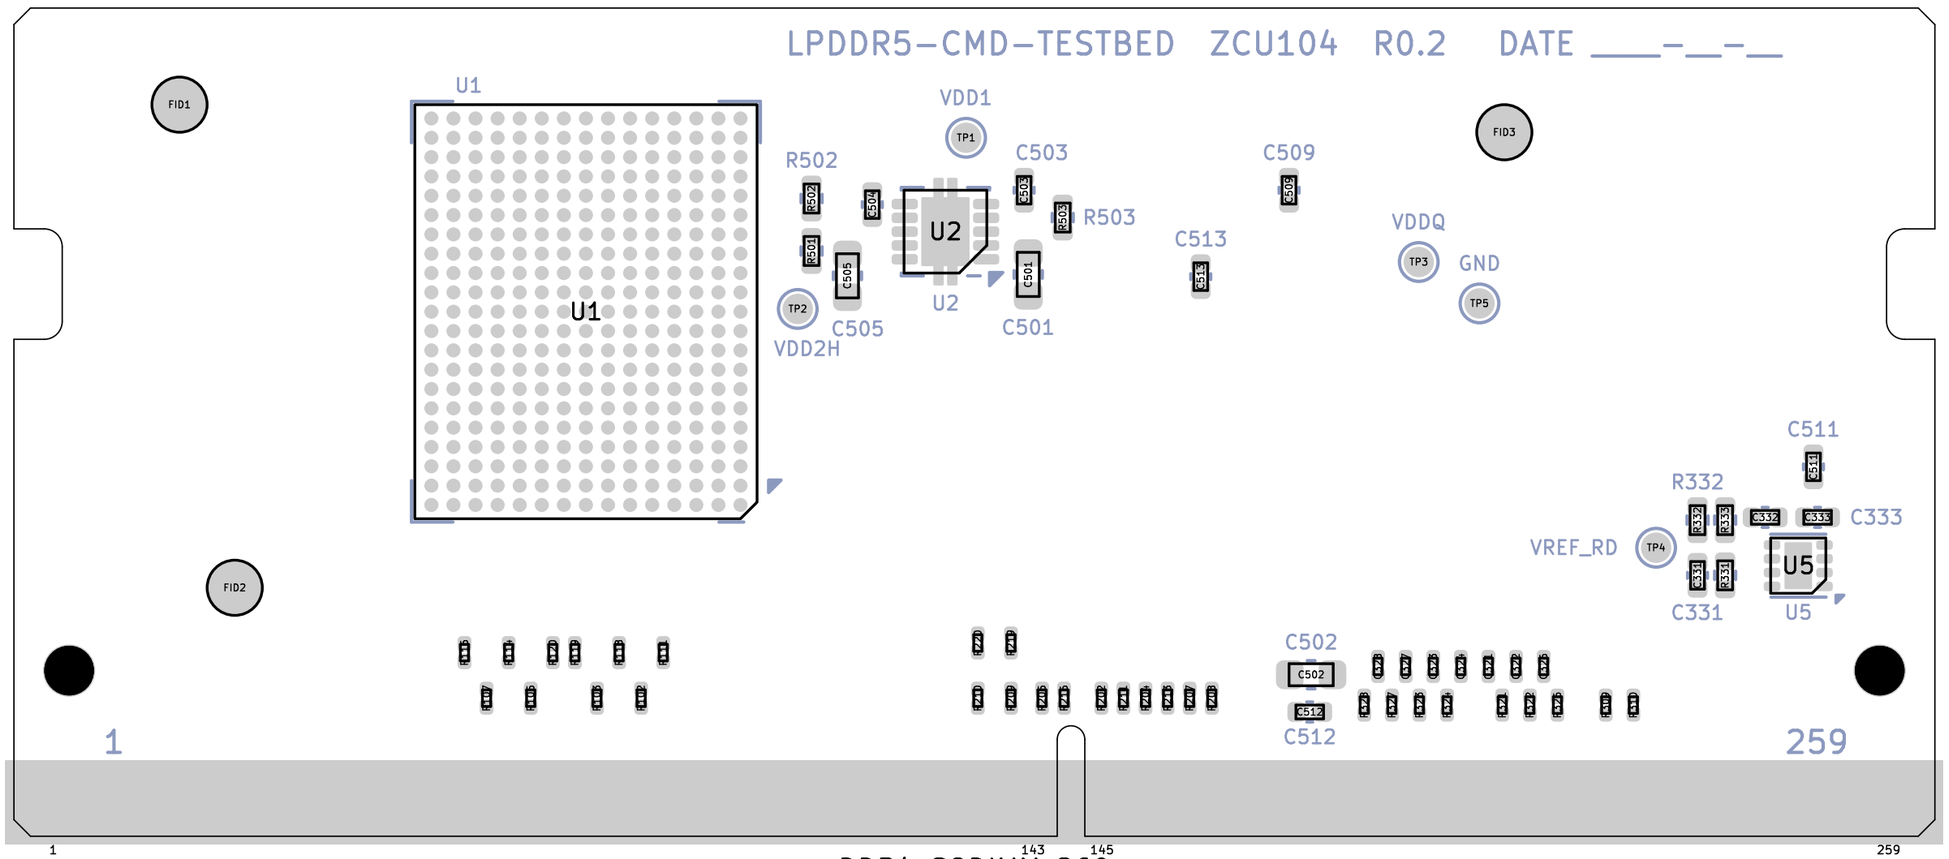

No polarised two-terminal part. ICs: pin 1 as drawn on the Fab outline (chamfered corner). No paste on the fingers, the test pads and the fiducials. Stencil 0.10 mm. Fiducials: 3 per face (FID1-3 top, FID4-6 bottom).

Item	Qty	Value	Footprint	MPN	References on this face
1	7	100n	C_0201_0603Metric	CL03A104KQ3NNNC	C321 C322 C323 C324 C326 C327 C328
2	4	1u	C_0402_1005Metric	CL05A105KP5NNNC	C331 C333 C503 C509
3	3	100n	C_0402_1005Metric	CL05B104KO5NNNC	C332 C512 C513
4	1	4u7	C_0402_1005Metric	CL05A475MP5NRNC	C511
5	3	22u	C_0603_1608Metric	CL10A226MQ8NRNC	C501 C502 C505
6	1	2n2	C_0402_1005Metric	CL05B222KB5NNNC	C504
7	6	91R	R_0201_0603Metric	RC0201FR-0791RL	R102 R103 R105 R107 R209 R210
9	7	68R	R_0201_0603Metric	RC0201FR-0768RL	R111 R114 R116 R119 R120 R219 R220
10	1	100R	R_0201_0603Metric	RC0201FR-07100RL	R118
11	5	240R	R_0201_0603Metric	RC0201FR-07240RL	R202 R204 R205 R207 R208
12	5	150R	R_0201_0603Metric	RC0201FR-07150RL	R211 R213 R216 R309 R310
13	7	39R	R_0201_0603Metric	RC0201FR-0739RL	R321 R322 R323 R324 R326 R327 R328
14	2	300R	R_0402_1005Metric	RC0402FR-07300RL	R331 R332
15	1	180R	R_0402_1005Metric	RC0402FR-07180RL	R333
17	1	10k	R_0402_1005Metric	RC0402FR-0710KL	R503
18	1	1k37	R_0402_1005Metric	RC0402FR-071K37L	R501
19	1	4k42	R_0402_1005Metric	RC0402FR-074K42L	R502
23	1	H58G56BK7BX068N	BGA-315_12.4x15mm_P0.8x0.7mm	H58G56BK7BX068N	U1
24	1	TPS74801	VSON-10-1EP_3x3mm_P0.5mm_EP1.65x2.	TPS74801DRCRM3	U2
27	1	DAC53401	WSON-8-1EP_2x2mm_P0.5mm_EP0.9x1.6m	DAC53401DSGR	U5

LPDDR5-CMD-TESTBED ZCU104 R0.2

ASSEMBLY DRAWING: TOP (front)

lpddr5-testbed.kicad_pcb sheet 1 of 1 dimensions in mm do not scale

board file SHA-256 ad7fe7fb7fc2977633b94e019d2710f9...