


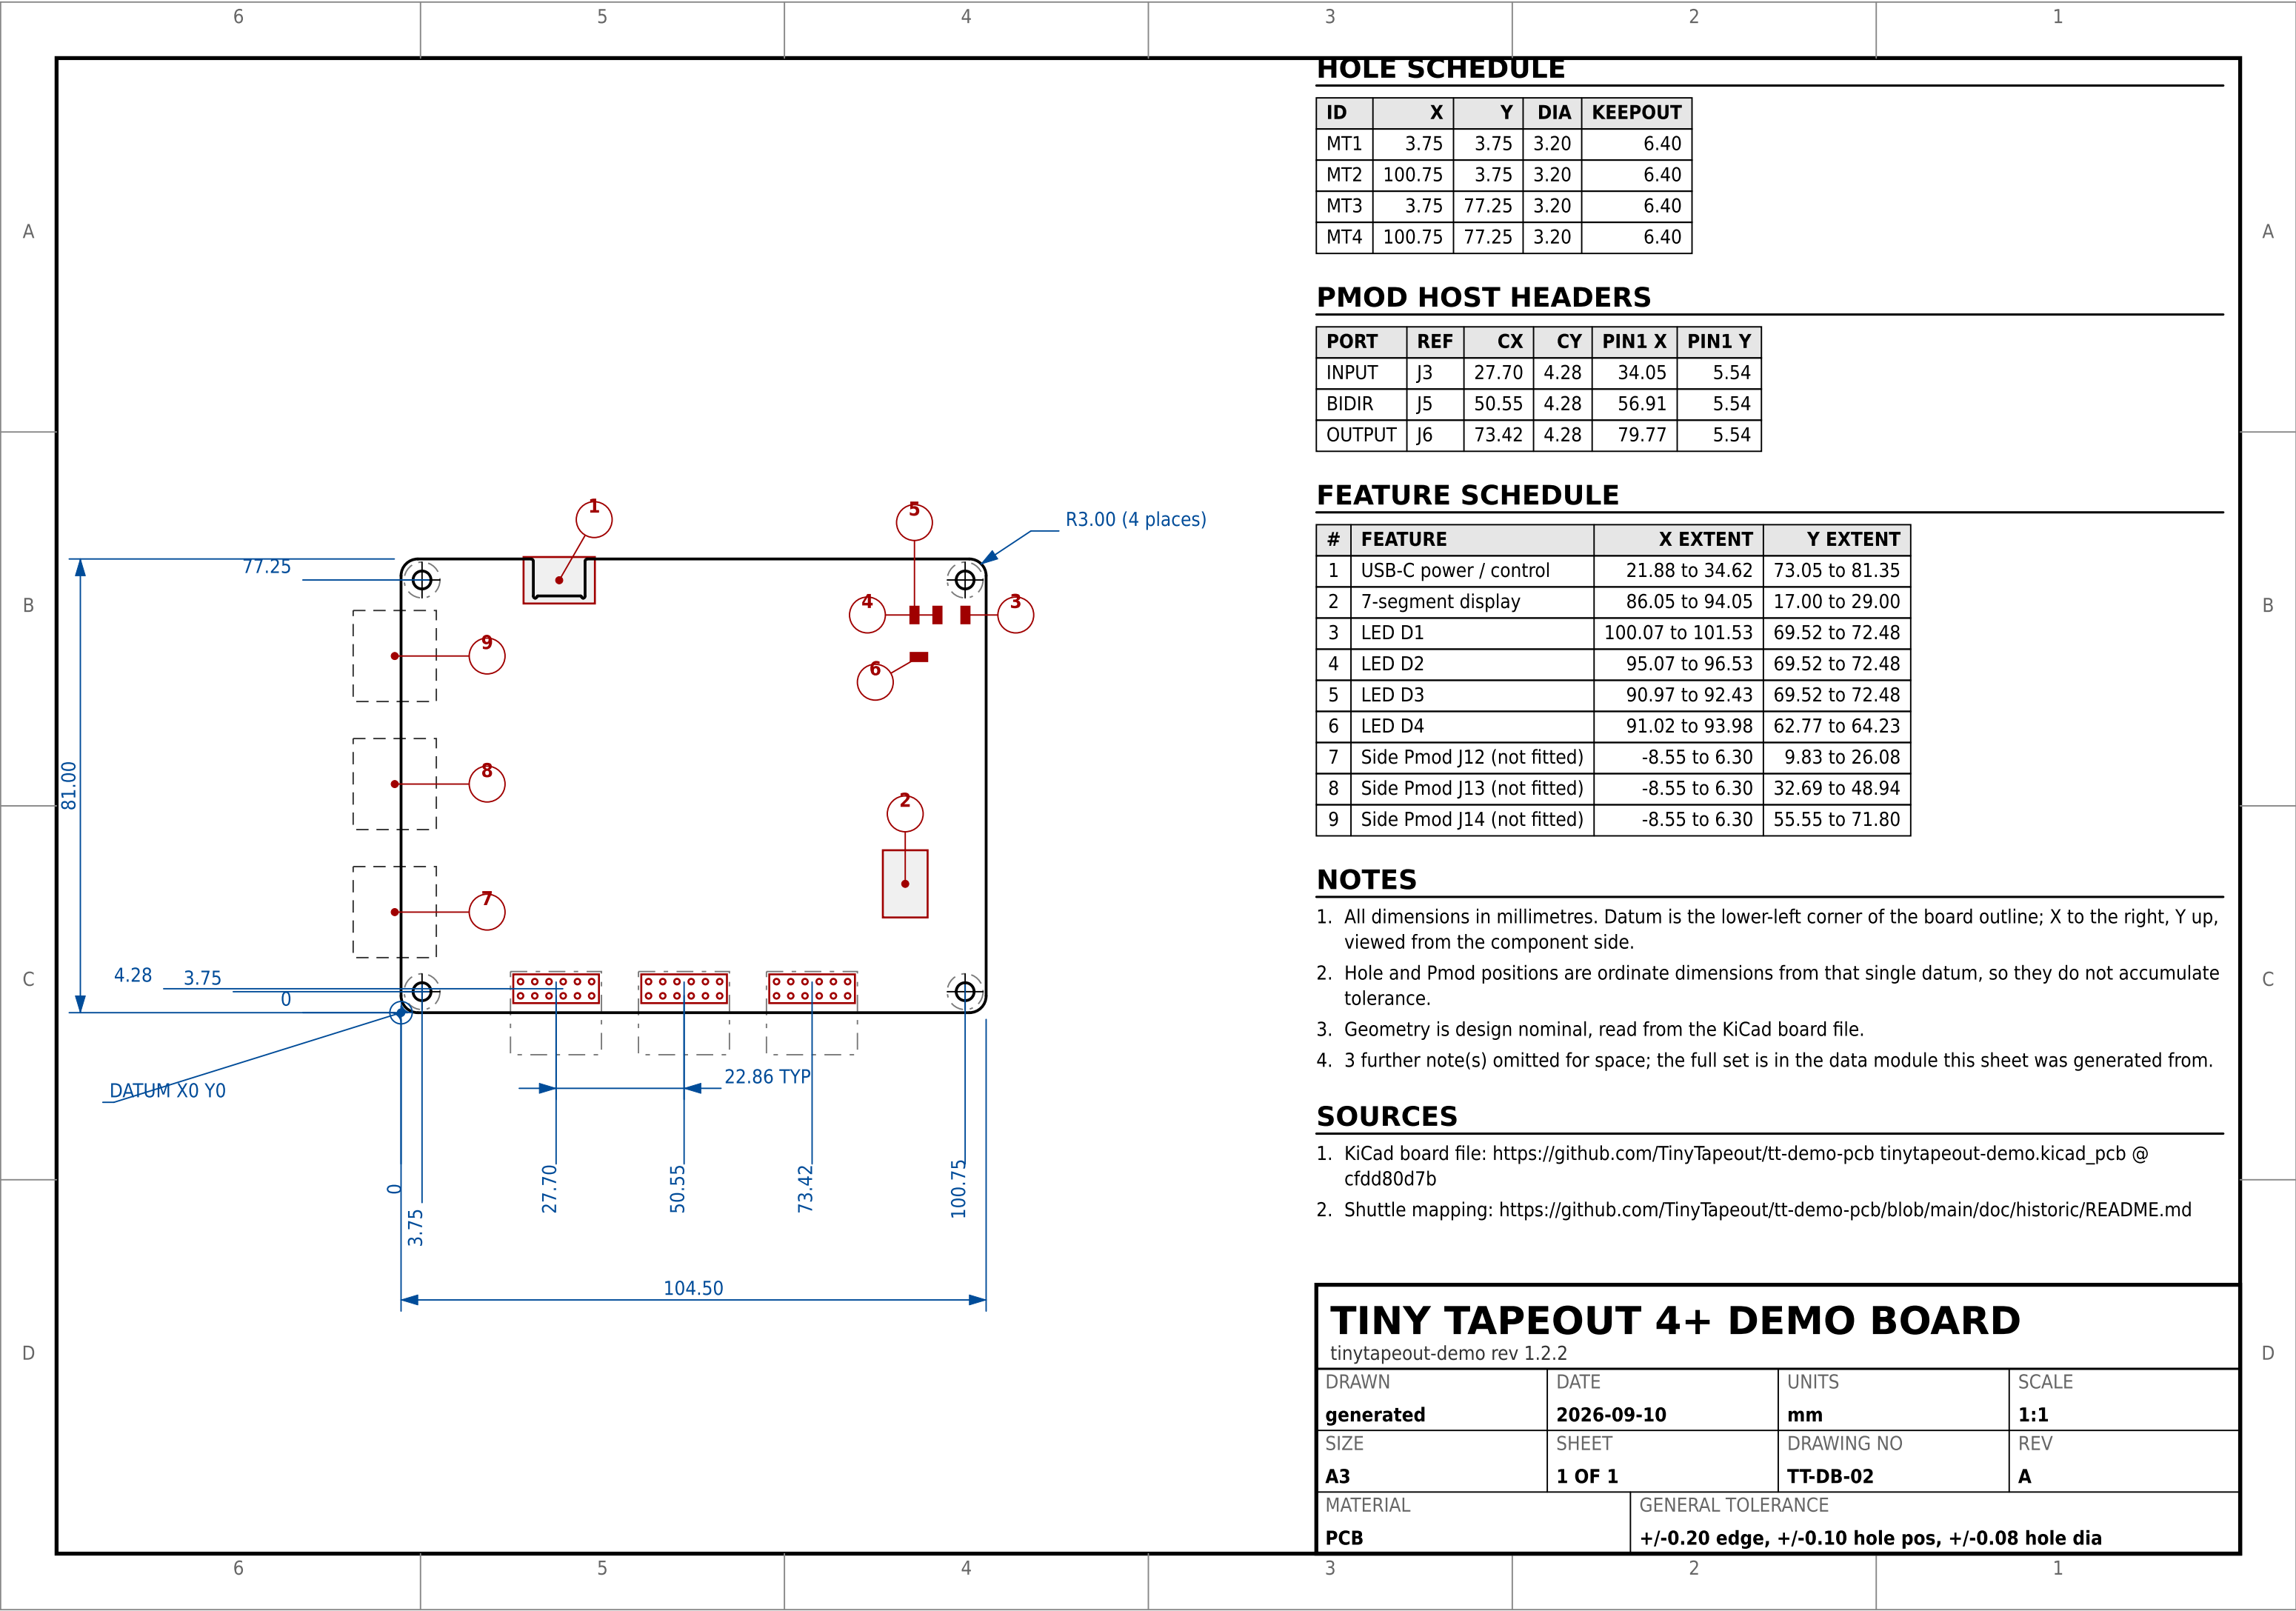

HOLE SCHEDULE

ID	X	Y	DIA	KEEPOUT
MT1	3.75	3.75	3.20	6.40
MT2	100.75	3.75	3.20	6.40
MT3	3.75	77.25	3.20	6.40
MT4	100.75	77.25	3.20	6.40

PMOD HOST HEADERS

PORT	REF	CX	CY	PIN1 X	PIN1 Y
INPUT	J3	27.70	4.28	34.05	5.54
BIDIR	J5	50.55	4.28	56.91	5.54
OUTPUT	J6	73.42	4.28	79.77	5.54

FEATURE SCHEDULE

#	FEATURE	X EXTENT	Y EXTENT
1	USB-C power / control	21.88 to 34.62	73.05 to 81.35
2	7-segment display	86.05 to 94.05	17.00 to 29.00
3	LED D1	100.07 to 101.53	69.52 to 72.48
4	LED D2	95.07 to 96.53	69.52 to 72.48
5	LED D3	90.97 to 92.43	69.52 to 72.48
6	LED D4	91.02 to 93.98	62.77 to 64.23
7	Side Pmod J12 (not fitted)	-8.55 to 6.30	9.83 to 26.08
8	Side Pmod J13 (not fitted)	-8.55 to 6.30	32.69 to 48.94
9	Side Pmod J14 (not fitted)	-8.55 to 6.30	55.55 to 71.80

NOTES

- All dimensions in millimetres. Datum is the lower-left corner of the board outline; X to the right, Y up, viewed from the component side.
- Hole and Pmod positions are ordinate dimensions from that single datum, so they do not accumulate tolerance.
- Geometry is design nominal, read from the KiCad board file.
- 3 further note(s) omitted for space; the full set is in the data module this sheet was generated from.

SOURCES

- KiCad board file: <https://github.com/TinyTapeout/tt-demo-pcb> tinytapeout-demo.kicad_pcb @ cfdd80d7b
- Shuttle mapping: <https://github.com/TinyTapeout/tt-demo-pcb/blob/main/doc/historic/README.md>

TINY TAPEOUT 4+ DEMO BOARD

tinytapeout-demo rev 1.2.2			
DRAWN generated	DATE 2026-09-10	UNITS mm	SCALE 1:1
SIZE A3	SHEET 1 OF 1	DRAWING NO TT-DB-02	REV A
MATERIAL PCB		GENERAL TOLERANCE +/-0.20 edge, +/-0.10 hole pos, +/-0.08 hole dia	