

A

B

C


D

A

B

C

D

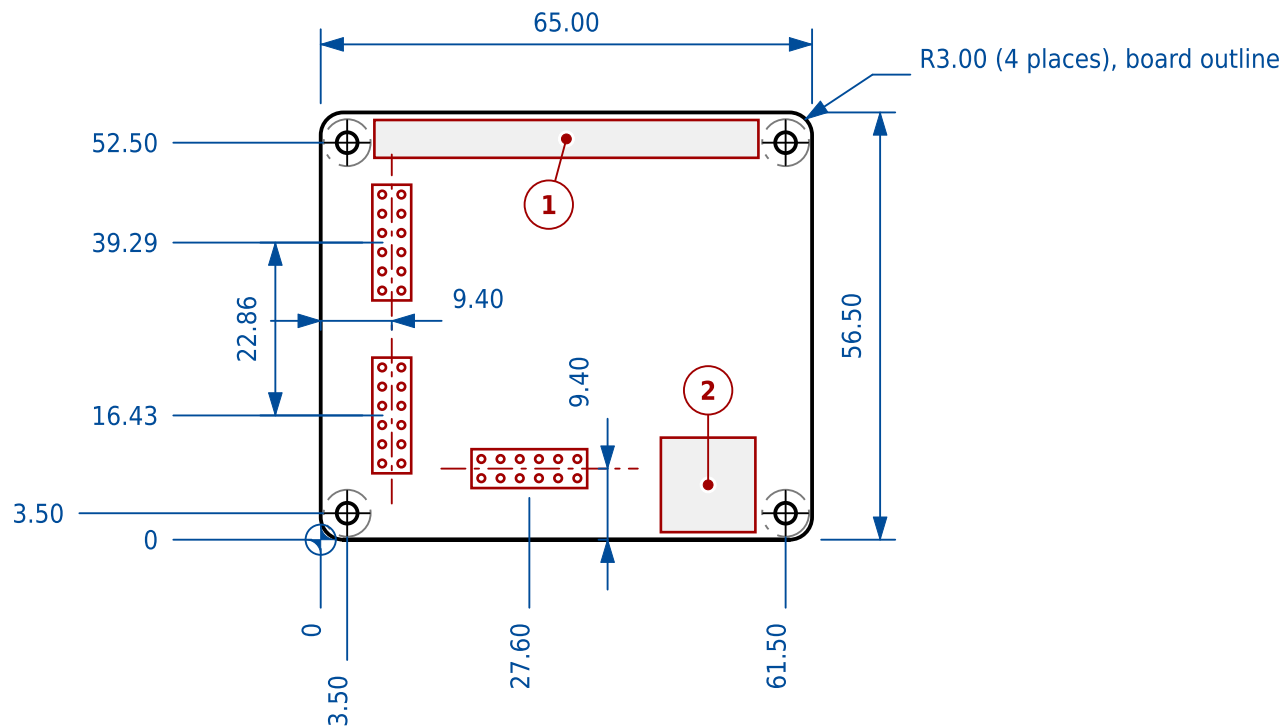

HOLE SCHEDULE

ID	X mm	Y mm	DIA mm	KEEPOUT mm
MT1	3.50	3.50	2.75	6.20
MT2	61.50	3.50	2.75	6.20
MT3	3.50	52.50	2.75	6.20
MT4	61.50	52.50	2.75	6.20

PMOD HOST HEADERS

PORT	EDGE	CX mm	CY mm	PIN1 X mm	PIN1 Y mm
JA	left	9.400	39.290	8.130	45.640
JB	left	9.400	16.430	8.130	22.780
JC	bottom	27.600	9.400	21.250	8.130

FEATURE SCHEDULE

#	FEATURE	X EXTENT mm	Y EXTENT mm
1	40-pin GPIO socket (mates with the Pi)	7.10 to 57.90	50.50 to 55.50
2	5 V barrel jack J2	45.00 to 57.50	1.00 to 13.50

LEGEND

- Board outline
- Component body, scheduled
- Pmod connector body, hole keep-out
- Dimension, extension and leader

NOTES

- Viewed from the component side.
- Outline, corner radii and mounting holes are the Raspberry Pi HAT specification's. Everything else is DERIVED from Digilent's top-view photo, as they publish no drawing: Pmod hosts good to about +/-0.75 mm, the barrel jack to +/-1.5 mm.
- All three hosts are right-angle: the connector body overhangs the board edge by roughly 3 mm and a peripheral plugs in from outside that edge.
- JA to JB is snapped to the 22.86 mm the Pmod Interface Specification mandates; it measured 23.18 mm, within the uncertainty.

SOURCES

- Raspberry Pi HAT mechanical specification: <https://github.com/raspberrypi/hats-hat-board-mechanical.pdf> - 65 x 56.0 or 65 x 56.5 mm (56.5 for an SMT 40-way header), 3 mm corner radii, four 2.75 mm holes 3.5 mm in from the edges on a 58 x 49 mm rectangle.

SOURCES (continued)

- Pmod Interface Specification 1.2.0: https://digilent.com/reference/_media/reference/pmod/pmod-interface-specification-1_2_0.pdf - Digilent, revised 5 October 2017. Host ports on a common board edge are spaced .90 in (22.86 mm) centre to centre; pins are on a .10 in (2.54 mm) grid in both axes.
- Board outline: <https://digilent.com/reference/add-ons/pmod-hat/start> - Digilent state width 65 mm, length 56.5 mm.
- Pmod host positions: https://digilent.com/reference/_media/reference/add-ons/pmod-hat/pmod-hat-adapter-top-1000.png - Measured from Digilent's official top view by accessories/measure_pmod_hat.py. Digilent publish no dimensioned drawing for this board.

DIGILENT PMOD HAT ADAPTER

410-366, fitted to a Raspberry Pi 40-pin GPIO header

DRAWN	VERSION	UNITS	SCALE
generated	v0.0-109-ge19f714	mm	1:1
SIZE	SHEET	DRAWING NO	REV
A3	1 OF 1	ACC-01	A
MATERIAL		GENERAL TOLERANCE	
PCB, thickness not stated		HAT spec outline; hosts DERIVED +/-0.75, see notes	