



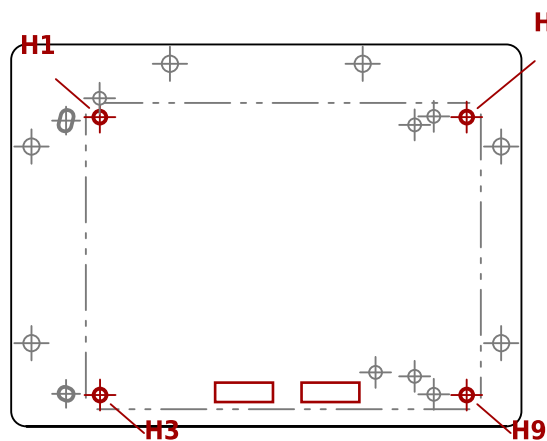


TT01-03 (TT01, TT02, TT03)

board rev tt123-v2.2.6
offset X 19.76 Y 4.54 mm

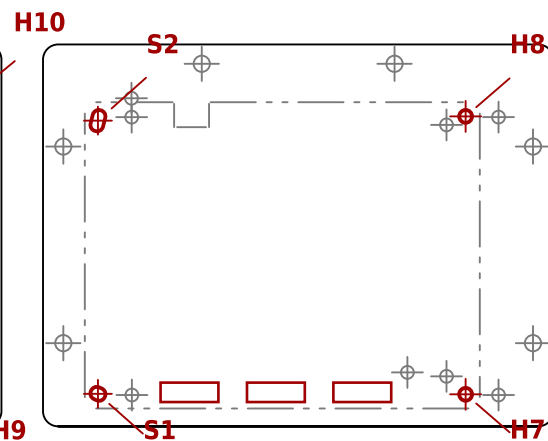


TT04-05 (TT04, TT05)

board rev v1.2.2, v1.2.3
offset X 11.05 Y 4.72 mm

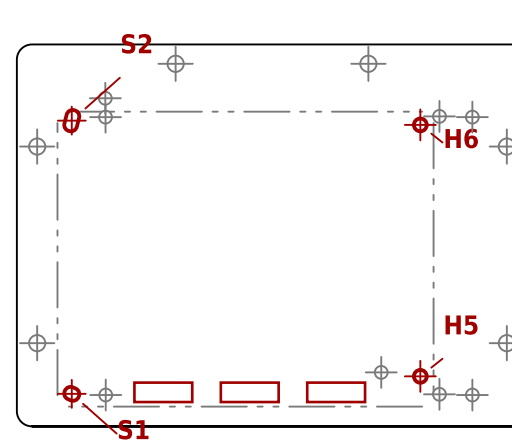


TT06-08 (TT06, TT07, TT08)

board rev v2.0.1, v2.1.0, v2.1.2
offset X 10.74 Y 5.22 mm

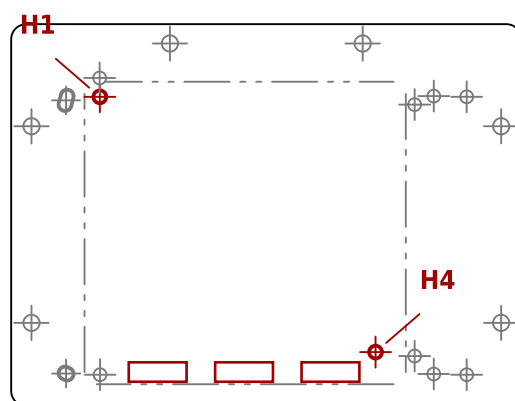

v3.2 (no shipped shuttle yet)

board rev v3.2
offset X 19.40 Y 5.77 mm

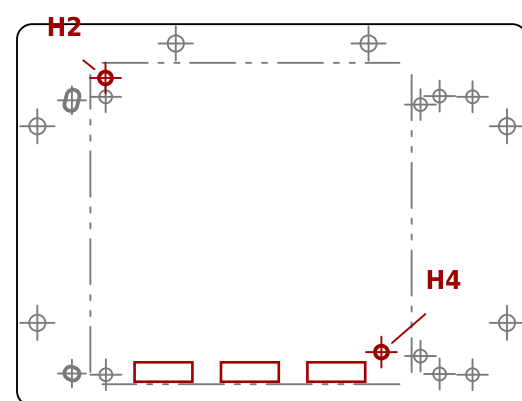

v3.3 (no shipped shuttle yet)

board rev v3.3
offset X 19.40 Y 5.77 mm

NOTES

1. Each view shows one group of demo board revisions on the plate, with the holes and slots that group uses drawn solid and labelled, and the rest greyed back. Hole IDs match drawing TT-MP-01.
2. The revisions in a group share their mounting holes and Pmod host positions exactly, which is all the plate registers against. They may differ elsewhere: v2.1.2 moved its USB-C connector 0.9 mm relative to v2.0.1 and v2.1.0, for instance.
3. dX and dY place the board: add them to a coordinate in that board's own frame to get a plate coordinate.
4. The TT01/02/03 board has only two Pmod hosts. They go on plate Pmod positions 2 and 3, which makes the plate 5.15 mm narrower than putting them on 1 and 2 would.
5. Every revision puts its Pmod host pin fields on the same three positions, at the same height above the plate's front edge. See drawing TT-MP-01 for the plate itself.

BOARD PLACEMENT ON THE PLATE

GROUP	BOARD REVISIONS	SHUTTLES	dX mm	dY mm	PMODS	FIRST PMOD POSITION
TT01-03	tt123-v2.2.6	TT01, TT02, TT03	19.76	4.54	2	2
TT04-05	v1.2.2, v1.2.3	TT04, TT05	11.05	4.72	3	1
TT06-08	v2.0.1, v2.1.0, v2.1.2	TT06, TT07, TT08	10.74	5.22	3	1
v3.2	v3.2	not yet shipped	19.40	5.77	3	1
v3.3	v3.3	not yet shipped	19.40	5.77	3	1

TT MOUNTING PLATE - BOARD FITTING GUIDE

Which holes each demo board revision uses

DRAWN generated	DATE 2026-09-10	UNITS mm	SCALE 1:2
SIZE A3	SHEET 1 OF 1	DRAWING NO TT-MP-02	REV A
MATERIAL -		GENERAL TOLERANCE edge +/-0.20 hole pos +/-0.10 hole dia +/-0.08	