
Touch II

# Clessidra

Granular sampler, inspired by the hourglass

By Francesco Di Maggio

v0.3 · francescodimaggio.nl/clessidra

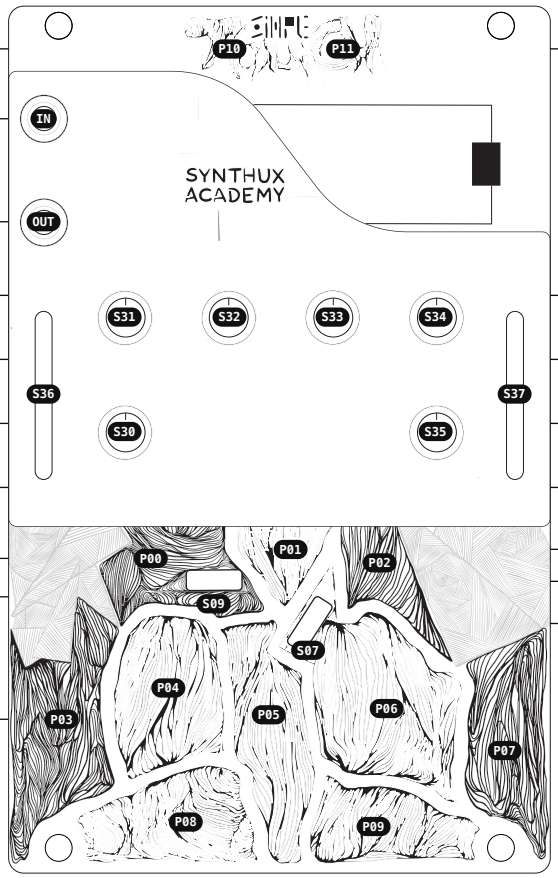


Tap: the last 8 s. Hold: up to 30 s **P10**
Listen: the input, nothing recorded

Input **IN**

Output **OUT**

Size: 5 ms – 2 s, 100 ms at the centre **S31**
Random size

Spray: scattered round the playhead **S32**
Reverse: grains read backwards

Speed 0–4×, stops at ¼ ½ 1 2 4 **S36**
Volume

Position: where the loop starts **S30**
Filter: low-pass / off / high-pass

Stop: held, slows to a halt **P00**

Forward / freeze / reverse **S09**

Slices: hold, several at once **P03–P09**

**P11** Hold: the second layer, in grey

**S33** Pitch ±24 semitones, musical stops
Random pitch: up free, down octaves

**S34** Shape: square, decay, bell, reverse
Random shape

**S37** Density: none, then 0.25–320 a second
Random timing: regular to random

**S35** Length: a share of the rest
Reverb

**P01** Reset: second layer to defaults

**P02** Trigger: the loop from its start

**S07** End: loop / turn over / once

Grey: with P11 held. After a layer change, a knob continues from the current value.

Always listening: a tap on P10 keeps what just played. Frozen by S09, Speed scrubs the loop.

LED: glow = grains, flash = recording, pulse = a stop, steady = P11 held, the last knob turned.